CISCO CONFIDENTIAL

Cisco Unified Communications Manager SIP Trunk Messaging Guide (Standard)

For Cisco Unified Communications Manager Release 7.1(2).

Americas Headquarters
Cisco Systems, Inc.
170 West Tasman Drive
San Jose, CA 95134-1706
USA
http://www.cisco.com
Tel: 408 526-4000
800 553-NETS (6387)
Fax: 408 527-0883

Text Part Number: OL-18720-01

These materials are made available by Cisco as a courtesy to provide certain Session Initiation Protocol (SIP) interoperability information. All information is provided "as is" and Cisco disclaims all express or implied warranties regarding these materials. Cisco is not liable for the accuracy or completeness of these materials.

THE SPECIFICATIONS AND INFORMATION REGARDING THE PRODUCTS IN THIS MANUAL ARE SUBJECT TO CHANGE WITHOUT NOTICE. ALL STATEMENTS, INFORMATION, AND RECOMMENDATIONS IN THIS MANUAL ARE BELIEVED TO BE ACCURATE BUT ARE PRESENTED WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED. USERS MUST TAKE FULL RESPONSIBILITY FOR THEIR APPLICATION OF ANY PRODUCTS.

THE SOFTWARE LICENSE AND LIMITED WARRANTY FOR THE ACCOMPANYING PRODUCT ARE SET FORTH IN THE INFORMATION PACKET THAT SHIPPED WITH THE PRODUCT AND ARE INCORPORATED HEREIN BY THIS REFERENCE. IF YOU ARE UNABLE TO LOCATE THE SOFTWARE LICENSE OR LIMITED WARRANTY, CONTACT YOUR CISCO REPRESENTATIVE FOR A COPY.

The Cisco implementation of TCP header compression is an adaptation of a program developed by the University of California, Berkeley (UCB) as part of UCB's public domain version of the UNIX operating system. All rights reserved. Copyright © 1981, Regents of the University of California.

NOTWITHSTANDING ANY OTHER WARRANTY HEREIN, ALL DOCUMENT FILES AND SOFTWARE OF THESE SUPPLIERS ARE PROVIDED "AS IS" WITH ALL FAULTS. CISCO AND THE ABOVE-NAMED SUPPLIERS DISCLAIM ALL WARRANTIES, EXPRESSED OR IMPLIED, INCLUDING, WITHOUT LIMITATION, THOSE OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT OR ARISING FROM A COURSE OF DEALING, USAGE, OR TRADE PRACTICE.

IN NO EVENT SHALL CISCO OR ITS SUPPLIERS BE LIABLE FOR ANY INDIRECT, SPECIAL, CONSEQUENTIAL, OR INCIDENTAL DAMAGES, INCLUDING, WITHOUT LIMITATION, LOST PROFITS OR LOSS OR DAMAGE TO DATA ARISING OUT OF THE USE OR INABILITY TO USE THIS MANUAL, EVEN IF CISCO OR ITS SUPPLIERS HAVE BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

CCDE, CCENT, CCSI, Cisco Eos, Cisco HealthPresence, Cisco Ironport, the Cisco logo, Cisco Lumin, Cisco Nexus, Cisco Nurse Connect, Cisco Stackpower, Cisco StadiumVision, Cisco TelePresence, Cisco Unified Computing System, Cisco WebEx, DCE, Flip Channels, Flip for Good, Flip Mino, Flip Video, Flip Video (Design), Flipshare (Design), Flip Ultra, and Welcome to the Human Network are trademarks; Changing the Way We Work, Live, Play, and Learn, Cisco Store, and Flip Gift Card are service marks; and Access Registrar, Aironet, AsyncOS, Bringing the Meeting To You, Catalyst, CCDA, CCDP, CCIE, CCIP, CCNA, CCNP, CCSP, CCVP, Cisco, the Cisco Certified Internetwork Expert logo, Cisco IOS, Cisco Press, Cisco Systems, Cisco Systems Capital, the Cisco Systems logo, Cisco Unity, Collaboration Without Limitation, EtherFast, EtherSwitch, Event Center, Fast Step, Follow Me Browsing, FormShare, GigaDrive, HomeLink, Internet Quotient, IOS, iPhone, iQuick Study, IronPort, the IronPort logo, LightStream, Linksys, MediaTone, MeetingPlace, MeetingPlace Chime Sound, MGX, Networkers, Networking Academy, Network Registrar, PCNow, PIX, PowerPanels, ProConnect, ScriptShare, SenderBase, SMARTnet, Spectrum Expert, StackWise, The Fastest Way to Increase Your Internet Quotient, TransPath, WebEx, and the WebEx logo are registered trademarks of Cisco Systems, Inc. and/or its affiliates in the United States and certain other countries.

All other trademarks mentioned in this document or website are the property of their respective owners. The use of the word partner does not imply a partnership relationship between Cisco and any other company. (0907R)

Any Internet Protocol (IP) addresses used in this document are not intended to be actual addresses. Any examples, command display output, and figures included in the document are shown for illustrative purposes only. Any use of actual IP addresses in illustrative content is unintentional and coincidental.

Cisco Unified Communications Manager SIP Trunk Messaging Guide (Standard), Release 7.1(2)
Copyright © 2006-2009, Cisco Systems, Inc. All rights reserved.

CISCO CONFIDENTIAL

CONTENTS

Preface v

Audience v

Organization v

Conventions vi

Obtaining Documentation, Obtaining Support, and Security Guidelines vii

CHAPTER 1

SIP Standard Trunk Interface 1-1

New and Changed Information 1-1

Backward Compatibility 1-2

Interface Compliance Summary 1-2

SIP Message Fields 1-8

Request Messages 1-8

INVITE 1-8

ACK 1-13

BYE 1-14

CANCEL 1-15

PRACK 1-16

UPDATE 1-17

SUBSCRIBE 1-19

NOTIFY 1-20

PUBLISH 1-21

Response Messages 1-23

18x 1-23

2xx 1-24

3xx 1-24

4xx 1-25

5xx 1-26

6xx 1-27

Message Timers 1-28

Message Retry Counts 1-29

SIP Status Code to Q.850 Cause Code Mapping 1-29

SIP Trunk Supported Features 1-32

Identification Services 1-33

Using Remote-Party-ID Header 1-33

CISCO CONFIDENTIAL

Using P-Asserted-Identity/P-Preferred-Identity and Privacy header 1-35
Outbound PUBLISH 1-39
G.729 with MTP 1-40
MLPP 1-40
Resource Priority Header Overview 1-41
Preemption Reason Header Overview 1-41
V.150.1 MOIP 1-41
SIP T.38 Interoperability with Microsoft Exchange 1-42
Multicast MOH over H.323/SIP trunk 1-43
IPv6 1-43
Support for Alternative Network Address Types (ANAT) over SIP Trunk 1-44
Inbound SIP Trunk call rules 1-45
Outgoing SIP Trunk Calls Rules 1-45
Calling Party Number Transformations 1-45
Troubleshooting 1-47

CHAPTER 2 **SIP Trunk Call Flows** 2-1
Basic Call
DTMF
Presence
Transfer
Update
TLS
T38
SipsUri
Info
MWI
Prack
Call Preservation
3xx
Authentication-Authorization
ACL
RSVP
Publish
G.729
PAI
MLPP

CISCO CONFIDENTIAL

V.150.1
T38Fax-interop-with-MSExchange
MMoH
IPv6
Calling Party Transformations

CISCO CONFIDENTIAL

Preface

This document describes the implementation of the Session Initiation Protocol (SIP) for trunk side devices in Cisco Unified Communications Manager.

The preface covers these topics:

- Audience
- Organization
- Conventions
- Obtaining Documentation, Obtaining Support, and Security Guidelines

Audience

This document provides information for developers, vendors, and customers who are developing applications or products that integrate with Cisco Unified Communications Manager using SIP messaging.

Organization

This document consists of the following chapters.

Chapter	Description
Chapter 1, "SIP Standard Trunk Interface"	Provides an overview of SIP trunk messages and standards compliance.
Chapter 2, "SIP Trunk Call Flows"	Comprises a listing of all SIP trunk messages, including sequence charts and examples of call flows.

CISCO CONFIDENTIAL

Conventions

This document uses the following conventions:

Convention	Description
boldface font	Commands and keywords are in **boldface**.
italic font	Arguments for which you supply values are in *italics*.
[ ]	Elements in square brackets are optional.
{ x | y | z }	Alternative keywords are grouped in braces and separated by vertical bars.
[x | y | z]	Optional alternative keywords are grouped in brackets and separated by vertical bars.
string	A nonquoted set of characters. Do not use quotation marks around the string or the string will include the quotation marks.
`screen` font	Terminal sessions and information the system displays are in `screen` font.
`boldface screen` font	Information you must enter is in **`boldface screen`** font.
italic screen font	Arguments for which you supply values are in *italic screen* font.
→	This pointer highlights an important line of text in an example.
^	The symbol ^ represents the key labeled Control—for example, the key combination ^D in a screen display means hold down the Control key while you press the D key.
< >	Nonprinting characters, such as passwords are in angle brackets.

Notes use the following conventions:

Note Means *reader take note*. Notes contain helpful suggestions or references to material not covered in the publication.

Caution Means *reader be careful*. In this situation, you might do something that could result in equipment damage or loss of data.

Tip Means *the following information might help you solve a proble*m.

Timesaver Means the *described action saves tim*e. You can save time by performing the action described in the paragraph.

CISCO CONFIDENTIAL

Obtaining Documentation, Obtaining Support, and Security Guidelines

For information on obtaining documentation, obtaining support, providing documentation feedback, security guidelines, and also recommended aliases and general Cisco documents, see the monthly *What's New in Cisco Product Documentation*, which also lists all new and revised Cisco technical documentation, at:

http://www.cisco.com/en/US/docs/general/whatsnew/whatsnew.html

CISCO CONFIDENTIAL

CISCO CONFIDENTIAL

CHAPTER 1

SIP Standard Trunk Interface

This document describes the standard external interface for Cisco Unified CM SIP trunk device. It highlights the SIP primitives that are supported across the SIP trunk and also describes basic call flow scenarios that can be used as a guide for technical support.

This chapter includes the following sections:

- New and Changed Information
- Backward Compatibility
- Interface Compliance Summary
- SIP Message Fields
- SIP Trunk Supported Features
- Troubleshooting

New and Changed Information

Table 1-1 provides high level information about new features in this release.

Table 1-1 Interface Changes At-A-Glance

Feature	Comments
IPv6	In this release, the Cisco Unified CM has been enhanced to support IPv6 and operate in either IPv4 only mode, or Dual Mode, i.e. IPv4_IPv6. If IPv6 is enabled on Cisco Unified CM, then Cisco Unified CM behaves in Dual Mode, otherwise it behaves in IPv4 only mode. SIP Trunk, as a components on Cisco Unified CM, added support for IPv6. As part of this feature SIP Trunk allows IPv6 addressing to be used for both signaling and media.
Calling Party Number Transformations	In this release, the system's capability is enhanced to provide accurate calling party number information to the phones by globalizing the incoming calling party number based on the numbering type. Accurate calling party number information is essential for rich caller id features as well as policy-based routing.

CISCO CONFIDENTIAL

Backward Compatibility

The features that are introduced in this release do not impose any backward compatibility implications on previous versions of the SIP trunk.

Interface Compliance Summary

Cisco Unified CM SIP compliance on the SIP trunk depends on the portable SIP stack itself, which is based on the RFC3261 standard.

The current stack supports the following items in RFC3261:

- Can process UPDATE method.
- Support for generating branch and sent-by parameters in Via header used to identify transactions.
- Implementation of loose-routing based on lr parameter in Record-Route header.
- A UAS that receives a second INVITE before it sends the final response to a first INVITE with a lower Cseq sequence number on the same dialog must return a 500 (Server Internal Error) response to the second INVITE and must include a Retry-After header field with a random value of between 0 and 10 seconds.
- If the non-2xx final response to a mid-call INVITE is a 481 (Call/Transaction Does Not Exist), or a 408 (Request Timeout), or no response at all is received for the re-INVITE (that is, a timeout is returned by the INVITE client transaction), the UAC will terminate the dialog.
- If the UAC receives a reliable provisional response with an answer, it may generate an additional offer in the PRACK. If the UAS receives a PRACK with an offer, it must place the answer in the 2xx to the PRACK.
- If a reliable provisional response is retransmitted for 32 seconds without reception of a corresponding PRACK, the UAS should reject the original request with a 5xx response.

This document identifies the SIP trunk compliance for SIP messages and headers, as described in Table 1-2 through Table 1-8.

Table 1-2 Compliance to SIP Requests

SIP Message	Cisco Unified CM Supported	Comments
INVITE	Yes	The system also supports re-INIVTE.
ACK	Yes	
OPTIONS	No	Cisco Unified CM SIP trunk does not support the OPTIONS method.
INFO	Yes	INFO method gets used for video support.
BYE	Yes	
CANCEL	Yes	
SUBSCRIBE	Yes	Supported events: kpml, presence
NOTIFY	Yes	Supported events: kpml, presence In addition, Cisco Unified CM supports unsolicited NOTIFY for DTMF and MWI.

CISCO CONFIDENTIAL

Table 1-2 Compliance to SIP Requests (continued)

SIP Message	Cisco Unified CM Supported	Comments
REFER	Yes	Cisco Unified CM SIP trunk supports inbound REFER only, both in dialog and out of dialog.
REGISTER	No	The system sends 405 Method Not Allowed for Cisco Unified CM SIP trunk.
PRACK	Yes	The system provides three options: • To send PRACK for Only 180 w/sdp, or • for all 18x messages, or • To disable PRACK entirely via CCM Service Parameter
UPDATE	Yes	Cisco Unified CM supports receiving and generating UPDATE.
PUBLISH	Yes	Cisco Unified CM supports only generating PUBLISH.

Table 1-3 Compliance to SIP Responses

SIP Message	Cisco Unified CM Supported	Comment
1xx Response	Yes	
100 Trying	Yes	
180 Ringing	Yes	The system supports early media.
181 Call Forward	No	Cisco Unified CM sends 181 Call forwarded response when the call forward feature is invoked.
182 Queued	No	Stack drops this message.
183 Progress	Yes	The system supports early media.
2xx Response	Yes	
200 OK	Yes	
202 OK	Yes	For REFER
3xx Response	Yes	
300–302, 305, 380, 385	Yes	The system does not generate these messages, but contacts the new address in Contact header upon receiving.
4xx Response	Yes	Upon receiving, the system initiates a graceful call disconnect.
401	Yes	Cisco Unified CM SIP trunk sends out 401 (Unauthorized) if authentication and authorization is enabled. Cisco Unified CM SIP trunk also responds to inbound 401 challenges.

CISCO CONFIDENTIAL

Table 1-3 Compliance to SIP Responses (continued)

SIP Message	Cisco Unified CM Supported	Comment
403	Yes	Cisco Unified CM SIP trunk sends a 403 (Forbidden) message if a SIP method is on the Access Control List.
405	Yes	Cisco Unified CM SIP trunk sends a 405 message if the incoming SIP message is not supported.
407	Yes	Cisco Unified CM SIP trunk responds to inbound 407 (Proxy Authentication Required) message challenges.
412	Yes	Cisco Unified CM SIP trunk processes 412 response for PUBLISH.
415	Yes	Cisco Unified CM SIP Trunk sends out 415 (Unsupported Media Type) message when it does not support the media type received in incoming request's SDP.
420	Yes	Cisco Unified CM SIP Trunk sends out 420 (Bad Extension) message when it receives sdp-anat tag in the Require/Supported header and it is not configured for ANAT.
424	Yes	Cisco Unified CM SIP Trunk sends out 424 (Bad Location Information) message when it receives INVITE requests carrying Location Conveyance info with errors against SIP compliance like: • Geolocation Headers indicate inclusion of PIDF-LO, but message body doesn't carry it. • Geolocation header has a cid header referring to a URI for which there is no corresponding Content-ID header with the same URI. • Geolocation header having URI other than cid header e.g SIP or SIPS URI for LbyR
5xx Response	Yes	Upon receiving, the system sends a new request if additional address is present. Otherwise, it initiates a graceful disconnect.
6xx Response	Yes	The system does not generate this response; upon receiving, the system initiates a graceful disconnect.

Table 1-4 SIP Header Fields

SIP Header	Cisco Unified CM Supported	Comments
Accept	No	
Accept-Encoding	No	
Accept-Language	No	

CISCO CONFIDENTIAL

Table 1-4 SIP Header Fields (continued)

SIP Header	Cisco Unified CM Supported	Comments
Alert-Info	No	
Allow	Yes	
Authentication-Info	No	
Authorization	Yes	
Allow-Events	Yes	kpml, presence
Call-Info	Yes	Call-Info is used to transmit the overall security level of the trunk call. For example: Call-Info: <urn:x-cisco-remotecc:callinfo>; security= NotAuthenticated Call-Info header is also used for figuring out the IP address of the originating device for SIP trunk identification, if it contains the tag, purpose=x-cisco-origIP. For example: Call-Info: <sip:172.18.200.127>; PURPOSE=x-cisco-origIP
Call-ID	Yes	
Contact	Yes	
Contact Disposition	No	
Content-Encoding	No	
Content-Language	No	
Content-Length	Yes	
Content-Type	Yes	Supported as: “sdp”, “kpml-request+xml”, “media_control+xml”, “text/plain”, "pidf+xml", and "simple-message-summary" The system does not support “multipart.”
CSeq	Yes	
Date	Yes	
Diversion	Yes	The system uses this header for RDNIS information. If it is present, it is always the Original Called Party information. The receiving side of this header always assumes that it is the Original Called Party information if present. In case of chained-forwarding to a voice messing system, the system leaves the message to the Original Called Party.
Encryption	No	
Error-Info	No	
Expires	Yes	
Event	Yes	
From	Yes	Cisco Unified CM adds x-nearend, x-farend, x-refCI and x-devicename parameters for Monitoring and Recording INVITEs.

CISCO CONFIDENTIAL

Table 1-4 SIP Header Fields (continued)

SIP Header	Cisco Unified CM Supported	Comments
Geolocation	Yes	Cisco Unified CM supports this header as part of Logical Partitioning feature.
Geolocation-Error	Yes	Cisco Unified CM supports this header as part of Logical Partitioning feature. This is an informatory header which is sent in SIP response messages.
Hide	No	
In-Reply-To	No	
Max-Forwards	Yes	Cisco Unified CM sets to 70 for outgoing INVITE and does not increment/decrement it.
Min-Expires	Yes	
MIME-Version	No	
Organization	No	
Priority	No	
Proxy-Authenticate	Yes	Cisco Unified CM SIP trunk supports receiving this header in 407 responses.
Proxy-Authorization	Yes	Cisco Unified CM SIP trunk supports sending new request with this header after receiving 407 responses.
Proxy-Require	No	
P-Asserted-Identity	Yes	
P-Preferred-Identity	Yes	
RAck	Yes	
Record-Route	Yes	
Remote-Party-ID	Yes	The system uses this header for ID services including Connected Name and ID. This is a non-standard header from a draft specification.
Replaces	Yes	For INIVTE and REFER.
Require	Yes	
Response-Key	No	
Retry-After	Yes	The system sends it but ignores receiving it.
Resource-Priority	Yes	
Route	Yes	
RSeq	Yes	
Server	Yes	
SIP-If-Match	Yes	For PUBLISH
SIP-Etag	Yes	For PUBLISH
Subject	No	

CISCO CONFIDENTIAL

Table 1-4 SIP Header Fields (continued)

SIP Header	Cisco Unified CM Supported	Comments
Supported	Yes	
Subscription-State	Yes	
Timestamp	Yes	
To	Yes	
Unsupported	Yes	
User-Agent	Yes	
Via	Yes	
Warning	Yes	
WWW-Authenticate	Yes	

Table 1-5 Supported Audio Media Types

Type	Encoding Name	Payload Type	Comments
G.711 u-law	PCMU	0	
GSM Full-rate	GSM	3	
G.723.1	G723	4	
G.711 A-law	PCMA	8	
G.722	G722	9	
G.728	G728	15	
G.729	G729	18	The system supports all combinations of annex A and B.
AAC	mpeg4-generic	Dynamically Assigned	Acceptable range is 96–127.
ILBC	iLBC	Dynamically Assigned	Acceptable range is 96–127.
RFC2833 DTMF	Telephony-event	Dynamically Assigned	Acceptable range is 96–127.
G.Clear	G.Clear	Dynamically Assigned	Acceptable range is 96–127. Cisco Unified CM default is 125.

Table 1-6 Supported Video Media Types

Types	Encoding Name	Payload Type
H.261	H261	31
H.263	H263	34
H.263+	H263-1998	Acceptable range is 96–127.
H.263++	H263-2000	Acceptable range is 96–127.
H.264	H264	Acceptable range is 96–127.

CISCO CONFIDENTIAL

Table 1-7 Supported Application Media Type

Types	Encoding Name	Payload Type
H.224 FECC	H224	Acceptable range is 96–127

Table 1-8 Supported T38fax Payload Type

Types	Encoding Name	Payload Type
T38fax	Not applied	Not applied

SIP Message Fields

The SIP trunk supports SIP request and SIP response messages. The request messages include INVITE, ACK, OPTIONS, BYE, CANCEL, PRACK, SUBSCRIBE, UPDATE, and REFER methods. The response message consists of a status-line with various status codes (1xx, 2xx, 3xx, 4xx, 5xx and 6xx). The SIP trunk supports all mandatory fields from the SIP standard. See Table 1-9 through Table 1-23.

Request Messages

INVITE

Table 1-9 INVITE Message Fields

Field	Example	Notes
Request-Line	`INVITE sip:cdpn@destIP:destPort; phone-context=cisco.com; tgrp=ccdata;user=phone SIP/2.0`	destIP=resolved IP address of configured DestAddr under SIPTrunk; it also could be FQDN SRV instead of destIP. If the address is an IPv6 address then it will be specified within [ ] square brackets. destPort=configured destPort or resolved port from DNS SRV. cgpn for outgoing INVITE, and cdpn for incoming INVITE. “phone-context=cisco.com; tgrp=ccdata;”= When MTP is not enabled and the G.Clear feature is enabled, these tags are added to the Request URI. Both of these values are user provisionable.

CISCO CONFIDENTIAL

Table 1-9 INVITE Message Fields (continued)

Field	Example	Notes

From	`From: "callerName" <sip:cgpn@CCM_IP_addr>;`
	`x-nearend;`
	`x-farend;`
	`x-refCI=CI_NUMBER;`
	`x-devicename=SEP_NAME`
		callerName = caller display i.e. IP phone
		Cgpn = calling party number
		CCM_IP_addr = CCM IP address (Depending on if this is a IPv4 or an IPv6 call, the appropriate Cisco Unified CM IP Address will be used)
		If the address is an IPv6 address then it will be specified within [ ] square brackets.
		x-nearend = Recorded party is the near-end.
		x-farend = Recorded party is the far-end
		x-refCI = Cisco Unified CM call identifier for recorded party
		x-devicename = Device name of recorded party.

To	`To: "calledName"` `<sip:cdpn@destIP;user=phone>`	The system includes calledName if available. destIP=resolved IP address of configured DestAddr/DestV6Addr under SIPTrunk; it could also be FQDN SRV instead of destIP.
Via	`Via:SIP/2.0 IP addr:Port;Branch=number`	IP addr = Cisco Unified CM IP (Depending on if this is a IPv4 or an IPv6 call, the appropriate CCM IP Address will be used) If the address is an IPv6 address then it will be specified within [ ] square brackets. Port = CCM Port Branch = Unique number
Call-ID	`Call-ID: number@CCM_IP_addr`	Cisco Unified CM generates the number internally.
Contact	`Contact:` `<sip:cgpn@CCM_IP_addr:localPort;user=phone>`	localPort = configured "Incoming port" of the indicated SIPTrunk
Cseq	`Cseq:number method`	Number = a traditional sequence number that is incremented for each new request within a dialog Method = INVITE
Max-Forwards	`Max-Forwards:number`	Number = Max-Forwards serves to limit the number of hops a request can make on the way to its destination. It consists of an integer that is decremented by one at each hop by sip proxy. CCM sets it 6 for outgoing INVITE.

CISCO CONFIDENTIAL

Table 1-9 INVITE Message Fields (continued)

Field	Example	Notes
Remote-Party-Id	**IPv4 Example** Remote-Party-ID:"Alice Smith" <sip:9728135111@161.44.147.67;user=phone>; party=calling;screen=no;privacy=off **IPv6 Example** Remote-Party-ID:"Alice Smith" <sip:97281351111@[2001:db8:1:101::12];user=phone>; party=calling;screen=no;privacy=off	Cisco Unified CM uses this SIP extension for more detailed description of Caller Identify and Privacy. It is also used to convey Connected Name and ID in a re-Invite message.
Diversion	**IPv4 Example** Diversion: <sip:23222@172.18.193.123>;reason=no-answer **IPv6 Example** Diversion:<sip:23222@[2001:db8:1:101::12]>; reason=no-answer	Cisco Unified CM uses Diversion header to carry RDNIS. In this case, 23222 will be carried as the Original Called Party ID.
Call-Info	**IPv4 Example** Call-Info: <sip:172.18.199.211>;purpose=x-cisco-origIP **IPv6 Example** Call-Info: <sip:[2001:db8:1:101::12]>;purpose=x-cisco-origIP	If this header is present in an incoming INVITE with the tag, purpose=x-cisco-origIP, and the trunk is configured to route the call based on the end device's IP Address, then this header will be used to route the call to the Trunk pointing to the IP Address in the Call-Info header.
P-Asserted-Identity	**IPv4 Example** P-Asserted-Identity: "Alice" <sip:4762424@172.18.199.211> **IPv6 Example** P-Asserted-Identity: "Alice" <sip:4762424@[2001:db8:1:101::12]>	Cisco Unified CM uses this header to convey caller name/number information. In the re-Invite message, it is used to convey the connected name/number. Cisco Unified CM adds the PAI header if the SIP trunk is configured with Asserted-Type=PAI or Asserted-Type=Default and the call control in Cisco Unified CM provides the screening indication of UserProvided “VerifiedAndPassed” or NetworkProvided. PAI header values are displayed per the user configuration.

CISCO CONFIDENTIAL

Table 1-9 INVITE Message Fields (continued)

Field	Example	Notes

P-Preferred-Identity	**IPv4 Example**
	
	`P-Preferred-Identity: "Alice" <sip: 4762424@172.18.199.211>`
	
	IPv6 Example
	
	`P-Preferred-Identity: "Alice" <sip: 4762424@[2001:db8:1:101::12]>`
		Cisco Unified CM uses this header to convey caller name/number information.
		
		In the re-Invite message, it is used to convey the connected name/number.
		
		Cisco Unified CM adds the PAI header if the SIP trunk is configured with Asserted-Type=PPI or Asserted-Type=Default and when the call control in Cisco Unified CM provides the screening indication of "Not Screened" or "VerifiedAndFailed" values.
		
		PPI header values are displayed as per the user configuration.

Resource-Priority	`Resource-Priority: DRSN.9`	If the MLPP feature is enabled, the Resource-Priority header is added to the initial INVITE.

Supported	`Supported: option-tag`
	
	`Example:`
	`Supported:`
	`100rel,timer,resource-priority,replaces`
		Cisco Unified CM adds Supported header in outgoing INVITE request when additional options like PRACK, Presence, Resource-Priority etc. are configured to indicate other side about Cisco Unified CM's capability.

Geolocation	`Geolocation: cid-url;inserted-by=hostport`
	
	`Example:`
	`Geolocation:`
	`<cid:4900@10.10.10.10>;inserted-by="10.10.10.10`
		SIP Trunk only supports sending and processing of cid-url in Geolocation header, though specification allows SIP, SIPS & pres URI's.

CISCO CONFIDENTIAL

Table 1-9 INVITE Message Fields (continued)

Field	Example	Notes
SDP	**IPv4 SDP** v=0 o=CiscoSystemsCCM-SIP 2000 1000 IN IP4 10.89.79.203 s=SIP Call c=IN IP4 10.89.79.203 t=0 0 m=audio 32314 RTP/AVP 0 101 a=rtpmap:0 PCMU/8000 a=ptime:20 a=rtpmap:101 telephone-event/8000 a=fmtp:101 0-15 m=audio 16604 RTP/AVP 125 a=rtpmap:125 CLEARMODE/8000 **IPv6 SDP** v=0 o=CiscoSystemsCCM-SIP 2000 1000 IN IP6 2001:db8:c18:1:21c:58ff:fe2a:23f8 s=SIP Call c=IN IP6 2001:db8:c18:1:21c:58ff:fe2a:23f3 t=0 0 m=audio 32314 RTP/AVP 0 101 a=rtpmap:0 PCMU/8000 a=ptime:20 a=rtpmap:101 telephone-event/8000 a=fmtp:101 0-15 **ANAT SDP with both IPv4 and IPv6 addresses** v=0 o=CiscoSystemsCCM-SIP 2000 1 IN IP4 172.18.199.129 s=SIP Call t=0 0 a=group:ANAT 1 2 m=audio 18484 RTP/AVP 0 101 c=IN IP6 2001:db8:c18:1:21c:58ff:fe2a:23f8 a=rtpmap:0 PCMU/8000 a=ptime:20 a=rtpmap:101 telephone-event/8000 a=fmtp:101 0-15 a=mid:1 m=audio 18282 RTP/AVP 0 101 c=IN IP4 172.18.199.55 a=rtpmap:0 PCMU/8000 a=ptime:20 a=rtpmap:101 telephone-event/8000 a=fmtp:101 0-15 a=mid:2	If MTP is not enabled for the SIP trunk, SDP is not in the initial INVITE. If MTP is enabled, Cisco Unified CM always include telephone-event for RFC2833 DTMF in the SDP. This dynamic payload type is configurable under Cisco Unified CM Service Parameter with default value as 101. For a SIP Trunk in IPv4 only mode, the SDP will contain the IPv4 address of the MTP device For a SIP Trunk in IPv6 only mode, the SDP will contain the IPv6 address of the MTP device For a Dual Mode SIP Trunk, if ANAT is enabled then, the SDP will contain both the IPv4 address, and the IPv6 address using the ANAT format. If MTP is enabled and G.Clear feature is enabled, CCM sends G.Clear mode information in the SDP in the initial INVITE.

CISCO CONFIDENTIAL

ACK

Table 1-10 ACK Message Fields

Field	Example	Notes
Request-Line	`ACK sip:cdpn@destIP:destPort;SIP/2.0`	destIP = resolved IP address of configured DestAddr/DestAddrIPv6 under SIPTrunk, it could also be FQDN SRV instead of destIP; If the address is an IPv6 address then it will be specified within [ ] square brackets. destPort=configured destPort or resolved port from DNS SRV.
From	`From: "callerName" <sip:cgpn@CCM_IP_addr>`	callerName=caller display i.e. IP phone Cgpn = calling party number CCM_IP_addr=CCM IP address (Depending on if this is a IPv4 or an IPv6 call, the appropriate CCM IP Address will be used) If the address is an IPv6 address then it will be specified within [ ] square brackets.
To	`To: "calledName"<sip:cdpn@destIP;user=phone>`	calledName is included if available destIP=resolved IP address of configured DestAddr/DestAddrIPv6 under SIPTrunk; it could also be FQDN SRV instead of destIP; If the address is an IPv6 address then it will be specified within [ ] square brackets.
Via	`Via:SIP/2.0 IP addr:Port;Branch=number`	IP addr=CCM IP (Depending on if this is a IPv4 or an IPv6 call, the appropriate CCM IP Address will be used) If the address is an IPv6 address then it will be specified within [ ] square brackets. Port=CCM Port Branch=Unique number
Call-ID	`Call-ID: number@CCM IP addr`	Cisco Unified CM generates this number internally.
CSeq	`Cseq: number method`	Number=a traditional sequence number that is incremented for each new request within a dialog Method=ACK
Max-Forwards	`Max-Forwards:number`	Number= Max-Forwards serves to limit the number of hops a request can make on the way to its destination. It consists of an integer that is decremented by one at each hop.

CISCO CONFIDENTIAL

BYE

Table 1-11 BYE Message Fields

Field	Example	Notes
Request-Line	`BYE sip:cdpn@destIP:destPort;SIP/2.0`	destIP = resolved IP address of configured DestAddr/DestAddrIPv6 under SIPTrunk, it could also be FQDN SRV instead of destIP; If the address is an IPv6 address then it will be specified within [ ] square brackets. destPort=configured destPort or resolved port from DNS SRV;
From	`From: "callerName" <sip:cgpn@CCM_IP_addr>`	callerName=caller display i.e. IP phone Cgpn = calling party number CCM_IP_addr=Cisco Unified CM IP address (Depending on if this is a IPv4 or an IPv6 call, the appropriate Cisco Unified CM IP Address will be used) If the address is an IPv6 address then it will be specified within [ ] square brackets.
To	`To: "calledName"<sip:cdpn@destIP;user=phone>`	calledName is included if available destIP=resolved IP address of configured DestAddr/DestAddrIPv6 under SIPTrunk; it could also be FQDN SRV instead of destIP; If the address is an IPv6 address then it will be specified within [ ] square brackets.
Via	`Via:SIP/2.0 IP addr:Port;Branch=number`	IP addr=Cisco Unified CM IP (Depending on if this is a IPv4 or an IPv6 call, the appropriate Cisco Unified CM IP Address will be used) If the address is an IPv6 address then it will be specified within [ ] square brackets. Port=CCM Port Branch=Unique number
Call-ID	`Call-ID: number@CCM IP addr`	Cisco Unified CM generates the number internally.
CSeq	`Cseq: number method`	Number=a traditional sequence number that is incremented for each new request within a dialog Method=BYE
Max-Forwards	`Max-Forwards:number`	Number = Max-Forwards serves to limit the number of hops a request can make on the way to its destination. It consists of an integer that is decremented by one at each hop

CISCO CONFIDENTIAL

Table 1-11 BYE Message Fields (continued)

Field	Example	Notes
Reason	`Reason: preemption;cause=<cause value>;text=<text string>`	Reason header is included when MLPP feature is enabled. Cause value and test string are defined as per RFC4411.

CANCEL

Table 1-12 CANCEL Message Fields

Field	Example	Notes
Request-Line	`CANCEL sip:cdpn@destIP:destPort;SIP/2.0`	destIP = resolved IP address of configured DestAddr/DestAddrV6 under SIPTrunk, it could also be FQDN SRV instead of destIP; If the address is an IPv6 address then it will be specified within [ ] square brackets. destPort=configured destPort or resolved port from DNS SRV.
From	`From: "callerName" <sip:cgpn@CCM_IP_addr>`	callerName=caller display i.e. IP phone Cgpn = calling party number CCM_IP_addr=Cisco Unified CM IP address (Depending on if this is a IPv4 or an IPv6 call, the appropriate Cisco Unified CM IP Address will be used) If the address is an IPv6 address then it will be specified within [ ] square brackets.
To	`To: "calledName"<sip:cdpn@destIP;user=phone>`	calledName is included if available destIP=resolved IP address of configured DestAddr/DestAddrIPv6 under SIPTrunk; it could also be FQDN SRV instead of destIP; If the address is an IPv6 address then it will be specified within [ ] square brackets.
Via	`Via:SIP/2.0 IP addr:Port;Branch=number`	IP addr=Cisco Unified CM IP (Depending on if this is a IPv4 or an IPv6 call, the appropriate CCM IP Address will be used) If the address is an IPv6 address then it will be specified within [ ] square brackets. Port=Cisco Unified CM Port Branch=Unique number
Call-ID	`Call-ID: number@CCM IP addr`	Cisco Unified CM generates the number internally.

CISCO CONFIDENTIAL

Table 1-12 CANCEL Message Fields (continued)

Field	Example	Notes
CSeq	`Cseq: number method`	Number=a traditional sequence number that is incremented for each new request within a dialog Method=CANCEL
Max-Forwards	`Max-Forwards:number`	Number= Max-Forwards serves to limit the number of hops a request can make on the way to its destination. It consists of an integer that is decremented by one at each hop

PRACK

Table 1-13 PRACK Message Fields

Field	Example	Notes
Request-Line	`PRACK sip:cdpn@destIP:destPort;SIP/2.0`	destIP = resolved IP address of configured DestAddr/DestAddrIPv6 under SIPTrunk, it could also be FQDN SRV instead of destIP; If the address is an IPv6 address then it will be specified within [ ] square brackets. destPort=configured destPort or resolved port from DNS SRV;
From	`From: "callerName" <sip:cgpn@CCM_IP_addr>`	callerName=caller display i.e. IP phone Cgpn = calling party number CCM_IP_addr=CCM IP address (Depending on if this is a IPv4 or an IPv6 call, the appropriate CCM IP Address will be used) If the address is an IPv6 address then it will be specified within [ ] square brackets.
To	`To: "calledName"<sip:cdpn@destIP;user=phone>`	calledName is included if available destIP=resolved IP address of configured DestAddr/DestAddrIPv6 under SIPTrunk; it could also be FQDN SRV instead of destIP; If the address is an IPv6 address then it will be specified within [ ] square brackets.
Via	`Via:SIP/2.0 IP addr:Port;Branch=number`	IP addr=CCM IP (Depending on if this is a IPv4 or an IPv6 call, the appropriate CCM IP Address will be used) If the address is an IPv6 address then it will be specified within [ ] square brackets. Port=CCM Port Branch=Unique number
Call-ID	`Call-ID: number@CCM IP addr`	Cisco Unified CM generates the number internally.

CISCO CONFIDENTIAL

Table 1-13 PRACK Message Fields (continued)

Field	Example	Notes
CSeq	`Cseq: number PRACK`	Number=a traditional sequence number that is incremented for each new request within a dialog Method=Method Name
Rack	`Rack:number1 number2`	Number1=value from the RSeq header in the provisional response that is being acknowledged Number2=The next number, and the method, are copied from the CSeq in the response that is being acknowledged.

UPDATE

Table 1-14 UPDATE Message Fields

Field	Example	Notes
Request-Line	`UPDATE sip:cdpn@destIP:destPort;user=phone SIP/2.0`	destIP = resolved IP address of configured DestAddr/DestAddrIPv6 under SIPTrunk, it could also be FQDN SRV instead of destIP; If the address is an IPv6 address then it will be specified within [ ] square brackets. destPort=configured destPort or resolved port from DNS SRV;
From	`From: "callerName" <sip:cgpn@CCM_IP_addr>`	callerName=caller display i.e. IP phone Cgpn = calling party number CCM_IP_addr=CCM IP address (Depending on if this is a IPv4 or an IPv6 call, the appropriate CCM IP Address will be used) If the address is an IPv6 address then it will be specified within [ ] square brackets.
To	`To: "calledName"<sip:cdpn@destIP;user=phone>`	calledName is included if available destIP=resolved IP address of configured DestAddr/DestAddrIPv6 under SIPTrunk; it could also be FQDN SRV instead of destIP; If the address is an IPv6 address then it will be specified within [ ] square brackets.
Via	`Via:SIP/2.0 IP addr:Port;Branch=number`	IP addr=CCM IP (Depending on if this is a IPv4 or an IPv6 call, the appropriate CCM IP Address will be used) If the address is an IPv6 address then it will be specified within [ ] square brackets. Port=CCM Port Branch=Unique number

CISCO CONFIDENTIAL

Table 1-14 UPDATE Message Fields (continued)

Field	Example	Notes
Call-ID	`Call-ID: number@CCM IP addr`	Cisco Unified CM generates the number internally.
Contact	`Contact: <sip:cgpn@CCM_IP_addr:localPort;user=phone>`	localPort = configured "Incoming port" of the indicated SIPTrunk
Cseq	`Cseq:number method`	Number=a traditional sequence number that is incremented for each new request within a dialog Method=UPDATE
Max-Forwards	`Max-Forwards:number`	Number= Max-Forwards serves to limit the number of hops a request can make on the way to its destination. It consists of an integer that is decremented by one at each hop

Remote-Party-Id	IPv4 Example
	`Remote-Party-ID:"Alice Smith" <sip:9728135111@161.44.147.67;user=phone>; party=calling;screen=no;privacy=off`
	IPv6 Example
	`Remote-Party-ID:"Alice Smith" <sip:97281351111@[2001:db8:1:101::12];user=phone>; party=calling;screen=no;privacy=off`
		Cisco Unified CM uses this SIP extension for more detailed description of Caller Identify and Privacy. It is also used to convey Connected Name & ID in a re-Invite message.

P-Asserted-Identity	IPv4 Example
	`P-Asserted-Identity: "Alice" <sip:4762424@172.18.199.211>`
	IPv6 Example
	`P-Asserted-Identity: "Alice" <sip:4762424@[2001:db8:1:101::12]>`
		Cisco Unified CM uses this header for conveying the Connected Name/Number.
		Cisco Unified CM adds the PAI header, if SIP Trunk is configured with Asserted-Type=PAI or Asserted-Type=Default and when the call control in Cisco Unified CM provides the screening indication of UserProvided "VerifiedAndPassed" or NetworkProvided..

P-Preferred-Identity	IPv4 Example
	`P-Preferred-Identity: "Alice" <sip:4762424@172.18.199.211>`
	IPv6 Example
	`P-Preferred-Identity: "Alice" <sip:4762424@[2001:db8:1:101::12]>`
		Cisco Unified CM uses this header for conveying the Connected Name/Number.
		Cisco Unified CM adds the PPI header, if SIP Trunk is configured with Asserted-Type=PPI or Asserted-Type=Default and when the call control in Cisco Unified CM provides the screening indication of "Not Screened" or "VerifiedAndFailed" values.
		PPI header values are displayed as per the user configuration.

Resource-Priority	`Resource-Priority: DRSN.9`	If the MLPP feature is enabled, Resource-Priority header is added to the UPDATE message.

CISCO CONFIDENTIAL

Table 1-14 UPDATE Message Fields (continued)

Field	Example	Notes

Geolocation	`Geolocation: cid-url;inserted-by=hostport`
	
	`Example:`
	`Geolocation:`
	`<cid:4900@10.10.10.10>;inserted-by="10.10.10.10`
		SIP Trunk only supports sending and processing of cid-url in Geolocation header, though specification allows SIP, SIPS & pres URI's.

SUBSCRIBE

Table 1-15 SUBSCRIBE Message Fields

Field	Example	Notes
Request-Line	`SUBSCRIBE sip:subscribee@destIP:destPort SIP/2.0`	destIP = resolved IP address of configured DestAddr/DestAddrIPv6 under SIPTrunk, it could also be FQDN SRV instead of destIP; If the address is an IPv6 address then it will be specified within [ ] square brackets. destPort=configured destPort or resolved port from DNS SRV;
From	`From: "callerName" <sip:cgpn@CCM_IP_addr>`	callerName=caller display i.e. IP phone Cgpn = calling party number CCM_IP_addr=CCM IP address (Depending on if this is a IPv4 or an IPv6 call, the appropriate CCM IP Address will be used) If the address is an IPv6 address then it will be specified within [ ] square brackets.
To	`To: "calledName"<sip:cdpn@destIP>`	calledName is included if available destIP=resolved IP address of configured DestAddr/DestAddrIPv6 under SIPTrunk; it could also be FQDN SRV instead of destIP; If the address is an IPv6 address then it will be specified within [ ] square brackets.
Via	`Via:SIP/2.0 IP addr:Port;Branch=number`	IP addr=CCM IP (Depending on if this is a IPv4 or an IPv6 call, the appropriate CCM IP Address will be used) If the address is an IPv6 address then it will be specified within [ ] square brackets. Port=CCM Port Branch=Unique number
Call-ID	`Call-ID: number@CCM IP addr`	Cisco Unified CM generates the number internally.
Contact	`Contact: <sip:cgpn@CCM_IP_addr:localPort>`	localPort = configured "Incoming port" of the indicated SIPTrunk

CISCO CONFIDENTIAL

Table 1-15 SUBSCRIBE Message Fields (continued)

Cseq	`Cseq:number method`	Number=a traditional sequence number that is incremented for each new request within a dialog Method=SUBSCRIBE
Expires	`Expires: number`	Number = The duration of the subscription, in seconds.
Max-Forwards	`Max-Forwards:number`	Number= Max-Forwards serves to limit the number of hops a request can make on the way to its destination. It consists of an integer that is decremented by one at each hop by sip proxy.
Event:	`kpml, presence`	The Event Type that the Subscribe if for. Unified CM supports kpml and presence event packages.
Content-Type:	`application/kpml-request+xml or message/sipfrag;version=2.0`	Unified CM SIP Trunk supports message/sipfrag;version=2.0, application/kpml-request+xml and application/pidf+xml

NOTIFY

Table 1-16 NOTIFY Message Fields

Field	Example	Notes
Request-Line	`NOTIFY sip:subscriber@destIP:destPort SIP/2.0`	destIP = resolved IP address of configured DestAddr/DestAddrIPv6 under SIPTrunk, it could also be FQDN SRV instead of destIP; If the address is an IPv6 address then it will be specified within [ ] square brackets. destPort=configured destPort or resolved port from DNS SRV;
From	`From: "callerName" <sip:cgpn@CCM_IP_addr>`	callerName=caller display i.e. IP phone Cgpn = calling party number CCM_IP_addr=CCM IP address (Depending on if this is a IPv4 or an IPv6 call, the appropriate CCM IP Address will be used) If the address is an IPv6 address then it will be specified within [ ] square brackets.
To	`To: "calledName"<sip:cdpn@destIP>`	calledName is included if available destIP=resolved IP address of configured DestAddr/DestAddrIPv6 under SIPTrunk; it could also be FQDN SRV instead of destIP; If the address is an IPv6 address then it will be specified within [ ] square brackets.

CISCO CONFIDENTIAL

Table 1-16 NOTIFY Message Fields (continued)

Field	Example	Notes
Via	`Via:SIP/2.0 IP addr:Port;Branch=number`	IP addr=CCM IP (Depending on if this is a IPv4 or an IPv6 call, the appropriate CCM IP Address will be used) If the address is an IPv6 address then it will be specified within [ ] square brackets. Port=CCM Port Branch=Unique number
Call-ID	`Call-ID: number@CCM IP addr`	Number is generated internally by Cisco Unified CM.
Contact	`Contact: <sip:cgpn@CCM_IP_addr:localPort>`	localPort = configured "Incoming port" of the indicated SIPTrunk
Cseq	`Cseq:number method`	Number=a traditional sequence number that is incremented for each new request within a dialog Method=NOTIFY
Subscription-State:	`Subscription-State:state-value; expires=number`	State-value=active|pending|terminated Expires= authoritative subscription duration.
Max-Forwards	`Max-Forwards:number`	Number= Max-Forwards serves to limit the number of hops a request can make on the way to its destination. It consists of an integer that is decremented by one at each hop by SIP proxy.
Event	`kpml, presence`	The Event Type that the Subscribe if for. Cisco Unified CM supports kpml and presence event packages.
Content-Type:	`application/kpml-request+xml or message/sipfrag;version=2.0`	Cisco Unified CM SIP Trunk supports message/sipfrag;version=2.0, application/kpml-request+xml and application/pidf+xml

PUBLISH

Table 1-17 PUBLISH Message Fields

Field	Example	Notes
Request-Line	`PUBLISH sip:user@destIP:destPort SIP/2.0`	user=end user name associated with a line appearance; destIP = resolved IP address of configured DestAddr/DestAddrIPv6 under SIPTrunk, it could also be FQDN SRV instead of destIP; If the address is an IPv6 address then it will be specified within [ ] square brackets. destPort=configured destPort or resolved port from DNS SRV;

CISCO CONFIDENTIAL

Table 1-17 PUBLISH Message Fields (continued)

Field	Example	Notes
From	`From: <sip:user@CCM_IP_addr>`	user=end user name associated with a line appearance; CCM_IP_addr=Cisco Unified CM IP address (Depending on if this is a IPv4 or an IPv6 call, the appropriate Cisco Unified CM IP Address will be used) If the address is an IPv6 address then it will be specified within [ ] square brackets.
To	`To: <sip:user@destIP>`	user=end user name associated with a line appearance; destIP=resolved IP address of configured DestAddr/DestAddrIPv6 under SIPTrunk; it could also be FQDN SRV instead of destIP; If the address is an IPv6 address then it will be specified within [ ] square brackets.
Via	`Via:SIP/2.0 IP addr:Port;Branch=number`	IP addr=Cisco Unified CM IP (Depending on if this is a IPv4 or an IPv6 call, the appropriate Cisco Unified CM IP Address will be used) If the address is an IPv6 address then it will be specified within [ ] square brackets. Port=Cisco Unified CM Port Branch=Unique number
Call-ID	`Call-ID: number@CCM IP addr`	Cisco Unified CM generates the number internally.
Cseq	`Cseq:number method`	Number=a traditional sequence number that is incremented for each new request within a dialog Method=PUBLISH
Max-Forwards	`Max-Forwards:number`	Number= Max-Forwards serves to limit the number of hops a request can make on the way to its destination. It consists of an integer that is decremented by one at each hop by sip proxy.
Event	`presence`	Cisco Unified CM supports presence event for PUBLISH.
Expires	`Expires: number`	number=suggested expiration time for PUBLISH in seconds. Default is 3600.
Content-Type:	`application/pidf+xml`	

CISCO CONFIDENTIAL

Response Messages

18x

Table 1-18 18X Message Fields

Field	Example	Notes
Remote-Party-Id	IPv4 Example Remote-Party-ID:"Bob Jones" <sip:9728135111@161.44.147.67;user=phone>; party=called;screen=no;privacy=off IPv6 Example Remote-Party-ID:"Bob Jones" <sip:9728135111@[2001:db8:1:101::12];user=phone>; party=called;screen=no;privacy=off	Cisco Unified CM uses this SIP extension to convey Connected Name and ID information.
P-Asserted-Identity	IPv4 Example P-Asserted-Identity: "Alice" <sip:4762424@172.18.199.211> IPv6 Example P-Asserted-Identity: "Alice" <sip:4762424@[2001:db8:1:101::12]>	Cisco Unified CM uses this header for conveying the Alerting Name/Number. Cisco Unified CM adds the PAI header, if SIP Trunk is configured with Asserted-Type=PAI or Asserted-Type=Default and when the call control in Cisco Unified CM provides the screening indication of UserProvided "VerifiedAndPassed" or NetworkProvided. PAI header values are displayed as per the user configuration.
P-Preferred-Identity	IPv4 Example P-Preferred-Identity: "Alice" <sip:4762424@172.18.199.211> IPv6 Example P-Preferred-Identity: "Alice" <sip:4762424@[2001:db8:1:101::12]>	Cisco Unified CM uses this header for conveying the Alerting Name/Number. Cisco Unified CM adds the PPI header, if SIP Trunk is configured with Asserted-Type=PPI or Asserted-Type=Default and when the call control in Cisco Unified CM provides the screening indication of "Not Screened" or "VerifiedAndFailed" values. PPI header values are displayed as per the user configuration.
SDP	m=audio 30844 RTP/AVP 0 101 a=rtpmap:0 pcmu/8000 a=rtpmap:101 telephone-event/8000 a=fmtp:101 0-11	If a call resulted in early media setup (that is, a SIP to MGCP PRI call), Cisco Unified CM includes SDP answer in 183 message.

CISCO CONFIDENTIAL

2xx

Table 1-19 2XX Message Fields

Field	Example	Notes
Remote-Party-Id	IPv4 Example Remote-Party-ID:"Bob Jones" <sip:9728135111@161.44.147.67;user=phone>; party=called;screen=no;privacy=off IPv6 Example Remote-Party-ID:"Bob Jones" <sip:97281351111@[2001:db8:1:101::12];user=phone>; party=called;screen=no;privacy=off	Cisco Unified CM uses this SIP extension to convey Connected Name and ID information.
P-Asserted-Identity	IPv4 Example P-Asserted-Identity: "Alice" <sip:4762424@172.18.199.211> IPv6 Example P-Asserted-Identity: "Alice" <sip:4762424@[2001:db8:1:101::12]>	Cisco Unified CM uses this header for conveying the Connected Name/Number. Cisco Unified CM adds the PAI header, if SIP Trunk is configured with Asserted-Type=PAI or Asserted-Type=Default and when the call control in Cisco Unified CM provides the screening indication of UserProvided "VerifiedAndPassed" or NetworkProvided. PAI header values are displayed as per the user configuration.
P-Preferred-Identity	IPv4 Example P-Preferred-Identity: "Alice" <sip:4762424@172.18.199.211> IPv6 Example P-Preferred-Identity: "Alice" <sip:4762424@[2001:db8:1:101::12]>	Cisco Unified CM uses this header for conveying the Connected Name/Number. Cisco Unified CM adds the PPI header, if SIP Trunk is configured with Asserted-Type=PPI or Asserted-Type=Default and when the call control in Cisco Unified CM provides the screening indication of "Not Screened" or "VerifiedAndFailed" values. PPI header values are displayed as per the user configuration.

3xx

3xx responses give information about the new user location or about alternative services that might be able to satisfy the call.

Table 1-20 3XX Message Fields

Field	Example	Notes
Status Code	SIP/2.0 302 Moved Temporarily	The requesting client SHOULD retry the request at the new address(es) given by the Contact header field.

CISCO CONFIDENTIAL

Table 1-20 3XX Message Fields (continued)

Field	Example	Notes
From	IPv4 Example From: <sip: 1101@10.89.79.203>;tag=16777234 IPv6 Example From: <sip: 1101@[2001:db8:1:101::12]>;tag=16777234	10.89.79.203 is CCM IPv4 address 2001:db8:1:101::12 is CCM IPv6 Address 16777234 is the Call Id
To	IPv4 Example To: <sip:30000@10.89.73.75>;tag=0002fd06e930010 8228d58c1-614f99be IPv6 Example To: <sip:30000@ [2001:db8:1:2::12]>;tag=0002fd06e9300108228 d58c1-614f99be	3000 is the Calling Party Number
Via	IPv4 Example Via: SIP/2.0/TCP 10.89.79.203:5060;received=10.89.79.203;bra nch=z9hG4bKfe8d27ec IPv6 Example Via: SIP/2.0/TCP [2001:db8:1:101::12]:5060;branch=z9hG4bKfe8 d27ec	10.89.79.203=CCM IPv4 Address 2001:db8:1:101::12 is CCM IPv6 Address 5060=CCM Port Branch=Unique number
Contact	IPv4 Example Contact: <sip:30000@10.8.69.115:5060> IPv6 Example Contact: <sip:30000@[2001:db8:1:101::12]:5060>	localPort = configured "Incoming port" of the indicated SIPTrunk

4xx

4xx responses represent definite failure responses from a particular server.

Table 1-21 4XX Message Fields

Field	Example	Notes
Status Code	SIP/2.0 487 Request Cancelled	The request was terminated by a BYE or CANCEL request.
From	IPv4 Example From: <sip: 1101@10.89.79.203>;tag=16777234 IPv6 Example From: <sip: 1101@[2001:db8:1:101::12]>;tag=16777234	10.89.79.203 is CCM IPv4 address 2001:db8:1:101::12 is CCM IPv6 Address 16777234 is the Call Id

CISCO CONFIDENTIAL

Table 1-21 4XX Message Fields (continued)

Field	Example	Notes
To	IPv4 Example To: <sip:30000@10.89.73.75>;tag=0002fd06e9300108228d58c1-614f99be IPv6 Example To: <sip:30000@[2001:db8:1:2::12]>;tag=0002fd06e9300108228d58c1-614f99be	3000 is the Calling Party Number.
Via	IPv4 Example Via: SIP/2.0/TCP 10.89.79.203:5060;received=10.89.79.203;branch=z9hG4bKfe8d27ec IPv6 Example Via: SIP/2.0/TCP [2001:db8:1:101::12]:5060;branch=z9hG4bKfe8d27ec	10.89.79.203=CCM IPv4 Address 2001:db8:1:101::12 is CCM IPv6 Address 5060=CCM Port Branch=Unique number
Contact	IPv4 Example Contact: <sip:30000@10.8.69.115:5060> IPv6 Example Contact: <sip:30000@[2001:db8:1:101::12]:5060>	localPort = configured "Incoming port" of the indicated SIPTrunk

5xx

The server encountered an unexpected condition that prevented it from fulfilling the request.

Table 1-22 5XX Message Fields

Field	Example	Notes
Status Code	SIP/2.0 501 Not Implemented	This is the appropriate response when a UAS does not recognize the request method
From	IPv4 Example From: <sip: 1101@10.89.79.203>;tag=16777234 IPv6 Example From: <sip:1101@[2001:db8:1:101::12]>;tag=16777234	10.89.79.203 is CCM IPv4 address 2001:db8:1:101::12 is CCM IPv6 Address 16777234 is the Call Id

CISCO CONFIDENTIAL

Table 1-22 5XX Message Fields (continued)

Field	Example	Notes
To	IPv4 Example To: <sip:30000@10.89.73.75>;tag=0002fd06e9300108228d58c1-614f99be IPv6 Example To: <sip:30000@ [2001:db8:1:2::12]>;tag=0002fd06e9300108228d58c1-614f99be	3000 is the Calling Party Number
Via	IPv4 Example Via: SIP/2.0/TCP 10.89.79.203:5060;received=10.89.79.203;branch=z9hG4bKfe8d27ec IPv6 Example Via: SIP/2.0/TCP [2001:db8:1:101::12]:5060;branch=z9hG4bKfe8d27ec	10.89.79.203=CCM IPv4 Address 2001:db8:1:101::12 is CCM IPv6 Address 5060=CCM Port Branch=Unique number
Contact	IPv4 Example Contact: <sip:30000@10.8.69.115:5060> IPv6 Example Contact: <sip:30000@[2001:db8:1:101::12]:5060>	localPort = configured "Incoming port" of the indicated SIPTrunk

6xx

6xx indicates that the callee end system was contacted successfully but the callee is busy and does not want to take the call at this time.

Table 1-23 6XX Message Fields

Field	Example	Notes
Status Code	SIP/2.0 600 Busy Everywhere	The callee end system was contacted successfully, but the callee is busy and does not want to take the call at this time.
From	IPv4 Example From: <sip: 1101@10.89.79.203>;tag=16777234 IPv6 Example From: <sip: 1101@[2001:db8:1:101::12]>;tag=16777234	10.89.79.203 is CCM IPv4 address 2001:db8:1:101::12 is CCM IPv6 Address 16777234 is the Call Id

CISCO CONFIDENTIAL

Table 1-23 6XX Message Fields (continued)

Field	Example	Notes
To	IPv4 Example To: <sip:30000@10.89.73.75>;tag=0002fd06e9300108228d58c1-614f99be IPv6 Example To: <sip:30000@[2001:db8:1:2::12]>;tag=0002fd06e9300108228d58c1-614f99be	3000 is the Calling Party Number
Via	IPv4 Example Via: SIP/2.0/TCP 10.89.79.203:5060;received=10.89.79.203;branch=z9hG4bKfe8d27ec IPv6 Example Via: SIP/2.0/TCP [2001:db8:1:101::12]:5060;branch=z9hG4bKfe8d27ec	10.89.79.203=CCM IPv4 Address 2001:db8:1:101::12 is CCM IPv6 Address 5060=CCM Port Branch=Unique number
Contact	IPv4 Example Contact: <sip:30000@10.8.69.115:5060> IPv6 Example Contact: <sip:30000@[2001:db8:1:101::12]:5060>	localPort=configured “Incoming port” of the indicated SIPTrunk

Message Timers

The following timers are service parameters that are configurable in Cisco Unified CM Administration. Cisco Unified CM maintains the following configuration data for the SIP timers.

Table 1-24 Message Timers

Timer	Value(Default/range)	Definition
trying	500 ms/100–1000 ms	The time to wait for a 100 response to an INVITE request
connect	500 ms / 100–1000 ms	The time to wait for a 200 response to an ACK request
disconnect	500 ms / 100–1000 ms	The time to wait for a 200 response to a BYE request
expires	3 min/ 1–5 min	Limits the time duration for which an INVITE is valid
rel1xx	500 ms / 100–1000 ms	The time that Cisco Unified CM should wait before retransmitting the reliable 1xx responses
prack	500 ms / 100–1000 ms	The time that Cisco Unified CM should wait before retransmitting the PRACK request

CISCO CONFIDENTIAL

Table 1-24 Message Timers (continued)

Timer	Value(Default/range)	Definition
notify	500 ms / 100–1000 ms	The time that Cisco Unified CM should wait before retransmitting the Notify message
publish	500 ms / 100–1000 ms	The time that Cisco Unified CM should wait before retransmitting the Publish message

Message Retry Counts

All the following retry counts are service parameters that are configurable in Cisco Unified CM Administration. Cisco Unified CM maintains the following configuration data for the SIP retries. In case of TCP transportation type, the timers will still pop as usual; however, in the event of timeout, Stack does not retransmit; it will instead rely on TCP itself to do the retry.

Table 1-25 Message Retry Counts

Counter	Default Value	Suggested Range	Definition
Invite retry count	5	1 – 10	Number of INVITE retries
Response retry count	6	1 – 10	Number of RESPONSE retries
Bye retry count	10	1 – 10	Number of BYE retries
Cancel retry count	10	1 – 10	Number of Cancel retries
PRACK retry count	6	1 – 10	Number of PRACK retries
Rel1xx retry count	10	1 – 10	Number of Reliable 1xx response retries
Notify retry count	6	1 - 10	Number of NOTIFY retries
Publish retry count	6	1 - 10	Number of Publish retries

SIP Status Code to Q.850 Cause Code Mapping

Table 1-26 lists the SIP Status Codes and maps them to the Q.850 Release Cause Codes.

Table 1-26 SIP Status Code to Q.850 Cause Code Mapping

SIP Status Code	Q.850 Cause Code	Q.850 Release Cause Description	Scenarios when generated by Cisco Unified CM (due to internal errors)
404 Not Found 485 Ambiguous 604 Does not exist anywhere	1 Unallocated (unassigned) number	Indicates that the destination that the calling user requested cannot be reached because the number is unassigned	The number is not in the routing table, or it has no path across the ISDN network.

CISCO CONFIDENTIAL

Table 1-26 SIP Status Code to Q.850 Cause Code Mapping (continued)

SIP Status Code	Q.850 Cause Code	Q.850 Release Cause Description	Scenarios when generated by Cisco Unified CM (due to internal errors)
486 Busy here 491 Request pending 493 Undecipherable 600 Busy everywhere	17 User busy	Indicates that the called party cannot accept another call because the user busy condition has been encountered. Either the called user or the network can generate this cause value. In the case of a user-determined user busy, be aware that the user equipment is compatible with the call.	User is already using the telephone.
480 Temporarily unavailable	18 No user responding	Used when the called party does not respond to a call establishment message with either an alerting or connect indication within the time allotted. The number that is being dialed has an active D-channel, but the far end chooses not to answer.	The user does not answer the telephone.
401 Unauthorized 402 Payment Required 403 Forbidden 407 Proxy Authentication Required 600 Decline	21 Call rejected	Indicates that the equipment sending this cause code does not want to accept this call, although it could accept the call because the equipment sending the cause is neither busy nor incompatible. The network might also generate this code to indicate that the call was cleared because of a supplementary service constraint. The diagnostic field might contain additional information about the supplementary service and reason for rejection.	A subscriber has a service constraint that does not accept this call.
410 Gone	22 Number changed	Returned to a calling party when the called number that is indicated by the calling party is no longer assigned. This diagnostic field might optionally contain the new called party number.	A subscriber changed their number.
482 Loop detected 483 Too many hoops	25 Exchange routing error	Indicates that the destination that the user indicated cannot be reached because an intermediate exchange released the call due to reaching a limit in executing the hop counter procedure.	The network is overloaded.
484 Address incomplete	28 Invalid number format	Indicates that the called party cannot be reached because the called party number is not in a valid format or is not complete.	The caller calls out by using a network type number (enterprise) rather instead of Unknown or National.

CISCO CONFIDENTIAL

Table 1-26 SIP Status Code to Q.850 Cause Code Mapping (continued)

SIP Status Code	Q.850 Cause Code	Q.850 Release Cause Description	Scenarios when generated by Cisco Unified CM (due to internal errors)
487 Request terminated 488 Not acceptable here 606 Not acceptable	31 Normal unspecified	Reports a normal event only when no other cause in the normal class applies.	Normal operation
502 Bad gateway	38 Network out of order	Indicates that the network is not functioning correctly and that the condition is likely to last for an extended time .	Network failure
400 Bad Request 481 Call leg does not exist 500 Server internal error 503 Service Unavailable	41 Temporary failure	Indicates that the network is not functioning correctly and that the condition is likely to be resolved quickly.	Network failure
405 Method not allowed	63 Service or option not available, unspecified	Reports a service or option as a not available event only when no other cause in the service or option not available class applies.	Service not available
406 Not acceptable 415 Unsupported media type 501 Not implemented	79 Service or option not implemented, unspecified	Reports a service or option as a not implemented event only when no other cause in the service or option not implemented class applies.	Service not implemented
408 Request timeout 504 Server timeout	102 Recovery on timer expiry	Indicates that the expiration of a timer in association with error handling procedures initiated the procedure.	•No H.323 call proceeding •No H.323 alerting or connect message received from the terminating gateway •Invite expires timer reached maximum number of retries that are allowed.

CISCO CONFIDENTIAL

Table 1-26 SIP Status Code to Q.850 Cause Code Mapping (continued)

SIP Status Code	Q.850 Cause Code	Q.850 Release Cause Description	Scenarios when generated by Cisco Unified CM (due to internal errors)
411 Length required 413 Request entity too long 414 Request URI too long 416 Unsupported URI scheme 420 Bad extension 421 Extension required 423 Interval too brief 505 SIP version not supported 513 Message too large	127 Internal error, unspecified	CC_CAUSE_INTERWORKING Indicates that interworking occurred with a network that does not provide causes for actions that it takes. The precise cause cannot be ascertained.	Failed to send message to Public Switched Telephone Network (PSTN)

SIP Trunk Supported Features

This section provides details with respect to overall flow and handling of basic SIP trunk features. This includes, but is not limited to, the following features:

- Identification Services
- Basic Call
- Simple Hold/Resume
- Transfer
- Enhanced Click To Dial
- Conference
- Call Forwarding
- Message Waiting Indication
- Endpoint 302 Redirect
- Park and Retrieve
- Video
- T38 Fax
- Presence (Busy Lamp Field)
- Out-of-band DTMF using KPML
- SIP Over TLS Connection
- Call Preservation
- Outbound PUBLISH
- Click-to-Call
- Monitoring and Recording
- SIP Trunk Device Identification

CISCO CONFIDENTIAL

- Click-to-conference
- G.729 with MTP
- PAI/PPI
- SRTP
- G.Clear
- MLPP
- V.150.1
- SIP T38 Fax Interoperability with Microsoft Exchange
- MMoH
- Location based CAC
- IPv6
- Calling Party Number Transformations
- Logical Partitioning
- Early Offer G.Clear
- SRTP over non-secure SIP Trunks

Identification Services

This section describes the SIP Identification Services in Cisco Unified CM. These services include Line Identification Services and Name Identification Services. Line Identification Services include Calling Line and Connected Line Presentation/Restriction. Name Identification Services include Calling Name and Connected Name Presentation/Restriction.

The following sections describe the options that Cisco Unified CM 6.1 and later provide for communication of identity and presentation information. The selection of these options is controllable through a SIP trunk configuration. You can use either or both options. If you select both, Asserted-Identity takes precedence over RPID.

- Using Remote-Party-ID Header, page 1-33
- Using P-Asserted-Identity/P-Preferred-Identity and Privacy header, page 1-35

Using Remote-Party-ID Header

Cisco Unified CM provides flexible configuration options to provide these services on a call-by-call basis or statically preconfigured for each SIP trunk. This section does not describe those configuration options; it only provides the details on how Cisco Unified CM conveys these ID services in SIP by using the Remote-Party-ID header. Table 1-27 captures the support levels for the various parameters:

Table 1-27 Support Levels for Various Parameters

Parameter	Values	Notes
party	calling	Ignored if received by Cisco Unified CM.
	called	Set to called for outgoing INVITE or UPDATE from Cisco Unified CM. Set to calling for outgoing responses from Cisco Unified CM.

CISCO CONFIDENTIAL

Table 1-27 Support Levels for Various Parameters (continued)

Parameter	Values	Notes
id-type	subscriber user term	Ignored if received by Cisco Unified CM. Set to subscriber for outgoing requests and responses.
privacy	full name uri off	Supported if received by Cisco Unified CM. Cisco Unified CM also supports sending all values in either INVITE or UPDATE requests and responses for the same.
screen	no yes	Ignored if received by Cisco Unified CM. Cisco Unified CM always sends yes when generating an Remote-Party-ID header.

The following sections provide additional details:

- Calling Line and Name Identification Presentation, page 1-34
- Calling Line and Name Identification Restriction, page 1-34
- Connected Line and Name Identification Presentation, page 1-35
- Connected Line and Name Identification Restriction, page 1-35

Cisco Unified CM uses SIP “From” and “Remote-Party-ID” headers to provide ID services as described in the following sections.

Calling Line and Name Identification Presentation

You can configure Number and Name restriction independently on the SIP trunk. Customers can choose to restrict only number and allow name to be presented or vice versa. The default SIP trunk configuration setting specifies “not selected” or “per call setting.”

Calling Line and Name Identification Restriction

- **Name**—When name is restricted, the display field (calling Name) in “From” header is set to a configurable string (that is, “Anonymous”). The display field in the “Remote-Party-ID” header still includes the actual name but the privacy field is set to **“name”**. For example:

```
From: “Anonymous” <sip:9728135001@localhost>
Remote-Party-ID: “Bob Jones”<9728135001@localhost; user=phone>;
party=calling;screen=yes;privacy=name
```

- **Number**—When number is restricted, the calling Line is left out in the “From” header; however, it is still included in the “Remote-Party-ID” header with **privacy=*uri***. For example:

```
From: “Bob Jones” <sip: 9728135001@localhost>
Remote-Party-ID: “Bob Jones”<9728135001@localhost; user=phone>;
party=calling;screen=yes;privacy=uri
```

- **Both Name and Number**—When both name and number are restricted, the same principle applies with privacy=full:

```
From: “Anonymous” <sip: 9728135001@localhost>
Remote-Party-ID: “Bob Jones”<9728135001@localhost; user=phone>;
party=calling;screen=yes;privacy=full
```

CISCO CONFIDENTIAL

- **None**—When both name and number are allowed, the following example applies:

```
From: "Bob Jones" <sip: 9728135001@localhost>
Remote-Party-ID: "Bob Jones"<9728135001@localhost; user=phone>;
party=calling;screen=yes;privacy=off
```

Connected Line and Name Identification Presentation

The Connected Number (Line) and Name Identification supplementary service provides the calling user with the called (connected) user number and/or name.

Cisco Unified CM uses the "Remote-Party-ID" headers in 18x, 200 and re-INVITE or UPDATE messages to convey connected information. The "party" field of the "Remote-Party-ID" header is set to "called" (instead of "calling" for calling ID services).

Connected Line and Name Identification Restriction

Similar to Calling ID services, customers have option to restrict connected number and name independently.

- **Name**—When name is restricted, the connected name still gets included with **privacy=name** For example:

```
Remote-Party-ID: "Bob Jones"<9728135001@localhost; user=phone>;
party=called;screen=yes;privacy=name
```

- **Number Restrict only**—When number is restricted, the connected number still gets included with **privacy=*uri***. For example:

```
Remote-Party-ID: "Bob Jones"<9728135001@localhost; user=phone>;
party=called;screen=yes;privacy=uri
```

- **Both Name and Number Restrict**—When both name and number are restricted, both get included with **privacy=*full***. For example:

```
Remote-Party-ID: "Bob Jones"<9728135001@localhost; user=phone>;
party=called;screen=yes;privacy=full
```

- **None**—Both name and number are allowed.

  For example, if Cisco Unified CM receives an INVITE that is destined to extension 9728135001, Cisco Unified CM includes the called party name in 18x and 200 messages as follows:

```
Remote-Party-ID: "Bob Jones"<9728135001@localhost; user=phone>;
party=called;screen=yes;privacy=off
```

Using P-Asserted-Identity/P-Preferred-Identity and Privacy header

Cisco Unified CM provides a flexible configuration options to provide these services based on a static configuration for each SIP Trunk. This section provides an overview of these configuration options and of how Cisco Unified CM conveys ID services in SIP protocol using the P-Asserted-Identity/P-Preferred-Identity and Privacy headers.

CISCO CONFIDENTIAL

Table 1-28 shows information about the Cisco Unified CM SIP trunk use and relevance of the various values for a “Privacy” header.

Table 1-28 Values for Various Parameters

Value	Notes
Header doesn’t exist	The absence of Privacy header in an INVITE, UPDATE, 180, 183 or 200 message means that the presentation is allowed for name and number. In case of initial INVITE, the presentation information applies to calling party information. In the case of reINVITE, UPDATE, 180, 183, or 200 it applies to connected party information.
id	For outgoing INVITE: Used for specifying presentation restriction for Calling Party name/number. For outgoing re-INVITE, UPDATE, 180, 183, or 200: Used for specifying presentation restriction for Connected Party name/number. For incoming INVITE, UPDATE, 180, 183, or 200: Interpreted as presentation restriction for Connected Party name/number.
header	If present in an incoming SIP request (INVITE or UPDATE), interpreted as presentation restriction for Connected Party name/number. If present in an incoming SIP response, ignored (interpreted as presentation allowed).
user	If present in an coming SIP request (INVITE or UPDATE), interpreted as presentation restriction for Connected Party name/number. If present in an incoming SIP response, ignored (interpreted as presentation allowed).
none	For outgoing INVITE: Used for specifying presentation allowed for Calling Party name/number. For outgoing re-INVITE, UPDATE, 180, 183, or 200: Used for specifying presentation allowed for Connected Party name/number. For incoming INVITE, UPDATE, 180, 183, or 200: Interpreted as presentation allowed for Connected Party's name/number.

CISCO CONFIDENTIAL

Table 1-28 Values for Various Parameters (continued)

Value	Notes
critical	For outgoing INVITE/UPDATE, implies that privacy services requested for this message are critical and therefore, if these privacy services cannot be provided by the network, this request should be rejected. Additionally, the request should carry a Proxy-Require header containing the new option-tag “privacy.” Per rfc3323, the “critical” value is not set in outgoing responses. For incoming SIP messages (requests or Responses), Cisco Unified CM performs no specific handling for “critical” other than syntax verification.

Table 1-29 provides information about P-Asserted-Identity/P-Preferred-Identity.

Table 1-29 P-Asserted-Identity/P-Preferred-Identity Headers

Headers with value formats	Notes
P-Asserted-Identity: “name” SIPURI, tel:+DN	Comma separated headers. One SIP URI and one tel URI.
P-Asserted-Identity: “name” SIPSURI, tel:+DN	Comma separated headers. One SIPS URI and one tel URI.
P-Asserted-Identity: “name” SIPURI P-Asserted-Identity: tel:+DN	Multiple PAI headers.

The P-Asserted-Identity/P-Preferred-Identity headers are validated for syntactical correctness. If the format is not expected as per rfc3325, a “400 Bad Request” response is sent to the UAC and the request is dropped.

The format of P-Preferred-Identity header the same as that of P-Asserted-Identity header, so this section does not explicitly cover P-Preferred-Identity.

The identity information is communicated by using P-Asserted-Identity or P-Preferred-Identity headers. The presentation information is communicated by using Privacy header.

Various pages in Cisco Unified CM Administration (such as the route pattern and the translation pattern configuration pages) allow the configuration of calling number or name restrictions. The SIP trunk screen provides configuration options for the type of Identity (either Asserted or RPID). For Asserted-Identity, there is no option for allowing or restricting name/number separately (as RFC 3323 & RFC 3325 does not provide separate option for this configuration). Therefore, the SIP Privacy option applies to name and number (calling and connected). When SIP Privacy selection box set to Default, the presentation information that is received from the upper layer (call control) is used by the SIP trunk for setting the presentation of name/number in outgoing SIP request and response messages.

CISCO CONFIDENTIAL

The following sections provide additional details:

- Calling Line and Name Identification Presentation, page 1-38
- Connected Line and Name Identification Presentation, page 1-38

Calling Line and Name Identification Presentation

- **Both name and number are allowed**—The Cisco Unified CM SIP trunk does not include a Privacy header when privacy for calling name an number is allowed. For example:

```
From: "Bob Jones" <sip:9728135001@ipAddr1>
P-Asserted-Identity: "Bob Jones"<sip:9728135001@ipAddr1>
```

Note The Privacy: none header also results in the same behavior: name and number are allowed.

- **Name is restricted**—When calling name is restricted and Privacy:id header must be sent, the From header with specific values for Display Name and SIP URI must be used. The P-Asserted-Identity header still includes the actual name. For example:

```
From: "Anonymous" <sip:anonymous@anonymous.invalid>
P-Asserted-Identity: "Bob Jones"<sip:9728135001@ipAddr1>
Privacy: id
```

Note When Name is restricted, the inclusion of Privacy: id also results in a restriction for number.

- **Number is restricted**—When calling number is restricted and Privacy:id header must be sent, it the From header with specific values for Display Name and SIP URI must be used. The P-Asserted-Identity header still includes the actual user part in the SIP URI. For example:

```
From: "Anonymous" <sip:anonymous@anonymous.invalid>
P-Asserted-Identity: "Bob Jones"<sip:9728135001@ipAddr1>
Privacy: id
```

Note When Number is restricted, the inclusion of Privacy: id also results in restriction for display name.

- **Both name and number are restricted**—When calling name and number are restricted, the same principle applies. For example:

```
From: "Anonymous" <sip:anonymous@anonymous.invalid>
P-Asserted-Identity: "Bob Jones"<sip:9728135001@ipAddr1>
Privacy: id
```

Connected Line and Name Identification Presentation

- **Both name and number are allowed**—The Cisco Unified CM SIP trunk does not include a Privacy header when privacy for connected name and number is allowed. For example:

```
P-Asserted-Identity: "alice"<sip:9193929001@ipAddr2>
```

CISCO CONFIDENTIAL

Note **Name is restricted**—When connected name is restricted, a Privacy:id header must be sent. The P-Asserted-Identity header still includes the actual connected name. For example:

```
P-Asserted-Identity: "alice"<sip:9193929001@ipAddr2>
Privacy: id
```

- **Number is restricted**—When connected number is restricted, a Privacy:id header must be sent. The P-Asserted-Identity header still includes the actual connected number. For example:

```
P-Asserted-Identity: "alice"<sip:9193929001@ipAddr2>
Privacy: id
```

- **Both name and number are restricted**—When name and number are restricted, the same principle applies: the P-Asserted-Identity header still includes the actual connected name and number. For example:

```
P-Asserted-Identity: "alice"<sip:9193929001@ipAddr2>
Privacy: id
```

Outbound PUBLISH

Cisco Unified CM uses the PUBLISH method as the preferred mechanism to send IP phone presence information over a SIP trunk.. The main reason for using the PUBLISH method is the performance improvement over the SUBSCRIBE/NOTIFY mechanism used in previous releases.

- Cisco Unified CM sends presence information for the phones that it manages over a SIP trunk.
- Release 5.x uses the SUBSCRIBE/NOTIFY framework for the presence communication over a SIP trunk; Release 6.0(1) uses the SIP PUBLISH method for presence communication.
- Presence status in Release 5.x (SUB/NOT) applies on a per-directory-number basis. Presence status in Release 6.0(1) (PUBLISH) applies on a per-line-appearance basis.
- Line appearance maps to one directory number on a specific phone device. Thus, if two phones share the same directory number 1000, two line appearances exist: (phone1, 1000) and (phone2, 1000)
- The PUBLISH message has user association.
- The PUBLISH mechanism works with multiple partitions.
- Only two status possibilities exist for Busy/Idle in PUBLISH: “Busy” or “Idle.” (Release 5.x also supports “Available.”)
- DND Status gets published if it is turned on.
- Mobility support improves because the mobile number is in the PUBLISH message.
- Performance improvement: by using the SUBSCRIBE/NOTIFY framework, a refresh requires four messages with the PIDF body. Using the PUBLISH mechanism, a refresh requires two messages without the PIDF body.
- Release 6.0(1) includes a set of BAT tools to facilitate the upgrade from Release 5.x.

CISCO CONFIDENTIAL

G.729 with MTP

In Cisco Unified CM 7.0, the SIP trunk allows early-offer calls (calls with pre-allocated MTP) to be initiated with low bandwidth codecs such as G.729. In previous releases, the SIP trunk supports only G711.a/ulaw with pre-allocated MTP. This feature is required for endpoints that do not support delayed media calls and that do not want to use the high bandwidth G.711 codec. This feature is turned off by default.

Software MTP on Cisco Unified CM does not support the G.729 codec. Therefore, this feature requires an external MTP/Xcoder device that supports the G29 coded to be configured.

G.729 has four variants. However, because there is no difference from the signaling perspective between G.729 and G.729a and between G.729b and G.729ab, the configuration menu for the preferred originating codec provides only show two options.

The two variants are not compatible with each other on the IOS MTP devices. Interworking with each other requires the presence of a transcoder that supports G.729 (annexb=no) to G.729 (annexb=yes) transcoding.

Cisco Unified CM treats an incoming call with G.729 with annexb=yes as an indication of all the 4 G.729 codec variants.

If MTP Required is configured. the initial INVITE only contains an offer, if the trunk is able to reserve MTP/Xcoder resource. Otherwise the call is initiated as a Delayed Media call.

If the terminating side does not support the codec that is offered, the call is torn down and not tried as a delayed media call.

T38 Fax is supported with G.729 codec. However, the call will not switch back to an audio call after the fax transmission completes. This functionality is consistent with T38 Fax support with other codecs.

Mid-call codec switching from the UAS is supported if there is an Xcoder/MTP device that supports both the original codec and the new codec that is offered.

MLPP

The Multilevel Precedence and Preemption (MLPP) feature implementation is based on RFC4411 (Reason Header for Preemption Events) and RFC4412 (Resource Priority for SIP). MLPP supplementary services over SIP trunk are:

- Precedence Call Waiting
- Call Hold
- Call Transfer
- Call Forwarding
- Three-way Calling
- Call Pickup
- Hunt List

CISCO CONFIDENTIAL

Resource Priority Header Overview

- Resource priority (RP) headers can be used in the following SIP messages: INVITE, UPDATE, REFER (in-dialogue only)
- Messages that contain RP header must mark message with the resource priority required tag:

  Require: resource-priority
- RP headers use either of the following formats:
  - Resource-Priority:<network-domain>.<priority-value>
  - Resource-Priority:<network-domain>-<precedence-domain>.<priority-value>
- RP Header precedence domain originates from the MLPP domain of the call. AMLPP domain of 000000 may or may not be present as it is the default MLPP domain and optional.

Preemption Reason Header Overview

Preemption reason headers are included in SIP messages that terminate existing dialogues.

The following text shows the format of the preemption reason header:

```
Reason: preemption;cause=<cause value>;text=<text string>
```

The following cause values are defined by RFC4411.

1. UA Preemption
2. Reserved Resources Preempted
3. Generic Preemption
4. Non-IP Preemption
5. Network Preemption

V.150.1 MOIP

ITU V.150.1 specifies the transport of modem communications, including modem relay and voice band data, over IP networks. For the SIP, this information is transmitted in the SDP by using the media capability sequence that is specified by RFC3407. The following example shows an SDP with MOIP data:

```
v=0
o=CiscoSystemsCCM-SIP 2000 1 IN IP4 172.18.152.50
s=SIP Call
c=IN IP4 172.18.154.236
t=0 0
m=audio 4000 RTP/AVP 0 8 18 118
a=rtpmap:0 PCMU/8000
a=ptime:20
a=rtpmap:8 PCMA/8000
a=ptime:20
a=rtpmap:18 G729/8000
a=ptime:20
a=rtpmap:118 v150fw/8000
a=sqn:0
a=cdsc: 1 audio udpsprt 120
a=cpar: a=sprtmap:120 v150mr/8000
a=sendonly
```

CISCO CONFIDENTIAL

In this example, the dynamic payload type 118 is mapped to v150 modem relay using sprt channel 120. The MOIP SDP information is internally generated based on device type and is not configurable. The following values are always used and systems that need to interconnect must use these values:

- SPRT channel: 20
- Modem relay payload type: 118
- Voice band data payload type: 100

Note There is no Cisco Unified CM configuration to enable this feature or change the information that is signaled. When a V.150.1 capable device is registered with Cisco Unified CM, the V.150.1 capabilities are automatically signaled in the SDP when communicating over a SIP trunk.

SIP T.38 Interoperability with Microsoft Exchange

The feature provides Cisco Unified CM with an alternate way to signal the call party switching over to T.38 in SIP.

Cisco Unified CM and gateways use a consistent way to initiate T.38 over audio calls in H.323, SIP, MGCP. The current way of representation in protocol signaling indicates to switch the existing audio channel to an image channel for a T.38 facsimile, and the existing ports are normally reused. The signal also implies that the audio transmission is be terminated before establishing image channels for a facsimile.

Some third-party products such as Microsoft Exchange Server prefer switching an established audio call to T.38 by explicitly indicating that the existing voice channel is terminated/not wanted and another new channel is needed to transmit T.38 facsimile. Both ways of representation for T.38 fax relay in SIP conform to the standards suggested by ITU T.38 and RFC3264. However, Cisco Unified CM does not handle the Microsoft negotiation method so that the call fails to switch over to fax.

Cisco Unified CM continues to behave the same so that when an audio call is established and a call party sends out T.38 call request, Cisco Unified CM terminates the existing audio channels and re-establishes an image channel for facsimile. Therefore, the existing functionality/mechanisms for T.38 will not be changed. The change supports incoming SIP signal that is supported by Microsoft and provides a configurable option in Cisco Unified CM to initiate fax request in the new signaling context.

Cisco Unified CM accepts the context of SIP signaling suggested by Microsoft to switch an audio call to a T.38 facsimile. Specifically, the SIP mid-call INVITE signal specifies that the current audio channel will be terminated by setting the audio port number as 0. In the same signal, another SIP media line syntax will be included to indicate detailed capability of T.38 and its receiving channel. Cisco Unified CM interprets this message as request of T.38 request.

If a SIP INVITE signal indicates active audio and image channels, it is continuously treated as an audio call request and Cisco Unified CM ignores the fax capability. Cisco Unified CM does not support Audio + Image call.

However, the limitation does not affect MS interoperability request as MS also intends to terminate audio session before establishing image channel for T.38.

Besides accepting multiple m=line (audio+image line) syntax in SIP signal to switch a call to T.38, Microsoft provides a configurable parameter in the SIP profile to initiate outgoing SIP signal in multiple m=line with audio port as 0 to negotiate T.38 calls. This parameter is offered to the SIP trunk only. Therefore, when an Exchange server (a server from another vendor) has been registered as SIP trunk in Microsoft and the parameter is checked, the server receives SIP T.38 in multiple m=lines.

CISCO CONFIDENTIAL

This interoperability support is in Cisco Unified CM only and Cisco Unified CM should continue to interact with Cisco SIP gateways with a signal image m=line for a T.38 request. Therefore, the configurable parameter should not be checked to any SIP trunk that is associated with Cisco gateways.

Although the new parameter can be checked in a SIP profile that is associated with a SIP ICT, you should avoid doing so as it does not offer any benefit for the call.

This interoperability support for MS Exchange should not change any existing behavior of T.38 calls in any VoIP protocols. In addition, this support should not affect any VoIP protocol interoperability. But the current T.38 limitations stated will remain.

Multicast MOH over H.323/SIP trunk

Currently, multicast MoH does not work fully as expected over SIP ICT trunk. Due to this, extra bandwidth used for each unicast MoH over the same ICT is wasted. This feature is to make multicast MoH work completely over SIP and H.323 ICT.

If the holding side is configured to use MMoH, multicast address is sent in SIP SDP message. If the other side supports MMoH, only then will it work. The new service parameter "Send Multicast MOH in H.245 OLC Message" does not apply for SIP ICT. MMoH works on tandem SIP/SIP and H.323/H.323 cases but not for SIP/H.323 interop scenarios.

IPv6

Cisco Unified CM has been enhanced to operate in both IPv4 only mode, or Dual Mode, i.e. IPv4_IPv6 mode. If IPv6 is enabled on Cisco Unified CM, then it behaves in Dual Mode, otherwise it behaves in IPv4 only mode.

SIP Trunk was one of the components on Cisco Unified CM that added support for IPv6. SIP Trunk via configuration can behave in IPv4 only mode, IPv6 only mode, or Dual Mode IPv4_IPv6.

The mode a trunk behaves is configured under the Common Device Configuration via setting the IP Addressing Mode. The default mode for a SIP Trunk is Dual Mode.

The IP Addressing Mode has three settings

- IPv4 only – The SIP Trunk uses the Cisco Unified CM IPv4 server address as its source address for SIP signaling and either, an MTP's, or Phone's IPv4 address for media.
- IPv6 only – The SIP Trunk uses the Cisco Unified CM IPv6 server address as its source address for SIP signaling and either, an MTP's, or Phone's IPv6 address for media.
- IPv4 and IPv6 – The SIP Trunk uses either the Cisco Unified CM IPv4 server address, or the Cisco Unified CM server IPv6 address as its source address for signaling and either, an MTP's IPv4 and/or IPv6 address, or the Phone's IPv4 and/or IPv6 address for media. If the trunk is configured in Dual Mode, then Cisco Unified CM will listen for SIP Traffic on both the IPv4 and IPv6 Interface.

For an IPv4 only trunk, the destination address will be populated with the remote peer's IPv4 address.

For an IPv6 only trunk, the destination IPv6 address field will be populated with the remote peer's IPv6 address.

For a dual mode trunk, both the Destination Address and the Destination v6 address fields are populated. If for some reason only one of the fields is populated, then the trunk will behave in only that mode. For a dual mode SIP Trunk, with both IP Addresses configured on the SIP Trunk device page, the enterprise parameter *IP addressing mode Preference Control* will dictate whether to use IPv4 or the IPv6 address for signaling.

CISCO CONFIDENTIAL

For an IPv6 call, all the SIP URI's will use the following IPv6 address format (address enclosed in [ ] square brackets) as defined by RFC 3261

```
SIP-URI          =  "sip:" [ userinfo ] hostport
                            uri-parameters [ headers ]hostport
hostport        =  host [ ":" port ]
host             =  hostname / IPv4address / IPv6reference
IPv6reference  =  "[" IPv6address "]"
```

Example:

```
INVITE sip:25421@[2001:db8:1:2::12]:5083 SIP/2.0
```

Support for Alternative Network Address Types (ANAT) over SIP Trunk

Cisco Unified CM supports ANAT over dual mode (IPv4_IPv6) SIP Trunks. ANAT allows for SIP devices to send both IPv4 and IPv6 addresses in the SDP body of a SIP Offer, and to return in the SDP body of the SIP Answer a preferred IP address (IPv4 or IPv6) with which to establish a media connection. ANAT is only supported over dual mode SIP Trunk and must be supported by both ends of the SIP Trunk.

Example ANAT Offer SDP

```
v=0
o=CiscoSystemsCCM-SIP 2000 1 IN IP4 172.18.199.129
s=SIP Call
t=0 0
a=group:ANAT 1 2
m=audio 18484 RTP/AVP 0 101
c=IN IP6 2001:db8:c18:1:21c:58ff:fe2a:23f8
a=rtpmap:0 PCMU/8000
a=ptime:20
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
a=mid:1
m=audio 18282 RTP/AVP 0 101
c=IN IP4 172.18.199.55
a=rtpmap:0 PCMU/8000
a=ptime:20
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
a=mid:2
```

ANAT is enabled by checking the "Enable ANAT" checkbox on the SIP Profile associated with the SIP Trunk. ANAT can be used with both Early Offer and Delayed Offer calls. ANAT should only be enabled on SIP Trunks with an IP Addressing Mode setting of IPv4 and IPv6.

The use of ANAT on a Dual Mode SIP Trunk is indicated in the header of the SIP Invite

- The field "Require: sdp-anat" is used by Cisco Unified CM SIP Trunks using Early Offer.
- The field "Supported: sdp-anat" is used by Cisco Unified CM SIP Trunks using Delayed Offer.
- The "require" sdp-anat value indicates to the far end of the SIP Trunk connection that an ANAT based response "must" be supported.
- The "supported" sdp-anat value indicates to the far end of the SIP Trunk connection that that an ANAT based response "should" be supported.

If ANAT is enabled it should be configured on both ends of the SIP Trunk, (If "require: sdp-anat" is sent in the SIP Invite and the receiving SIP Trunk does not support ANAT all calls will be rejected).

CISCO CONFIDENTIAL

Inbound SIP Trunk call rules

- If IPv6 is not enabled on Cisco Unified CM and a call comes into Cisco Unified CM on IPv6 signaling, call is dropped with no response being sent to caller. The reason for this is that when IPv6 is disabled, Cisco Unified CM does not have any ports listening for IPv6 connections. The caller hears dead air.
- If IPv6 is enabled on Cisco Unified CM and a call comes into Cisco Unified CM with invalid mode, the call is rejected with an error being sent from Cisco Unified CM to caller.
  For example, in case IPv6_only trunk receives a call w/v4 signaling in INVITE, Cisco Unified CM sends a 503 response for that INVITE request. The caller hears fast busy tone.

Outgoing SIP Trunk Calls Rules

- If IP addressing mode for SIP Trunk is set to IPv4_only and no IPv4 address is specified on the SIP Trunk configuration page, no call can be made from that sip trunk. Same is true for IPv6_only.
- If IP addressing mode for SIP Trunk is set to IPv6_only, IPv6 is chosen for signaling to send out INVITE. Same is true for IPv4_only.
- If IP addressing mode for SIP Trunk is IPv4_v6, signaling mode is chosen based on 'IP addressing mode preference for Signaling' and specified IP address on trunk configuration page. If preferred IP is not configured on trunk page then whatever is configured on SIP trunk is chosen.
- If IP addressing mode of SIP Trunk is set to IPv4_only and MTP Required is checked, IPv4 media is sent out in SDP if MTP is allocated. If no MTP is available, INVITE without SDP is sent.
- If IP addressing mode of SIP Trunk is set to IPv6_only and MTP Required is checked, IPv6 media is sent out in SDP If dual stack MTP is allocated. If no IPv4\IPv6 MTP is available, INVITE without SDP is sent.
- If IP addressing mode of SIP Trunk is set to IPv4_v6, and MTP Required is checked, a dual stack MTP is allocated if media preference is IPv6; Otherwise IPv4 MTP is allocated. If no MTP is available, the call is tried as a delayed media call.
- If IP addressing mode of SIP Trunk is set to IPv4_v6, and MTP Required is checked and a dual stack is allocated, SIP Trunk decides whether to send both IPv4 and IPv6 SDP or only IPv4 or only IPv6 SDP based on "ANAT Configuration" parameter.
- If ANAT is enabled both IPv4 and IPv6 SDP is sent with ANAT parameters set. Peer device can select one and that one is used for media for that call.
- If ANAT is disabled, SDP sent is based on media preference configured under Enterprise parameters.

Calling Party Number Transformations

The current design in Cisco Unified CM for globalizing on ingress and localizing on egress leaves very few holes that remain to be addressed.

The current design allows for prefixing digits to inbound calls based on ISDN number type. There is no way to manipulate the digits other than prefixing or stripping a fixed number of digits.

A problem that has come up in some of the early Alpha testing is that service providers are not consistently delivering numbering plan information correctly, leading to incorrect number manipulation because the calls are presented as unknown when they should be coming in as national or international. Unknown calls need to be transformed conditionally based on the digits presented and the current prefix/strip field does not offer a way to modify digits conditionally.

CISCO CONFIDENTIAL

Also, SIP only has unknown numbering type, making it almost impossible to prefix anything that will apply to all the different numbers that may come in. This will be problematic for customers subscribing to SIP trunking services. Some of this problem can possibly be addressed if there is an SBC in the picture or the call is going to a SIP gateway by doing the manipulation on the SBC/Gateway, but the capabilities of the SBCs are questionable.

As part of this feature the prefix digits field is modified to allow stripping as well with a special notation (prefix:strip digits). However this is not very user friendly for an administrator.

To address these limitations, the following enhancements are being made:

- For all the current Incoming Calling Party Settings configuration sections on Gateway and Trunk configuration pages as well as Device Pool and Service Parameters, adding an option to configure Number of Digits to Strip in addition to the already available Prefix fields. This would replace the colon (:) notation that was added in Cisco Unified CM 7.0.
- Add the ability to configure a Transformation CSS on each of the above mentioned configuration pages as well. There will be a transformation CSS for each calling party number type to allow the ability to conditionally transform the calling party number based on number type.

For Globalization with this feature, three operations are possible to the Incoming Calling Party Number

- Strip - valid entries 0-24
- Prefix - maximum length is 16 digits
- Incoming Calling Party Transformation CSS which uses Calling Party Transformation patterns

It is recommended to use Strip & Prefix together as per the customer requirements. If conditional modifications are required then instead CSS can be used. There are not many cases where all 3 should be used together.

If all three are configured then the order in which these are applied are:

1. Strip
2. Prefix
3. CSS match and transformations applied

After the above feature changes, administrator is able to configure Prefix and Strip Digits at different levels and there was no sync at device, device pool and service parameter levels. In Cisco Unified CM 7.0, this issue was non-existant, as both the Prefix and Strip Digits, were configure in the Prefix field, using (Prefix: Strip digits) notation.

In addition to this, the Strip Digits and Transformation CSS field, by default had the NULL and <None> configuration.

In initial feature implementation, it was assumed that these default configuration for both Strip Digits and CGPN Transformation CSS, indicates that the call processing will use the values configured at the next level (Device Pool). Whereas, the Prefix field has the "Default" option, which implies that the call processing will use Prefix Digits, at the next level setting (Device Pool/Service Parameter).

So, ideally there's no way to indicate the call processing that, the user does not want to apply Strip Digits and CGPN Transformation CSS. Call processing will always go to the next level (Device Pool) and if nothing is configured at the next level, then no Strip Digits and CGPN Transformation CSS, will be applied.

Extra changes for this feature addressed these limitations in Cisco Unified CM 7.1(2) by:

- Adding "Use Device Pool Calling Party Transformation CSS" checkbox, associated with Incoming Calling Party Transformation CSS for National, International, Subscriber and Unknown number types.
- Database shouldn't allow Strip Digits to be configured, when the Prefix field is set to "Default".

CISCO CONFIDENTIAL

Troubleshooting

Table 1-30 highlights some of the common problems that might be encountered when you are configuring a SIP trunk.

Table 1-30 Troubleshooting SIP Trunk Configuration

Symptom	Possible Cause	Recommended Action

Cannot receive or make calls through a SIP trunk.	The SIP trunks are not initialized because the Cisco Unified CM process is not part of a Cisco Unified CM Group	Associate the Cisco Unified CM to a Cisco Unified CM Group.
		1. In Cisco Unified CM Administration, choose **System > Cisco Unified CM Group**.
		2. Click **Find** and choose a group name (such as Default).
		3. Make sure that the Cisco Unified CM appears under the "Selected Cisco Unified CMs" section.
		The following example SDL logs illustrate how a SIP trunk fails initialization because the Cisco Unified CM node is not a member of a Cisco Unified CM Group:
		`|SIPD(1,100,76,1)|SIPInit(1,100,73,1)||NumOfCurrentInstances: 1`
		`000000561|2005/07/20 12:54:17.598| 001|SdlSig|Start|start|`
		`SIPD(1,100,76,1)|SIPD(1,100,76,1)|(1,100,76,1).1-(*:*)`
		`|[R:HP - HP: 0, NP: 0, LP: 0, VLP: 0, LZP: 0 DBP: 0] 000000562|`
		`2005/07/20 12:54:17.598| 001|SdlSig|DbSIPTspReq|initializing|`
		`Db(1,100,160,1)|SIPD(1,100,76,1)|(1,100,76,1).1-(*:*)|[NP-PQ: 0]`
		
		`000000563|2005/07/20 12:54:17.620|001|SdlSig|DbSIPTspRes`
		`tsp_discovery|SIPD(1,100,76,1)|Db(1,100,160,1)|(1,100,76,1).1-(*:*)`
		`|[R:NP - HP: 0, NP: 0, LP: 0, VLP: 0, LZP: 0 DBP: 0]`
		
		`000000564|2005/07/20 12:54:17.621|001|SdlSig|`
		`DbSimpleDeviceServerReq|initializing|Db(1,100,160,1)`
		`|SIPD(1,100,76,1) |(1,100,76,1).1-(*:*)|[NP - PQ: 0]`
		
		`000000565|2005/07/20 12:54:17.636|001|SdlSig`
		`|DbSimpleDeviceServerRes|device_server_discovery`
		`|SIPD(1,100,76,1)|Db(1,100,160,1)|(1,100,76,1).1-(*:*)`
		`|[R:NP - HP: 0, NP: 0, LP: 0, VLP: 0, LZP: 0 DBP: 0]`
		
		`000000566| 2005/07/20 12:54:17.636|001|Stopping||`
		`|SIPD(1,100,76,1)|SIPD(1,100,76,1)||NumOfCurrentInstances: 1`
		
		`000000567| 2005/07/20 12:54:17.637|001|Stopped||`
		`|SIPD(1,100,76,1)|SIPD(1,100,76,1)||NumOfCurrentInstances: 0`
		
		`000000568| 2005/07/20 12:54:17.637| 001| SdlSig|DeviceStop`

The UAS may reject all outbound calls associated with a SIP trunk with a 4xx response, or signaling may go through, but no audio path gets detected.	Unusual third-party SIP UA might not support delayed media INVITE.	The SIP trunk default configuration results in sending INVITE (without SDP). This definition prevents the use of an MTP resource. Cisco recommends that you leave the "MTP Required" checkbox on the SIP trunk configuration page unchecked; however, if third-party devices do not support delayed media INVITE requests, you can check this box. You must reset the SIP trunk for the change to take effect.

CISCO CONFIDENTIAL

Table 1-30 Troubleshooting SIP Trunk Configuration (continued)

Symptom	Possible Cause	Recommended Action
DTMF digits do not get sent to the remote SIP device such as a Unity Voice Messaging server.	This could represent an interoperability issue. The SIP trunk supports RFC2833 and Out-of-Band methods when sending DTMF tones across the network. - Most SIP devices support RFC2833. - The supported OOB methods are KPML and Unsolicited Notify. KPML is not widely used in the marketplace at this time. Currently, the only known products supporting KPML are the Cisco TNP phones, Cisco Unified CM, and Cisco IOS Gateway (12.4 and later). Unsolicited Notify is a Cisco proprietary method that is used only on Cisco IOS Gateways (12.2 and later?). Unity does not support either one at this time but might support KPML in the future. If you are connecting Unity to Cisco Unified CM via SCCP, OOB is assumed.	Check whether an MTP resource is allocated for the call: • If both parties have at least one common DTMF method, an MTP is *not* required. • If one party only supports the Out-of-Band method, but the other party only supports RFC2833, an MTP is required. For RFC23833 DTMF events, verify that the media stream (via Sniffer) contains packets with the DTMF Payload Type value. For OOB, incoming or outgoing NOTIFY messages get captured in the Cisco Unified CM trace file. the following example shows Subscribing for DTMF-KPML: SUBSCRIBE sip:172.18.199.61:5060 SIP/2.0 Via: SIP/2.0/UDP 172.18.199.62:5060;branch=z9hG4bK1BD From: <sip:3601@172.18.199.62>;tag=169AEB4-93D To: "sccp_3000" <sip:3000@172.18.199.61>;tag=520767e3-a20b-488e-9ca2-3b1506ab9e 94-24577005 Call-ID: 47b5f280-2de1b302-3fc-3dc712ac@172.18.199.61 CSeq: 101 SUBSCRIBE Max-Forwards: 70 Date: Wed, 20 Jul 2005 20:24:36 GMT User-Agent: Cisco-SIPGateway/IOS-12.x Event: kpml Expires: 7200 Contact: <sip:3601@172.18.199.62:5060> Content-Type: application/kpml-request+xml Content-Length: 327 <?xml version="1.0" encoding="UTF-8"?><kpml-request xmlns="urn:ietf:params:xml:ns:kpml-request" xmlns:xsi="http://www.w3.org/2001 /XMLSchema-instance" xsi:schemaLocation="urn:ietf:params:xml:ns:kpml-request kpml-request.xsd" version="1.0"><pattern persist="persist"><regex tag="dtmf">[x*#ABCD]</regex></pattern></kpml-request> SIP/2.0 200 OK Via: SIP/2.0/UDP 172.18.199.62:5060;branch=z9hG4bK1BD From: <sip:3601@172.18.199.62>;tag=169AEB4-93D To: "sccp_3000" <sip:3000@172.18.199.61>;tag=520767e3-a20b-488e-9ca2-3b1506ab9e 94-24577005 Call-ID: 47b5f280-2de1b302-3fc-3dc712ac@172.18.199.61 CSeq: 101 SUBSCRIBE Content-Length: 0 Contact: <sip:172.18.199.61:5060> Expires: 3600

CISCO CONFIDENTIAL

Table 1-30 Troubleshooting SIP Trunk Configuration (continued)

Symptom	Possible Cause	Recommended Action

DTMF digits do not get sent to the remote SIP device (continued)		The following example shows an outbound KPML NOTIFY message:
		`NOTIFY sip:3010@172.18.199.92:5060 SIP/2.0`
		`Via: SIP/2.0/UDP 172.18.199.61:5060;branch=z9hG4bK48b28f9b`
		`From:`
		`<sip:3010@172.18.199.61>;tag=520767e3-a20b-488e-9ca2-3b1506ab9e`
		`94-26499709`
		`To: <sip:3501@172.18.199.92>;tag=1A60AE98-324`
		`Call-ID: 4724DD80-FC6211D9-8190EC13-60F39CA2@172.18.199.92`
		`CSeq: 103 NOTIFY`
		`Max-Forwards: 70`
		`Date: Mon, 25 Jul 2005 16:45:29 GMT`
		`User-Agent: Cisco-CCM5.0`
		`Event: kpml`
		`Subscription-State: active;expires=3600`
		`Contact: <sip:172.18.199.61:5060>`
		`Content-Type: application/kpml-response+xml`
		`Content-Length: 177`
		`<?xml version="1.0" encoding="UTF-8" standalone="no" ?>`
		`<kpml-response code="200" digits="1" forced_flush="false"`
		`suppressed="false" tag="dtmf" text="Success" version="1.0"/>`

		The following example shows negotiating Unsolicited NOTIFY request:
		`INVITE sip:3501@172.18.199.92:5060 SIP/2.0`
		`Call-Info:`
		`<sip:172.18.199.61:5060>;method="NOTIFY;Event=telephone-event;D`
		`uration=500"`
		`Response:`
		`SIP/2.0 200 OK`
		`Call-Info:`
		`<sip:172.18.199.92:5060>;method="NOTIFY;Event=telephone-event;D`
		`uration=500"`
		
		The following example shows an outbound Unsolicited NOTIFY message:
		`07/26/2005 14:15:18.658 CCM|Outgoing UDP SIP message to`
		`172.18.199.92:[57475]:`
		`NOTIFY sip:172.18.199.92:57475 SIP/2.0`
		`Via: SIP/2.0/UDP 172.18.199.61:5060;branch=z9hG4bK66516ae9`
		`From: "sccp_3010"`
		`<sip:3010@172.18.199.61>;tag=520767e3-a20b-488e-9ca2-3b1506ab9e`
		`94-26499723`
		`To: <sip:3501@172.18.199.92>;tag=1FD98A34-1DC0`
		`Call-ID: 314ae380-2e617dac-325-3dc712ac@172.18.199.61`
		`CSeq: 102 NOTIFY`
		`Max-Forwards: 70`
		`Date: Tue, 26 Jul 2005 18:15:18 GMT`
		`User-Agent: Cisco-CCM5.0`
		`Event: telephone-event;rate=1000`
		`Subscription-State: active;expires=-1281397684`
		`Contact: <sip:172.18.199.61:5060>`
		`Content-Type: audio/telephone-event`
		`Content-Length: 4`

CISCO CONFIDENTIAL

Table 1-30 Troubleshooting SIP Trunk Configuration (continued)

Symptom	Possible Cause	Recommended Action

UAS responds to an INVITE request with a 401 (Unauthorized) message.	Authentication or Authorization is failing	If authentication or authorization are not needed, make sure the appropriate check boxes on the SIP Trunk Security Profile window are unchecked.
		or
		Configure the application user on Cisco Unified CM with proper authorization.
		Configure the UAC to match credentials on Cisco Unified CM.
		`INVITE sip:5000@172.18.193.222 SIP/2.0`
		`Via: SIP/2.0/UDP 172.18.194.208:5060;branch=z9hG4bK5ba60c17`
		`From: "4900"`
		`<sip:4900@172.18.193.222>;tag=000f24c6a16f000d171bb590-611445d9`
		`To: <sip:5000@172.18.193.222>`
		`Call-ID: 000f24c6-a16f000c-245cb98c-57a622e0@172.18.194.208`
		`……`
		`SIP/2.0 401 Unauthorized`
		`From: "4900"`
		`<sip:4900@172.18.193.222>;tag=000f24c6a16f000d171bb590-611445d9`
		`To: <sip:5000@172.18.193.222>;tag=466540560`
		`Call-ID: 000f24c6-a16f000c-245cb98c-57a622e0@172.18.194.208`
		`CSeq: 101 INVITE`
		`WWW-Authenticate: DIGEST realm="siptrunk4l",`
		`nonce="YoK5FiEuXpeIlp52EnUWFLIU1m24t5gV", algorithm=MD5`
		`Content-Length: 0`
		`……`

UAS responds to a SIP request with a 403 (Forbidden) message.	In the System->Security Profile->SIP Security Profile window, and per the default settings, the following features require authorization:
	- Presence Subscription
	- OOD REFER
	- Unsolicited NOTIFY
	- INVITE and REFER w/ Replaces header
		If authentication or authorization are not needed, make sure the appropriate check boxes on the SIP Trunk Security Profile window are unchecked.
		or
		Configure the application user on Cisco Unified CM with proper authorization.
		Configure the UAC to match credentials on Cisco Unified CM.
		`INVITE sip:5000@172.18.193.222:5060 SIP/2.0`
		`Via: SIP/2.0/UDP 172.18.195.83:5060`
		`From: sipp <sip:sipp@172.18.195.83:5060>;tag=1`
		`To: sut <sip:5000@172.18.193.222:5060>`
		`Call-ID: 1-21473@172.18.195.83`
		`Cseq: 1 INVITE`
		`Replaces: 425928@bobster.example.org;to-tag=7743;from-tag=6472`
		`……`
		`SIP/2.0 403 Forbidden`
		`Via: SIP/2.0/UDP 172.18.195.83:5060`
		`From: sipp <sip:sipp@172.18.195.83:5060>;tag=1`
		`To: sut <sip:5000@172.18.193.222:5060>;tag=673966968`
		`Date: Tue, 5 Jul 2005 18:25:02 GMT`
		`Call-ID: 1-21473@172.18.195.83`
		`CSeq: 1 INVITE`
		`Content-Length: 0`

CISCO CONFIDENTIAL

Table 1-30 Troubleshooting SIP Trunk Configuration (continued)

Symptom	Possible Cause	Recommended Action
UAS responds to a SIP request with a 404 Not Found message.	Digit analysis failed to find the device or a route for the called number.	This could happen for many reasons. If the phone with the dialed number is not registered, or if the host in the request does not match the Cisco Unified CM host or IP address and there is no SIP route pattern to route this number or DN, Digit Analysis will fail.
Potential problems with forking exist. Downstream SIP endpoints do not receive ACK to responses.	Not actually a problem. The SIP trunk does not support downstream forking for delayed media INVITE (w/o SDP).	If downstream forking support is required, the SIP trunk must use an MTP. Make sure the "MTP Required" check box is checked on the SIP trunk configuration window.
TLS connection for SIP trunk fails with "HandleSSLError - TLS protocol error…" in SDI log (ccmtrace).	TLS SIP trunk peer X509 certificate has not been imported into the local Cisco Unified CM trust store or is the incorrect version.	Ensure that the peer X509 certificate is version 3 and has been properly imported into the local Cisco Unified CM trust store.
TLS connection for SIP trunk fails with a 'ConnectionFailure' alarm on the TLS SIP trunk.	X509 Certificate validation failed for the TLS SIP trunk peer.	Possible problems include X509 Subject Name mismatch or cipher string mismatch. Check the SDL log for more detailed logs under 'validTLSConnection' log. Reason code 1 – Got X509 certificate for neither Authenticate or Encrypted trunk. (Should not happen.) Reason code 2 – X509 Subject Common Name (CN=) mismatch with the trunk security profile settings. Reason code 3 – TLS cipher string mismatch. (The trunk security profile 'Device Security Mode' settings determine this.)
TLS connection from CSPS to Cisco Unified CM via SIP fails with '416 Unsupported URI Scheme' or fails following a '301 Redirect' message.	Cisco Unified CM does not support SIPS URI handling, and CSPS will not complete a TLS connection without SIPS URI support.	Do not use SIP TLS connections between CSPS and Cisco Unified CM.
No Diversion header exists in the outgoing INVITE message when the call is forwarded	The SIP trunk configuration option "Redirecting Diversion Header Delivery - outbound" does not get checked.	Make sure that the "Redirecting Diversion Header Delivery - outbound" is checked.
Although an end user is associated with primary extension and phone, no PUBLISH comes out.	The preceding configuration applies for SUB/NOT based presence. It does not get used for PUBLISH.	Associate the user to the line appearance in the phone number configuration window.

CISCO CONFIDENTIAL

Table 1-30 Troubleshooting SIP Trunk Configuration (continued)

Symptom	Possible Cause	Recommended Action
Although an end user is associated to a line appearance, no PUBLISH comes out.	PUBLISH will not get sent for the line appearance if its associated user does not have a Cisco Unified Presence license.	Assign a Cisco Unified Presence license to that user.
REFER (method=BYE) does not terminate the call in a multinode Cisco Unified CM cluster.	Refer Manager cannot find the dialog to terminate.	Make sure REFER(method=BYE) comes into the same node as the node that receives REFER(method=INVITE), for the same call.

Troubleshooting Calling Party Number Transformations feature	Troubleshooting Calling Party Number Transformations feature	There are a few detailed level SDI trace line that will help us find the number Prefixed and the number of digits striped, and the CSS applied.
		Example Stripping/Prefixing Digits, CSS:
		`12/17/2008 00:43:18.826 CCM|//SIP/SIPCdpc(0,0,0)/ci=0/ccbId=0/scbId=0/globalize: Performing stripAndPrependDigits --- Prefix data = +1, Strip Data = 1|<CLID::StandAloneCluster><NID::rtp-galaxy><LVL::Detailed><MASK::20000>`
		`12/17/2008 00:43:18.826 CCM|SPROC :: stripAndPrependDigits- The number 4089023019 is prepended with prefix +1, updated number=+14089023019|<CLID::StandAloneCluster><NID::rtp-galaxy><LVL::Detailed><MASK::ffffff>`
		`12/17/2008 00:43:18.826 CCM|//SIP/SIPCdpc(0,0,0)/ci=0/ccbId=0/scbId=0/globalize: CallingNumber after stripAndPrependDigits +14089023019`
		`12/17/2008 00:58:54.923 CCM|//SIP/SIPCdpc(0,0,0)/ci=0/ccbId=0/scbId=0/globalize: Using Calling CSS 57803b7e-1bcc-b0d7-da08-f023c78dd179|<CLID::StandAloneCluster><NID::rtp-galaxy><LVL::Detailed><MASK::20000>`

Calls using SRTP over non secure trunk don't behave correctly.	Cisco Unified CM down grades to RTP (i.e. AVP)	Check if endpoint on the far end of the trunk indicates support for SAVP in the SDP.
Calls using SRTP over non secure trunk don't behave correctly.	Cisco Unified CM down grades to RTP (i.e. AVP)	Check if other call leg (e.g. perhaps a line side endpoint) on Cisco Unified CM supports SRTP.
Calls using SRTP over non secure trunk don't behave correctly.	Cisco Unified CM down grades to RTP (i.e. AVP)	Check if Cisco Unified CM had to insert an MTP (e.g. due to codec mismatch for example).
Calls using SRTP over non secure trunk don't behave correctly.	Cisco Unified CM disconnects call during setup.	Check if endpoint on the other side of the trunk indicates support for X-cisco-srtp-fallback but the call requires RTP for other reasons (see problems above).
G.Clear calls not working for SIP line/trunk to MGCP GW T1/E1 PRI	Call drops due to media mismatch.	Check if G.Clear codec was offered by SIP leg.

CISCO CONFIDENTIAL

Table 1-30 Troubleshooting SIP Trunk Configuration (continued)

Symptom	Possible Cause	Recommended Action
G.Clear calls not working for SIP line/trunk to MGCP GW T1/E1 PRI	Call drops due to media mismatch.	Check if "Enable G.Clear" checkbox is checked on the MGCP PRI.
G.Clear calls not working for SIP line/trunk to MGCP GW T1/E1 PRI	Call rejected by PSTN/PBX with incompatible destination (88).	Check if ISDN setup from MGCP GW to PBX/PSTN has bearer cap set to 0x8890.
G.Clear calls not working for SIP line to SIP line/trunk	INVITE without G.Clear SDP going out.	Check if G.Clear codec was offered by SIP leg.
G.Clear calls not working for SIP line to SIP line/trunk	INVITE without G.Clear SDP going out	Check if SIP Profile for both the legs have "Enable Early Offer for G.Clear" enabled.
G.Clear calls not working for SIP line to SIP line/trunk	G.Clear call rejected with 488 Incompatible Media	Check if the terminating device supports G.Clear codec / data calls. Cisco IP Phones do not support G.Clear codec.
Logical Partitioning feature not working	Logical Partitioning feature not working	• Check if Enterprise Param "Enable Logical Partitioning" is True. • Check that the device is associated with a valid Geolocation at device or device pool level. • Check that the device is associated with a valid Geolocation filter, having selection of some of the Geolocation fields, at device or device pool level. • When Enterprise Param "Logical Partitioning Default Policy" is DENY, check if ALLOW LP policies between GeolocationPolicy of a Gateway & VoIP site configured. • Make sure case is correct for fields of the LP GeolocationPolicy records and match with that configured for Geolocation records. • There is no LP Policy check for VoIP to VoIP device call or feature with only VoIP participants. • The Cisco Unified CM Admin will allow configuring policies between Interior:geolocpolicyX to Interior:geolocpolicyY but it will not be used during LP checks. • Hierarchy is important for fields of Geolocation 1. Say searching for policy between Border:IN:KA and Interior:IN:KA 2. The following possible policies will match in order • The possible policies that lack some of the fields in hierarchy, such as following will not match: – Border:KA – Interior:KA – Border:BLR

CISCO CONFIDENTIAL

Table 1-30 Troubleshooting SIP Trunk Configuration (continued)

Symptom	Possible Cause	Recommended Action
		– Interior:BLR – Border:KA:BLR – Interior:KA:BLR – Note: Country=IN is missing
IPv6 calls not working	IPv6_only phones are not able to register with Cisco Unified CM	• Verify that IPv6 has been enabled on the Cisco Unified CM server using platform CLI. • Verify that "Enable IPv6" enterprise parameter is set to True. • Verify Server IPv6 Name has been configured with either the hostname or the IPv6 address. If configured for hostname, verify that phone has been configured with a DNS address to resolve hostname to an IPv6 address. • Verify that Cisco Unified CM host only has 1 non link-local IPv6 address. • If the phone will get an IPv6 address via RA, verify that "Allow Auto Configuration for Phone" enterprise parameter is set to ON. • Verify Cisco Unified CM and Cisco TFTP services are running.
IPv6 calls not working	Incoming calls on V6_only SIP Trunk are not answered	• Verify that IPv6 has been enabled on the Cisco Unified CM server using CLI. • Verify that "Enable IPv6" enterprise parameter is set to True. • Verify that the INVITE does not contains IPv4 signaling.
IPv6 calls not working	Outgoing calls on V6_only SIP Trunk are not answered	• Verify that IPv6 has been enabled on the Cisco Unified CM server using CLI. • Verify that "Enable IPv6" enterprise parameter is set to True. • Verify that an IPv6 address is configured on the SIP Trunk configuration page.
IPv6 calls not working	Calls between two endpoint fails	Verify the addressing modes of the endpoints. If one is configured for IPv4_only and the other is configured for IPv6_only, ensure that a dual stack MTP is available to do the media translation.
IPv6 call no MOH is heard	No MOH is heard	• Verify the addressing modes of the endpoint to which MOH is played. If the addressing mode is IPv6_only and MOH is configured for unicast, ensure that a dual stack MTP is available. • If MOH is configured for multicast, the expected behavior is that no MOH will be heard on the IPv6_only phones.

CISCO CONFIDENTIAL

CHAPTER 2

SIP Trunk Call Flows

This chapter describes the new and modified SIP trunk call flows for OL-16705-01 Release 6.0(1). It shows the interfaces and interactions between OL-16705-01 and SIP networks for basic calls and supplementary services. The new features and enhancements that are introduced in this release do not impose any backward compatibility implications on previous versions of the SIP trunk.

Note Release 5.0(1) and later no longer requires preallocation of an MTP resource on the SIP trunk, which was a requirement of Release 4.1(3). As a result of not allocating an MTP, outbound INVITE messages do not contain SDP information. Only when an MTP is allocated does the SIP trunk send SDP in the INVITE. This is a key difference between Release 4.1(3) and later releases. The default behavior for OL-16705-01 is to remove the MTP across the SIP trunk.

Tip A few SIP devices are not SIP compliant, and therefore, they do not support delayed media (INVITE without SDP). To interoperate with these types of devices, the SIP trunk that is associated with these devices must have MTP enabled.

List of Scenarios:

1. BasicCall
   - 1.1 Basic Incoming Call
   - 1.2 Basic Outgoing Call
   - 1.3 Basic Early Offer Call via an Inter Cluster SIP Trunk
   - 1.4 Basic Call to a SCCP Device via an Inter Cluster SIP Trunk
   - 1.5 Basic Call to a SIP Device via an Inter Cluster SIP Trunk
   - 1.6 Basic Call to a SCCP Device via an Inter Cluster SIP Trunk Using a FQDN as the
   - 1.7 Basic Call to a SCCP Device via an Inter Cluster SIP Trunk using an SRV record as the destination address in the SIP Trunk configuration
   - 1.8 Basic Hold-resume Call via a SIP Trunk to a SIP Proxy
   - 1.9 Basic Hold-resume Call via an Inter Cluster SIP Trunk
   - 1.10 Basic Conference Call via an Inter Cluster SIP Trunk

2. DTMF
   - 2.1 Call between Cisco Unified CM SCCP Phone and SIP Gateway using OOB Notify
   - 2.2 Call between Cisco Unified CM SCCP Phone and SIP Gateway using KPML
   - 2.3 Call between Cisco Unified CM SCCP Phone and SIP Gateway using RFC2833

3. Presence
   - 3.1 Outgoing Presence Subscription
   - 3.2 Incoming Presence Subscription
   - 3.3 Incoming Presence Forbidden for Authorization Failure

4. Transfer
   - 4.1 Basic Attended Transfer Call via an Inter Cluster SIP Trunk
   - 4.2 Basic Early Transfer Call via an Inter Cluster SIP Trunk
   - 4.3 Attended Transfer Call using the Cisco Unified CM SIP Trunk
   - 4.4 Early Attended Transfer To SIP Proxy via Cisco Unified CM SIP Trunk

5. Update
   - 5.1 Early Transfer Call to SIP Gateway No PRACK via Cisco Unified CM SIP Trunk
   - 5.2 Early Transfer Call to SIP Gateway with PRACK via Cisco Unified CM SIP Trunk

6. TLS
   - 6.1 TLS Rejection with X509 Subject Name Mismatch
   - 6.2 TLS Basic Incoming Call

7. T38
   - 7.1 SIP Trunk Passes through T38 Fax Call between SIP Gateways

8. SipsUri

CISCO CONFIDENTIAL

8.1 Incoming SIPS URI Request Redirected by Cisco Unified CM
8.2 Incoming SIPS URI Request Rejected by Cisco Unified CM

9. Info
9.1 SIP Video Call Using INFO Method

10. MWI
10.1 MWI Status via Unsolicited NOTIFY

11. Prack
11.1 Outbound Early Media Call with PRACK
11.2 Outbound Delayed Media Call with PRACK

12. CallPreservation
12.1 Session Timers Negotiation & Refresh for the Sip Trunk Call on "Cisco Unified CM"
12.2 Periodic Refresh after Session Timer Negotiation Failure
12.3 Sip Trunk Call Preservation when "Cisco Unified CM" is the "Refresher"
12.4 Sip Trunk Call Preservation when "Cisco Unified CM" is the "Non-Refresher"

13. 3xx
13.1 Incoming 3xx Redirection

14. Authentication-Authorization
14.1 Unified CM gets Authenticated as UAC
14.2 Unified CM Authenticates Incoming Request

15. ACL
15.1 Access Control List, Deny Presence Subscription
15.2 Access Control List, Deny Out of Dialog REFER
15.3 Access Control List, Deny Unsolicited NOTIFY
15.4 Access Control List, Deny INVITE with Replaces Header
15.5 Access Control List, Deny REFER with Replaces Header

16. RSVP
16.1 Outgoing RSVP Call through SIP Trunk

17. Publish
17.1 Basic PUBLISH Operations
17.2 PUBLISH with Shared Line, A Holds and B Resumes
17.3 PUBLISH with Shared Line, A Holds and B Selects
17.4 PUBLISH Support for Mobility
17.5 PUBlISH Support for DND

18. G.729

18.1 Establish G.729a with No MTP
18.2 Establish G.729 with MTP
18.3 Delayed Media Call with No MTP
18.4 Delayed Media Call No Support

19. PAI
    19.1 Basic Outgoing Call with default identity configurations on SIP Trunk
    19.2 Basic Outgoing Call with identity in only From header
    19.3 Basic Outgoing Call with only Remote-Party-Id
    19.4 Basic Outgoing Call with identity in P-Preferred-Identity header.
    19.5 Basic Incoming SIP TrunkCall, sending 180/200 with Asserted-Identity & Privacy:id
    19.6 Incoming SIP TrunkCall, sending identity in Asserted-Identity with Privacy:none
    19.7 Basic Incoming SIP TrunkCall
    19.8 Incoming SIP TrunkCall, sending 180, 200 without any identity headers
    19.9 Basic Incoming SIP TrunkCall, sending PPI in outgoing 180/200
    19.10 Mid-Call UPDATE for Display identity change using Asserted-Identity.
    19.11 Mid-Call UPDATE for Display identity change with P-Preferred-Identity
    19.12 Incoming OOB REFER request for performing a click to call scenario.
    19.13 Basic Outgoing Call with Asserted-Identity & Privacy:id headers.
    19.14 Basic Outgoing Call with an identity in Asserted-Identity header & Privacy: id;critical
    19.15 Basic Outgoing Call with identity in Asserted-Identity & Privacy:none

20. MLPP
    20.1 MLPP Basic Call

21. V.150.1
    21.1 Basic Call with V.150.1 virtual codec

22. T38Fax-interop-with-MSExchange
    22.1 T38 Interop with MS Exchange

23. MMoH
    23.1 Basic Hold-resume Call via an SIP ICT with MMOH enabled

24. IPv6
    24.1 Outbound Delayed media call using Dual Mode SIP Trunk with signaling preference IPv4
    24.2 Outbound Delayed media call using Dual Mode SIP Trunk with signaling preference IPv6
    24.3 Outbound Delayed media call using Dual Mode SIP Trunk with signaling preference IPv6, media IPv4
    24.4 Inbound Delayed media call using IPv6 only SIP Trunk
    24.5 Outbound early offer call using IPv6 only SIP Trunk
    24.6 Outbound delayed offer call using ANAT over Dual Mode SIP Trunk with
    24.7 Outbound delayed offer call using ANAT over Dual Mode SIP Trunk with
    24.8 Outbound early offer call using ANAT over Dual Mode SIP Trunk with

24.9 Outbound IPv4 call to an IPv6 trunk results in a 503
24.10 Outbound IPv6 call to an IPv4 trunk results in a 503

25. CallingPartyTransformations
25.1 Define number of digits to be prefixed, stripped for Unknown Number Type on Service Parameter page
25.2 Define number of digits to be prefixed, stripped for Unknown Number Type on trunk device page
25.3 Define Calling Party Transformation CSS for Unknown Number on Trunk Device Page
25.4 Define both Stripping/Prefixing and Calling Party Transformation CSS for Unknown Number on Device Pool Page

CISCO CONFIDENTIAL

1. BasicCall

1.1 Basic Incoming Call

Title: Basic Incoming Call

Description:
The following basic call flow illustrates the SIP messaging when the SIP trunk is acting as a UAS.

Unified CM1 received an INVITE via the SIP Trunk.

Configuration:
Node = Unified CM1, IP = 10.10.199.250
Node = Unified CM2, IP = 10.10.199.251

Phone = A, Line = 1001, IP = 10.10.199.130, Model = SCCP
Phone = B, Line = 2002, IP = 10.10.199.179, Model = SCCP

SIP Trunk between Unified CM2 & Unified CM1 has route pattern 1.XXXX

Scenario:
Phone B DN 2002 calls Phone A DN 1001 over the SIP Trunk by dialing 11001
Phone A DN 1001 Answers
Phone A DN 1001 goes onHook
End of Scenario

CISCO CONFIDENTIAL

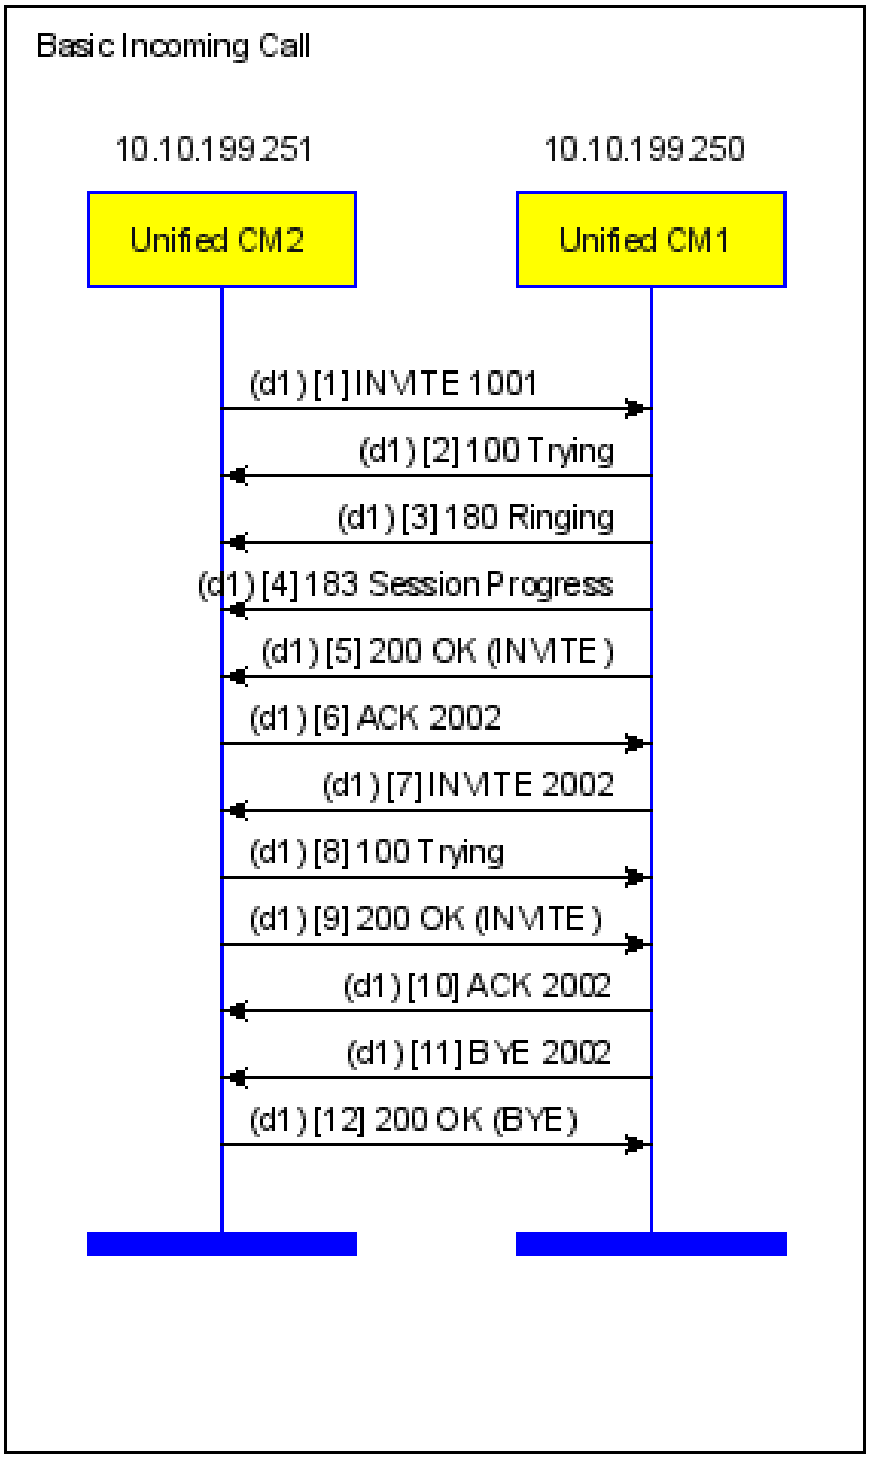

CISCO CONFIDENTIAL

[diagram] Call-ID:[prev][next]
[1] INVITE sip:1001@10.10.199.250:5060 SIP/2.0
Date: Mon, 28 Jul 2008 18:08:27 GMT
Call-Info: <sip:10.10.199.251:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:2002@10.10.199.251>;tag=e7a2b54c-403c-42f2-986a-ef3df579135a-20446696
Allow-Events: presence, kpml
P-Asserted-Identity: <sip:2002@10.10.199.251>
Supported: timer,resource-priority,replaces
Min-SE: 1800
Remote-Party-ID: <sip:2002@10.10.199.251>;party=calling;screen=yes;privacy=off
Content-Length: 0
User-Agent: Cisco-CUCM7.1
To: <sip:1001@10.10.199.250>
Contact: <sip:2002@10.10.199.251:5060;transport=tcp>
Expires: 180
Call-ID: 2bd8a500-88e10b1b-26-fbc712ac@10.10.199.251
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bKb5ac2634d
CSeq: 101 INVITE
Session-Expires: 1800
Max-Forwards: 70

[diagram] Call-ID:[prev][next]
[2] SIP/2.0 100 Trying
Date: Mon, 28 Jul 2008 18:06:39 GMT
From: <sip:2002@10.10.199.251>;tag=e7a2b54c-403c-42f2-986a-ef3df579135a-20446696
Allow-Events: presence
Content-Length: 0
To: <sip:1001@10.10.199.250>
Call-ID: 2bd8a500-88e10b1b-26-fbc712ac@10.10.199.251
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bKb5ac2634d
CSeq: 101 INVITE

[diagram] Call-ID:[prev][next]
[3] SIP/2.0 180 Ringing
Date: Mon, 28 Jul 2008 18:06:39 GMT
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:2002@10.10.199.251>;tag=e7a2b54c-403c-42f2-986a-ef3df579135a-20446696
Allow-Events: presence
P-Asserted-Identity: <sip:1001@10.10.199.250>
Remote-Party-ID: <sip:1001@10.10.199.250>;party=called;screen=yes;privacy=off
Content-Length: 0
To: <sip:1001@10.10.199.250>;tag=95ef4362-75f9-4faf-ae01-3fcd294149a0-20447305
Contact: <sip:2002@10.10.199.250:5060;transport=tcp>
Call-ID: 2bd8a500-88e10b1b-26-fbc712ac@10.10.199.251
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bKb5ac2634d
CSeq: 101 INVITE

[diagram] Call-ID:[prev][next]
[4] SIP/2.0 183 Session Progress
Date: Mon, 28 Jul 2008 18:06:39 GMT
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:2002@10.10.199.251>;tag=e7a2b54c-403c-42f2-986a-ef3df579135a-20446696
Allow-Events: presence
P-Asserted-Identity: <sip:1001@10.10.199.250>
Remote-Party-ID: <sip:1001@10.10.199.250>;party=called;screen=yes;privacy=off
Content-Length: 348
To: <sip:1001@10.10.199.250>;tag=95ef4362-75f9-4faf-ae01-3fcd294149a0-20447305
Contact: <sip:2002@10.10.199.250:5060;transport=tcp>
Content-Type: application/sdp
Call-ID: 2bd8a500-88e10b1b-26-fbc712ac@10.10.199.251
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bKb5ac2634d
CSeq: 101 INVITE

v=0
o=CiscoSystemsCCM-SIP 2000 1 IN IP4 10.10.199.250
s=SIP Call
c=IN IP4 10.10.199.130
t=0 0
m=audio 4000 RTP/AVP 9 0 8 18 101
a=rtpmap:9 G722/8000
a=ptime:20
a=rtpmap:0 PCMU/8000
a=ptime:20
a=rtpmap:8 PCMA/8000
a=ptime:20
a=rtpmap:18 G729/8000
a=ptime:20
a=fmtp:0
a=sendonly

CISCO CONFIDENTIAL

```
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15

[diagram]   Call-ID:[prev][next]
[5] SIP/2.0 200 OK
Date: Mon, 28 Jul 2008 18:06:39 GMT
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:2002@10.10.199.251>;tag=e7a2b54c-403c-42f2-986a-ef3df579135a-20446696
Allow-Events: presence
P-Asserted-Identity: <sip:1001@10.10.199.250>
Supported: replaces
Remote-Party-ID: <sip:1001@10.10.199.250>;party=called;screen=yes;privacy=off
Content-Length: 348
Require:  timer
To: <sip:1001@10.10.199.250>;tag=95ef4362-75f9-4faf-ae01-3fcd294149a0-20447305
Contact: <sip:2002@10.10.199.250:5060;transport=tcp>
Content-Type: application/sdp
Call-ID: 2bd8a500-88e10b1b-26-fbc712ac@10.10.199.251
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bKb5ac2634d
CSeq: 101 INVITE
Session-Expires:  1800;refresher=uas

v=0
o=CiscoSystemsCCM-SIP 2000 1 IN IP4 10.10.199.250
s=SIP Call
c=IN IP4 10.10.199.130
t=0 0
m=audio 4000 RTP/AVP 9 0 8 18 101
a=rtpmap:9 G722/8000
a=ptime:20
a=rtpmap:0 PCMU/8000
a=ptime:20
a=rtpmap:8 PCMA/8000
a=ptime:20
a=rtpmap:18 G729/8000
a=ptime:20
a=fmtp:0
a=sendonly
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15

[diagram]   Call-ID:[prev][next]
[6] ACK sip:2002@10.10.199.250:5060;transport=tcp SIP/2.0
Date: Mon, 28 Jul 2008 18:08:27 GMT
From: <sip:2002@10.10.199.251>;tag=e7a2b54c-403c-42f2-986a-ef3df579135a-20446696
Allow-Events: presence, kpml
Content-Length: 228
To: <sip:1001@10.10.199.250>;tag=95ef4362-75f9-4faf-ae01-3fcd294149a0-20447305
Content-Type: application/sdp
Call-ID: 2bd8a500-88e10b1b-26-fbc712ac@10.10.199.251
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bKc6542578b
CSeq: 101 ACK
Max-Forwards: 70

v=0
o=CiscoSystemsCCM-SIP 2000 1 IN IP4 10.10.199.251
s=SIP Call
c=IN IP4 10.10.199.179
t=0 0
m=audio 23172 RTP/AVP 9 101
a=rtpmap:9 G722/8000
a=ptime:20
a=recvonly
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15

[diagram]   Call-ID:[prev][next]
[7] INVITE sip:2002@10.10.199.251:5060;transport=tcp SIP/2.0
Date: Mon, 28 Jul 2008 18:06:41 GMT
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:1001@10.10.199.250>;tag=95ef4362-75f9-4faf-ae01-3fcd294149a0-20447305
Allow-Events: presence
P-Asserted-Identity: <sip:1001@10.10.199.250>
Supported: 100rel,timer,resource-priority,replaces
Min-SE:  1800
Cisco-Guid: 3950585600-2296449711-48-4207350444
Remote-Party-ID: <sip:1001@10.10.199.250>;party=calling;screen=yes;privacy=off
Content-Length: 216
User-Agent: Cisco-CUCM7.1
To: <sip:2002@10.10.199.251>;tag=e7a2b54c-403c-42f2-986a-ef3df579135a-20446696
```

CISCO CONFIDENTIAL

```
Contact: <sip:1001@10.10.199.250:5060;transport=tcp>
Expires: 180
Content-Type: application/sdp
Call-ID: 2bd8a500-88e10b1b-26-fbc712ac@10.10.199.251
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK1d161260a8
CSeq: 101 INVITE
Session-Expires:  1800;refresher=uac
Max-Forwards: 70

v=0
o=CiscoSystemsCCM-SIP 2000 2 IN IP4 10.10.199.250
s=SIP Call
c=IN IP4 10.10.199.130
t=0 0
m=audio 24578 RTP/AVP 9 101
a=rtpmap:9 G722/8000
a=ptime:20
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
```

[diagram] Call-ID:[prev][next]

[8] SIP/2.0 100 Trying

```
Date: Mon, 28 Jul 2008 18:08:29 GMT
From: <sip:1001@10.10.199.250>;tag=95ef4362-75f9-4faf-ae01-3fcd294149a0-20447305
Allow-Events: presence, kpml
Content-Length: 0
To: <sip:2002@10.10.199.251>;tag=e7a2b54c-403c-42f2-986a-ef3df579135a-20446696
Call-ID: 2bd8a500-88e10b1b-26-fbc712ac@10.10.199.251
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK1d161260a8
CSeq: 101 INVITE
```

[diagram] Call-ID:[prev][next]

[9] SIP/2.0 200 OK

```
Date: Mon, 28 Jul 2008 18:08:29 GMT
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:1001@10.10.199.250>;tag=95ef4362-75f9-4faf-ae01-3fcd294149a0-20447305
Allow-Events: presence, kpml
P-Asserted-Identity: <sip:2002@10.10.199.251>
Supported: replaces
Remote-Party-ID: <sip:2002@10.10.199.251>;party=called;screen=yes;privacy=off
Content-Length: 216
Require:  timer
To: <sip:2002@10.10.199.251>;tag=e7a2b54c-403c-42f2-986a-ef3df579135a-20446696
Contact: <sip:2002@10.10.199.251:5060;transport=tcp>
Content-Type: application/sdp
Call-ID: 2bd8a500-88e10b1b-26-fbc712ac@10.10.199.251
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK1d161260a8
CSeq: 101 INVITE
Session-Expires:  1800;refresher=uac

v=0
o=CiscoSystemsCCM-SIP 2000 2 IN IP4 10.10.199.251
s=SIP Call
c=IN IP4 10.10.199.179
t=0 0
m=audio 23172 RTP/AVP 9 101
a=rtpmap:9 G722/8000
a=ptime:20
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
```

[diagram] Call-ID:[prev][next]

[10] ACK sip:2002@10.10.199.251:5060;transport=tcp SIP/2.0

```
Date: Mon, 28 Jul 2008 18:06:41 GMT
From: <sip:1001@10.10.199.250>;tag=95ef4362-75f9-4faf-ae01-3fcd294149a0-20447305
Allow-Events: presence
Content-Length: 0
To: <sip:2002@10.10.199.251>;tag=e7a2b54c-403c-42f2-986a-ef3df579135a-20446696
Call-ID: 2bd8a500-88e10b1b-26-fbc712ac@10.10.199.251
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK1e23724c32
CSeq: 101 ACK
Max-Forwards: 70
```

[diagram] Call-ID:[prev][next]

[11] BYE sip:2002@10.10.199.251:5060;transport=tcp SIP/2.0

```
Date: Mon, 28 Jul 2008 18:06:41 GMT
From: <sip:1001@10.10.199.250>;tag=95ef4362-75f9-4faf-ae01-3fcd294149a0-20447305
Content-Length: 0
User-Agent: Cisco-CUCM7.1
To: <sip:2002@10.10.199.251>;tag=e7a2b54c-403c-42f2-986a-ef3df579135a-20446696
```

CISCO CONFIDENTIAL

```
Call-ID: 2bd8a500-88e10b1b-26-fbc712ac@10.10.199.251
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK1f52e35c92
CSeq: 102 BYE
Max-Forwards: 70

[diagram]   Call-ID:[prev][next]
[12] SIP/2.0 200 OK
Date: Mon, 28 Jul 2008 18:08:37 GMT
From: <sip:1001@10.10.199.250>;tag=95ef4362-75f9-4faf-ae01-3fcd294149a0-20447305
Content-Length: 0
To: <sip:2002@10.10.199.251>;tag=e7a2b54c-403c-42f2-986a-ef3df579135a-20446696
Call-ID: 2bd8a500-88e10b1b-26-fbc712ac@10.10.199.251
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK1f52e35c92
CSeq: 102 BYE
```

CISCO CONFIDENTIAL

1.2 Basic Outgoing Call

Title: Basic Outgoing Call

Description:

The following basic call flow illustrates the SIP messaging when the SIP trunk is acting as a UAC.

Cisco Unified CM1 sent out the initial INVITE.

Configuration:

Node = Unified CM1, IP = 10.10.199.250

Node = Unified CM2, IP = 10.10.199.251

Phone = A, Line = 1003, IP = 10.10.199.66, Model = SCCP

Phone = B, Line = 2002, IP = 10.10.199.179, Model = SCCP

SIP Trunk between Unified CM1 & Unified CM2 has route pattern 2.XXXX

Scenario:

Phone A DN 1003 calls Phone B DN 2002 over the SIP Trunk by dialing 22002

Phone B DN 2002 Answers

Phone A DN 1003 goes onHook

End of Scenario

CISCO CONFIDENTIAL

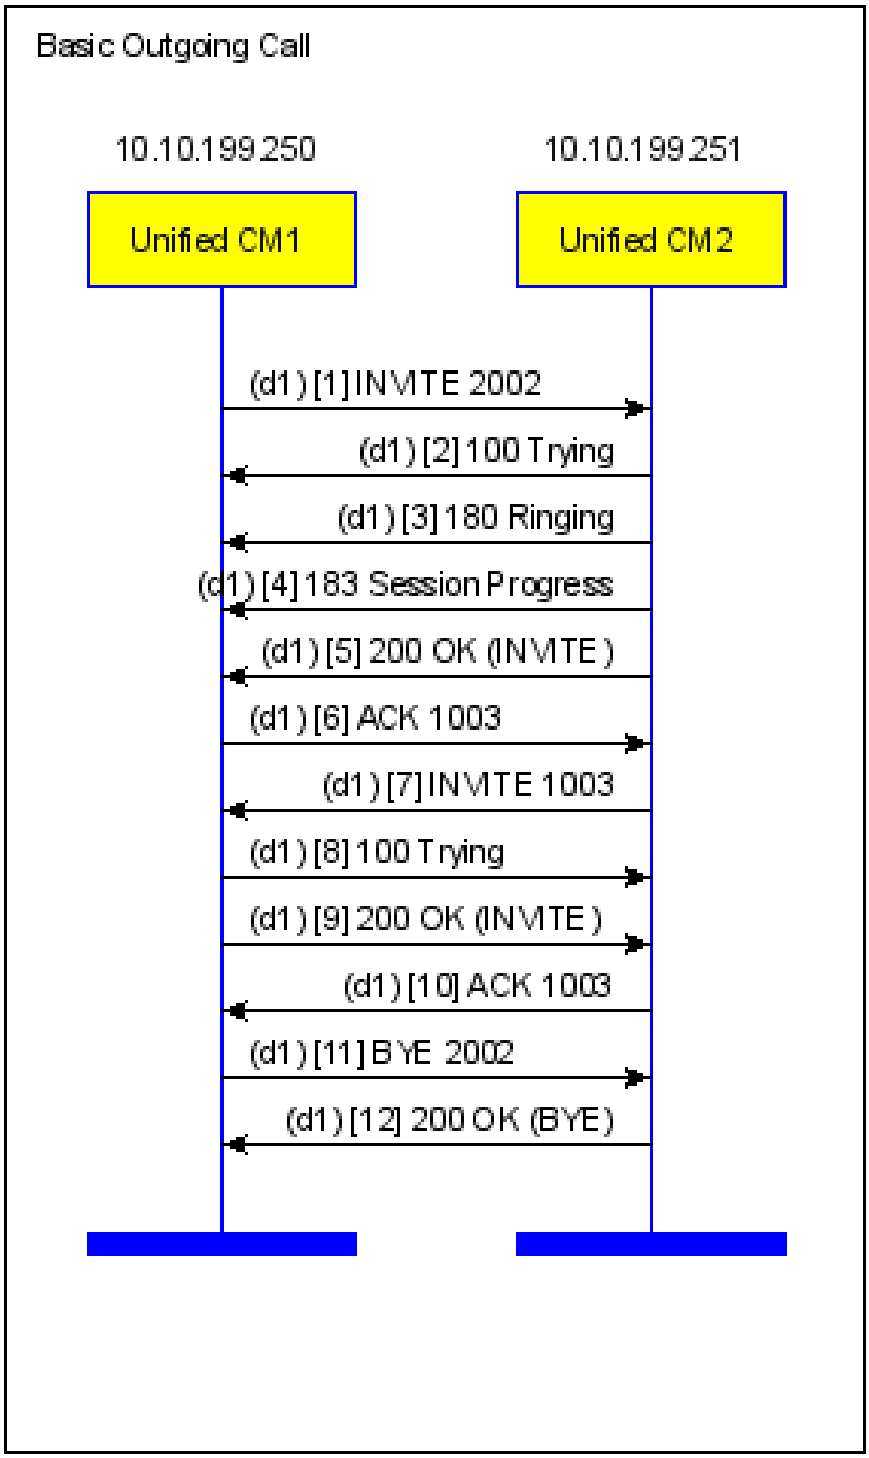

CISCO CONFIDENTIAL

```
[diagram]   Call-ID:[prev][next]
[1] INVITE sip:2002@10.10.199.251:5060 SIP/2.0
Date: Mon, 28 Jul 2008 18:08:33 GMT
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:1003@10.10.199.250>;tag=95ef4362-75f9-4faf-ae01-3fcd294149a0-20447308
Allow-Events: presence
P-Asserted-Identity: <sip:1003@10.10.199.250>
Supported: 100rel,timer,resource-priority,replaces
Min-SE:  1800
Remote-Party-ID: <sip:1003@10.10.199.250>;party=calling;screen=yes;privacy=off
Content-Length: 0
User-Agent: Cisco-CUCM7.1
To: <sip:2002@10.10.199.251>
Contact: <sip:1003@10.10.199.250:5060;transport=tcp>
Expires: 180
Call-ID: 2f6c2c00-88e10b21-32-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK20506e2169
CSeq: 101 INVITE
Session-Expires:  1800
Max-Forwards: 70

[diagram]   Call-ID:[prev][next]
[2] SIP/2.0 100 Trying
Date: Mon, 28 Jul 2008 18:10:20 GMT
From: <sip:1003@10.10.199.250>;tag=95ef4362-75f9-4faf-ae01-3fcd294149a0-20447308
Allow-Events: presence
Content-Length: 0
To: <sip:2002@10.10.199.251>
Call-ID: 2f6c2c00-88e10b21-32-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK20506e2169
CSeq: 101 INVITE

[diagram]   Call-ID:[prev][next]
[3] SIP/2.0 180 Ringing
Date: Mon, 28 Jul 2008 18:10:20 GMT
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:1003@10.10.199.250>;tag=95ef4362-75f9-4faf-ae01-3fcd294149a0-20447308
Allow-Events: presence
P-Asserted-Identity: <sip:2002@10.10.199.251>
Remote-Party-ID: <sip:2002@10.10.199.251>;party=called;screen=yes;privacy=off
Content-Length: 0
To: <sip:2002@10.10.199.251>;tag=e7a2b54c-403c-42f2-986a-ef3df579135a-20446697
Contact: <sip:1003@10.10.199.251:5060;transport=tcp>
Call-ID: 2f6c2c00-88e10b21-32-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK20506e2169
CSeq: 101 INVITE

[diagram]   Call-ID:[prev][next]
[4] SIP/2.0 183 Session Progress
Date: Mon, 28 Jul 2008 18:10:20 GMT
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:1003@10.10.199.250>;tag=95ef4362-75f9-4faf-ae01-3fcd294149a0-20447308
Allow-Events: presence, kpml
P-Asserted-Identity: <sip:2002@10.10.199.251>
Remote-Party-ID: <sip:2002@10.10.199.251>;party=called;screen=yes;privacy=off
Content-Length: 348
To: <sip:2002@10.10.199.251>;tag=e7a2b54c-403c-42f2-986a-ef3df579135a-20446697
Contact: <sip:1003@10.10.199.251:5060;transport=tcp>
Content-Type: application/sdp
Call-ID: 2f6c2c00-88e10b21-32-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK20506e2169
CSeq: 101 INVITE

v=0
o=CiscoSystemsCCM-SIP 2000 1 IN IP4 10.10.199.251
s=SIP Call
c=IN IP4 10.10.199.179
t=0 0
m=audio 4000 RTP/AVP 9 0 8 18 101
a=rtpmap:9 G722/8000
a=ptime:20
a=rtpmap:0 PCMU/8000
a=ptime:20
a=rtpmap:8 PCMA/8000
a=ptime:20
a=rtpmap:18 G729/8000
a=ptime:20
a=fmtp:0
a=sendonly
a=rtpmap:101 telephone-event/8000
```

CISCO CONFIDENTIAL

```
a=fmtp:101 0-15

[diagram]   Call-ID:[prev][next]
[5] SIP/2.0 200 OK
Date: Mon, 28 Jul 2008 18:10:20 GMT
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:1003@10.10.199.250>;tag=95ef4362-75f9-4faf-ae01-3fcd294149a0-20447308
Allow-Events: presence, kpml
P-Asserted-Identity: <sip:2002@10.10.199.251>
Supported: replaces
Remote-Party-ID: <sip:2002@10.10.199.251>;party=called;screen=yes;privacy=off
Content-Length: 348
Require:  timer
To: <sip:2002@10.10.199.251>;tag=e7a2b54c-403c-42f2-986a-ef3df579135a-20446697
Contact: <sip:1003@10.10.199.251:5060;transport=tcp>
Content-Type: application/sdp
Call-ID: 2f6c2c00-88e10b21-32-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK20506e2169
CSeq: 101 INVITE
Session-Expires:  1800;refresher=uas

v=0
o=CiscoSystemsCCM-SIP 2000 1 IN IP4 10.10.199.251
s=SIP Call
c=IN IP4 10.10.199.179
t=0 0
m=audio 4000 RTP/AVP 9 0 8 18 101
a=rtpmap:9 G722/8000
a=ptime:20
a=rtpmap:0 PCMU/8000
a=ptime:20
a=rtpmap:8 PCMA/8000
a=ptime:20
a=rtpmap:18 G729/8000
a=ptime:20
a=fmtp:0
a=sendonly
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15

[diagram]   Call-ID:[prev][next]
[6] ACK sip:1003@10.10.199.251:5060;transport=tcp SIP/2.0
Date: Mon, 28 Jul 2008 18:08:33 GMT
From: <sip:1003@10.10.199.250>;tag=95ef4362-75f9-4faf-ae01-3fcd294149a0-20447308
Allow-Events: presence
Content-Length: 227
To: <sip:2002@10.10.199.251>;tag=e7a2b54c-403c-42f2-986a-ef3df579135a-20446697
Content-Type: application/sdp
Call-ID: 2f6c2c00-88e10b21-32-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK2143d5b58e
CSeq: 101 ACK
Max-Forwards: 70

v=0
o=CiscoSystemsCCM-SIP 2000 1 IN IP4 10.10.199.250
s=SIP Call
c=IN IP4 10.10.199.66
t=0 0
m=audio 20128 RTP/AVP 9 101
a=rtpmap:9 G722/8000
a=ptime:20
a=recvonly
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15

[diagram]   Call-ID:[prev][next]
[7] INVITE sip:1003@10.10.199.250:5060;transport=tcp SIP/2.0
Date: Mon, 28 Jul 2008 18:10:22 GMT
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:2002@10.10.199.251>;tag=e7a2b54c-403c-42f2-986a-ef3df579135a-20446697
Allow-Events: presence, kpml
P-Asserted-Identity: <sip:2002@10.10.199.251>
Supported: timer,resource-priority,replaces
Min-SE:  1800
Cisco-Guid: 1865618304-2296449932-40-4224127660
Remote-Party-ID: <sip:2002@10.10.199.251>;party=calling;screen=yes;privacy=off
Content-Length: 216
User-Agent: Cisco-CUCM7.1
To: <sip:1003@10.10.199.250>;tag=95ef4362-75f9-4faf-ae01-3fcd294149a0-20447308
Contact: <sip:2002@10.10.199.251:5060;transport=tcp>
```

CISCO CONFIDENTIAL

```
Expires: 180
Content-Type: application/sdp
Call-ID: 2f6c2c00-88e10b21-32-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bKd762db55
CSeq: 101 INVITE
Session-Expires:  1800;refresher=uac
Max-Forwards: 70

v=0
o=CiscoSystemsCCM-SIP 2000 2 IN IP4 10.10.199.251
s=SIP Call
c=IN IP4 10.10.199.179
t=0 0
m=audio 18156 RTP/AVP 9 101
a=rtpmap:9 G722/8000
a=ptime:20
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
```

[diagram] Call-ID:[prev][next]

[8] SIP/2.0 100 Trying

```
Date: Mon, 28 Jul 2008 18:08:35 GMT
From: <sip:2002@10.10.199.251>;tag=e7a2b54c-403c-42f2-986a-ef3df579135a-20446697
Allow-Events: presence
Content-Length: 0
To: <sip:1003@10.10.199.250>;tag=95ef4362-75f9-4faf-ae01-3fcd294149a0-20447308
Call-ID: 2f6c2c00-88e10b21-32-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bKd762db55
CSeq: 101 INVITE
```

[diagram] Call-ID:[prev][next]

[9] SIP/2.0 200 OK

```
Date: Mon, 28 Jul 2008 18:08:35 GMT
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:2002@10.10.199.251>;tag=e7a2b54c-403c-42f2-986a-ef3df579135a-20446697
Allow-Events: presence
P-Asserted-Identity: <sip:1003@10.10.199.250>
Supported: replaces
Remote-Party-ID: <sip:1003@10.10.199.250>;party=called;screen=yes;privacy=off
Content-Length: 215
Require:  timer
To: <sip:1003@10.10.199.250>;tag=95ef4362-75f9-4faf-ae01-3fcd294149a0-20447308
Contact: <sip:1003@10.10.199.250:5060;transport=tcp>
Content-Type: application/sdp
Call-ID: 2f6c2c00-88e10b21-32-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bKd762db55
CSeq: 101 INVITE
Session-Expires:  1800;refresher=uac

v=0
o=CiscoSystemsCCM-SIP 2000 2 IN IP4 10.10.199.250
s=SIP Call
c=IN IP4 10.10.199.66
t=0 0
m=audio 20128 RTP/AVP 9 101
a=rtpmap:9 G722/8000
a=ptime:20
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
```

[diagram] Call-ID:[prev][next]

[10] ACK sip:1003@10.10.199.250:5060;transport=tcp SIP/2.0

```
Date: Mon, 28 Jul 2008 18:10:22 GMT
From: <sip:2002@10.10.199.251>;tag=e7a2b54c-403c-42f2-986a-ef3df579135a-20446697
Allow-Events: presence, kpml
Content-Length: 0
To: <sip:1003@10.10.199.250>;tag=95ef4362-75f9-4faf-ae01-3fcd294149a0-20447308
Call-ID: 2f6c2c00-88e10b21-32-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bKe4a70d476
CSeq: 101 ACK
Max-Forwards: 70
```

[diagram] Call-ID:[prev][next]

[11] BYE sip:2002@10.10.199.251:5060;transport=tcp SIP/2.0

```
Date: Mon, 28 Jul 2008 18:08:35 GMT
From: <sip:1003@10.10.199.250>;tag=95ef4362-75f9-4faf-ae01-3fcd294149a0-20447308
P-Asserted-Identity: <sip:1003@10.10.199.250>
Content-Length: 0
User-Agent: Cisco-CUCM7.1
To: <sip:2002@10.10.199.251>;tag=e7a2b54c-403c-42f2-986a-ef3df579135a-20446697
```

CISCO CONFIDENTIAL

```
Call-ID: 2f6c2c00-88e10b21-32-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK225be82f8b
CSeq: 102 BYE
Max-Forwards: 70

[diagram]   Call-ID:[prev][next]
[12] SIP/2.0 200 OK
Date: Mon, 28 Jul 2008 18:10:29 GMT
From: <sip:1003@10.10.199.250>;tag=95ef4362-75f9-4faf-ae01-3fcd294149a0-20447308
Content-Length: 0
To: <sip:2002@10.10.199.251>;tag=e7a2b54c-403c-42f2-986a-ef3df579135a-20446697
Call-ID: 2f6c2c00-88e10b21-32-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK225be82f8b
CSeq: 102 BYE
```

CISCO CONFIDENTIAL

1.3 Basic Early Offer Call via an Inter Cluster SIP Trunk

Title: Basic Early Offer Call via an Inter Cluster SIP Trunk

Description:

The following call flow illustrates the SIP messaging that takes place between two Cisco Unified CMs via an inter cluster SIP trunk.

Cisco Unified CM1 received an INVITE with SDP.

Configuration:

Node = Unified CM1, IP = 10.10.199.250
Node = Unified CM2, IP = 10.10.199.251

Phone = A, Line = 1003, IP = 10.10.199.66, Model = SCCP
Phone = B, Line = 2001, IP = 10.10.199.171, Model = SIP TNP

SIP Trunk between Unified CM1 & Unified CM2 has
a) route pattern 2.XXXX
b) Media Termination Point Required checked.

Scenario:

Phone A DN 1003 calls Phone B DN 2001 over the SIP Trunk by dialing 22001
Phone B DN 2001 Answers
Phone A DN 1003 goes onHook
End of Scenario

CISCO CONFIDENTIAL

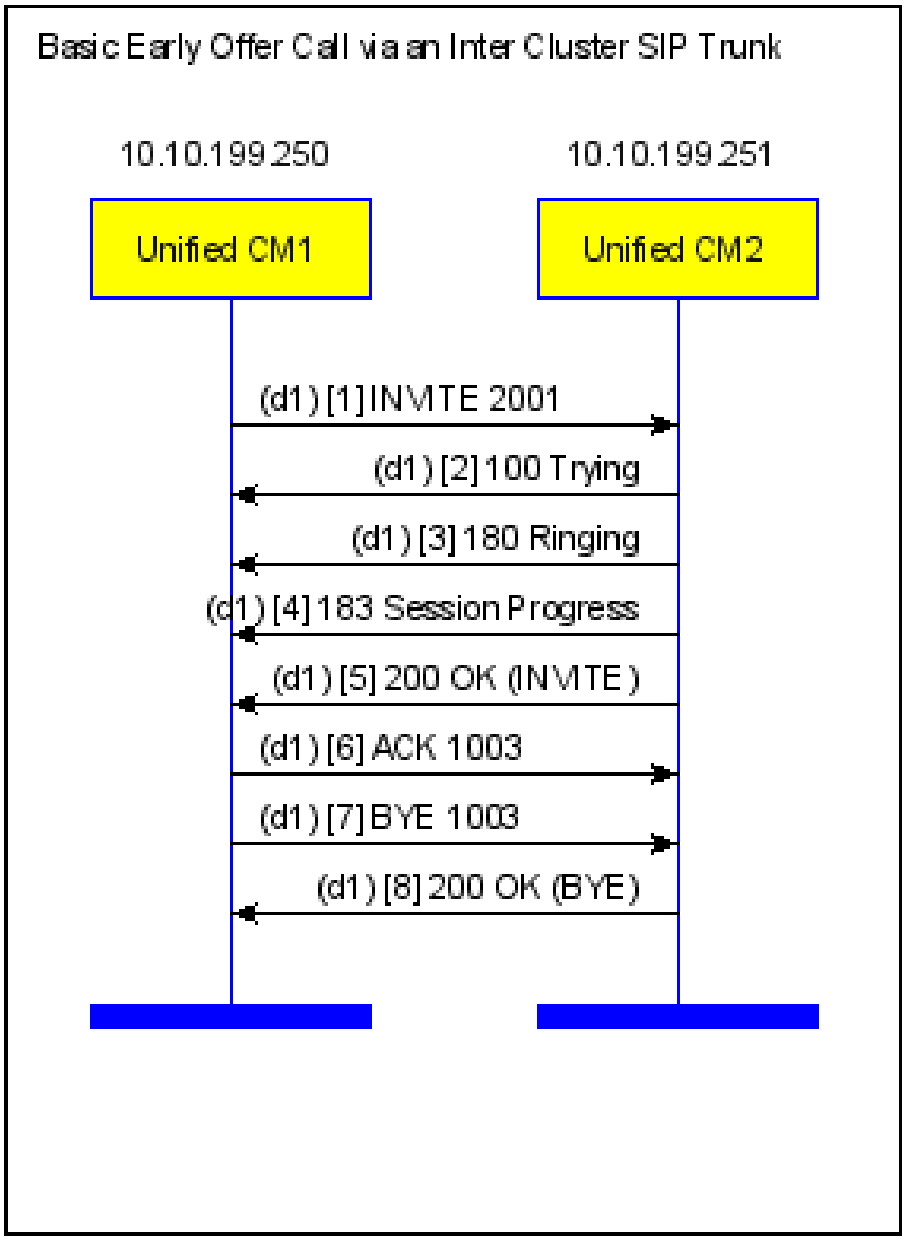

CISCO CONFIDENTIAL

[diagram] Call-ID:[prev][next]
[1] INVITE sip:2001@10.10.199.251:5060 SIP/2.0
Date: Mon, 28 Jul 2008 18:19:49 GMT
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:1003@10.10.199.250>;tag=95ef4362-75f9-4faf-ae01-3fcd294149a0-20447316
Allow-Events: presence
P-Asserted-Identity: <sip:1003@10.10.199.250>
Supported: 100rel,timer,resource-priority,replaces
Min-SE: 1800
Remote-Party-ID: <sip:1003@10.10.199.250>;party=calling;screen=yes;privacy=off
Content-Length: 216
User-Agent: Cisco-CUCM7.1
To: <sip:2001@10.10.199.251>
Contact: <sip:1003@10.10.199.250:5060;transport=tcp>
Expires: 180
Content-Type: application/sdp
Call-ID: c2599600-88e10dc5-3b-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK2978ac7c04
CSeq: 101 INVITE
Session-Expires: 1800
Max-Forwards: 70

v=0
o=CiscoSystemsCCM-SIP 2000 1 IN IP4 10.10.199.250
s=SIP Call
c=IN IP4 10.10.199.250
t=0 0
m=audio 24590 RTP/AVP 0 101
a=rtpmap:0 PCMU/8000
a=ptime:20
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15

[diagram] Call-ID:[prev][next]
[2] SIP/2.0 100 Trying
Date: Mon, 28 Jul 2008 18:21:37 GMT
From: <sip:1003@10.10.199.250>;tag=95ef4362-75f9-4faf-ae01-3fcd294149a0-20447316
Allow-Events: presence
Content-Length: 0
To: <sip:2001@10.10.199.251>
Call-ID: c2599600-88e10dc5-3b-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK2978ac7c04
CSeq: 101 INVITE

[diagram] Call-ID:[prev][next]
[3] SIP/2.0 180 Ringing
Date: Mon, 28 Jul 2008 18:21:37 GMT
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:1003@10.10.199.250>;tag=95ef4362-75f9-4faf-ae01-3fcd294149a0-20447316
Allow-Events: presence
P-Asserted-Identity: <sip:2001@10.10.199.251>
Remote-Party-ID: <sip:2001@10.10.199.251>;party=called;screen=yes;privacy=off
Content-Length: 0
To: <sip:2001@10.10.199.251>;tag=e7a2b54c-403c-42f2-986a-ef3df579135a-20446703
Contact: <sip:1003@10.10.199.251:5060;transport=tcp>
Call-ID: c2599600-88e10dc5-3b-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK2978ac7c04
CSeq: 101 INVITE

[diagram] Call-ID:[prev][next]
[4] SIP/2.0 183 Session Progress
Date: Mon, 28 Jul 2008 18:21:37 GMT
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:1003@10.10.199.250>;tag=95ef4362-75f9-4faf-ae01-3fcd294149a0-20447316
Allow-Events: presence
P-Asserted-Identity: <sip:2001@10.10.199.251>
Remote-Party-ID: <sip:2001@10.10.199.251>;party=called;screen=yes;privacy=off
Content-Length: 216
To: <sip:2001@10.10.199.251>;tag=e7a2b54c-403c-42f2-986a-ef3df579135a-20446703
Contact: <sip:1003@10.10.199.251:5060;transport=tcp>
Content-Type: application/sdp
Call-ID: c2599600-88e10dc5-3b-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK2978ac7c04
CSeq: 101 INVITE

v=0
o=CiscoSystemsCCM-SIP 2000 1 IN IP4 10.10.199.251
s=SIP Call
c=IN IP4 10.10.199.171
t=0 0

CISCO CONFIDENTIAL

```
m=audio 30802 RTP/AVP 0 101
a=rtpmap:0 PCMU/8000
a=ptime:20
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
```

[diagram] Call-ID:[prev][next]

[5] SIP/2.0 200 OK

```
Date: Mon, 28 Jul 2008 18:21:37 GMT
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:1003@10.10.199.250>;tag=95ef4362-75f9-4faf-ae01-3fcd294149a0-20447316
Allow-Events: presence
P-Asserted-Identity: <sip:2001@10.10.199.251>
Supported: replaces
Remote-Party-ID: <sip:2001@10.10.199.251>;party=called;screen=yes;privacy=off
Content-Length: 216
Require:  timer
To: <sip:2001@10.10.199.251>;tag=e7a2b54c-403c-42f2-986a-ef3df579135a-20446703
Contact: <sip:1003@10.10.199.251:5060;transport=tcp>
Content-Type: application/sdp
Call-ID: c2599600-88e10dc5-3b-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK2978ac7c04
CSeq: 101 INVITE
Session-Expires:  1800;refresher=uas

v=0
o=CiscoSystemsCCM-SIP 2000 1 IN IP4 10.10.199.251
s=SIP Call
c=IN IP4 10.10.199.171
t=0 0
m=audio 30802 RTP/AVP 0 101
a=rtpmap:0 PCMU/8000
a=ptime:20
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
```

[diagram] Call-ID:[prev][next]

[6] ACK sip:1003@10.10.199.251:5060;transport=tcp SIP/2.0

```
Date: Mon, 28 Jul 2008 18:19:49 GMT
From: <sip:1003@10.10.199.250>;tag=95ef4362-75f9-4faf-ae01-3fcd294149a0-20447316
Allow-Events: presence
Content-Length: 0
To: <sip:2001@10.10.199.251>;tag=e7a2b54c-403c-42f2-986a-ef3df579135a-20446703
Call-ID: c2599600-88e10dc5-3b-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK2a43dc8748
CSeq: 101 ACK
Max-Forwards: 70
```

[diagram] Call-ID:[prev][next]

[7] BYE sip:1003@10.10.199.251:5060;transport=tcp SIP/2.0

```
Date: Mon, 28 Jul 2008 18:19:49 GMT
From: <sip:1003@10.10.199.250>;tag=95ef4362-75f9-4faf-ae01-3fcd294149a0-20447316
P-Asserted-Identity: <sip:1003@10.10.199.250>
Content-Length: 0
User-Agent: Cisco-CUCM7.1
To: <sip:2001@10.10.199.251>;tag=e7a2b54c-403c-42f2-986a-ef3df579135a-20446703
Call-ID: c2599600-88e10dc5-3b-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK2b46175196
CSeq: 102 BYE
Max-Forwards: 70
```

[diagram] Call-ID:[prev][next]

[8] SIP/2.0 200 OK

```
Date: Mon, 28 Jul 2008 18:21:45 GMT
From: <sip:1003@10.10.199.250>;tag=95ef4362-75f9-4faf-ae01-3fcd294149a0-20447316
Content-Length: 0
To: <sip:2001@10.10.199.251>;tag=e7a2b54c-403c-42f2-986a-ef3df579135a-20446703
Call-ID: c2599600-88e10dc5-3b-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK2b46175196
CSeq: 102 BYE
```

CISCO CONFIDENTIAL

1.4 Basic Call to a SCCP Device via an Inter Cluster SIP Trunk

Title: Basic Call to a SCCP Device via an Inter Cluster SIP Trunk

Description:

The following call flow illustrates the SIP messaging that takes place between two Cisco Unified CMs via an inter cluster SIP trunk.

Cisco Unified CM1 sent out the initial INVITE.

Configuration:

Node = Unified CM1, IP = 10.10.199.250
Node = Unified CM2, IP = 10.10.199.251

Phone = A, Line = 1003, IP = 10.10.199.66, Model = SCCP
Phone = B, Line = 2002, IP = 10.10.199.179, Model = SCCP

SIP Trunk between Unified CM1 & Unified CM2 has route pattern 2.XXXX

Scenario:

Phone A DN 1003 calls Phone B DN 2002 over the SIP Trunk by dialing 22002
Phone B DN 2002 Answers
Phone A DN 1003 goes onHook
End of Scenario

CISCO CONFIDENTIAL

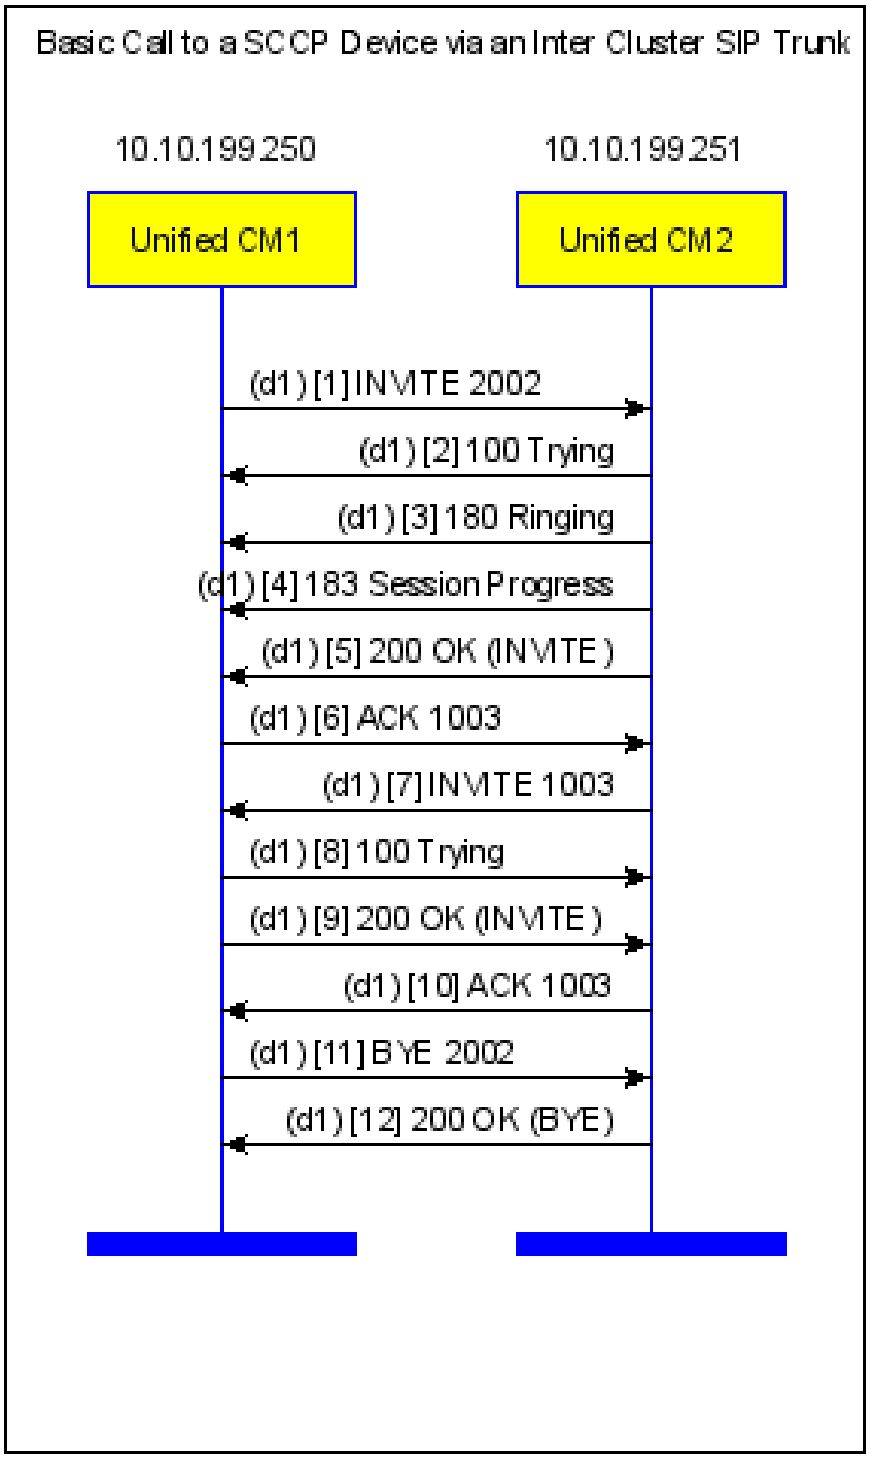

CISCO CONFIDENTIAL

[diagram] Call-ID:[prev][next]
[1] INVITE sip:2002@10.10.199.251:5060 SIP/2.0
```
Date: Mon, 28 Jul 2008 18:21:14 GMT
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:1003@10.10.199.250>;tag=95ef4362-75f9-4faf-ae01-3fcd294149a0-20447321
Allow-Events: presence
P-Asserted-Identity: <sip:1003@10.10.199.250>
Supported: 100rel,timer,resource-priority,replaces
Min-SE:  1800
Remote-Party-ID: <sip:1003@10.10.199.250>;party=calling;screen=yes;privacy=off
Content-Length: 0
User-Agent: Cisco-CUCM7.1
To: <sip:2002@10.10.199.251>
Contact: <sip:1003@10.10.199.250:5060;transport=tcp>
Expires: 180
Call-ID: f5038e80-88e10e1a-3c-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK2c6051e550
CSeq: 101 INVITE
Session-Expires:  1800
Max-Forwards: 70
```

[diagram] Call-ID:[prev][next]
[2] SIP/2.0 100 Trying
```
Date: Mon, 28 Jul 2008 18:23:02 GMT
From: <sip:1003@10.10.199.250>;tag=95ef4362-75f9-4faf-ae01-3fcd294149a0-20447321
Allow-Events: presence
Content-Length: 0
To: <sip:2002@10.10.199.251>
Call-ID: f5038e80-88e10e1a-3c-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK2c6051e550
CSeq: 101 INVITE
```

[diagram] Call-ID:[prev][next]
[3] SIP/2.0 180 Ringing
```
Date: Mon, 28 Jul 2008 18:23:02 GMT
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:1003@10.10.199.250>;tag=95ef4362-75f9-4faf-ae01-3fcd294149a0-20447321
Allow-Events: presence
P-Asserted-Identity: <sip:2002@10.10.199.251>
Remote-Party-ID: <sip:2002@10.10.199.251>;party=called;screen=yes;privacy=off
Content-Length: 0
To: <sip:2002@10.10.199.251>;tag=e7a2b54c-403c-42f2-986a-ef3df579135a-20446705
Contact: <sip:1003@10.10.199.251:5060;transport=tcp>
Call-ID: f5038e80-88e10e1a-3c-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK2c6051e550
CSeq: 101 INVITE
```

[diagram] Call-ID:[prev][next]
[4] SIP/2.0 183 Session Progress
```
Date: Mon, 28 Jul 2008 18:23:02 GMT
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:1003@10.10.199.250>;tag=95ef4362-75f9-4faf-ae01-3fcd294149a0-20447321
Allow-Events: presence
P-Asserted-Identity: <sip:2002@10.10.199.251>
Remote-Party-ID: <sip:2002@10.10.199.251>;party=called;screen=yes;privacy=off
Content-Length: 348
To: <sip:2002@10.10.199.251>;tag=e7a2b54c-403c-42f2-986a-ef3df579135a-20446705
Contact: <sip:1003@10.10.199.251:5060;transport=tcp>
Content-Type: application/sdp
Call-ID: f5038e80-88e10e1a-3c-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK2c6051e550
CSeq: 101 INVITE

v=0
o=CiscoSystemsCCM-SIP 2000 1 IN IP4 10.10.199.251
s=SIP Call
c=IN IP4 10.10.199.179
t=0 0
m=audio 4000 RTP/AVP 9 0 8 18 101
a=rtpmap:9 G722/8000
a=ptime:20
a=rtpmap:0 PCMU/8000
a=ptime:20
a=rtpmap:8 PCMA/8000
a=ptime:20
a=rtpmap:18 G729/8000
a=ptime:20
a=fmtp:0
a=sendonly
a=rtpmap:101 telephone-event/8000
```

CISCO CONFIDENTIAL

```
a=fmtp:101 0-15

[diagram]   Call-ID:[prev][next]
[5] SIP/2.0 200 OK
Date: Mon, 28 Jul 2008 18:23:02 GMT
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:1003@10.10.199.250>;tag=95ef4362-75f9-4faf-ae01-3fcd294149a0-20447321
Allow-Events: presence
P-Asserted-Identity: <sip:2002@10.10.199.251>
Supported: replaces
Remote-Party-ID: <sip:2002@10.10.199.251>;party=called;screen=yes;privacy=off
Content-Length: 348
Require:  timer
To: <sip:2002@10.10.199.251>;tag=e7a2b54c-403c-42f2-986a-ef3df579135a-20446705
Contact: <sip:1003@10.10.199.251:5060;transport=tcp>
Content-Type: application/sdp
Call-ID: f5038e80-88e10e1a-3c-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK2c6051e550
CSeq: 101 INVITE
Session-Expires:  1800;refresher=uas

v=0
o=CiscoSystemsCCM-SIP 2000 1 IN IP4 10.10.199.251
s=SIP Call
c=IN IP4 10.10.199.179
t=0 0
m=audio 4000 RTP/AVP 9 0 8 18 101
a=rtpmap:9 G722/8000
a=ptime:20
a=rtpmap:0 PCMU/8000
a=ptime:20
a=rtpmap:8 PCMA/8000
a=ptime:20
a=rtpmap:18 G729/8000
a=ptime:20
a=fmtp:0
a=sendonly
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15

[diagram]   Call-ID:[prev][next]
[6] ACK sip:1003@10.10.199.251:5060;transport=tcp SIP/2.0
Date: Mon, 28 Jul 2008 18:21:14 GMT
From: <sip:1003@10.10.199.250>;tag=95ef4362-75f9-4faf-ae01-3fcd294149a0-20447321
Allow-Events: presence
Content-Length: 227
To: <sip:2002@10.10.199.251>;tag=e7a2b54c-403c-42f2-986a-ef3df579135a-20446705
Content-Type: application/sdp
Call-ID: f5038e80-88e10e1a-3c-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK2d947d4
CSeq: 101 ACK
Max-Forwards: 70

v=0
o=CiscoSystemsCCM-SIP 2000 1 IN IP4 10.10.199.250
s=SIP Call
c=IN IP4 10.10.199.66
t=0 0
m=audio 30726 RTP/AVP 9 101
a=rtpmap:9 G722/8000
a=ptime:20
a=recvonly
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15

[diagram]   Call-ID:[prev][next]
[7] INVITE sip:1003@10.10.199.250:5060;transport=tcp SIP/2.0
Date: Mon, 28 Jul 2008 18:23:04 GMT
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:2002@10.10.199.251>;tag=e7a2b54c-403c-42f2-986a-ef3df579135a-20446705
Allow-Events: presence
P-Asserted-Identity: <sip:2002@10.10.199.251>
Supported: timer,resource-priority,replaces
Min-SE:  1800
Cisco-Guid: 895683712-2296450694-53-4224127660
Remote-Party-ID: <sip:2002@10.10.199.251>;party=calling;screen=yes;privacy=off
Content-Length: 216
User-Agent: Cisco-CUCM7.1
To: <sip:1003@10.10.199.250>;tag=95ef4362-75f9-4faf-ae01-3fcd294149a0-20447321
Contact: <sip:2002@10.10.199.251:5060;transport=tcp>
```

CISCO CONFIDENTIAL

```
Expires: 180
Content-Type: application/sdp
Call-ID: f5038e80-88e10e1a-3c-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bK215f607541
CSeq: 101 INVITE
Session-Expires:  1800;refresher=uac
Max-Forwards: 70

v=0
o=CiscoSystemsCCM-SIP 2000 2 IN IP4 10.10.199.251
s=SIP Call
c=IN IP4 10.10.199.179
t=0 0
m=audio 28754 RTP/AVP 9 101
a=rtpmap:9 G722/8000
a=ptime:20
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
```

[diagram] Call-ID:[prev][next]

[8] SIP/2.0 100 Trying

```
Date: Mon, 28 Jul 2008 18:21:16 GMT
From: <sip:2002@10.10.199.251>;tag=e7a2b54c-403c-42f2-986a-ef3df579135a-20446705
Allow-Events: presence
Content-Length: 0
To: <sip:1003@10.10.199.250>;tag=95ef4362-75f9-4faf-ae01-3fcd294149a0-20447321
Call-ID: f5038e80-88e10e1a-3c-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bK215f607541
CSeq: 101 INVITE
```

[diagram] Call-ID:[prev][next]

[9] SIP/2.0 200 OK

```
Date: Mon, 28 Jul 2008 18:21:16 GMT
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:2002@10.10.199.251>;tag=e7a2b54c-403c-42f2-986a-ef3df579135a-20446705
Allow-Events: presence
P-Asserted-Identity: <sip:1003@10.10.199.250>
Supported: replaces
Remote-Party-ID: <sip:1003@10.10.199.250>;party=called;screen=yes;privacy=off
Content-Length: 215
Require:  timer
To: <sip:1003@10.10.199.250>;tag=95ef4362-75f9-4faf-ae01-3fcd294149a0-20447321
Contact: <sip:1003@10.10.199.250:5060;transport=tcp>
Content-Type: application/sdp
Call-ID: f5038e80-88e10e1a-3c-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bK215f607541
CSeq: 101 INVITE
Session-Expires:  1800;refresher=uac

v=0
o=CiscoSystemsCCM-SIP 2000 2 IN IP4 10.10.199.250
s=SIP Call
c=IN IP4 10.10.199.66
t=0 0
m=audio 30726 RTP/AVP 9 101
a=rtpmap:9 G722/8000
a=ptime:20
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
```

[diagram] Call-ID:[prev][next]

[10] ACK sip:1003@10.10.199.250:5060;transport=tcp SIP/2.0

```
Date: Mon, 28 Jul 2008 18:23:04 GMT
From: <sip:2002@10.10.199.251>;tag=e7a2b54c-403c-42f2-986a-ef3df579135a-20446705
Allow-Events: presence
Content-Length: 0
To: <sip:1003@10.10.199.250>;tag=95ef4362-75f9-4faf-ae01-3fcd294149a0-20447321
Call-ID: f5038e80-88e10e1a-3c-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bK227378348d
CSeq: 101 ACK
Max-Forwards: 70
```

[diagram] Call-ID:[prev][next]

[11] BYE sip:2002@10.10.199.251:5060;transport=tcp SIP/2.0

```
Date: Mon, 28 Jul 2008 18:21:16 GMT
From: <sip:1003@10.10.199.250>;tag=95ef4362-75f9-4faf-ae01-3fcd294149a0-20447321
P-Asserted-Identity: <sip:1003@10.10.199.250>
Content-Length: 0
User-Agent: Cisco-CUCM7.1
To: <sip:2002@10.10.199.251>;tag=e7a2b54c-403c-42f2-986a-ef3df579135a-20446705
```

CISCO CONFIDENTIAL

```
Call-ID: f5038e80-88e10e1a-3c-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK2e459d96ac
CSeq: 102 BYE
Max-Forwards: 70

[diagram]   Call-ID:[prev][next]
[12] SIP/2.0 200 OK
Date: Mon, 28 Jul 2008 18:23:09 GMT
From: <sip:1003@10.10.199.250>;tag=95ef4362-75f9-4faf-ae01-3fcd294149a0-20447321
Content-Length: 0
To: <sip:2002@10.10.199.251>;tag=e7a2b54c-403c-42f2-986a-ef3df579135a-20446705
Call-ID: f5038e80-88e10e1a-3c-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK2e459d96ac
CSeq: 102 BYE
```

CISCO CONFIDENTIAL

1.5 Basic Call to a SIP Device via an Inter Cluster SIP Trunk

Title: Basic Call to a SIP Device via an Inter Cluster SIP Trunk

Description:

The following call flow illustrates the SIP messaging that takes place between two Cisco Unified CMs via an inter cluster SIP trunk.

Cisco Unified CM1 sent out the initial INVITE.

Configuration:

Node = Unified CM1, IP = 10.10.199.250
Node = Unified CM2, IP = 10.10.199.251

Phone = A, Line = 1003, IP = 10.10.199.66, Model = SCCP
Phone = B, Line = 2001, IP = 10.10.199.171, Model = SIP TNP

SIP Trunk between Unified CM1 & Unified CM2 has route pattern 2.XXXX

Scenario:

Phone A DN 1003 calls Phone B DN 2001 over the SIP Trunk by dialing 22001
Phone B DN 2001 Answers
Phone A DN 1003 goes onHook
End of Scenario

CISCO CONFIDENTIAL

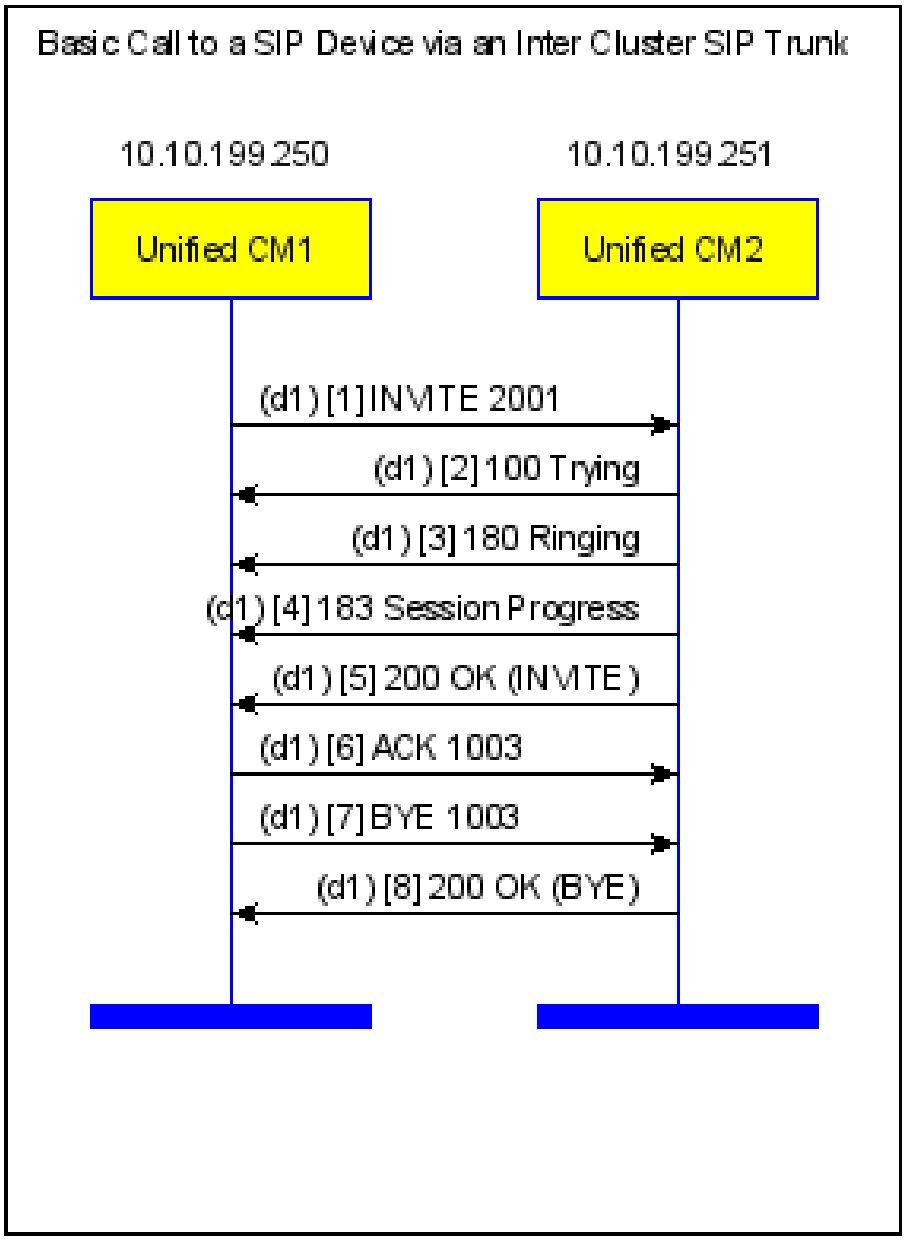

CISCO CONFIDENTIAL

```
[diagram]   Call-ID:[prev][next]
[1] INVITE sip:2001@10.10.199.251:5060 SIP/2.0
Date: Mon, 28 Jul 2008 18:23:40 GMT
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:1003@10.10.199.250>;tag=95ef4362-75f9-4faf-ae01-3fcd294149a0-20447323
Allow-Events: presence
P-Asserted-Identity: <sip:1003@10.10.199.250>
Supported: 100rel,timer,resource-priority,replaces
Min-SE:  1800
Remote-Party-ID: <sip:1003@10.10.199.250>;party=calling;screen=yes;privacy=off
Content-Length: 0
User-Agent: Cisco-CUCM7.1
To: <sip:2001@10.10.199.251>
Contact: <sip:1003@10.10.199.250:5060;transport=tcp>
Expires: 180
Call-ID: 4c096380-88e10eac-3f-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK2f74bba46d
CSeq: 101 INVITE
Session-Expires:  1800
Max-Forwards: 70

[diagram]   Call-ID:[prev][next]
[2] SIP/2.0 100 Trying
Date: Mon, 28 Jul 2008 18:25:27 GMT
From: <sip:1003@10.10.199.250>;tag=95ef4362-75f9-4faf-ae01-3fcd294149a0-20447323
Allow-Events: presence
Content-Length: 0
To: <sip:2001@10.10.199.251>
Call-ID: 4c096380-88e10eac-3f-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK2f74bba46d
CSeq: 101 INVITE

[diagram]   Call-ID:[prev][next]
[3] SIP/2.0 180 Ringing
Date: Mon, 28 Jul 2008 18:25:27 GMT
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:1003@10.10.199.250>;tag=95ef4362-75f9-4faf-ae01-3fcd294149a0-20447323
Allow-Events: presence
P-Asserted-Identity: <sip:2001@10.10.199.251>
Remote-Party-ID: <sip:2001@10.10.199.251>;party=called;screen=yes;privacy=off
Content-Length: 0
To: <sip:2001@10.10.199.251>;tag=e7a2b54c-403c-42f2-986a-ef3df579135a-20446707
Contact: <sip:1003@10.10.199.251:5060;transport=tcp>
Call-ID: 4c096380-88e10eac-3f-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK2f74bba46d
CSeq: 101 INVITE

[diagram]   Call-ID:[prev][next]
[4] SIP/2.0 183 Session Progress
Date: Mon, 28 Jul 2008 18:25:27 GMT
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:1003@10.10.199.250>;tag=95ef4362-75f9-4faf-ae01-3fcd294149a0-20447323
Allow-Events: presence
P-Asserted-Identity: <sip:2001@10.10.199.251>
Remote-Party-ID: <sip:2001@10.10.199.251>;party=called;screen=yes;privacy=off
Content-Length: 347
To: <sip:2001@10.10.199.251>;tag=e7a2b54c-403c-42f2-986a-ef3df579135a-20446707
Contact: <sip:1003@10.10.199.251:5060;transport=tcp>
Content-Type: application/sdp
Call-ID: 4c096380-88e10eac-3f-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK2f74bba46d
CSeq: 101 INVITE

v=0
o=CiscoSystemsCCM-SIP 2000 1 IN IP4 10.10.199.251
s=SIP Call
c=IN IP4 10.10.199.171
t=0 0
m=audio 24204 RTP/AVP 9 0 8 18 101
a=rtpmap:9 G722/8000
a=ptime:20
a=rtpmap:0 PCMU/8000
a=ptime:20
a=rtpmap:8 PCMA/8000
a=ptime:20
a=rtpmap:18 G729/8000
a=ptime:20
a=fmtp:18 annexb=no
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
```

CISCO CONFIDENTIAL

[diagram] Call-ID:[prev][next]
[5] SIP/2.0 200 OK
```
Date: Mon, 28 Jul 2008 18:25:27 GMT
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:1003@10.10.199.250>;tag=95ef4362-75f9-4faf-ae01-3fcd294149a0-20447323
Allow-Events: presence
P-Asserted-Identity: <sip:2001@10.10.199.251>
Supported: replaces
Remote-Party-ID: <sip:2001@10.10.199.251>;party=called;screen=yes;privacy=off
Content-Length: 347
Require:  timer
To: <sip:2001@10.10.199.251>;tag=e7a2b54c-403c-42f2-986a-ef3df579135a-20446707
Contact: <sip:1003@10.10.199.251:5060;transport=tcp>
Content-Type: application/sdp
Call-ID: 4c096380-88e10eac-3f-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK2f74bba46d
CSeq: 101 INVITE
Session-Expires:  1800;refresher=uas

v=0
o=CiscoSystemsCCM-SIP 2000 1 IN IP4 10.10.199.251
s=SIP Call
c=IN IP4 10.10.199.171
t=0 0
m=audio 24204 RTP/AVP 9 0 8 18 101
a=rtpmap:9 G722/8000
a=ptime:20
a=rtpmap:0 PCMU/8000
a=ptime:20
a=rtpmap:8 PCMA/8000
a=ptime:20
a=rtpmap:18 G729/8000
a=ptime:20
a=fmtp:18 annexb=no
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
```

[diagram] Call-ID:[prev][next]
[6] ACK sip:1003@10.10.199.251:5060;transport=tcp SIP/2.0
```
Date: Mon, 28 Jul 2008 18:23:40 GMT
From: <sip:1003@10.10.199.250>;tag=95ef4362-75f9-4faf-ae01-3fcd294149a0-20447323
Allow-Events: presence
Content-Length: 215
To: <sip:2001@10.10.199.251>;tag=e7a2b54c-403c-42f2-986a-ef3df579135a-20446707
Content-Type: application/sdp
Call-ID: 4c096380-88e10eac-3f-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK30260ae7a8
CSeq: 101 ACK
Max-Forwards: 70

v=0
o=CiscoSystemsCCM-SIP 2000 1 IN IP4 10.10.199.250
s=SIP Call
c=IN IP4 10.10.199.66
t=0 0
m=audio 28908 RTP/AVP 9 101
a=rtpmap:9 G722/8000
a=ptime:20
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
```

[diagram] Call-ID:[prev][next]
[7] BYE sip:1003@10.10.199.251:5060;transport=tcp SIP/2.0
```
Date: Mon, 28 Jul 2008 18:23:40 GMT
From: <sip:1003@10.10.199.250>;tag=95ef4362-75f9-4faf-ae01-3fcd294149a0-20447323
P-Asserted-Identity: <sip:1003@10.10.199.250>
Content-Length: 0
User-Agent: Cisco-CUCM7.1
To: <sip:2001@10.10.199.251>;tag=e7a2b54c-403c-42f2-986a-ef3df579135a-20446707
Call-ID: 4c096380-88e10eac-3f-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK3161608d25
CSeq: 102 BYE
Max-Forwards: 70
```

[diagram] Call-ID:[prev][next]
[8] SIP/2.0 200 OK
```
Date: Mon, 28 Jul 2008 18:25:40 GMT
From: <sip:1003@10.10.199.250>;tag=95ef4362-75f9-4faf-ae01-3fcd294149a0-20447323
Content-Length: 0
```

CISCO CONFIDENTIAL

```
To: <sip:2001@10.10.199.251>;tag=e7a2b54c-403c-42f2-986a-ef3df579135a-20446707
Call-ID: 4c096380-88e10eac-3f-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK3161608d25
CSeq: 102 BYE
```

CISCO CONFIDENTIAL

1.6 Basic Call to a SCCP Device via an Inter Cluster SIP Trunk Using a FQDN as the

Title: Basic Call to a SCCP Device via an Inter Cluster SIP Trunk Using a FQDN as the destination address in the SIP Trunk configuration

Description:

The following call flow illustrates the SIP messaging that takes place between two Cisco Unified CMs via an inter cluster SIP trunk, where Unified CM2's address is in the form of an FQDN

Cisco Unified CM1 sent out the initial INVITE.

Configuration:

Node = Unified CM1, IP = 10.10.199.250
Node = Unified CM2, IP = 10.10.199.251

Phone = A, Line = 1003, IP = 10.10.199.66, Model = SCCP
Phone = B, Line = 2002, IP = 10.10.199.179, Model = SCCP

SIP Trunk between Unified CM1 & Unified CM2 has
a) route pattern 2.XXXX pattern
b) Destination Address as the FQDN of the Unified CM2

Scenario:

Phone A DN 1003 calls Phone B DN 2002 over the SIP Trunk by dialing 22002
Phone B DN 2002 Answers
Phone A DN 1003 goes onHook

End of Scenario

CISCO CONFIDENTIAL

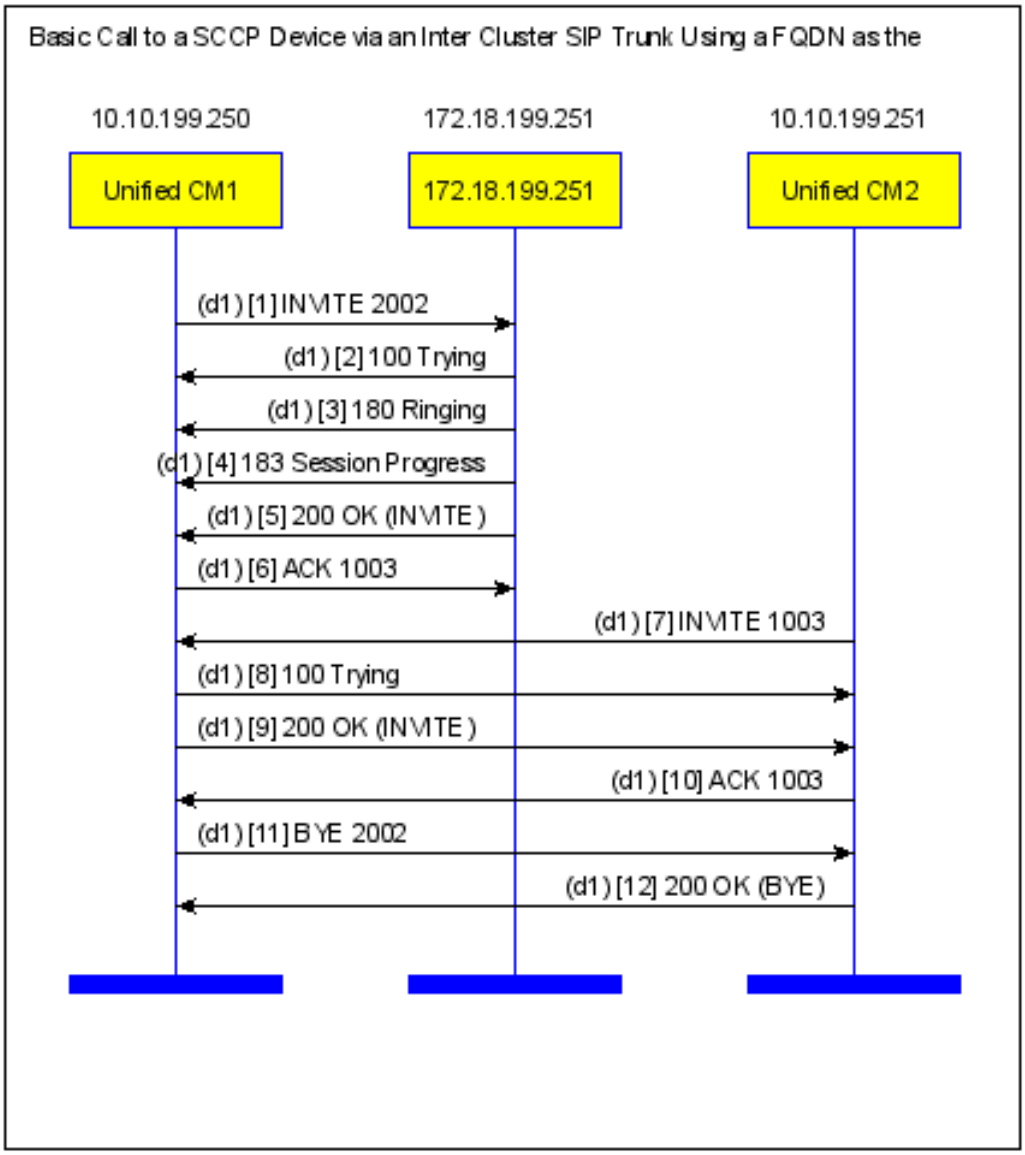

CISCO CONFIDENTIAL

[diagram] Call-ID:[prev][next]
[1] INVITE sip:2002@siptrunk17.cisco.com:5060 SIP/2.0
Date: Mon, 28 Jul 2008 18:27:00 GMT
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:1003@10.10.199.250>;tag=95ef4362-75f9-4faf-ae01-3fcd294149a0-20447325
Allow-Events: presence
P-Asserted-Identity: <sip:1003@10.10.199.250>
Supported: 100rel,timer,resource-priority,replaces
Min-SE: 1800
Remote-Party-ID: <sip:1003@10.10.199.250>;party=calling;screen=yes;privacy=off
Content-Length: 0
User-Agent: Cisco-CUCM7.1
To: <sip:2002@siptrunk17.cisco.com>
Contact: <sip:1003@10.10.199.250:5060;transport=tcp>
Expires: 180
Call-ID: c33ef780-88e10f74-41-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK326388944c
CSeq: 101 INVITE
Session-Expires: 1800
Max-Forwards: 70

[diagram] Call-ID:[prev][next]
[2] SIP/2.0 100 Trying
Date: Mon, 28 Jul 2008 18:28:47 GMT
From: <sip:1003@10.10.199.250>;tag=95ef4362-75f9-4faf-ae01-3fcd294149a0-20447325
Allow-Events: presence
Content-Length: 0
To: <sip:2002@siptrunk17.cisco.com>
Call-ID: c33ef780-88e10f74-41-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK326388944c
CSeq: 101 INVITE

[diagram] Call-ID:[prev][next]
[3] SIP/2.0 180 Ringing
Date: Mon, 28 Jul 2008 18:28:47 GMT
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:1003@10.10.199.250>;tag=95ef4362-75f9-4faf-ae01-3fcd294149a0-20447325
Allow-Events: presence
P-Asserted-Identity: <sip:2002@10.10.199.251>
Remote-Party-ID: <sip:2002@10.10.199.251>;party=called;screen=yes;privacy=off
Content-Length: 0
To: <sip:2002@siptrunk17.cisco.com>;tag=e7a2b54c-403c-42f2-986a-ef3df579135a-20446709
Contact: <sip:1003@10.10.199.251:5060;transport=tcp>
Call-ID: c33ef780-88e10f74-41-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK326388944c
CSeq: 101 INVITE

[diagram] Call-ID:[prev][next]
[4] SIP/2.0 183 Session Progress
Date: Mon, 28 Jul 2008 18:28:47 GMT
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:1003@10.10.199.250>;tag=95ef4362-75f9-4faf-ae01-3fcd294149a0-20447325
Allow-Events: presence
P-Asserted-Identity: <sip:2002@10.10.199.251>
Remote-Party-ID: <sip:2002@10.10.199.251>;party=called;screen=yes;privacy=off
Content-Length: 348
To: <sip:2002@siptrunk17.cisco.com>;tag=e7a2b54c-403c-42f2-986a-ef3df579135a-20446709
Contact: <sip:1003@10.10.199.251:5060;transport=tcp>
Content-Type: application/sdp
Call-ID: c33ef780-88e10f74-41-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK326388944c
CSeq: 101 INVITE

v=0
o=CiscoSystemsCCM-SIP 2000 1 IN IP4 10.10.199.251
s=SIP Call
c=IN IP4 10.10.199.179
t=0 0
m=audio 4000 RTP/AVP 9 0 8 18 101
a=rtpmap:9 G722/8000
a=ptime:20
a=rtpmap:0 PCMU/8000
a=ptime:20
a=rtpmap:8 PCMA/8000
a=ptime:20
a=rtpmap:18 G729/8000
a=ptime:20
a=fmtp:0
a=sendonly
a=rtpmap:101 telephone-event/8000

CISCO CONFIDENTIAL

```
a=fmtp:101 0-15

[diagram]   Call-ID:[prev][next]
[5] SIP/2.0 200 OK
Date: Mon, 28 Jul 2008 18:28:47 GMT
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:1003@10.10.199.250>;tag=95ef4362-75f9-4faf-ae01-3fcd294149a0-20447325
Allow-Events: presence
P-Asserted-Identity: <sip:2002@10.10.199.251>
Supported: replaces
Remote-Party-ID: <sip:2002@10.10.199.251>;party=called;screen=yes;privacy=off
Content-Length: 348
Require:  timer
To: <sip:2002@siptrunk17.cisco.com>;tag=e7a2b54c-403c-42f2-986a-ef3df579135a-20446709
Contact: <sip:1003@10.10.199.251:5060;transport=tcp>
Content-Type: application/sdp
Call-ID: c33ef780-88e10f74-41-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK326388944c
CSeq: 101 INVITE
Session-Expires:  1800;refresher=uas

v=0
o=CiscoSystemsCCM-SIP 2000 1 IN IP4 10.10.199.251
s=SIP Call
c=IN IP4 10.10.199.179
t=0 0
m=audio 4000 RTP/AVP 9 0 8 18 101
a=rtpmap:9 G722/8000
a=ptime:20
a=rtpmap:0 PCMU/8000
a=ptime:20
a=rtpmap:8 PCMA/8000
a=ptime:20
a=rtpmap:18 G729/8000
a=ptime:20
a=fmtp:0
a=sendonly
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15

[diagram]   Call-ID:[prev][next]
[6] ACK sip:1003@10.10.199.251:5060;transport=tcp SIP/2.0
Date: Mon, 28 Jul 2008 18:27:00 GMT
From: <sip:1003@10.10.199.250>;tag=95ef4362-75f9-4faf-ae01-3fcd294149a0-20447325
Allow-Events: presence
Content-Length: 227
To: <sip:2002@siptrunk17.cisco.com>;tag=e7a2b54c-403c-42f2-986a-ef3df579135a-20446709
Content-Type: application/sdp
Call-ID: c33ef780-88e10f74-41-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK33385f13a
CSeq: 101 ACK
Max-Forwards: 70

v=0
o=CiscoSystemsCCM-SIP 2000 1 IN IP4 10.10.199.250
s=SIP Call
c=IN IP4 10.10.199.66
t=0 0
m=audio 32508 RTP/AVP 9 101
a=rtpmap:9 G722/8000
a=ptime:20
a=recvonly
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15

[diagram]   Call-ID:[prev][next]
[7] INVITE sip:1003@10.10.199.250:5060;transport=tcp SIP/2.0
Date: Mon, 28 Jul 2008 18:28:49 GMT
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:2002@siptrunk17.cisco.com>;tag=e7a2b54c-403c-42f2-986a-ef3df579135a-20446709
Allow-Events: presence
P-Asserted-Identity: <sip:2002@10.10.199.251>
Supported: timer,resource-priority,replaces
Min-SE:  1800
Cisco-Guid: 50716416-2296451039-59-4224127660
Remote-Party-ID: <sip:2002@10.10.199.251>;party=calling;screen=yes;privacy=off
Content-Length: 216
User-Agent: Cisco-CUCM7.1
To: <sip:1003@10.10.199.250>;tag=95ef4362-75f9-4faf-ae01-3fcd294149a0-20447325
Contact: <sip:2002@10.10.199.251:5060;transport=tcp>
```

CISCO CONFIDENTIAL

```
Expires: 180
Content-Type: application/sdp
Call-ID: c33ef780-88e10f74-41-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bK28ee796a5
CSeq: 101 INVITE
Session-Expires:  1800;refresher=uac
Max-Forwards: 70

v=0
o=CiscoSystemsCCM-SIP 2000 2 IN IP4 10.10.199.251
s=SIP Call
c=IN IP4 10.10.199.179
t=0 0
m=audio 30536 RTP/AVP 9 101
a=rtpmap:9 G722/8000
a=ptime:20
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
```

[diagram] Call-ID:[prev][next]

[8] SIP/2.0 100 Trying

```
Date: Mon, 28 Jul 2008 18:27:02 GMT
From: <sip:2002@siptrunk17.cisco.com>;tag=e7a2b54c-403c-42f2-986a-ef3df579135a-20446709
Allow-Events: presence
Content-Length: 0
To: <sip:1003@10.10.199.250>;tag=95ef4362-75f9-4faf-ae01-3fcd294149a0-20447325
Call-ID: c33ef780-88e10f74-41-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bK28ee796a5
CSeq: 101 INVITE
```

[diagram] Call-ID:[prev][next]

[9] SIP/2.0 200 OK

```
Date: Mon, 28 Jul 2008 18:27:02 GMT
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:2002@siptrunk17.cisco.com>;tag=e7a2b54c-403c-42f2-986a-ef3df579135a-20446709
Allow-Events: presence
P-Asserted-Identity: <sip:1003@10.10.199.250>
Supported: replaces
Remote-Party-ID: <sip:1003@10.10.199.250>;party=called;screen=yes;privacy=off
Content-Length: 215
Require:  timer
To: <sip:1003@10.10.199.250>;tag=95ef4362-75f9-4faf-ae01-3fcd294149a0-20447325
Contact: <sip:1003@10.10.199.250:5060;transport=tcp>
Content-Type: application/sdp
Call-ID: c33ef780-88e10f74-41-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bK28ee796a5
CSeq: 101 INVITE
Session-Expires:  1800;refresher=uac

v=0
o=CiscoSystemsCCM-SIP 2000 2 IN IP4 10.10.199.250
s=SIP Call
c=IN IP4 10.10.199.66
t=0 0
m=audio 32508 RTP/AVP 9 101
a=rtpmap:9 G722/8000
a=ptime:20
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
```

[diagram] Call-ID:[prev][next]

[10] ACK sip:1003@10.10.199.250:5060;transport=tcp SIP/2.0

```
Date: Mon, 28 Jul 2008 18:28:49 GMT
From: <sip:2002@siptrunk17.cisco.com>;tag=e7a2b54c-403c-42f2-986a-ef3df579135a-20446709
Allow-Events: presence
Content-Length: 0
To: <sip:1003@10.10.199.250>;tag=95ef4362-75f9-4faf-ae01-3fcd294149a0-20447325
Call-ID: c33ef780-88e10f74-41-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bK295ae8da59
CSeq: 101 ACK
Max-Forwards: 70
```

[diagram] Call-ID:[prev][next]

[11] BYE sip:2002@10.10.199.251:5060;transport=tcp SIP/2.0

```
Date: Mon, 28 Jul 2008 18:27:02 GMT
From: <sip:1003@10.10.199.250>;tag=95ef4362-75f9-4faf-ae01-3fcd294149a0-20447325
P-Asserted-Identity: <sip:1003@10.10.199.250>
Content-Length: 0
User-Agent: Cisco-CUCM7.1
To: <sip:2002@siptrunk17.cisco.com>;tag=e7a2b54c-403c-42f2-986a-ef3df579135a-20446709
```

CISCO CONFIDENTIAL

```
Call-ID: c33ef780-88e10f74-41-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK347a9b6af
CSeq: 102 BYE
Max-Forwards: 70

[diagram]   Call-ID:[prev][next]
[12] SIP/2.0 200 OK
Date: Mon, 28 Jul 2008 18:28:56 GMT
From: <sip:1003@10.10.199.250>;tag=95ef4362-75f9-4faf-ae01-3fcd294149a0-20447325
Content-Length: 0
To: <sip:2002@siptrunk17.cisco.com>;tag=e7a2b54c-403c-42f2-986a-ef3df579135a-20446709
Call-ID: c33ef780-88e10f74-41-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK347a9b6af
CSeq: 102 BYE
```

CISCO CONFIDENTIAL

1.7 Basic Call to a SCCP Device via an Inter Cluster SIP Trunk using an SRV record as the destination address in the SIP Trunk configuration

Title: Basic Call to a SCCP Device via an Inter Cluster SIP Trunk using an SRV record as the destination address in the SIP Trunk configuration

Description:

The following call flow illustrates the SIP messaging that takes place between two Cisco Unified CMs via an inter cluster SIP trunk, where Unified CM2's address is in the form of an SRV record that gets resolved to an fqdn pointing to CM2.

Cisco Unified CM (Unified CM1) sent out the initial INVITE.

Configuration:

Node = Unified CM1, IP = 10.10.199.250
Node = Unified CM2, IP = 10.10.193.253

Phone = A, Line = 1003, IP = 10.10.199.66, Model = SCCP
Phone = B, Line = 2002, IP = 10.10.199.179, Model = SCCP

SIP Trunk between Unified CM1 & Unified CM2 has route pattern 2.XXXX

Scenario:

Phone A DN 1003 calls Phone B DN 2002 over the SIP Trunk by dialing 22002
Phone B DN 2002 Answers
Phone A DN 1003 goes onHook

End of Scenario

CISCO CONFIDENTIAL

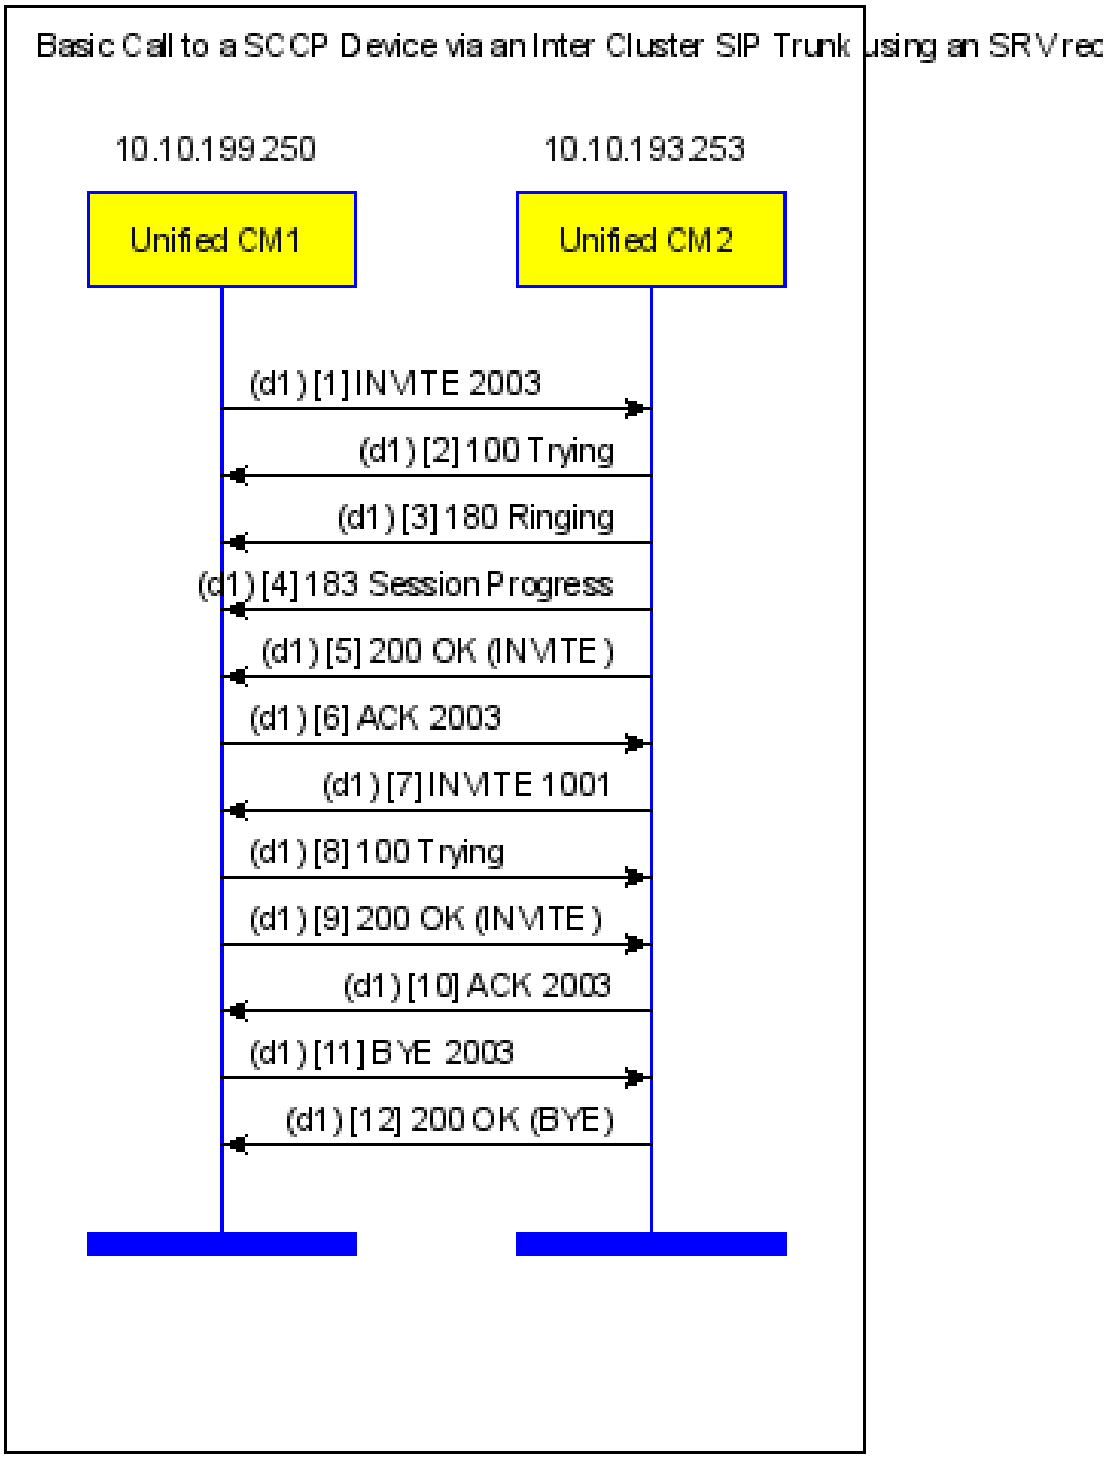

CISCO CONFIDENTIAL

[diagram] Call-ID:[prev][next]
[1] INVITE sip:2003@siptrunk17.sip.com:5060 SIP/2.0
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK2f5e2d3ecd
Remote-Party-ID: <sip:1001@10.10.199.250>;party=calling;screen=yes;privacy=off
From: <sip:1001@10.10.199.250>;tag=88fd35fa-b656-4fbc-bcf3-3fdd2ba559b3-23784868
To: <sip:2003@siptrunk17.sip.com>
Date: Mon, 23 Jul 2007 17:19:15 GMT
Call-ID: d2150080-6a41e30e-16a9-fac712ac@10.10.199.250
Supported: timer,replaces
Min-SE: 1800
User-Agent: Cisco-CUCM7.1
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY, PUBLISH
CSeq: 102 INVITE
Contact: <sip:1001@10.10.199.250:5060;transport=tcp>
Expires: 180
Allow-Events: presence
Max-Forwards: 70
Content-Length: 0

[diagram] Call-ID:[prev][next]
[2] SIP/2.0 100 Trying
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK2f5e2d3ecd
From: <sip:1001@10.10.199.250>;tag=88fd35fa-b656-4fbc-bcf3-3fdd2ba559b3-23784868
To: <sip:2003@siptrunk17.sip.com>
Date: Mon, 23 Jul 2007 17:19:15 GMT
Call-ID: d2150080-6a41e30e-16a9-fac712ac@10.10.199.250
CSeq: 102 INVITE
Allow-Events: presence
Content-Length: 0

[diagram] Call-ID:[prev][next]
[3] SIP/2.0 180 Ringing
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK2f5e2d3ecd
From: <sip:1001@10.10.199.250>;tag=88fd35fa-b656-4fbc-bcf3-3fdd2ba559b3-23784868
To: <sip:2003@siptrunk17.sip.com>;tag=c5bc4d0f-1965-4b87-bd74-7e24820e120a-26446603
Date: Mon, 23 Jul 2007 17:19:15 GMT
Call-ID: d2150080-6a41e30e-16a9-fac712ac@10.10.199.250
CSeq: 102 INVITE
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY, PUBLISH
Allow-Events: presence
Remote-Party-ID: <sip:2003@10.10.193.253>;party=called;screen=yes;privacy=off
Contact: <sip:2003@10.10.193.253:5060;transport=tcp>
Content-Length: 0

[diagram] Call-ID:[prev][next]
[4] SIP/2.0 183 Session Progress
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK2f5e2d3ecd
From: <sip:1001@10.10.199.250>;tag=88fd35fa-b656-4fbc-bcf3-3fdd2ba559b3-23784868
To: <sip:2003@siptrunk17.sip.com>;tag=c5bc4d0f-1965-4b87-bd74-7e24820e120a-26446603
Date: Mon, 23 Jul 2007 17:19:15 GMT
Call-ID: d2150080-6a41e30e-16a9-fac712ac@10.10.199.250
CSeq: 102 INVITE
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY, PUBLISH
Allow-Events: presence, kpml
Remote-Party-ID: <sip:2003@10.10.193.253>;party=called;screen=yes;privacy=off
Contact: <sip:2003@10.10.193.253:5060;transport=tcp>
Content-Type: application/sdp
Content-Length: 301

v=0
o=CiscoSystemsCCM-SIP 2000 1 IN IP4 10.10.193.253
s=SIP Call
c=IN IP4 10.10.199.238
t=0 0
m=audio 4000 RTP/AVP 0 8 18 101
a=rtpmap:0 PCMU/8000
a=ptime:20
a=rtpmap:8 PCMA/8000
a=ptime:20
a=rtpmap:18 G729/8000
a=ptime:20
a=sendonly
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15

[diagram] Call-ID:[prev][next]
[5] SIP/2.0 200 OK
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK2f5e2d3ecd
From: <sip:1001@10.10.199.250>;tag=88fd35fa-b656-4fbc-bcf3-3fdd2ba559b3-23784868
To: <sip:2003@siptrunk17.sip.com>;tag=c5bc4d0f-1965-4b87-bd74-7e24820e120a-26446603

CISCO CONFIDENTIAL

```
Date: Mon, 23 Jul 2007 17:19:15 GMT
Call-ID: d2150080-6a41e30e-16a9-fac712ac@10.10.199.250
CSeq: 102 INVITE
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY, PUBLISH
Allow-Events: presence, kpml
Remote-Party-ID: <sip:2003@10.10.193.253>;party=called;screen=yes;privacy=off
Contact: <sip:2003@10.10.193.253:5060;transport=tcp>
Supported: replaces
Session-Expires:  1800;refresher=uas
Require:  timer
Content-Type: application/sdp
Content-Length: 301

v=0
o=CiscoSystemsCCM-SIP 2000 1 IN IP4 10.10.193.253
s=SIP Call
c=IN IP4 10.10.199.238
t=0 0
m=audio 4000 RTP/AVP 0 8 18 101
a=rtpmap:0 PCMU/8000
a=ptime:20
a=rtpmap:8 PCMA/8000
a=ptime:20
a=rtpmap:18 G729/8000
a=ptime:20
a=sendonly
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
```

[diagram] Call-ID:[prev][next]

[6] ACK sip:2003@10.10.193.253:5060;transport=tcp SIP/2.0

```
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK306805814b
From: <sip:1001@10.10.199.250>;tag=88fd35fa-b656-4fbc-bcf3-3fdd2ba559b3-23784868
To: <sip:2003@siptrunk17.sip.com>;tag=c5bc4d0f-1965-4b87-bd74-7e24820e120a-26446603
Date: Mon, 23 Jul 2007 17:19:15 GMT
Call-ID: d2150080-6a41e30e-16a9-fac712ac@10.10.199.250
Max-Forwards: 70
CSeq: 102 ACK
Allow-Events: presence
Content-Type: application/sdp
Content-Length: 228

v=0
o=CiscoSystemsCCM-SIP 2000 1 IN IP4 10.10.199.250
s=SIP Call
c=IN IP4 10.10.199.251
t=0 0
m=audio 23412 RTP/AVP 0 101
a=rtpmap:0 PCMU/8000
a=ptime:20
a=recvonly
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
```

[diagram] Call-ID:[prev][next]

[7] INVITE sip:1001@10.10.199.250:5060;transport=tcp SIP/2.0

```
Via: SIP/2.0/TCP 10.10.193.253:5060;branch=z9hG4bK03ff46e6b
Remote-Party-ID: <sip:2003@10.10.193.253>;party=calling;screen=yes;privacy=off
From: <sip:2003@siptrunk17.sip.com>;tag=c5bc4d0f-1965-4b87-bd74-7e24820e120a-26446603
To: <sip:1001@10.10.199.250>;tag=88fd35fa-b656-4fbc-bcf3-3fdd2ba559b3-23784868
Date: Mon, 23 Jul 2007 17:19:17 GMT
Call-ID: d2150080-6a41e30e-16a9-fac712ac@10.10.199.250
Supported: 100rel,timer,replaces
Min-SE:  120
Cisco-Guid: 3574591744-1782702867-2-4257288876
User-Agent: Cisco-CUCM7.1
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY, PUBLISH
CSeq: 101 INVITE
Max-Forwards: 70
Contact: <sip:2003@10.10.193.253:5060;transport=tcp>
Expires: 180
Allow-Events: presence, kpml
Session-Expires:  1800;refresher=uac
Content-Type: application/sdp
Content-Length: 216

v=0
o=CiscoSystemsCCM-SIP 2000 2 IN IP4 10.10.193.253
s=SIP Call
c=IN IP4 10.10.199.238
```

CISCO CONFIDENTIAL

```
t=0 0
m=audio 16578 RTP/AVP 0 101
a=rtpmap:0 PCMU/8000
a=ptime:20
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15

[diagram]   Call-ID:[prev][next]
[8] SIP/2.0 100 Trying
Via: SIP/2.0/TCP 10.10.193.253:5060;branch=z9hG4bK03ff46e6b
From: <sip:2003@siptrunk17.sip.com>;tag=c5bc4d0f-1965-4b87-bd74-7e24820e120a-26446603
To: <sip:1001@10.10.199.250>;tag=88fd35fa-b656-4fbc-bcf3-3fdd2ba559b3-23784868
Date: Mon, 23 Jul 2007 17:19:17 GMT
Call-ID: d2150080-6a41e30e-16a9-fac712ac@10.10.199.250
CSeq: 101 INVITE
Allow-Events: presence
Content-Length: 0

[diagram]   Call-ID:[prev][next]
[9] SIP/2.0 200 OK
Via: SIP/2.0/TCP 10.10.193.253:5060;branch=z9hG4bK03ff46e6b
From: <sip:2003@siptrunk17.sip.com>;tag=c5bc4d0f-1965-4b87-bd74-7e24820e120a-26446603
To: <sip:1001@10.10.199.250>;tag=88fd35fa-b656-4fbc-bcf3-3fdd2ba559b3-23784868
Date: Mon, 23 Jul 2007 17:19:17 GMT
Call-ID: d2150080-6a41e30e-16a9-fac712ac@10.10.199.250
CSeq: 101 INVITE
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY, PUBLISH
Allow-Events: presence
Remote-Party-ID: <sip:1001@10.10.199.250>;party=called;screen=yes;privacy=off
Contact: <sip:2003@10.10.199.250:5060;transport=tcp>
Supported: replaces
Content-Type: application/sdp
Content-Length: 216

v=0
o=CiscoSystemsCCM-SIP 2000 2 IN IP4 10.10.199.250
s=SIP Call
c=IN IP4 10.10.199.251
t=0 0
m=audio 23412 RTP/AVP 0 101
a=rtpmap:0 PCMU/8000
a=ptime:20
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15

[diagram]   Call-ID:[prev][next]
[10] ACK sip:2003@10.10.199.250:5060;transport=tcp SIP/2.0
Via: SIP/2.0/TCP 10.10.193.253:5060;branch=z9hG4bK13cb0facc
From: <sip:2003@siptrunk17.sip.com>;tag=c5bc4d0f-1965-4b87-bd74-7e24820e120a-26446603
To: <sip:1001@10.10.199.250>;tag=88fd35fa-b656-4fbc-bcf3-3fdd2ba559b3-23784868
Date: Mon, 23 Jul 2007 17:19:17 GMT
Call-ID: d2150080-6a41e30e-16a9-fac712ac@10.10.199.250
Max-Forwards: 70
CSeq: 101 ACK
Allow-Events: presence, kpml
Content-Length: 0

[diagram]   Call-ID:[prev][next]
[11] BYE sip:2003@10.10.193.253:5060;transport=tcp SIP/2.0
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK31507f6bd1
From: <sip:1001@10.10.199.250>;tag=88fd35fa-b656-4fbc-bcf3-3fdd2ba559b3-23784868
To: <sip:2003@siptrunk17.sip.com>;tag=c5bc4d0f-1965-4b87-bd74-7e24820e120a-26446603
Date: Mon, 23 Jul 2007 17:19:17 GMT
Call-ID: d2150080-6a41e30e-16a9-fac712ac@10.10.199.250
User-Agent: Cisco-CUCM7.1
Max-Forwards: 70
CSeq: 103 BYE
Content-Length: 0

[diagram]   Call-ID:[prev][next]
[12] SIP/2.0 200 OK
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK31507f6bd1
From: <sip:1001@10.10.199.250>;tag=88fd35fa-b656-4fbc-bcf3-3fdd2ba559b3-23784868
To: <sip:2003@siptrunk17.sip.com>;tag=c5bc4d0f-1965-4b87-bd74-7e24820e120a-26446603
Date: Mon, 23 Jul 2007 17:19:22 GMT
Call-ID: d2150080-6a41e30e-16a9-fac712ac@10.10.199.250
CSeq: 103 BYE
Content-Length: 0
```

CISCO CONFIDENTIAL

1.8 Basic Hold-resume Call via a SIP Trunk to a SIP Proxy

Title: Basic Hold-resume Call via a SIP Trunk to a SIP Proxy

Description:

The following call flow illustrates the SIP messaging that takes place between two Cisco Unified CMs and a Cisco Unified SIP Proxy via a SIP trunk.

Cisco Unified CM initiated the "hold" and then resumed the call.

Configuration:

Node = Unified CM1, IP = 10.10.199.250
Node = SIP Proxy, IP = 10.10.199.32
Node = SIP Endpoint, IP = 10.10.199.42

Phone = A, Line = 1003, IP = 10.10.199.66, Model = SCCP
Phone = B, Line = 3001, IP = 10.10.199.42, Model = SIP TNP

SIP Trunk on Unified CM1 pointing to the SIP Proxy with route pattern 4.XXXX

Scenario:

Phone A DN 1003 calls Phone B DN 3001 over the SIP Trunk by dialing 43001
Phone B DN 3001 Answers
Phone A DN 1003 presses hold softkey
Phone B DN 3001 hears music on hold (MOH)
Duration short
Phone A DN 1003 presses resume softkey
Phone A DN 1003 and Phone B DN 3001 have two-way speech
Phone A DN 1003 goes onHook

End of Scenario

CISCO CONFIDENTIAL

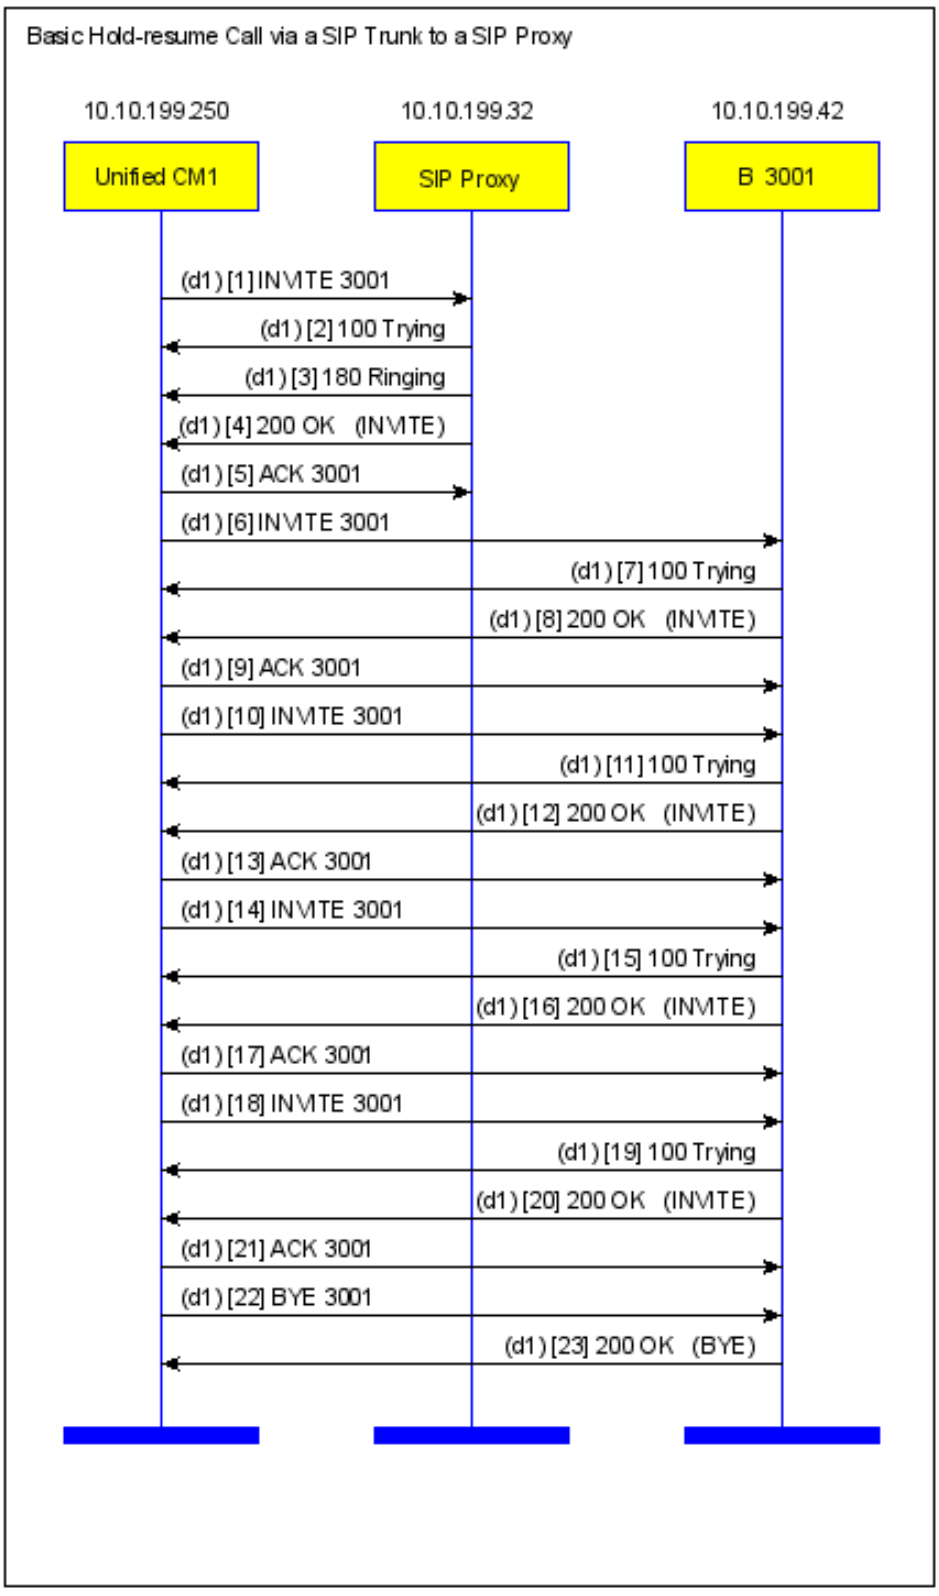

CISCO CONFIDENTIAL

```
[diagram]   Call-ID:[prev][next]
[1] INVITE sip:3001@10.10.199.32:5060 SIP/2.0
Date: Mon, 28 Jul 2008 18:32:04 GMT
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:1003@10.10.199.250>;tag=95ef4362-75f9-4faf-ae01-3fcd294149a0-20447329
Allow-Events: presence
P-Asserted-Identity: <sip:1003@10.10.199.250>
Supported: 100rel,timer,resource-priority,replaces
Min-SE:  1800
Remote-Party-ID: <sip:1003@10.10.199.250>;party=calling;screen=yes;privacy=off
Content-Length: 0
User-Agent: Cisco-CUCM7.1
To: <sip:3001@10.10.199.32>
Contact: <sip:1003@10.10.199.250:5060;transport=tcp>
Expires: 180
Call-ID: 7871af80-88e110a4-46-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK35cc97937
CSeq: 101 INVITE
Session-Expires:  1800
Max-Forwards: 70

[diagram]   Call-ID:[prev][next]
[2] SIP/2.0 100 Trying
Via: SIP/2.0/TCP 10.10.199.250:5060;received=10.10.199.250;branch=z9hG4bK35cc97937
Call-ID: 7871af80-88e110a4-46-fac712ac@10.10.199.250
From: <sip:1003@10.10.199.250>;tag=95ef4362-75f9-4faf-ae01-3fcd294149a0-20447329
To: <sip:3001@10.10.199.32>
CSeq: 101 INVITE
Content-Length: 0

[diagram]   Call-ID:[prev][next]
[3] SIP/2.0 180 Ringing
Via: SIP/2.0/TCP 10.10.199.250:5060;received=10.10.199.250;branch=z9hG4bK35cc97937
From: <sip:1003@10.10.199.250>;tag=95ef4362-75f9-4faf-ae01-3fcd294149a0-20447329
To: <sip:3001@10.10.199.32>;tag=000f24aa92b9000319685e29-768f1a4e
Call-ID: 7871af80-88e110a4-46-fac712ac@10.10.199.250
Date: Mon, 28 Jul 2008 15:33:43 GMT
CSeq: 101 INVITE
Server: CSCO/7
Contact: <sip:3001@10.10.199.42:5060>
Record-Route: <sip:3001@10.10.199.32:5060;maddr=10.10.199.32;transport=tcp;lr>
Content-Length: 0

[diagram]   Call-ID:[prev][next]
[4] SIP/2.0 200 OK
Via: SIP/2.0/TCP 10.10.199.250:5060;received=10.10.199.250;branch=z9hG4bK35cc97937
From: <sip:1003@10.10.199.250>;tag=95ef4362-75f9-4faf-ae01-3fcd294149a0-20447329
To: <sip:3001@10.10.199.32>;tag=000f24aa92b9000319685e29-768f1a4e
Call-ID: 7871af80-88e110a4-46-fac712ac@10.10.199.250
Date: Mon, 28 Jul 2008 15:33:45 GMT
CSeq: 101 INVITE
Server: CSCO/7
Contact: <sip:3001@10.10.199.42:5060>
Record-Route: <sip:3001@10.10.199.32:5060;maddr=10.10.199.32;transport=tcp;lr>
Content-Type: application/sdp
Content-Length: 249

v=0
o=Cisco-SIPUA 17532 16996 IN IP4 10.10.199.42
s=SIP Call
c=IN IP4 10.10.199.42
t=0 0
m=audio 23352 RTP/AVP 0 8 18 101
a=rtpmap:0 PCMU/8000
a=rtpmap:8 PCMA/8000
a=rtpmap:18 G729/8000
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15

[diagram]   Call-ID:[prev][next]
[5] ACK sip:3001@10.10.199.42:5060 SIP/2.0
Route: <sip:3001@10.10.199.32:5060;maddr=10.10.199.32;transport=tcp;lr>
Date: Mon, 28 Jul 2008 18:32:04 GMT
From: <sip:1003@10.10.199.250>;tag=95ef4362-75f9-4faf-ae01-3fcd294149a0-20447329
Allow-Events: presence
Content-Length: 215
To: <sip:3001@10.10.199.32>;tag=000f24aa92b9000319685e29-768f1a4e
Content-Type: application/sdp
Call-ID: 7871af80-88e110a4-46-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK3652deffad
```

CISCO CONFIDENTIAL

```
CSeq: 101 ACK
Max-Forwards: 70

v=0
o=CiscoSystemsCCM-SIP 2000 1 IN IP4 10.10.199.250
s=SIP Call
c=IN IP4 10.10.199.66
t=0 0
m=audio 30236 RTP/AVP 0 101
a=rtpmap:0 PCMU/8000
a=ptime:20
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
```

[diagram] Call-ID:[prev][next]

[6] INVITE sip:3001@10.10.199.42:5060 SIP/2.0

```
Route: <sip:3001@10.10.199.32:5060;maddr=10.10.199.32;transport=tcp;lr>
Date: Mon, 28 Jul 2008 18:32:12 GMT
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:1003@10.10.199.250>;tag=95ef4362-75f9-4faf-ae01-3fcd294149a0-20447329
Allow-Events: presence
P-Asserted-Identity: <sip:1003@10.10.199.250>
Supported: 100rel,timer,resource-priority,replaces
Min-SE:  1800
Remote-Party-ID: <sip:1003@10.10.199.250>;party=calling;screen=yes;privacy=off
Content-Length: 221
User-Agent: Cisco-CUCM7.1
To: <sip:3001@10.10.199.32>;tag=000f24aa92b9000319685e29-768f1a4e
Contact: <sip:1003@10.10.199.250:5060;transport=tcp>
Expires: 180
Content-Type: application/sdp
Call-ID: 7871af80-88e110a4-46-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK3772749f51
CSeq: 102 INVITE
Max-Forwards: 70

v=0
o=CiscoSystemsCCM-SIP 2000 2 IN IP4 10.10.199.250
s=SIP Call
c=IN IP4 0.0.0.0
t=0 0
m=audio 30236 RTP/AVP 0 101
a=rtpmap:0 PCMU/8000
a=ptime:20
a=inactive
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
```

[diagram] Call-ID:[prev][next]

[7] SIP/2.0 100 Trying

```
Via: SIP/2.0/TCP 10.10.199.250:5060;received=10.10.199.250;branch=z9hG4bK3772749f51
Call-ID: 7871af80-88e110a4-46-fac712ac@10.10.199.250
From: <sip:1003@10.10.199.250>;tag=95ef4362-75f9-4faf-ae01-3fcd294149a0-20447329
To: <sip:3001@10.10.199.32>;tag=000f24aa92b9000319685e29-768f1a4e
CSeq: 102 INVITE
Content-Length: 0
```

[diagram] Call-ID:[prev][next]

[8] SIP/2.0 200 OK

```
Via: SIP/2.0/TCP 10.10.199.250:5060;received=10.10.199.250;branch=z9hG4bK3772749f51
From: <sip:1003@10.10.199.250>;tag=95ef4362-75f9-4faf-ae01-3fcd294149a0-20447329
To: <sip:3001@10.10.199.32>;tag=000f24aa92b9000319685e29-768f1a4e
Call-ID: 7871af80-88e110a4-46-fac712ac@10.10.199.250
Date: Mon, 28 Jul 2008 15:33:51 GMT
CSeq: 102 INVITE
Server: CSCO/7
Contact: <sip:3001@10.10.199.42:5060>
Record-Route: <sip:3001@10.10.199.42:5060;maddr=10.10.199.32;transport=tcp;lr>
Content-Type: application/sdp
Content-Length: 242

v=0
o=Cisco-SIPUA 8345 12880 IN IP4 10.10.199.42
s=SIP Call
c=IN IP4 0.0.0.0
t=0 0
m=audio 23352 RTP/AVP 0 8 18 101
a=rtpmap:0 PCMU/8000
a=rtpmap:8 PCMA/8000
a=rtpmap:18 G729/8000
```

CISCO CONFIDENTIAL

```
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15

[diagram]   Call-ID:[prev][next]
[9] ACK sip:3001@10.10.199.42:5060 SIP/2.0
Route: <sip:3001@10.10.199.32:5060;maddr=10.10.199.32;transport=tcp;lr>
Date: Mon, 28 Jul 2008 18:32:12 GMT
From: <sip:1003@10.10.199.250>;tag=95ef4362-75f9-4faf-ae01-3fcd294149a0-20447329
Allow-Events: presence
Content-Length: 0
To: <sip:3001@10.10.199.32>;tag=000f24aa92b9000319685e29-768f1a4e
Call-ID: 7871af80-88e110a4-46-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK3845336c77
CSeq: 102 ACK
Max-Forwards: 70

[diagram]   Call-ID:[prev][next]
[10] INVITE sip:3001@10.10.199.42:5060 SIP/2.0
Route: <sip:3001@10.10.199.32:5060;maddr=10.10.199.32;transport=tcp;lr>
Date: Mon, 28 Jul 2008 18:32:12 GMT
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:1003@10.10.199.250>;tag=95ef4362-75f9-4faf-ae01-3fcd294149a0-20447329
Allow-Events: presence
P-Asserted-Identity: <sip:1003@10.10.199.250>
Supported: 100rel,timer,resource-priority,replaces
Min-SE:  1800
Remote-Party-ID: <sip:1003@10.10.199.250>;party=calling;screen=yes;privacy=off
Content-Length: 0
User-Agent: Cisco-CUCM7.1
To: <sip:3001@10.10.199.32>;tag=000f24aa92b9000319685e29-768f1a4e
Contact: <sip:1003@10.10.199.250:5060;transport=tcp>
Expires: 180
Call-ID: 7871af80-88e110a4-46-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK3945ba9f1e
CSeq: 103 INVITE
Max-Forwards: 70

[diagram]   Call-ID:[prev][next]
[11] SIP/2.0 100 Trying
Via: SIP/2.0/TCP 10.10.199.250:5060;received=10.10.199.250;branch=z9hG4bK3945ba9f1e
Call-ID: 7871af80-88e110a4-46-fac712ac@10.10.199.250
From: <sip:1003@10.10.199.250>;tag=95ef4362-75f9-4faf-ae01-3fcd294149a0-20447329
To: <sip:3001@10.10.199.32>;tag=000f24aa92b9000319685e29-768f1a4e
CSeq: 103 INVITE
Content-Length: 0

[diagram]   Call-ID:[prev][next]
[12] SIP/2.0 200 OK
Via: SIP/2.0/TCP 10.10.199.250:5060;received=10.10.199.250;branch=z9hG4bK3945ba9f1e
From: <sip:1003@10.10.199.250>;tag=95ef4362-75f9-4faf-ae01-3fcd294149a0-20447329
To: <sip:3001@10.10.199.32>;tag=000f24aa92b9000319685e29-768f1a4e
Call-ID: 7871af80-88e110a4-46-fac712ac@10.10.199.250
Date: Mon, 28 Jul 2008 15:33:51 GMT
CSeq: 103 INVITE
Server: CSCO/7
Contact: <sip:3001@10.10.199.42:5060>
Record-Route: <sip:3001@10.10.199.42:5060;maddr=10.10.199.32;transport=tcp;lr>
Content-Type: application/sdp
Content-Length: 247

v=0
o=Cisco-SIPUA 2032 1470 IN IP4 10.10.199.42
s=SIP Call
c=IN IP4 10.10.199.42
t=0 0
m=audio 23352 RTP/AVP 0 8 18 101
a=rtpmap:0 PCMU/8000
a=rtpmap:8 PCMA/8000
a=rtpmap:18 G729/8000
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15

[diagram]   Call-ID:[prev][next]
[13] ACK sip:3001@10.10.199.42:5060 SIP/2.0
Route: <sip:3001@10.10.199.32:5060;maddr=10.10.199.32;transport=tcp;lr>
Date: Mon, 28 Jul 2008 18:32:12 GMT
From: <sip:1003@10.10.199.250>;tag=95ef4362-75f9-4faf-ae01-3fcd294149a0-20447329
Allow-Events: presence
Content-Length: 227
To: <sip:3001@10.10.199.32>;tag=000f24aa92b9000319685e29-768f1a4e
```

CISCO CONFIDENTIAL

```
Content-Type: application/sdp
Call-ID: 7871af80-88e110a4-46-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK3a410bf712
CSeq: 103 ACK
Max-Forwards: 70

v=0
o=CiscoSystemsCCM-SIP 2000 3 IN IP4 10.10.199.250
s=SIP Call
c=IN IP4 10.10.199.250
t=0 0
m=audio 4000 RTP/AVP 0 101
a=rtpmap:0 PCMU/8000
a=ptime:20
a=sendonly
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
```

[diagram] Call-ID:[prev][next]

[14] INVITE sip:3001@10.10.199.42:5060 SIP/2.0

```
Route: <sip:3001@10.10.199.32:5060;maddr=10.10.199.32;transport=tcp;lr>
Date: Mon, 28 Jul 2008 18:32:24 GMT
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:1003@10.10.199.250>;tag=95ef4362-75f9-4faf-ae01-3fcd294149a0-20447329
Allow-Events: presence
P-Asserted-Identity: <sip:1003@10.10.199.250>
Supported: 100rel,timer,resource-priority,replaces
Min-SE:  1800
Remote-Party-ID: <sip:1003@10.10.199.250>;party=calling;screen=yes;privacy=off
Content-Length: 220
User-Agent: Cisco-CUCM7.1
To: <sip:3001@10.10.199.32>;tag=000f24aa92b9000319685e29-768f1a4e
Contact: <sip:1003@10.10.199.250:5060;transport=tcp>
Expires: 180
Content-Type: application/sdp
Call-ID: 7871af80-88e110a4-46-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK3ba4e7f5a
CSeq: 104 INVITE
Max-Forwards: 70

v=0
o=CiscoSystemsCCM-SIP 2000 4 IN IP4 10.10.199.250
s=SIP Call
c=IN IP4 0.0.0.0
t=0 0
m=audio 4000 RTP/AVP 0 101
a=rtpmap:0 PCMU/8000
a=ptime:20
a=inactive
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
```

[diagram] Call-ID:[prev][next]

[15] SIP/2.0 100 Trying

```
Via: SIP/2.0/TCP 10.10.199.250:5060;received=10.10.199.250;branch=z9hG4bK3ba4e7f5a
Call-ID: 7871af80-88e110a4-46-fac712ac@10.10.199.250
From: <sip:1003@10.10.199.250>;tag=95ef4362-75f9-4faf-ae01-3fcd294149a0-20447329
To: <sip:3001@10.10.199.32>;tag=000f24aa92b9000319685e29-768f1a4e
CSeq: 104 INVITE
Content-Length: 0
```

[diagram] Call-ID:[prev][next]

[16] SIP/2.0 200 OK

```
Via: SIP/2.0/TCP 10.10.199.250:5060;received=10.10.199.250;branch=z9hG4bK3ba4e7f5a
From: <sip:1003@10.10.199.250>;tag=95ef4362-75f9-4faf-ae01-3fcd294149a0-20447329
To: <sip:3001@10.10.199.32>;tag=000f24aa92b9000319685e29-768f1a4e
Call-ID: 7871af80-88e110a4-46-fac712ac@10.10.199.250
Date: Mon, 28 Jul 2008 15:34:03 GMT
CSeq: 104 INVITE
Server: CSCO/7
Contact: <sip:3001@10.10.199.42:5060>
Record-Route: <sip:3001@10.10.199.42:5060;maddr=10.10.199.32;transport=tcp;lr>
Content-Type: application/sdp
Content-Length: 242

v=0
o=Cisco-SIPUA 24888 3627 IN IP4 10.10.199.42
s=SIP Call
c=IN IP4 0.0.0.0
t=0 0
```

CISCO CONFIDENTIAL

```
m=audio 23352 RTP/AVP 0 8 18 101
a=rtpmap:0 PCMU/8000
a=rtpmap:8 PCMA/8000
a=rtpmap:18 G729/8000
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15

[diagram]   Call-ID:[prev][next]
[17] ACK sip:3001@10.10.199.42:5060 SIP/2.0
Route: <sip:3001@10.10.199.32:5060;maddr=10.10.199.32;transport=tcp;lr>
Date: Mon, 28 Jul 2008 18:32:24 GMT
From: <sip:1003@10.10.199.250>;tag=95ef4362-75f9-4faf-ae01-3fcd294149a0-20447329
Allow-Events: presence
Content-Length: 0
To: <sip:3001@10.10.199.32>;tag=000f24aa92b9000319685e29-768f1a4e
Call-ID: 7871af80-88e110a4-46-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK3c11cba77
CSeq: 104 ACK
Max-Forwards: 70

[diagram]   Call-ID:[prev][next]
[18] INVITE sip:3001@10.10.199.42:5060 SIP/2.0
Route: <sip:3001@10.10.199.32:5060;maddr=10.10.199.32;transport=tcp;lr>
Date: Mon, 28 Jul 2008 18:32:24 GMT
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:1003@10.10.199.250>;tag=95ef4362-75f9-4faf-ae01-3fcd294149a0-20447329
Allow-Events: presence
P-Asserted-Identity: <sip:1003@10.10.199.250>
Supported: 100rel,timer,resource-priority,replaces
Min-SE:  1800
Remote-Party-ID: <sip:1003@10.10.199.250>;party=calling;screen=yes;privacy=off
Content-Length: 0
User-Agent: Cisco-CUCM7.1
To: <sip:3001@10.10.199.32>;tag=000f24aa92b9000319685e29-768f1a4e
Contact: <sip:1003@10.10.199.250:5060;transport=tcp>
Expires: 180
Call-ID: 7871af80-88e110a4-46-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK3d616c2662
CSeq: 105 INVITE
Max-Forwards: 70

[diagram]   Call-ID:[prev][next]
[19] SIP/2.0 100 Trying
Via: SIP/2.0/TCP 10.10.199.250:5060;received=10.10.199.250;branch=z9hG4bK3d616c2662
Call-ID: 7871af80-88e110a4-46-fac712ac@10.10.199.250
From: <sip:1003@10.10.199.250>;tag=95ef4362-75f9-4faf-ae01-3fcd294149a0-20447329
To: <sip:3001@10.10.199.32>;tag=000f24aa92b9000319685e29-768f1a4e
CSeq: 105 INVITE
Content-Length: 0

[diagram]   Call-ID:[prev][next]
[20] SIP/2.0 200 OK
Via: SIP/2.0/TCP 10.10.199.250:5060;received=10.10.199.250;branch=z9hG4bK3d616c2662
From: <sip:1003@10.10.199.250>;tag=95ef4362-75f9-4faf-ae01-3fcd294149a0-20447329
To: <sip:3001@10.10.199.32>;tag=000f24aa92b9000319685e29-768f1a4e
Call-ID: 7871af80-88e110a4-46-fac712ac@10.10.199.250
Date: Mon, 28 Jul 2008 15:34:03 GMT
CSeq: 105 INVITE
Server: CSCO/7
Contact: <sip:3001@10.10.199.42:5060>
Record-Route: <sip:3001@10.10.199.42:5060;maddr=10.10.199.32;transport=tcp;lr>
Content-Type: application/sdp
Content-Length: 248

v=0
o=Cisco-SIPUA 26013 1273 IN IP4 10.10.199.42
s=SIP Call
c=IN IP4 10.10.199.42
t=0 0
m=audio 23352 RTP/AVP 0 8 18 101
a=rtpmap:0 PCMU/8000
a=rtpmap:8 PCMA/8000
a=rtpmap:18 G729/8000
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15

[diagram]   Call-ID:[prev][next]
[21] ACK sip:3001@10.10.199.42:5060 SIP/2.0
Route: <sip:3001@10.10.199.32:5060;maddr=10.10.199.32;transport=tcp;lr>
Date: Mon, 28 Jul 2008 18:32:24 GMT
```

CISCO CONFIDENTIAL

```
From: <sip:1003@10.10.199.250>;tag=95ef4362-75f9-4faf-ae01-3fcd294149a0-20447329
Allow-Events: presence
Content-Length: 215
To: <sip:3001@10.10.199.32>;tag=000f24aa92b9000319685e29-768f1a4e
Content-Type: application/sdp
Call-ID: 7871af80-88e110a4-46-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK3e740245ce
CSeq: 105 ACK
Max-Forwards: 70

v=0
o=CiscoSystemsCCM-SIP 2000 5 IN IP4 10.10.199.250
s=SIP Call
c=IN IP4 10.10.199.66
t=0 0
m=audio 32030 RTP/AVP 0 101
a=rtpmap:0 PCMU/8000
a=ptime:20
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15

[diagram]   Call-ID:[prev][next]
[22] BYE sip:3001@10.10.199.42:5060 SIP/2.0
Route: <sip:3001@10.10.199.32:5060;maddr=10.10.199.32;transport=tcp;lr>
Date: Mon, 28 Jul 2008 18:32:24 GMT
From: <sip:1003@10.10.199.250>;tag=95ef4362-75f9-4faf-ae01-3fcd294149a0-20447329
P-Asserted-Identity: <sip:1003@10.10.199.250>
Content-Length: 0
User-Agent: Cisco-CUCM7.1
To: <sip:3001@10.10.199.32>;tag=000f24aa92b9000319685e29-768f1a4e
Call-ID: 7871af80-88e110a4-46-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK3f46897ce0
CSeq: 106 BYE
Max-Forwards: 70

[diagram]   Call-ID:[prev][next]
[23] SIP/2.0 200 OK
Via: SIP/2.0/TCP 10.10.199.250:5060;received=10.10.199.250;branch=z9hG4bK3f46897ce0
From: <sip:1003@10.10.199.250>;tag=95ef4362-75f9-4faf-ae01-3fcd294149a0-20447329
To: <sip:3001@10.10.199.32>;tag=000f24aa92b9000319685e29-768f1a4e
Call-ID: 7871af80-88e110a4-46-fac712ac@10.10.199.250
Date: Mon, 28 Jul 2008 15:34:08 GMT
CSeq: 106 BYE
Server: CSCO/7
Content-Length: 0
```

CISCO CONFIDENTIAL

1.9 Basic Hold-resume Call via an Inter Cluster SIP Trunk

Title: Basic Hold-resume Call via an Inter Cluster SIP Trunk

Description:

The following call flow illustrates the SIP messaging that takes place between two Cisco Unified CMs via an inter cluster SIP trunk.

Cisco Unified CM1 initiated the "hold" and then resumed the call.

Configuration:

Node = Unified CM1, IP = 10.10.199.250
Node = Unified CM2, IP = 10.10.199.251

Phone = A, Line = 1003, IP = 10.10.199.66, Model = SCCP
Phone = B, Line = 2001, IP = 10.10.199.171, Model = SIP TNP

SIP Trunk between Unified CM1 & Unified CM2 has route pattern 2.XXXX

Scenario:

Phone A DN 1003 calls Phone B DN 2001 over the SIP Trunk by dialing 22001
Phone B DN 2001 Answers
Phone A DN 1003 presses hold softkey
Phone B DN 2001 hears music on hold (MOH)
Duration short
Phone A DN 1003 presses resume softkey
Phone A DN 1003 and Phone B DN 2001 have two-way speech
Phone A DN 1003 goes onHook

End of Scenario

CISCO CONFIDENTIAL

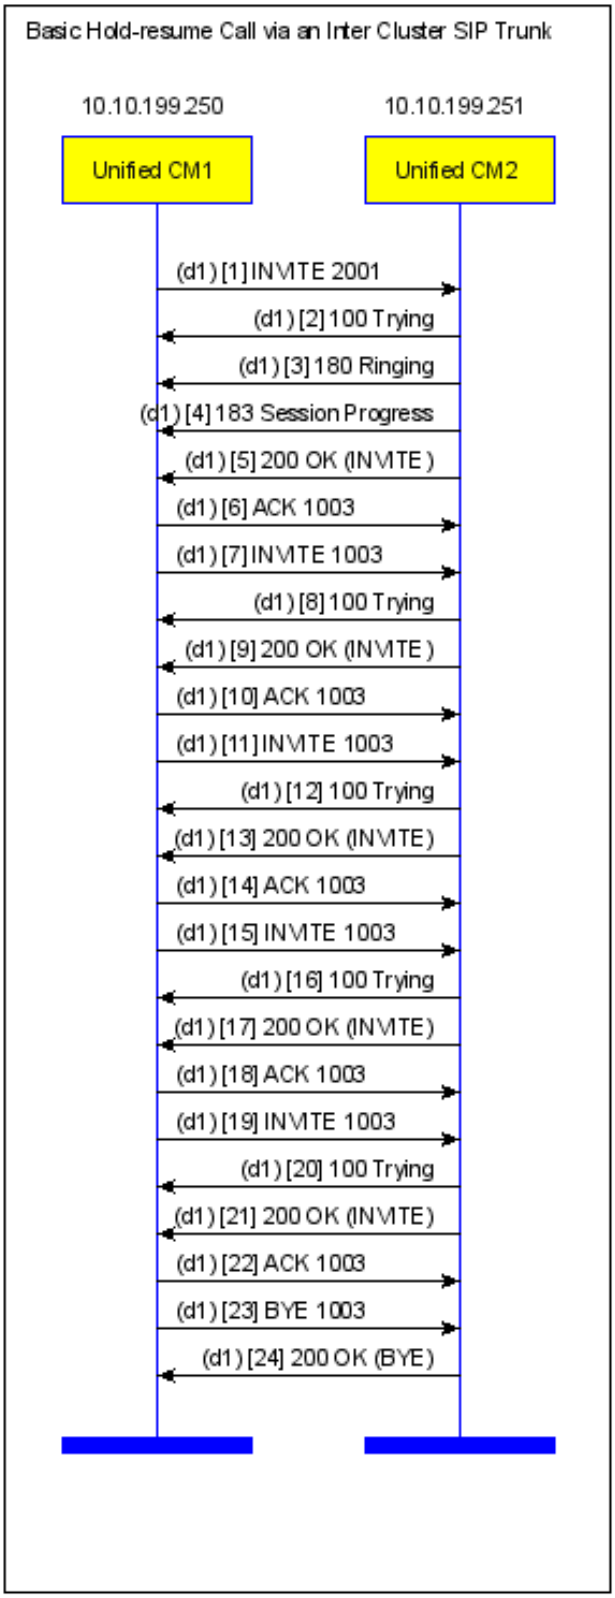

CISCO CONFIDENTIAL

```
[diagram]   Call-ID:[prev][next]
[1] INVITE sip:2001@10.10.199.251:5060 SIP/2.0
Date: Mon, 28 Jul 2008 18:37:55 GMT
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:1003@10.10.199.250>;tag=95ef4362-75f9-4faf-ae01-3fcd294149a0-20447332
Allow-Events: presence
P-Asserted-Identity: <sip:1003@10.10.199.250>
Supported: 100rel,timer,resource-priority,replaces
Min-SE:  1800
Remote-Party-ID: <sip:1003@10.10.199.250>;party=calling;screen=yes;privacy=off
Content-Length: 0
User-Agent: Cisco-CUCM7.1
To: <sip:2001@10.10.199.251>
Contact: <sip:1003@10.10.199.250:5060;transport=tcp>
Expires: 180
Call-ID: 49a80900-88e11203-4a-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK4064d42141
CSeq: 101 INVITE
Session-Expires:  1800
Max-Forwards: 70

[diagram]   Call-ID:[prev][next]
[2] SIP/2.0 100 Trying
Date: Mon, 28 Jul 2008 18:39:43 GMT
From: <sip:1003@10.10.199.250>;tag=95ef4362-75f9-4faf-ae01-3fcd294149a0-20447332
Allow-Events: presence
Content-Length: 0
To: <sip:2001@10.10.199.251>
Call-ID: 49a80900-88e11203-4a-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK4064d42141
CSeq: 101 INVITE

[diagram]   Call-ID:[prev][next]
[3] SIP/2.0 180 Ringing
Date: Mon, 28 Jul 2008 18:39:43 GMT
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:1003@10.10.199.250>;tag=95ef4362-75f9-4faf-ae01-3fcd294149a0-20447332
Allow-Events: presence
P-Asserted-Identity: <sip:2001@10.10.199.251>
Remote-Party-ID: <sip:2001@10.10.199.251>;party=called;screen=yes;privacy=off
Content-Length: 0
To: <sip:2001@10.10.199.251>;tag=e7a2b54c-403c-42f2-986a-ef3df579135a-20446711
Contact: <sip:1003@10.10.199.251:5060;transport=tcp>
Call-ID: 49a80900-88e11203-4a-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK4064d42141
CSeq: 101 INVITE

[diagram]   Call-ID:[prev][next]
[4] SIP/2.0 183 Session Progress
Date: Mon, 28 Jul 2008 18:39:43 GMT
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:1003@10.10.199.250>;tag=95ef4362-75f9-4faf-ae01-3fcd294149a0-20447332
Allow-Events: presence
P-Asserted-Identity: <sip:2001@10.10.199.251>
Remote-Party-ID: <sip:2001@10.10.199.251>;party=called;screen=yes;privacy=off
Content-Length: 347
To: <sip:2001@10.10.199.251>;tag=e7a2b54c-403c-42f2-986a-ef3df579135a-20446711
Contact: <sip:1003@10.10.199.251:5060;transport=tcp>
Content-Type: application/sdp
Call-ID: 49a80900-88e11203-4a-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK4064d42141
CSeq: 101 INVITE

v=0
o=CiscoSystemsCCM-SIP 2000 1 IN IP4 10.10.199.251
s=SIP Call
c=IN IP4 10.10.199.171
t=0 0
m=audio 29496 RTP/AVP 9 0 8 18 101
a=rtpmap:9 G722/8000
a=ptime:20
a=rtpmap:0 PCMU/8000
a=ptime:20
a=rtpmap:8 PCMA/8000
a=ptime:20
a=rtpmap:18 G729/8000
a=ptime:20
a=fmtp:18 annexb=no
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
```

CISCO CONFIDENTIAL

```
[diagram]   Call-ID:[prev][next]
[5] SIP/2.0 200 OK
Date: Mon, 28 Jul 2008 18:39:43 GMT
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:1003@10.10.199.250>;tag=95ef4362-75f9-4faf-ae01-3fcd294149a0-20447332
Allow-Events: presence
P-Asserted-Identity: <sip:2001@10.10.199.251>
Supported: replaces
Remote-Party-ID: <sip:2001@10.10.199.251>;party=called;screen=yes;privacy=off
Content-Length: 347
Require:  timer
To: <sip:2001@10.10.199.251>;tag=e7a2b54c-403c-42f2-986a-ef3df579135a-20446711
Contact: <sip:1003@10.10.199.251:5060;transport=tcp>
Content-Type: application/sdp
Call-ID: 49a80900-88e11203-4a-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK4064d42141
CSeq: 101 INVITE
Session-Expires:  1800;refresher=uas

v=0
o=CiscoSystemsCCM-SIP 2000 1 IN IP4 10.10.199.251
s=SIP Call
c=IN IP4 10.10.199.171
t=0 0
m=audio 29496 RTP/AVP 9 0 8 18 101
a=rtpmap:9 G722/8000
a=ptime:20
a=rtpmap:0 PCMU/8000
a=ptime:20
a=rtpmap:8 PCMA/8000
a=ptime:20
a=rtpmap:18 G729/8000
a=ptime:20
a=fmtp:18 annexb=no
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15

[diagram]   Call-ID:[prev][next]
[6] ACK sip:1003@10.10.199.251:5060;transport=tcp SIP/2.0
Date: Mon, 28 Jul 2008 18:37:55 GMT
From: <sip:1003@10.10.199.250>;tag=95ef4362-75f9-4faf-ae01-3fcd294149a0-20447332
Allow-Events: presence
Content-Length: 215
To: <sip:2001@10.10.199.251>;tag=e7a2b54c-403c-42f2-986a-ef3df579135a-20446711
Content-Type: application/sdp
Call-ID: 49a80900-88e11203-4a-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK41184db548
CSeq: 101 ACK
Max-Forwards: 70

v=0
o=CiscoSystemsCCM-SIP 2000 1 IN IP4 10.10.199.250
s=SIP Call
c=IN IP4 10.10.199.66
t=0 0
m=audio 32502 RTP/AVP 9 101
a=rtpmap:9 G722/8000
a=ptime:20
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15

[diagram]   Call-ID:[prev][next]
[7] INVITE sip:1003@10.10.199.251:5060;transport=tcp SIP/2.0
Date: Mon, 28 Jul 2008 18:38:03 GMT
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:1003@10.10.199.250>;tag=95ef4362-75f9-4faf-ae01-3fcd294149a0-20447332
Allow-Events: presence
P-Asserted-Identity: <sip:1003@10.10.199.250>
Supported: 100rel,timer,resource-priority,replaces
Min-SE:  1800
Remote-Party-ID: <sip:1003@10.10.199.250>;party=calling;screen=yes;privacy=off
Content-Length: 221
User-Agent: Cisco-CUCM7.1
To: <sip:2001@10.10.199.251>;tag=e7a2b54c-403c-42f2-986a-ef3df579135a-20446711
Contact: <sip:1003@10.10.199.250:5060;transport=tcp>
Expires: 180
Content-Type: application/sdp
Call-ID: 49a80900-88e11203-4a-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK4266b7a17a
```

CISCO CONFIDENTIAL

```
CSeq: 102 INVITE
Session-Expires:  1800;refresher=uas
Max-Forwards: 70

v=0
o=CiscoSystemsCCM-SIP 2000 2 IN IP4 10.10.199.250
s=SIP Call
c=IN IP4 0.0.0.0
t=0 0
m=audio 32502 RTP/AVP 9 101
a=rtpmap:9 G722/8000
a=ptime:20
a=inactive
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
```

[diagram] Call-ID:[prev][next]

[8] SIP/2.0 100 Trying

```
Date: Mon, 28 Jul 2008 18:39:50 GMT
From: <sip:1003@10.10.199.250>;tag=95ef4362-75f9-4faf-ae01-3fcd294149a0-20447332
Allow-Events: presence
Content-Length: 0
To: <sip:2001@10.10.199.251>;tag=e7a2b54c-403c-42f2-986a-ef3df579135a-20446711
Call-ID: 49a80900-88e11203-4a-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK4266b7a17a
CSeq: 102 INVITE
```

[diagram] Call-ID:[prev][next]

[9] SIP/2.0 200 OK

```
Date: Mon, 28 Jul 2008 18:39:50 GMT
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:1003@10.10.199.250>;tag=95ef4362-75f9-4faf-ae01-3fcd294149a0-20447332
Allow-Events: presence
P-Asserted-Identity: <sip:2001@10.10.199.251>
Supported: replaces
Remote-Party-ID: <sip:2001@10.10.199.251>;party=called;screen=yes;privacy=off
Content-Length: 228
Require:  timer
To: <sip:2001@10.10.199.251>;tag=e7a2b54c-403c-42f2-986a-ef3df579135a-20446711
Contact: <sip:1003@10.10.199.251:5060;transport=tcp>
Content-Type: application/sdp
Call-ID: 49a80900-88e11203-4a-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK4266b7a17a
CSeq: 102 INVITE
Session-Expires:  1800;refresher=uas

v=0
o=CiscoSystemsCCM-SIP 2000 2 IN IP4 10.10.199.251
s=SIP Call
c=IN IP4 10.10.199.171
t=0 0
m=audio 29496 RTP/AVP 9 101
a=rtpmap:9 G722/8000
a=ptime:20
a=inactive
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
```

[diagram] Call-ID:[prev][next]

[10] ACK sip:1003@10.10.199.251:5060;transport=tcp SIP/2.0

```
Date: Mon, 28 Jul 2008 18:38:03 GMT
From: <sip:1003@10.10.199.250>;tag=95ef4362-75f9-4faf-ae01-3fcd294149a0-20447332
Allow-Events: presence
Content-Length: 0
To: <sip:2001@10.10.199.251>;tag=e7a2b54c-403c-42f2-986a-ef3df579135a-20446711
Call-ID: 49a80900-88e11203-4a-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK433fbe64df
CSeq: 102 ACK
Max-Forwards: 70
```

[diagram] Call-ID:[prev][next]

[11] INVITE sip:1003@10.10.199.251:5060;transport=tcp SIP/2.0

```
Date: Mon, 28 Jul 2008 18:38:03 GMT
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:1003@10.10.199.250>;tag=95ef4362-75f9-4faf-ae01-3fcd294149a0-20447332
Allow-Events: presence
P-Asserted-Identity: <sip:1003@10.10.199.250>
Supported: 100rel,timer,resource-priority,replaces
Min-SE:  1800
Remote-Party-ID: <sip:1003@10.10.199.250>;party=calling;screen=yes;privacy=off
```

CISCO CONFIDENTIAL

```
Content-Length: 0
User-Agent: Cisco-CUCM7.1
To: <sip:2001@10.10.199.251>;tag=e7a2b54c-403c-42f2-986a-ef3df579135a-20446711
Contact: <sip:1003@10.10.199.250:5060;transport=tcp>
Expires: 180
Call-ID: 49a80900-88e11203-4a-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK44158feb64
CSeq: 103 INVITE
Session-Expires:  1800;refresher=uas
Max-Forwards: 70
```

[diagram] Call-ID:[prev][next]

[12] SIP/2.0 100 Trying

```
Date: Mon, 28 Jul 2008 18:39:50 GMT
From: <sip:1003@10.10.199.250>;tag=95ef4362-75f9-4faf-ae01-3fcd294149a0-20447332
Allow-Events: presence
Content-Length: 0
To: <sip:2001@10.10.199.251>;tag=e7a2b54c-403c-42f2-986a-ef3df579135a-20446711
Call-ID: 49a80900-88e11203-4a-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK44158feb64
CSeq: 103 INVITE
```

[diagram] Call-ID:[prev][next]

[13] SIP/2.0 200 OK

```
Date: Mon, 28 Jul 2008 18:39:50 GMT
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:1003@10.10.199.250>;tag=95ef4362-75f9-4faf-ae01-3fcd294149a0-20447332
Allow-Events: presence
P-Asserted-Identity: <sip:2001@10.10.199.251>
Supported: replaces
Remote-Party-ID: <sip:2001@10.10.199.251>;party=called;screen=yes;privacy=off
Content-Length: 347
Require:  timer
To: <sip:2001@10.10.199.251>;tag=e7a2b54c-403c-42f2-986a-ef3df579135a-20446711
Contact: <sip:1003@10.10.199.251:5060;transport=tcp>
Content-Type: application/sdp
Call-ID: 49a80900-88e11203-4a-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK44158feb64
CSeq: 103 INVITE
Session-Expires:  1800;refresher=uas

v=0
o=CiscoSystemsCCM-SIP 2000 3 IN IP4 10.10.199.251
s=SIP Call
c=IN IP4 10.10.199.171
t=0 0
m=audio 29496 RTP/AVP 9 0 8 18 101
a=rtpmap:9 G722/8000
a=ptime:20
a=rtpmap:0 PCMU/8000
a=ptime:20
a=rtpmap:8 PCMA/8000
a=ptime:20
a=rtpmap:18 G729/8000
a=ptime:20
a=fmtp:18 annexb=no
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
```

[diagram] Call-ID:[prev][next]

[14] ACK sip:1003@10.10.199.251:5060;transport=tcp SIP/2.0

```
Date: Mon, 28 Jul 2008 18:38:03 GMT
From: <sip:1003@10.10.199.250>;tag=95ef4362-75f9-4faf-ae01-3fcd294149a0-20447332
Allow-Events: presence
Content-Length: 227
To: <sip:2001@10.10.199.251>;tag=e7a2b54c-403c-42f2-986a-ef3df579135a-20446711
Content-Type: application/sdp
Call-ID: 49a80900-88e11203-4a-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK456bb30d4f
CSeq: 103 ACK
Max-Forwards: 70

v=0
o=CiscoSystemsCCM-SIP 2000 3 IN IP4 10.10.199.250
s=SIP Call
c=IN IP4 10.10.199.250
t=0 0
m=audio 4000 RTP/AVP 0 101
a=rtpmap:0 PCMU/8000
a=ptime:20
```

CISCO CONFIDENTIAL

```
a=sendonly
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15

[diagram]   Call-ID:[prev][next]
[15] INVITE sip:1003@10.10.199.251:5060;transport=tcp SIP/2.0
Date: Mon, 28 Jul 2008 18:38:14 GMT
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:1003@10.10.199.250>;tag=95ef4362-75f9-4faf-ae01-3fcd294149a0-20447332
Allow-Events: presence
P-Asserted-Identity: <sip:1003@10.10.199.250>
Supported: 100rel,timer,resource-priority,replaces
Min-SE:  1800
Remote-Party-ID: <sip:1003@10.10.199.250>;party=calling;screen=yes;privacy=off
Content-Length: 220
User-Agent: Cisco-CUCM7.1
To: <sip:2001@10.10.199.251>;tag=e7a2b54c-403c-42f2-986a-ef3df579135a-20446711
Contact: <sip:1003@10.10.199.250:5060;transport=tcp>
Expires: 180
Content-Type: application/sdp
Call-ID: 49a80900-88e11203-4a-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK46334afe2f
CSeq: 104 INVITE
Session-Expires:  1800;refresher=uas
Max-Forwards: 70

v=0
o=CiscoSystemsCCM-SIP 2000 4 IN IP4 10.10.199.250
s=SIP Call
c=IN IP4 0.0.0.0
t=0 0
m=audio 4000 RTP/AVP 0 101
a=rtpmap:0 PCMU/8000
a=ptime:20
a=inactive
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15

[diagram]   Call-ID:[prev][next]
[16] SIP/2.0 100 Trying
Date: Mon, 28 Jul 2008 18:40:02 GMT
From: <sip:1003@10.10.199.250>;tag=95ef4362-75f9-4faf-ae01-3fcd294149a0-20447332
Allow-Events: presence
Content-Length: 0
To: <sip:2001@10.10.199.251>;tag=e7a2b54c-403c-42f2-986a-ef3df579135a-20446711
Call-ID: 49a80900-88e11203-4a-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK46334afe2f
CSeq: 104 INVITE

[diagram]   Call-ID:[prev][next]
[17] SIP/2.0 200 OK
Date: Mon, 28 Jul 2008 18:40:02 GMT
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:1003@10.10.199.250>;tag=95ef4362-75f9-4faf-ae01-3fcd294149a0-20447332
Allow-Events: presence
P-Asserted-Identity: <sip:2001@10.10.199.251>
Supported: replaces
Remote-Party-ID: <sip:2001@10.10.199.251>;party=called;screen=yes;privacy=off
Content-Length: 228
Require:  timer
To: <sip:2001@10.10.199.251>;tag=e7a2b54c-403c-42f2-986a-ef3df579135a-20446711
Contact: <sip:1003@10.10.199.251:5060;transport=tcp>
Content-Type: application/sdp
Call-ID: 49a80900-88e11203-4a-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK46334afe2f
CSeq: 104 INVITE
Session-Expires:  1800;refresher=uas

v=0
o=CiscoSystemsCCM-SIP 2000 4 IN IP4 10.10.199.251
s=SIP Call
c=IN IP4 10.10.199.171
t=0 0
m=audio 29496 RTP/AVP 0 101
a=rtpmap:0 PCMU/8000
a=ptime:20
a=inactive
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
```

CISCO CONFIDENTIAL

[diagram] Call-ID:[prev][next]
[18] ACK sip:1003@10.10.199.251:5060;transport=tcp SIP/2.0
Date: Mon, 28 Jul 2008 18:38:14 GMT
From: <sip:1003@10.10.199.250>;tag=95ef4362-75f9-4faf-ae01-3fcd294149a0-20447332
Allow-Events: presence
Content-Length: 0
To: <sip:2001@10.10.199.251>;tag=e7a2b54c-403c-42f2-986a-ef3df579135a-20446711
Call-ID: 49a80900-88e11203-4a-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK471ec1f9b1
CSeq: 104 ACK
Max-Forwards: 70

[diagram] Call-ID:[prev][next]
[19] INVITE sip:1003@10.10.199.251:5060;transport=tcp SIP/2.0
Date: Mon, 28 Jul 2008 18:38:14 GMT
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:1003@10.10.199.250>;tag=95ef4362-75f9-4faf-ae01-3fcd294149a0-20447332
Allow-Events: presence
P-Asserted-Identity: <sip:1003@10.10.199.250>
Supported: 100rel,timer,resource-priority,replaces
Min-SE: 1800
Remote-Party-ID: <sip:1003@10.10.199.250>;party=calling;screen=yes;privacy=off
Content-Length: 0
User-Agent: Cisco-CUCM7.1
To: <sip:2001@10.10.199.251>;tag=e7a2b54c-403c-42f2-986a-ef3df579135a-20446711
Contact: <sip:1003@10.10.199.250:5060;transport=tcp>
Expires: 180
Call-ID: 49a80900-88e11203-4a-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK48660439bd
CSeq: 105 INVITE
Session-Expires: 1800;refresher=uas
Max-Forwards: 70

[diagram] Call-ID:[prev][next]
[20] SIP/2.0 100 Trying
Date: Mon, 28 Jul 2008 18:40:02 GMT
From: <sip:1003@10.10.199.250>;tag=95ef4362-75f9-4faf-ae01-3fcd294149a0-20447332
Allow-Events: presence
Content-Length: 0
To: <sip:2001@10.10.199.251>;tag=e7a2b54c-403c-42f2-986a-ef3df579135a-20446711
Call-ID: 49a80900-88e11203-4a-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK48660439bd
CSeq: 105 INVITE

[diagram] Call-ID:[prev][next]
[21] SIP/2.0 200 OK
Date: Mon, 28 Jul 2008 18:40:02 GMT
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:1003@10.10.199.250>;tag=95ef4362-75f9-4faf-ae01-3fcd294149a0-20447332
Allow-Events: presence
P-Asserted-Identity: <sip:2001@10.10.199.251>
Supported: replaces
Remote-Party-ID: <sip:2001@10.10.199.251>;party=called;screen=yes;privacy=off
Content-Length: 347
Require: timer
To: <sip:2001@10.10.199.251>;tag=e7a2b54c-403c-42f2-986a-ef3df579135a-20446711
Contact: <sip:1003@10.10.199.251:5060;transport=tcp>
Content-Type: application/sdp
Call-ID: 49a80900-88e11203-4a-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK48660439bd
CSeq: 105 INVITE
Session-Expires: 1800;refresher=uas

v=0
o=CiscoSystemsCCM-SIP 2000 5 IN IP4 10.10.199.251
s=SIP Call
c=IN IP4 10.10.199.171
t=0 0
m=audio 29496 RTP/AVP 9 0 8 18 101
a=rtpmap:9 G722/8000
a=ptime:20
a=rtpmap:0 PCMU/8000
a=ptime:20
a=rtpmap:8 PCMA/8000
a=ptime:20
a=rtpmap:18 G729/8000
a=ptime:20
a=fmtp:18 annexb=no
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15

CISCO CONFIDENTIAL

[diagram] Call-ID:[prev][next]
[22] ACK sip:1003@10.10.199.251:5060;transport=tcp SIP/2.0
Date: Mon, 28 Jul 2008 18:38:14 GMT
From: <sip:1003@10.10.199.250>;tag=95ef4362-75f9-4faf-ae01-3fcd294149a0-20447332
Allow-Events: presence
Content-Length: 215
To: <sip:2001@10.10.199.251>;tag=e7a2b54c-403c-42f2-986a-ef3df579135a-20446711
Content-Type: application/sdp
Call-ID: 49a80900-88e11203-4a-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK49523f256f
CSeq: 105 ACK
Max-Forwards: 70

v=0
o=CiscoSystemsCCM-SIP 2000 5 IN IP4 10.10.199.250
s=SIP Call
c=IN IP4 10.10.199.66
t=0 0
m=audio 17928 RTP/AVP 9 101
a=rtpmap:9 G722/8000
a=ptime:20
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15

[diagram] Call-ID:[prev][next]
[23] BYE sip:1003@10.10.199.251:5060;transport=tcp SIP/2.0
Date: Mon, 28 Jul 2008 18:38:14 GMT
From: <sip:1003@10.10.199.250>;tag=95ef4362-75f9-4faf-ae01-3fcd294149a0-20447332
P-Asserted-Identity: <sip:1003@10.10.199.250>
Content-Length: 0
User-Agent: Cisco-CUCM7.1
To: <sip:2001@10.10.199.251>;tag=e7a2b54c-403c-42f2-986a-ef3df579135a-20446711
Call-ID: 49a80900-88e11203-4a-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK4a732e0ba6
CSeq: 106 BYE
Max-Forwards: 70

[diagram] Call-ID:[prev][next]
[24] SIP/2.0 200 OK
Date: Mon, 28 Jul 2008 18:40:09 GMT
From: <sip:1003@10.10.199.250>;tag=95ef4362-75f9-4faf-ae01-3fcd294149a0-20447332
Content-Length: 0
To: <sip:2001@10.10.199.251>;tag=e7a2b54c-403c-42f2-986a-ef3df579135a-20446711
Call-ID: 49a80900-88e11203-4a-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK4a732e0ba6
CSeq: 106 BYE

CISCO CONFIDENTIAL

1.10 Basic Conference Call via an Inter Cluster SIP Trunk

Title: Basic Conference Call via an Inter Cluster SIP Trunk

Description:

The following call flow illustrates the SIP messaging that takes place between two Cisco Unified CMs via an inter cluster SIP trunk.

Cisco Unified IP Phone 1001 (registered with CM1) calls Cisco Unified IP Phone 2001 (registered with CM2). Then Cisco Unified IP Phone 2001 conferences with Cisco Unified IP Phone 1003 (registered with CM1)

Configuration:

Node = Unified CM1, IP = 10.10.199.250
Node = Unified CM2, IP = 10.10.199.251

Phone = A, Line = 1001, IP = 10.10.199.130, Model = SCCP
Phone = B, Line = 2001, IP = 10.10.199.171, Model = SIP TNP
Phone = C, Line = 1003, IP = 10.10.199.66, Model = SCCP

SIP Trunk between Unified CM1 & Unified CM2 has route pattern 2.XXXX

Scenario:

Phone A DN 1001 calls Phone B DN 2001 over the SIP Trunk by dialing 22001
Phone B DN 2001 Answers
Phone B DN 2001 presses Confrn softkey
Phone B DN 2001 calls Phone C DN 1003 over the SIP Trunk by dialing 11003
Phone C DN 1003 Answers
Phone B DN 2001 presses Confrn softkey to complete the conference
Phone A DN 1001, Phone B DN 2001 and Phone C DN 1003 are in conference call
Phone A DN 1001 goes onHook
Phone B DN 2001 goes onHook

End of Scenario

CISCO CONFIDENTIAL

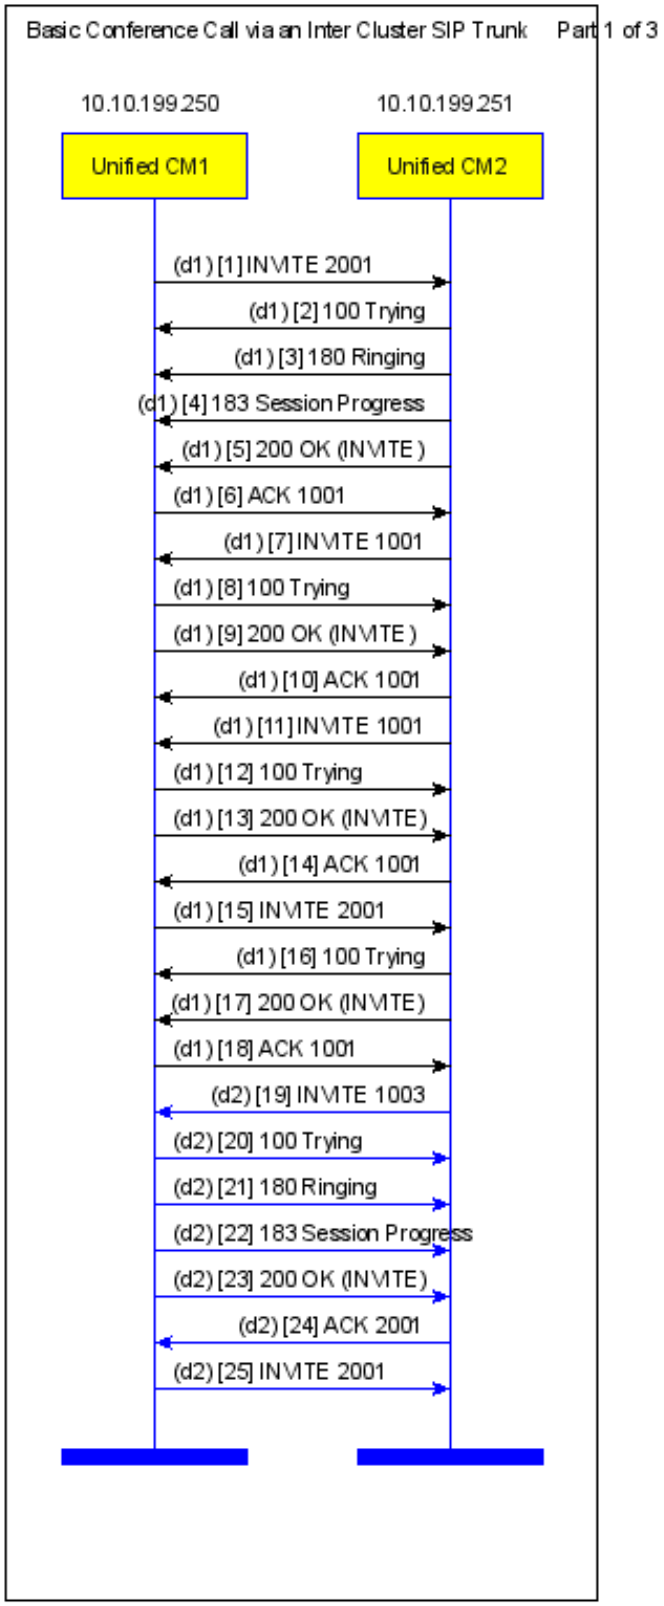

CISCO CONFIDENTIAL

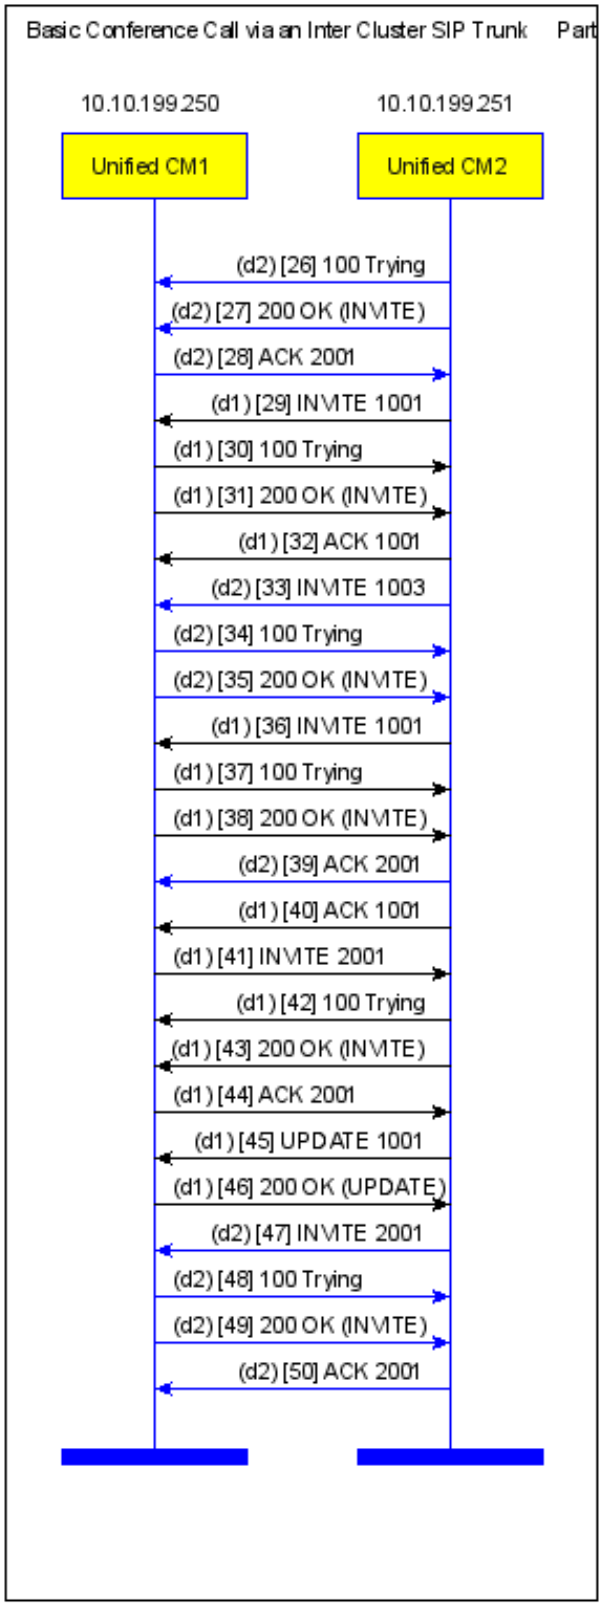

CISCO CONFIDENTIAL

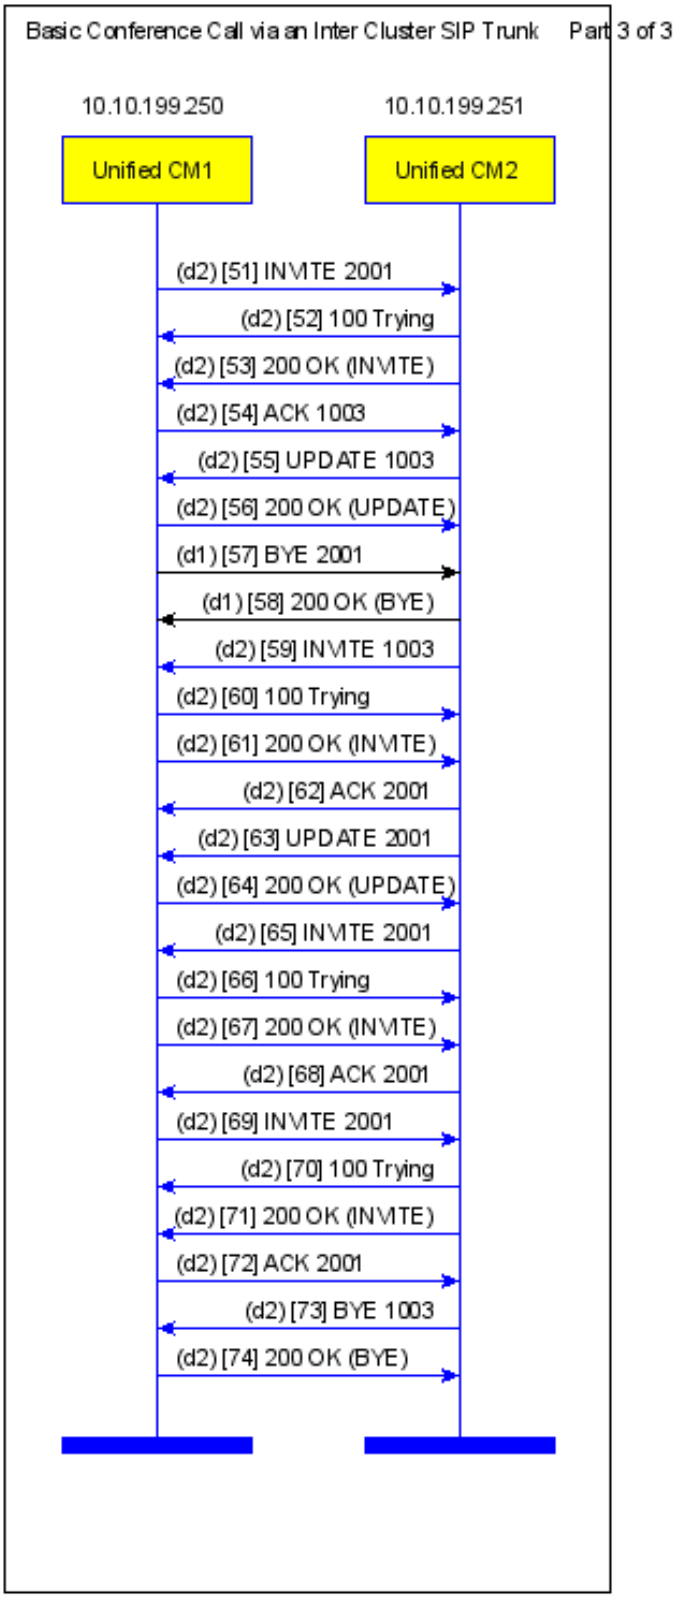

CISCO CONFIDENTIAL

[diagram] Call-ID:[prev][next]
[1] INVITE sip:2001@10.10.199.251:5060 SIP/2.0
```
Date: Mon, 28 Jul 2008 18:40:46 GMT
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:1001@10.10.199.250>;tag=95ef4362-75f9-4faf-ae01-3fcd294149a0-20447335
Allow-Events: presence
P-Asserted-Identity: <sip:1001@10.10.199.250>
Supported: 100rel,timer,resource-priority,replaces
Min-SE:  1800
Remote-Party-ID: <sip:1001@10.10.199.250>;party=calling;screen=yes;privacy=off
Content-Length: 0
User-Agent: Cisco-CUCM7.1
To: <sip:2001@10.10.199.251>
Contact: <sip:1001@10.10.199.250:5060;transport=tcp>
Expires: 180
Call-ID: af949080-88e112ae-4d-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK4b305021db
CSeq: 101 INVITE
Session-Expires:  1800
Max-Forwards: 70
```

[diagram] Call-ID:[prev][next]
[2] SIP/2.0 100 Trying
```
Date: Mon, 28 Jul 2008 18:42:34 GMT
From: <sip:1001@10.10.199.250>;tag=95ef4362-75f9-4faf-ae01-3fcd294149a0-20447335
Allow-Events: presence
Content-Length: 0
To: <sip:2001@10.10.199.251>
Call-ID: af949080-88e112ae-4d-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK4b305021db
CSeq: 101 INVITE
```

[diagram] Call-ID:[prev][next]
[3] SIP/2.0 180 Ringing
```
Date: Mon, 28 Jul 2008 18:42:34 GMT
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:1001@10.10.199.250>;tag=95ef4362-75f9-4faf-ae01-3fcd294149a0-20447335
Allow-Events: presence
P-Asserted-Identity: <sip:2001@10.10.199.251>
Remote-Party-ID: <sip:2001@10.10.199.251>;party=called;screen=yes;privacy=off
Content-Length: 0
To: <sip:2001@10.10.199.251>;tag=e7a2b54c-403c-42f2-986a-ef3df579135a-20446713
Contact: <sip:1001@10.10.199.251:5060;transport=tcp>
Call-ID: af949080-88e112ae-4d-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK4b305021db
CSeq: 101 INVITE
```

[diagram] Call-ID:[prev][next]
[4] SIP/2.0 183 Session Progress
```
Date: Mon, 28 Jul 2008 18:42:34 GMT
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:1001@10.10.199.250>;tag=95ef4362-75f9-4faf-ae01-3fcd294149a0-20447335
Allow-Events: presence
P-Asserted-Identity: <sip:2001@10.10.199.251>
Remote-Party-ID: <sip:2001@10.10.199.251>;party=called;screen=yes;privacy=off
Content-Length: 347
To: <sip:2001@10.10.199.251>;tag=e7a2b54c-403c-42f2-986a-ef3df579135a-20446713
Contact: <sip:1001@10.10.199.251:5060;transport=tcp>
Content-Type: application/sdp
Call-ID: af949080-88e112ae-4d-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK4b305021db
CSeq: 101 INVITE

v=0
o=CiscoSystemsCCM-SIP 2000 1 IN IP4 10.10.199.251
s=SIP Call
c=IN IP4 10.10.199.171
t=0 0
m=audio 26882 RTP/AVP 9 0 8 18 101
a=rtpmap:9 G722/8000
a=ptime:20
a=rtpmap:0 PCMU/8000
a=ptime:20
a=rtpmap:8 PCMA/8000
a=ptime:20
a=rtpmap:18 G729/8000
a=ptime:20
a=fmtp:18 annexb=no
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
```

CISCO CONFIDENTIAL

```
[diagram]   Call-ID:[prev][next]
[5] SIP/2.0 200 OK
Date: Mon, 28 Jul 2008 18:42:34 GMT
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:1001@10.10.199.250>;tag=95ef4362-75f9-4faf-ae01-3fcd294149a0-20447335
Allow-Events: presence
P-Asserted-Identity: <sip:2001@10.10.199.251>
Supported: replaces
Remote-Party-ID: <sip:2001@10.10.199.251>;party=called;screen=yes;privacy=off
Content-Length: 347
Require:  timer
To: <sip:2001@10.10.199.251>;tag=e7a2b54c-403c-42f2-986a-ef3df579135a-20446713
Contact: <sip:1001@10.10.199.251:5060;transport=tcp>
Content-Type: application/sdp
Call-ID: af949080-88e112ae-4d-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK4b305021db
CSeq: 101 INVITE
Session-Expires:  1800;refresher=uas

v=0
o=CiscoSystemsCCM-SIP 2000 1 IN IP4 10.10.199.251
s=SIP Call
c=IN IP4 10.10.199.171
t=0 0
m=audio 26882 RTP/AVP 9 0 8 18 101
a=rtpmap:9 G722/8000
a=ptime:20
a=rtpmap:0 PCMU/8000
a=ptime:20
a=rtpmap:8 PCMA/8000
a=ptime:20
a=rtpmap:18 G729/8000
a=ptime:20
a=fmtp:18 annexb=no
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15

[diagram]   Call-ID:[prev][next]
[6] ACK sip:1001@10.10.199.251:5060;transport=tcp SIP/2.0
Date: Mon, 28 Jul 2008 18:40:46 GMT
From: <sip:1001@10.10.199.250>;tag=95ef4362-75f9-4faf-ae01-3fcd294149a0-20447335
Allow-Events: presence
Content-Length: 216
To: <sip:2001@10.10.199.251>;tag=e7a2b54c-403c-42f2-986a-ef3df579135a-20446713
Content-Type: application/sdp
Call-ID: af949080-88e112ae-4d-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK4c2755a294
CSeq: 101 ACK
Max-Forwards: 70

v=0
o=CiscoSystemsCCM-SIP 2000 1 IN IP4 10.10.199.250
s=SIP Call
c=IN IP4 10.10.199.130
t=0 0
m=audio 16402 RTP/AVP 9 101
a=rtpmap:9 G722/8000
a=ptime:20
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15

[diagram]   Call-ID:[prev][next]
[7] INVITE sip:1001@10.10.199.250:5060;transport=tcp SIP/2.0
Date: Mon, 28 Jul 2008 18:42:42 GMT
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:2001@10.10.199.251>;tag=e7a2b54c-403c-42f2-986a-ef3df579135a-20446713
Allow-Events: presence
P-Asserted-Identity: <sip:2001@10.10.199.251>
Supported: timer,resource-priority,replaces
Min-SE:  1800
Cisco-Guid: 4025749120-2296451866-69-4224127660
Remote-Party-ID: <sip:2001@10.10.199.251>;party=calling;screen=yes;privacy=off
Content-Length: 352
User-Agent: Cisco-CUCM7.1
To: <sip:1001@10.10.199.250>;tag=95ef4362-75f9-4faf-ae01-3fcd294149a0-20447335
Contact: <sip:2001@10.10.199.251:5060;transport=tcp>
Expires: 180
Content-Type: application/sdp
Call-ID: af949080-88e112ae-4d-fac712ac@10.10.199.250
```

CISCO CONFIDENTIAL

```
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bK3a19246164
CSeq: 101 INVITE
Session-Expires:  1800;refresher=uac
Max-Forwards: 70

v=0
o=CiscoSystemsCCM-SIP 2000 2 IN IP4 10.10.199.251
s=SIP Call
c=IN IP4 0.0.0.0
t=0 0
m=audio 26882 RTP/AVP 9 0 8 18 101
a=rtpmap:9 G722/8000
a=ptime:20
a=rtpmap:0 PCMU/8000
a=ptime:20
a=rtpmap:8 PCMA/8000
a=ptime:20
a=rtpmap:18 G729/8000
a=ptime:20
a=fmtp:18 annexb=no
a=inactive
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15

[diagram]   Call-ID:[prev][next]
[8] SIP/2.0 100 Trying
Date: Mon, 28 Jul 2008 18:40:54 GMT
From: <sip:2001@10.10.199.251>;tag=e7a2b54c-403c-42f2-986a-ef3df579135a-20446713
Allow-Events: presence
Content-Length: 0
To: <sip:1001@10.10.199.250>;tag=95ef4362-75f9-4faf-ae01-3fcd294149a0-20447335
Call-ID: af949080-88e112ae-4d-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bK3a19246164
CSeq: 101 INVITE

[diagram]   Call-ID:[prev][next]
[9] SIP/2.0 200 OK
Date: Mon, 28 Jul 2008 18:40:54 GMT
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:2001@10.10.199.251>;tag=e7a2b54c-403c-42f2-986a-ef3df579135a-20446713
Allow-Events: presence
P-Asserted-Identity: <sip:1001@10.10.199.250>
Supported: replaces
Remote-Party-ID: <sip:1001@10.10.199.250>;party=called;screen=yes;privacy=off
Content-Length: 228
Require:  timer
To: <sip:1001@10.10.199.250>;tag=95ef4362-75f9-4faf-ae01-3fcd294149a0-20447335
Contact: <sip:1001@10.10.199.250:5060;transport=tcp>
Content-Type: application/sdp
Call-ID: af949080-88e112ae-4d-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bK3a19246164
CSeq: 101 INVITE
Session-Expires:  1800;refresher=uac

v=0
o=CiscoSystemsCCM-SIP 2000 2 IN IP4 10.10.199.250
s=SIP Call
c=IN IP4 10.10.199.130
t=0 0
m=audio 16402 RTP/AVP 9 101
a=rtpmap:9 G722/8000
a=ptime:20
a=inactive
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15

[diagram]   Call-ID:[prev][next]
[10] ACK sip:1001@10.10.199.250:5060;transport=tcp SIP/2.0
Date: Mon, 28 Jul 2008 18:42:42 GMT
From: <sip:2001@10.10.199.251>;tag=e7a2b54c-403c-42f2-986a-ef3df579135a-20446713
Allow-Events: presence
Content-Length: 0
To: <sip:1001@10.10.199.250>;tag=95ef4362-75f9-4faf-ae01-3fcd294149a0-20447335
Call-ID: af949080-88e112ae-4d-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bK3bc56948c
CSeq: 101 ACK
Max-Forwards: 70

[diagram]   Call-ID:[prev][next]
[11] INVITE sip:1001@10.10.199.250:5060;transport=tcp SIP/2.0
```

CISCO CONFIDENTIAL

```
Date: Mon, 28 Jul 2008 18:42:42 GMT
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:2001@10.10.199.251>;tag=e7a2b54c-403c-42f2-986a-ef3df579135a-20446713
Allow-Events: presence
P-Asserted-Identity: <sip:2001@10.10.199.251>
Supported: timer,resource-priority,replaces
Min-SE:  1800
Cisco-Guid: 4025749120-2296451866-69-4224127660
Remote-Party-ID: <sip:2001@10.10.199.251>;party=calling;screen=yes;privacy=off
Content-Length: 0
User-Agent: Cisco-CUCM7.1
To: <sip:1001@10.10.199.250>;tag=95ef4362-75f9-4faf-ae01-3fcd294149a0-20447335
Contact: <sip:2001@10.10.199.251:5060;transport=tcp>
Expires: 180
Call-ID: af949080-88e112ae-4d-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bK3c2bc19ab
CSeq: 102 INVITE
Session-Expires:  1800;refresher=uac
Max-Forwards: 70
```

[diagram] Call-ID:[prev][next]

[12] SIP/2.0 100 Trying

```
Date: Mon, 28 Jul 2008 18:40:54 GMT
From: <sip:2001@10.10.199.251>;tag=e7a2b54c-403c-42f2-986a-ef3df579135a-20446713
Allow-Events: presence
Content-Length: 0
To: <sip:1001@10.10.199.250>;tag=95ef4362-75f9-4faf-ae01-3fcd294149a0-20447335
Call-ID: af949080-88e112ae-4d-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bK3c2bc19ab
CSeq: 102 INVITE
```

[diagram] Call-ID:[prev][next]

[13] SIP/2.0 200 OK

```
Date: Mon, 28 Jul 2008 18:40:54 GMT
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:2001@10.10.199.251>;tag=e7a2b54c-403c-42f2-986a-ef3df579135a-20446713
Allow-Events: presence
P-Asserted-Identity: <sip:1001@10.10.199.250>
Supported: replaces
Remote-Party-ID: <sip:1001@10.10.199.250>;party=called;screen=yes;privacy=off
Content-Length: 348
Require:  timer
To: <sip:1001@10.10.199.250>;tag=95ef4362-75f9-4faf-ae01-3fcd294149a0-20447335
Contact: <sip:1001@10.10.199.250:5060;transport=tcp>
Content-Type: application/sdp
Call-ID: af949080-88e112ae-4d-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bK3c2bc19ab
CSeq: 102 INVITE
Session-Expires:  1800;refresher=uac

v=0
o=CiscoSystemsCCM-SIP 2000 3 IN IP4 10.10.199.250
s=SIP Call
c=IN IP4 10.10.199.130
t=0 0
m=audio 4000 RTP/AVP 9 0 8 18 101
a=rtpmap:9 G722/8000
a=ptime:20
a=rtpmap:0 PCMU/8000
a=ptime:20
a=rtpmap:8 PCMA/8000
a=ptime:20
a=rtpmap:18 G729/8000
a=ptime:20
a=fmtp:0
a=sendonly
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
```

[diagram] Call-ID:[prev][next]

[14] ACK sip:1001@10.10.199.250:5060;transport=tcp SIP/2.0

```
Date: Mon, 28 Jul 2008 18:42:42 GMT
From: <sip:2001@10.10.199.251>;tag=e7a2b54c-403c-42f2-986a-ef3df579135a-20446713
Allow-Events: presence
Content-Length: 227
To: <sip:1001@10.10.199.250>;tag=95ef4362-75f9-4faf-ae01-3fcd294149a0-20447335
Content-Type: application/sdp
Call-ID: af949080-88e112ae-4d-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bK3d5d50672f
CSeq: 102 ACK
```

CISCO CONFIDENTIAL

```
Max-Forwards: 70

v=0
o=CiscoSystemsCCM-SIP 2000 3 IN IP4 10.10.199.251
s=SIP Call
c=IN IP4 10.10.199.251
t=0 0
m=audio 4000 RTP/AVP 0 101
a=rtpmap:0 PCMU/8000
a=ptime:20
a=inactive
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
```

[diagram] Call-ID:[prev][next]

[15] INVITE sip:2001@10.10.199.251:5060;transport=tcp SIP/2.0

```
Date: Mon, 28 Jul 2008 18:40:54 GMT
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:1001@10.10.199.250>;tag=95ef4362-75f9-4faf-ae01-3fcd294149a0-20447335
Allow-Events: presence
P-Asserted-Identity: <sip:1001@10.10.199.250>
Supported: 100rel,timer,resource-priority,replaces
Min-SE:  1800
Remote-Party-ID: <sip:1001@10.10.199.250>;party=calling;screen=yes;privacy=off
Content-Length: 216
User-Agent: Cisco-CUCM7.1
To: <sip:2001@10.10.199.251>;tag=e7a2b54c-403c-42f2-986a-ef3df579135a-20446713
Contact: <sip:1001@10.10.199.250:5060;transport=tcp>
Expires: 180
Content-Type: application/sdp
Call-ID: af949080-88e112ae-4d-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK4d622dcad3
CSeq: 102 INVITE
Session-Expires:  1800;refresher=uas
Max-Forwards: 70

v=0
o=CiscoSystemsCCM-SIP 2000 4 IN IP4 10.10.199.250
s=SIP Call
c=IN IP4 10.10.199.130
t=0 0
m=audio 16884 RTP/AVP 0 101
a=rtpmap:0 PCMU/8000
a=ptime:20
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
```

[diagram] Call-ID:[prev][next]

[16] SIP/2.0 100 Trying

```
Date: Mon, 28 Jul 2008 18:42:42 GMT
From: <sip:1001@10.10.199.250>;tag=95ef4362-75f9-4faf-ae01-3fcd294149a0-20447335
Allow-Events: presence
Content-Length: 0
To: <sip:2001@10.10.199.251>;tag=e7a2b54c-403c-42f2-986a-ef3df579135a-20446713
Call-ID: af949080-88e112ae-4d-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK4d622dcad3
CSeq: 102 INVITE
```

[diagram] Call-ID:[prev][next]

[17] SIP/2.0 200 OK

```
Date: Mon, 28 Jul 2008 18:42:42 GMT
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:1001@10.10.199.250>;tag=95ef4362-75f9-4faf-ae01-3fcd294149a0-20447335
Allow-Events: presence
P-Asserted-Identity: <sip:2001@10.10.199.251>
Supported: replaces
Remote-Party-ID: <sip:2001@10.10.199.251>;party=called;screen=yes;privacy=off
Content-Length: 227
Require:  timer
To: <sip:2001@10.10.199.251>;tag=e7a2b54c-403c-42f2-986a-ef3df579135a-20446713
Contact: <sip:1001@10.10.199.251:5060;transport=tcp>
Content-Type: application/sdp
Call-ID: af949080-88e112ae-4d-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK4d622dcad3
CSeq: 102 INVITE
Session-Expires:  1800;refresher=uas

v=0
o=CiscoSystemsCCM-SIP 2000 4 IN IP4 10.10.199.251
s=SIP Call
```

CISCO CONFIDENTIAL

```
c=IN IP4 10.10.199.251
t=0 0
m=audio 4000 RTP/AVP 0 101
a=rtpmap:0 PCMU/8000
a=ptime:20
a=sendonly
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15

[diagram]   Call-ID:[prev][next]
[18] ACK sip:1001@10.10.199.251:5060;transport=tcp SIP/2.0
Date: Mon, 28 Jul 2008 18:40:54 GMT
From: <sip:1001@10.10.199.250>;tag=95ef4362-75f9-4faf-ae01-3fcd294149a0-20447335
Allow-Events: presence
Content-Length: 0
To: <sip:2001@10.10.199.251>;tag=e7a2b54c-403c-42f2-986a-ef3df579135a-20446713
Call-ID: af949080-88e112ae-4d-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK4e6cbbdd6e
CSeq: 102 ACK
Max-Forwards: 70

[diagram]   Call-ID:[prev][next]
[19] INVITE sip:1003@10.10.199.250:5060 SIP/2.0
Date: Mon, 28 Jul 2008 18:42:49 GMT
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:2001@10.10.199.251>;tag=e7a2b54c-403c-42f2-986a-ef3df579135a-20446717
Allow-Events: presence
P-Asserted-Identity: <sip:2001@10.10.199.251>
Supported: timer,resource-priority,replaces
Min-SE:  1800
Remote-Party-ID: <sip:2001@10.10.199.251>;party=calling;screen=yes;privacy=off
Content-Length: 0
User-Agent: Cisco-CUCM7.1
To: <sip:1003@10.10.199.250>
Contact: <sip:2001@10.10.199.251:5060;transport=tcp>
Expires: 180
Call-ID: f8e4e000-88e11329-4b-fbc712ac@10.10.199.251
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bK42ef04443
CSeq: 101 INVITE
Session-Expires:  1800
Max-Forwards: 69

[diagram]   Call-ID:[prev][next]
[20] SIP/2.0 100 Trying
Date: Mon, 28 Jul 2008 18:41:01 GMT
From: <sip:2001@10.10.199.251>;tag=e7a2b54c-403c-42f2-986a-ef3df579135a-20446717
Allow-Events: presence
Content-Length: 0
To: <sip:1003@10.10.199.250>
Call-ID: f8e4e000-88e11329-4b-fbc712ac@10.10.199.251
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bK42ef04443
CSeq: 101 INVITE

[diagram]   Call-ID:[prev][next]
[21] SIP/2.0 180 Ringing
Date: Mon, 28 Jul 2008 18:41:01 GMT
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:2001@10.10.199.251>;tag=e7a2b54c-403c-42f2-986a-ef3df579135a-20446717
Allow-Events: presence
P-Asserted-Identity: <sip:1003@10.10.199.250>
Remote-Party-ID: <sip:1003@10.10.199.250>;party=called;screen=yes;privacy=off
Content-Length: 0
To: <sip:1003@10.10.199.250>;tag=95ef4362-75f9-4faf-ae01-3fcd294149a0-20447336
Contact: <sip:2001@10.10.199.250:5060;transport=tcp>
Call-ID: f8e4e000-88e11329-4b-fbc712ac@10.10.199.251
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bK42ef04443
CSeq: 101 INVITE

[diagram]   Call-ID:[prev][next]
[22] SIP/2.0 183 Session Progress
Date: Mon, 28 Jul 2008 18:41:01 GMT
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:2001@10.10.199.251>;tag=e7a2b54c-403c-42f2-986a-ef3df579135a-20446717
Allow-Events: presence
P-Asserted-Identity: <sip:1003@10.10.199.250>
Remote-Party-ID: <sip:1003@10.10.199.250>;party=called;screen=yes;privacy=off
Content-Length: 347
To: <sip:1003@10.10.199.250>;tag=95ef4362-75f9-4faf-ae01-3fcd294149a0-20447336
Contact: <sip:2001@10.10.199.250:5060;transport=tcp>
Content-Type: application/sdp
```

CISCO CONFIDENTIAL

```
Call-ID: f8e4e000-88e11329-4b-fbc712ac@10.10.199.251
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bK42ef04443
CSeq: 101 INVITE

v=0
o=CiscoSystemsCCM-SIP 2000 1 IN IP4 10.10.199.250
s=SIP Call
c=IN IP4 10.10.199.66
t=0 0
m=audio 4000 RTP/AVP 9 0 8 18 101
a=rtpmap:9 G722/8000
a=ptime:20
a=rtpmap:0 PCMU/8000
a=ptime:20
a=rtpmap:8 PCMA/8000
a=ptime:20
a=rtpmap:18 G729/8000
a=ptime:20
a=fmtp:0
a=sendonly
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
```

[diagram] Call-ID:[prev][next]

[23] SIP/2.0 200 OK

```
Date: Mon, 28 Jul 2008 18:41:01 GMT
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:2001@10.10.199.251>;tag=e7a2b54c-403c-42f2-986a-ef3df579135a-20446717
Allow-Events: presence
P-Asserted-Identity: <sip:1003@10.10.199.250>
Supported: replaces
Remote-Party-ID: <sip:1003@10.10.199.250>;party=called;screen=yes;privacy=off
Content-Length: 347
Require:  timer
To: <sip:1003@10.10.199.250>;tag=95ef4362-75f9-4faf-ae01-3fcd294149a0-20447336
Contact: <sip:2001@10.10.199.250:5060;transport=tcp>
Content-Type: application/sdp
Call-ID: f8e4e000-88e11329-4b-fbc712ac@10.10.199.251
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bK42ef04443
CSeq: 101 INVITE
Session-Expires:  1800;refresher=uas

v=0
o=CiscoSystemsCCM-SIP 2000 1 IN IP4 10.10.199.250
s=SIP Call
c=IN IP4 10.10.199.66
t=0 0
m=audio 4000 RTP/AVP 9 0 8 18 101
a=rtpmap:9 G722/8000
a=ptime:20
a=rtpmap:0 PCMU/8000
a=ptime:20
a=rtpmap:8 PCMA/8000
a=ptime:20
a=rtpmap:18 G729/8000
a=ptime:20
a=fmtp:0
a=sendonly
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
```

[diagram] Call-ID:[prev][next]

[24] ACK sip:2001@10.10.199.250:5060;transport=tcp SIP/2.0

```
Date: Mon, 28 Jul 2008 18:42:49 GMT
From: <sip:2001@10.10.199.251>;tag=e7a2b54c-403c-42f2-986a-ef3df579135a-20446717
Allow-Events: presence
Content-Length: 228
To: <sip:1003@10.10.199.250>;tag=95ef4362-75f9-4faf-ae01-3fcd294149a0-20447336
Content-Type: application/sdp
Call-ID: f8e4e000-88e11329-4b-fbc712ac@10.10.199.251
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bK4353a8ac1e
CSeq: 101 ACK
Max-Forwards: 70

v=0
o=CiscoSystemsCCM-SIP 2000 1 IN IP4 10.10.199.251
s=SIP Call
c=IN IP4 10.10.199.171
t=0 0
m=audio 27356 RTP/AVP 9 101
```

CISCO CONFIDENTIAL

```
a=rtpmap:9 G722/8000
a=ptime:20
a=recvonly
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
```

[diagram] Call-ID:[prev][next]

[25] INVITE sip:2001@10.10.199.251:5060;transport=tcp SIP/2.0

```
Date: Mon, 28 Jul 2008 18:41:05 GMT
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:1003@10.10.199.250>;tag=95ef4362-75f9-4faf-ae01-3fcd294149a0-20447336
Allow-Events: presence
P-Asserted-Identity: <sip:1003@10.10.199.250>
Supported: 100rel,timer,resource-priority,replaces
Min-SE:  1800
Cisco-Guid: 3095749120-2296451773-78-4207350444
Remote-Party-ID: <sip:1003@10.10.199.250>;party=calling;screen=yes;privacy=off
Content-Length: 215
User-Agent: Cisco-CUCM7.1
To: <sip:2001@10.10.199.251>;tag=e7a2b54c-403c-42f2-986a-ef3df579135a-20446717
Contact: <sip:1003@10.10.199.250:5060;transport=tcp>
Expires: 180
Content-Type: application/sdp
Call-ID: f8e4e000-88e11329-4b-fbc712ac@10.10.199.251
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK4f5482c201
CSeq: 101 INVITE
Session-Expires:  1800;refresher=uac
Max-Forwards: 70

v=0
o=CiscoSystemsCCM-SIP 2000 2 IN IP4 10.10.199.250
s=SIP Call
c=IN IP4 10.10.199.66
t=0 0
m=audio 18502 RTP/AVP 9 101
a=rtpmap:9 G722/8000
a=ptime:20
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
```

[diagram] Call-ID:[prev][next]

[26] SIP/2.0 100 Trying

```
Date: Mon, 28 Jul 2008 18:42:52 GMT
From: <sip:1003@10.10.199.250>;tag=95ef4362-75f9-4faf-ae01-3fcd294149a0-20447336
Allow-Events: presence
Content-Length: 0
To: <sip:2001@10.10.199.251>;tag=e7a2b54c-403c-42f2-986a-ef3df579135a-20446717
Call-ID: f8e4e000-88e11329-4b-fbc712ac@10.10.199.251
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK4f5482c201
CSeq: 101 INVITE
```

[diagram] Call-ID:[prev][next]

[27] SIP/2.0 200 OK

```
Date: Mon, 28 Jul 2008 18:42:52 GMT
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:1003@10.10.199.250>;tag=95ef4362-75f9-4faf-ae01-3fcd294149a0-20447336
Allow-Events: presence
P-Asserted-Identity: <sip:2001@10.10.199.251>
Supported: replaces
Remote-Party-ID: <sip:2001@10.10.199.251>;party=called;screen=yes;privacy=off
Content-Length: 216
Require:  timer
To: <sip:2001@10.10.199.251>;tag=e7a2b54c-403c-42f2-986a-ef3df579135a-20446717
Contact: <sip:2001@10.10.199.251:5060;transport=tcp>
Content-Type: application/sdp
Call-ID: f8e4e000-88e11329-4b-fbc712ac@10.10.199.251
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK4f5482c201
CSeq: 101 INVITE
Session-Expires:  1800;refresher=uac

v=0
o=CiscoSystemsCCM-SIP 2000 2 IN IP4 10.10.199.251
s=SIP Call
c=IN IP4 10.10.199.171
t=0 0
m=audio 27356 RTP/AVP 9 101
a=rtpmap:9 G722/8000
a=ptime:20
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
```

CISCO CONFIDENTIAL

[diagram] Call-ID:[prev][next]
[28] ACK sip:2001@10.10.199.251:5060;transport=tcp SIP/2.0
```
Date: Mon, 28 Jul 2008 18:41:05 GMT
From: <sip:1003@10.10.199.250>;tag=95ef4362-75f9-4faf-ae01-3fcd294149a0-20447336
Allow-Events: presence
Content-Length: 0
To: <sip:2001@10.10.199.251>;tag=e7a2b54c-403c-42f2-986a-ef3df579135a-20446717
Call-ID: f8e4e000-88e11329-4b-fbc712ac@10.10.199.251
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK5029bb9f9c
CSeq: 101 ACK
Max-Forwards: 70
```

[diagram] Call-ID:[prev][next]
[29] INVITE sip:1001@10.10.199.250:5060;transport=tcp SIP/2.0
```
Date: Mon, 28 Jul 2008 18:42:54 GMT
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:2001@10.10.199.251>;tag=e7a2b54c-403c-42f2-986a-ef3df579135a-20446713
Allow-Events: presence
P-Asserted-Identity: <sip:2001@10.10.199.251>
Supported: timer,resource-priority,replaces
Min-SE:  1800
Cisco-Guid: 4025749120-2296451866-69-4224127660
Remote-Party-ID: <sip:2001@10.10.199.251>;party=calling;screen=yes;privacy=off
Content-Length: 220
User-Agent: Cisco-CUCM7.1
To: <sip:1001@10.10.199.250>;tag=95ef4362-75f9-4faf-ae01-3fcd294149a0-20447335
Contact: <sip:2001@10.10.199.251:5060;transport=tcp>
Expires: 180
Content-Type: application/sdp
Call-ID: af949080-88e112ae-4d-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bK4734448af7
CSeq: 103 INVITE
Session-Expires:  1800;refresher=uac
Max-Forwards: 70

v=0
o=CiscoSystemsCCM-SIP 2000 5 IN IP4 10.10.199.251
s=SIP Call
c=IN IP4 0.0.0.0
t=0 0
m=audio 4000 RTP/AVP 0 101
a=rtpmap:0 PCMU/8000
a=ptime:20
a=inactive
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
```

[diagram] Call-ID:[prev][next]
[30] SIP/2.0 100 Trying
```
Date: Mon, 28 Jul 2008 18:41:07 GMT
From: <sip:2001@10.10.199.251>;tag=e7a2b54c-403c-42f2-986a-ef3df579135a-20446713
Allow-Events: presence
Content-Length: 0
To: <sip:1001@10.10.199.250>;tag=95ef4362-75f9-4faf-ae01-3fcd294149a0-20447335
Call-ID: af949080-88e112ae-4d-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bK4734448af7
CSeq: 103 INVITE
```

[diagram] Call-ID:[prev][next]
[31] SIP/2.0 200 OK
```
Date: Mon, 28 Jul 2008 18:41:07 GMT
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:2001@10.10.199.251>;tag=e7a2b54c-403c-42f2-986a-ef3df579135a-20446713
Allow-Events: presence
P-Asserted-Identity: <sip:1001@10.10.199.250>
Supported: replaces
Remote-Party-ID: <sip:1001@10.10.199.250>;party=called;screen=yes;privacy=off
Content-Length: 228
Require:  timer
To: <sip:1001@10.10.199.250>;tag=95ef4362-75f9-4faf-ae01-3fcd294149a0-20447335
Contact: <sip:1001@10.10.199.250:5060;transport=tcp>
Content-Type: application/sdp
Call-ID: af949080-88e112ae-4d-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bK4734448af7
CSeq: 103 INVITE
Session-Expires:  1800;refresher=uac

v=0
o=CiscoSystemsCCM-SIP 2000 5 IN IP4 10.10.199.250
```

CISCO CONFIDENTIAL

```
s=SIP Call
c=IN IP4 10.10.199.130
t=0 0
m=audio 16884 RTP/AVP 0 101
a=rtpmap:0 PCMU/8000
a=ptime:20
a=inactive
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15

[diagram]   Call-ID:[prev][next]
[32] ACK sip:1001@10.10.199.250:5060;transport=tcp SIP/2.0
Date: Mon, 28 Jul 2008 18:42:54 GMT
From: <sip:2001@10.10.199.251>;tag=e7a2b54c-403c-42f2-986a-ef3df579135a-20446713
Allow-Events: presence
Content-Length: 0
To: <sip:1001@10.10.199.250>;tag=95ef4362-75f9-4faf-ae01-3fcd294149a0-20447335
Call-ID: af949080-88e112ae-4d-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bK48178a8f46
CSeq: 103 ACK
Max-Forwards: 70

[diagram]   Call-ID:[prev][next]
[33] INVITE sip:1003@10.10.199.250:5060;transport=tcp SIP/2.0
Date: Mon, 28 Jul 2008 18:42:54 GMT
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:2001@10.10.199.251>;tag=e7a2b54c-403c-42f2-986a-ef3df579135a-20446717
Allow-Events: presence
P-Asserted-Identity: <sip:2001@10.10.199.251>
Supported: timer,resource-priority,replaces
Min-SE:  1800
Remote-Party-ID: <sip:2001@10.10.199.251>;party=calling;screen=yes;privacy=off
Content-Length: 221
User-Agent: Cisco-CUCM7.1
To: <sip:1003@10.10.199.250>;tag=95ef4362-75f9-4faf-ae01-3fcd294149a0-20447336
Contact: <sip:2001@10.10.199.251:5060;transport=tcp>
Expires: 180
Content-Type: application/sdp
Call-ID: f8e4e000-88e11329-4b-fbc712ac@10.10.199.251
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bK4b6c16c474
CSeq: 102 INVITE
Session-Expires:  1800;refresher=uas
Max-Forwards: 70

v=0
o=CiscoSystemsCCM-SIP 2000 3 IN IP4 10.10.199.251
s=SIP Call
c=IN IP4 0.0.0.0
t=0 0
m=audio 27356 RTP/AVP 9 101
a=rtpmap:9 G722/8000
a=ptime:20
a=inactive
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15

[diagram]   Call-ID:[prev][next]
[34] SIP/2.0 100 Trying
Date: Mon, 28 Jul 2008 18:41:07 GMT
From: <sip:2001@10.10.199.251>;tag=e7a2b54c-403c-42f2-986a-ef3df579135a-20446717
Allow-Events: presence
Content-Length: 0
To: <sip:1003@10.10.199.250>;tag=95ef4362-75f9-4faf-ae01-3fcd294149a0-20447336
Call-ID: f8e4e000-88e11329-4b-fbc712ac@10.10.199.251
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bK4b6c16c474
CSeq: 102 INVITE

[diagram]   Call-ID:[prev][next]
[35] SIP/2.0 200 OK
Date: Mon, 28 Jul 2008 18:41:07 GMT
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:2001@10.10.199.251>;tag=e7a2b54c-403c-42f2-986a-ef3df579135a-20446717
Allow-Events: presence
P-Asserted-Identity: <sip:1003@10.10.199.250>
Supported: replaces
Remote-Party-ID: <sip:1003@10.10.199.250>;party=called;screen=yes;privacy=off
Content-Length: 227
Require:  timer
To: <sip:1003@10.10.199.250>;tag=95ef4362-75f9-4faf-ae01-3fcd294149a0-20447336
Contact: <sip:2001@10.10.199.250:5060;transport=tcp>
```

CISCO CONFIDENTIAL

```
Content-Type: application/sdp
Call-ID: f8e4e000-88e11329-4b-fbc712ac@10.10.199.251
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bK4b6c16c474
CSeq: 102 INVITE
Session-Expires:  1800;refresher=uas

v=0
o=CiscoSystemsCCM-SIP 2000 3 IN IP4 10.10.199.250
s=SIP Call
c=IN IP4 10.10.199.66
t=0 0
m=audio 18502 RTP/AVP 9 101
a=rtpmap:9 G722/8000
a=ptime:20
a=inactive
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
```

[diagram] Call-ID:[prev][next]

[36] INVITE sip:1001@10.10.199.250:5060;transport=tcp SIP/2.0

```
Date: Mon, 28 Jul 2008 18:42:55 GMT
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:2001@10.10.199.251>;tag=e7a2b54c-403c-42f2-986a-ef3df579135a-20446713
Allow-Events: presence
P-Asserted-Identity: <sip:2001@10.10.199.251>
Supported: timer,resource-priority,replaces
Min-SE:  1800
Cisco-Guid: 4025749120-2296451866-69-4224127660
Remote-Party-ID: <sip:2001@10.10.199.251>;party=calling;screen=yes;privacy=off
Content-Length: 0
User-Agent: Cisco-CUCM7.1
To: <sip:1001@10.10.199.250>;tag=95ef4362-75f9-4faf-ae01-3fcd294149a0-20447335
Contact: <sip:2001@10.10.199.251:5060;transport=tcp>
Expires: 180
Call-ID: af949080-88e112ae-4d-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bK4c27f8ad47
CSeq: 104 INVITE
Session-Expires:  1800;refresher=uac
Max-Forwards: 70
```

[diagram] Call-ID:[prev][next]

[37] SIP/2.0 100 Trying

```
Date: Mon, 28 Jul 2008 18:41:07 GMT
From: <sip:2001@10.10.199.251>;tag=e7a2b54c-403c-42f2-986a-ef3df579135a-20446713
Allow-Events: presence
Content-Length: 0
To: <sip:1001@10.10.199.250>;tag=95ef4362-75f9-4faf-ae01-3fcd294149a0-20447335
Call-ID: af949080-88e112ae-4d-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bK4c27f8ad47
CSeq: 104 INVITE
```

[diagram] Call-ID:[prev][next]

[38] SIP/2.0 200 OK

```
Date: Mon, 28 Jul 2008 18:41:07 GMT
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:2001@10.10.199.251>;tag=e7a2b54c-403c-42f2-986a-ef3df579135a-20446713
Allow-Events: presence
P-Asserted-Identity: <sip:1001@10.10.199.250>
Supported: replaces
Remote-Party-ID: <sip:1001@10.10.199.250>;party=called;screen=yes;privacy=off
Content-Length: 348
Require:  timer
To: <sip:1001@10.10.199.250>;tag=95ef4362-75f9-4faf-ae01-3fcd294149a0-20447335
Contact: <sip:1001@10.10.199.250:5060;transport=tcp>
Content-Type: application/sdp
Call-ID: af949080-88e112ae-4d-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bK4c27f8ad47
CSeq: 104 INVITE
Session-Expires:  1800;refresher=uac

v=0
o=CiscoSystemsCCM-SIP 2000 6 IN IP4 10.10.199.250
s=SIP Call
c=IN IP4 10.10.199.130
t=0 0
m=audio 4000 RTP/AVP 9 0 8 18 101
a=rtpmap:9 G722/8000
a=ptime:20
a=rtpmap:0 PCMU/8000
a=ptime:20
```

CISCO CONFIDENTIAL

```
a=rtpmap:8 PCMA/8000
a=ptime:20
a=rtpmap:18 G729/8000
a=ptime:20
a=fmtp:0
a=sendonly
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15

[diagram]   Call-ID:[prev][next]
[39] ACK sip:2001@10.10.199.250:5060;transport=tcp SIP/2.0
Date: Mon, 28 Jul 2008 18:42:54 GMT
From: <sip:2001@10.10.199.251>;tag=e7a2b54c-403c-42f2-986a-ef3df579135a-20446717
Allow-Events: presence
Content-Length: 0
To: <sip:1003@10.10.199.250>;tag=95ef4362-75f9-4faf-ae01-3fcd294149a0-20447336
Call-ID: f8e4e000-88e11329-4b-fbc712ac@10.10.199.251
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bK4d47441a17
CSeq: 102 ACK
Max-Forwards: 70

[diagram]   Call-ID:[prev][next]
[40] ACK sip:1001@10.10.199.250:5060;transport=tcp SIP/2.0
Date: Mon, 28 Jul 2008 18:42:55 GMT
From: <sip:2001@10.10.199.251>;tag=e7a2b54c-403c-42f2-986a-ef3df579135a-20446713
Allow-Events: presence
Content-Length: 228
To: <sip:1001@10.10.199.250>;tag=95ef4362-75f9-4faf-ae01-3fcd294149a0-20447335
Content-Type: application/sdp
Call-ID: af949080-88e112ae-4d-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bK4e2cdc9b79
CSeq: 104 ACK
Max-Forwards: 70

v=0
o=CiscoSystemsCCM-SIP 2000 6 IN IP4 10.10.199.251
s=SIP Call
c=IN IP4 10.10.199.251
t=0 0
m=audio 24582 RTP/AVP 0 101
a=rtpmap:0 PCMU/8000
a=ptime:20
a=recvonly
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15

[diagram]   Call-ID:[prev][next]
[41] INVITE sip:2001@10.10.199.251:5060;transport=tcp SIP/2.0
Date: Mon, 28 Jul 2008 18:41:07 GMT
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:1001@10.10.199.250>;tag=95ef4362-75f9-4faf-ae01-3fcd294149a0-20447335
Allow-Events: presence
P-Asserted-Identity: <sip:1001@10.10.199.250>
Supported: 100rel,timer,resource-priority,replaces
Min-SE:  1800
Remote-Party-ID: <sip:1001@10.10.199.250>;party=calling;screen=yes;privacy=off
Content-Length: 216
User-Agent: Cisco-CUCM7.1
To: <sip:2001@10.10.199.251>;tag=e7a2b54c-403c-42f2-986a-ef3df579135a-20446713
Contact: <sip:1001@10.10.199.250:5060;transport=tcp>
Expires: 180
Content-Type: application/sdp
Call-ID: af949080-88e112ae-4d-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK517d288c1
CSeq: 103 INVITE
Session-Expires:  1800;refresher=uas
Max-Forwards: 70

v=0
o=CiscoSystemsCCM-SIP 2000 7 IN IP4 10.10.199.250
s=SIP Call
c=IN IP4 10.10.199.130
t=0 0
m=audio 18152 RTP/AVP 0 101
a=rtpmap:0 PCMU/8000
a=ptime:20
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
```

CISCO CONFIDENTIAL

[diagram] Call-ID:[prev][next]
[42] SIP/2.0 100 Trying
```
Date: Mon, 28 Jul 2008 18:42:55 GMT
From: <sip:1001@10.10.199.250>;tag=95ef4362-75f9-4faf-ae01-3fcd294149a0-20447335
Allow-Events: presence
Content-Length: 0
To: <sip:2001@10.10.199.251>;tag=e7a2b54c-403c-42f2-986a-ef3df579135a-20446713
Call-ID: af949080-88e112ae-4d-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK517d288c1
CSeq: 103 INVITE
```

[diagram] Call-ID:[prev][next]
[43] SIP/2.0 200 OK
```
Date: Mon, 28 Jul 2008 18:42:55 GMT
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:1001@10.10.199.250>;tag=95ef4362-75f9-4faf-ae01-3fcd294149a0-20447335
Allow-Events: presence
P-Asserted-Identity: "Conference" <sip:b00103001001@10.10.199.251>
Supported: replaces
Remote-Party-ID: "Conference" <sip:b00103001001@10.10.199.251>;party=called;screen=yes;privacy=uri
Content-Length: 216
Require:  timer
Privacy: id
To: <sip:2001@10.10.199.251>;tag=e7a2b54c-403c-42f2-986a-ef3df579135a-20446713
Contact: <sip:2001@10.10.199.251:5060;transport=tcp>;isfocus
Content-Type: application/sdp
Call-ID: af949080-88e112ae-4d-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK517d288c1
CSeq: 103 INVITE
Session-Expires:  1800;refresher=uas

v=0
o=CiscoSystemsCCM-SIP 2000 7 IN IP4 10.10.199.251
s=SIP Call
c=IN IP4 10.10.199.251
t=0 0
m=audio 24582 RTP/AVP 0 101
a=rtpmap:0 PCMU/8000
a=ptime:20
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
```

[diagram] Call-ID:[prev][next]
[44] ACK sip:2001@10.10.199.251:5060;transport=tcp SIP/2.0
```
Date: Mon, 28 Jul 2008 18:41:07 GMT
From: <sip:1001@10.10.199.250>;tag=95ef4362-75f9-4faf-ae01-3fcd294149a0-20447335
Allow-Events: presence
Content-Length: 0
To: <sip:2001@10.10.199.251>;tag=e7a2b54c-403c-42f2-986a-ef3df579135a-20446713
Call-ID: af949080-88e112ae-4d-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK525fd6edda
CSeq: 103 ACK
Max-Forwards: 70
```

[diagram] Call-ID:[prev][next]
[45] UPDATE sip:1001@10.10.199.250:5060;transport=tcp SIP/2.0
```
Date: Mon, 28 Jul 2008 18:42:55 GMT
From: <sip:2001@10.10.199.251>;tag=e7a2b54c-403c-42f2-986a-ef3df579135a-20446713
P-Asserted-Identity: "Conference" <sip:10.10.199.251>
Remote-Party-ID: "Conference" <sip:10.10.199.251>;party=calling;screen=yes;privacy=off
Content-Length: 0
User-Agent: Cisco-CUCM7.1
To: <sip:1001@10.10.199.250>;tag=95ef4362-75f9-4faf-ae01-3fcd294149a0-20447335
Contact: <sip:2001@10.10.199.251:5060;transport=tcp>
Call-ID: af949080-88e112ae-4d-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bK50664c364a
CSeq: 105 UPDATE
Max-Forwards: 70
```

[diagram] Call-ID:[prev][next]
[46] SIP/2.0 200 OK
```
Date: Mon, 28 Jul 2008 18:41:07 GMT
From: <sip:2001@10.10.199.251>;tag=e7a2b54c-403c-42f2-986a-ef3df579135a-20446713
Allow-Events: presence
P-Asserted-Identity: <sip:1001@10.10.199.250>
Remote-Party-ID: <sip:1001@10.10.199.250>;party=called;screen=yes;privacy=off
Content-Length: 0
Require:  timer
To: <sip:1001@10.10.199.250>;tag=95ef4362-75f9-4faf-ae01-3fcd294149a0-20447335
Contact: <sip:1001@10.10.199.250:5060;transport=tcp>
```

CISCO CONFIDENTIAL

```
Call-ID: af949080-88e112ae-4d-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bK50664c364a
CSeq: 105 UPDATE
Session-Expires:  1800;refresher=uac
```

[diagram] Call-ID:[prev][next]

[47] INVITE sip:2001@10.10.199.250:5060;transport=tcp SIP/2.0

```
Date: Mon, 28 Jul 2008 18:42:55 GMT
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:2001@10.10.199.251>;tag=e7a2b54c-403c-42f2-986a-ef3df579135a-20446717
Allow-Events: presence
P-Asserted-Identity: <sip:2001@10.10.199.251>
Supported: timer,resource-priority,replaces
Min-SE:  1800
Remote-Party-ID: <sip:2001@10.10.199.251>;party=calling;screen=yes;privacy=off
Content-Length: 0
User-Agent: Cisco-CUCM7.1
To: <sip:1003@10.10.199.250>;tag=95ef4362-75f9-4faf-ae01-3fcd294149a0-20447336
Contact: <sip:2001@10.10.199.251:5060;transport=tcp>
Expires: 180
Call-ID: f8e4e000-88e11329-4b-fbc712ac@10.10.199.251
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bK525ceb5bc1
CSeq: 103 INVITE
Session-Expires:  1800;refresher=uas
Max-Forwards: 70
```

[diagram] Call-ID:[prev][next]

[48] SIP/2.0 100 Trying

```
Date: Mon, 28 Jul 2008 18:41:07 GMT
From: <sip:2001@10.10.199.251>;tag=e7a2b54c-403c-42f2-986a-ef3df579135a-20446717
Allow-Events: presence
Content-Length: 0
To: <sip:1003@10.10.199.250>;tag=95ef4362-75f9-4faf-ae01-3fcd294149a0-20447336
Call-ID: f8e4e000-88e11329-4b-fbc712ac@10.10.199.251
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bK525ceb5bc1
CSeq: 103 INVITE
```

[diagram] Call-ID:[prev][next]

[49] SIP/2.0 200 OK

```
Date: Mon, 28 Jul 2008 18:41:07 GMT
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:2001@10.10.199.251>;tag=e7a2b54c-403c-42f2-986a-ef3df579135a-20446717
Allow-Events: presence
P-Asserted-Identity: <sip:1003@10.10.199.250>
Supported: replaces
Remote-Party-ID: <sip:1003@10.10.199.250>;party=called;screen=yes;privacy=off
Content-Length: 347
Require:  timer
To: <sip:1003@10.10.199.250>;tag=95ef4362-75f9-4faf-ae01-3fcd294149a0-20447336
Contact: <sip:2001@10.10.199.250:5060;transport=tcp>
Content-Type: application/sdp
Call-ID: f8e4e000-88e11329-4b-fbc712ac@10.10.199.251
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bK525ceb5bc1
CSeq: 103 INVITE
Session-Expires:  1800;refresher=uas

v=0
o=CiscoSystemsCCM-SIP 2000 4 IN IP4 10.10.199.250
s=SIP Call
c=IN IP4 10.10.199.66
t=0 0
m=audio 4000 RTP/AVP 9 0 8 18 101
a=rtpmap:9 G722/8000
a=ptime:20
a=rtpmap:0 PCMU/8000
a=ptime:20
a=rtpmap:8 PCMA/8000
a=ptime:20
a=rtpmap:18 G729/8000
a=ptime:20
a=fmtp:0
a=sendonly
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
```

[diagram] Call-ID:[prev][next]

[50] ACK sip:2001@10.10.199.250:5060;transport=tcp SIP/2.0

```
Date: Mon, 28 Jul 2008 18:42:55 GMT
From: <sip:2001@10.10.199.251>;tag=e7a2b54c-403c-42f2-986a-ef3df579135a-20446717
Allow-Events: presence
```

CISCO CONFIDENTIAL

```
Content-Length: 228
To: <sip:1003@10.10.199.250>;tag=95ef4362-75f9-4faf-ae01-3fcd294149a0-20447336
Content-Type: application/sdp
Call-ID: f8e4e000-88e11329-4b-fbc712ac@10.10.199.251
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bK53b6456da
CSeq: 103 ACK
Max-Forwards: 70

v=0
o=CiscoSystemsCCM-SIP 2000 4 IN IP4 10.10.199.251
s=SIP Call
c=IN IP4 10.10.199.251
t=0 0
m=audio 24588 RTP/AVP 0 101
a=rtpmap:0 PCMU/8000
a=ptime:20
a=recvonly
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
```

[diagram] Call-ID:[prev][next]

[51] INVITE sip:2001@10.10.199.251:5060;transport=tcp SIP/2.0

```
Date: Mon, 28 Jul 2008 18:41:07 GMT
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:1003@10.10.199.250>;tag=95ef4362-75f9-4faf-ae01-3fcd294149a0-20447336
Allow-Events: presence
P-Asserted-Identity: <sip:1003@10.10.199.250>
Supported: 100rel,timer,resource-priority,replaces
Min-SE:  1800
Cisco-Guid: 3095749120-2296451773-78-4207350444
Remote-Party-ID: <sip:1003@10.10.199.250>;party=calling;screen=yes;privacy=off
Content-Length: 215
User-Agent: Cisco-CUCM7.1
To: <sip:2001@10.10.199.251>;tag=e7a2b54c-403c-42f2-986a-ef3df579135a-20446717
Contact: <sip:1003@10.10.199.250:5060;transport=tcp>
Expires: 180
Content-Type: application/sdp
Call-ID: f8e4e000-88e11329-4b-fbc712ac@10.10.199.251
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK534295c89d
CSeq: 102 INVITE
Session-Expires:  1800;refresher=uac
Max-Forwards: 70

v=0
o=CiscoSystemsCCM-SIP 2000 5 IN IP4 10.10.199.250
s=SIP Call
c=IN IP4 10.10.199.66
t=0 0
m=audio 18746 RTP/AVP 0 101
a=rtpmap:0 PCMU/8000
a=ptime:20
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
```

[diagram] Call-ID:[prev][next]

[52] SIP/2.0 100 Trying

```
Date: Mon, 28 Jul 2008 18:42:55 GMT
From: <sip:1003@10.10.199.250>;tag=95ef4362-75f9-4faf-ae01-3fcd294149a0-20447336
Allow-Events: presence
Content-Length: 0
To: <sip:2001@10.10.199.251>;tag=e7a2b54c-403c-42f2-986a-ef3df579135a-20446717
Call-ID: f8e4e000-88e11329-4b-fbc712ac@10.10.199.251
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK534295c89d
CSeq: 102 INVITE
```

[diagram] Call-ID:[prev][next]

[53] SIP/2.0 200 OK

```
Date: Mon, 28 Jul 2008 18:42:55 GMT
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:1003@10.10.199.250>;tag=95ef4362-75f9-4faf-ae01-3fcd294149a0-20447336
Allow-Events: presence
P-Asserted-Identity: "Conference" <sip:b00103001001@10.10.199.251>
Supported: replaces
Remote-Party-ID: "Conference" <sip:b00103001001@10.10.199.251>;party=called;screen=yes;privacy=uri
Content-Length: 216
Require:  timer
Privacy: id
To: <sip:2001@10.10.199.251>;tag=e7a2b54c-403c-42f2-986a-ef3df579135a-20446717
Contact: <sip:1003@10.10.199.251:5060;transport=tcp>;isfocus
Content-Type: application/sdp
```

CISCO CONFIDENTIAL

```
Call-ID: f8e4e000-88e11329-4b-fbc712ac@10.10.199.251
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK534295c89d
CSeq: 102 INVITE
Session-Expires:  1800;refresher=uac

v=0
o=CiscoSystemsCCM-SIP 2000 5 IN IP4 10.10.199.251
s=SIP Call
c=IN IP4 10.10.199.251
t=0 0
m=audio 24588 RTP/AVP 0 101
a=rtpmap:0 PCMU/8000
a=ptime:20
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15

[diagram]   Call-ID:[prev][next]
[54] ACK sip:1003@10.10.199.251:5060;transport=tcp SIP/2.0
Date: Mon, 28 Jul 2008 18:41:07 GMT
From: <sip:1003@10.10.199.250>;tag=95ef4362-75f9-4faf-ae01-3fcd294149a0-20447336
Allow-Events: presence
Content-Length: 0
To: <sip:2001@10.10.199.251>;tag=e7a2b54c-403c-42f2-986a-ef3df579135a-20446717
Call-ID: f8e4e000-88e11329-4b-fbc712ac@10.10.199.251
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK545f997435
CSeq: 102 ACK
Max-Forwards: 70

[diagram]   Call-ID:[prev][next]
[55] UPDATE sip:1003@10.10.199.250:5060;transport=tcp SIP/2.0
Date: Mon, 28 Jul 2008 18:42:55 GMT
From: <sip:2001@10.10.199.251>;tag=e7a2b54c-403c-42f2-986a-ef3df579135a-20446717
P-Asserted-Identity: "Conference" <sip:10.10.199.251>
Remote-Party-ID: "Conference" <sip:10.10.199.251>;party=calling;screen=yes;privacy=off
Content-Length: 0
User-Agent: Cisco-CUCM7.1
To: <sip:1003@10.10.199.250>;tag=95ef4362-75f9-4faf-ae01-3fcd294149a0-20447336
Contact: <sip:2001@10.10.199.251:5060;transport=tcp>
Call-ID: f8e4e000-88e11329-4b-fbc712ac@10.10.199.251
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bK56769b4776
CSeq: 104 UPDATE
Max-Forwards: 70

[diagram]   Call-ID:[prev][next]
[56] SIP/2.0 200 OK
Date: Mon, 28 Jul 2008 18:41:07 GMT
From: <sip:2001@10.10.199.251>;tag=e7a2b54c-403c-42f2-986a-ef3df579135a-20446717
Allow-Events: presence
P-Asserted-Identity: <sip:1003@10.10.199.250>
Remote-Party-ID: <sip:1003@10.10.199.250>;party=called;screen=yes;privacy=off
Content-Length: 0
Require:  timer
To: <sip:1003@10.10.199.250>;tag=95ef4362-75f9-4faf-ae01-3fcd294149a0-20447336
Contact: <sip:1003@10.10.199.250:5060;transport=tcp>
Call-ID: f8e4e000-88e11329-4b-fbc712ac@10.10.199.251
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bK56769b4776
CSeq: 104 UPDATE
Session-Expires:  1800;refresher=uas

[diagram]   Call-ID:[prev][next]
[57] BYE sip:2001@10.10.199.251:5060;transport=tcp SIP/2.0
Date: Mon, 28 Jul 2008 18:41:07 GMT
From: <sip:1001@10.10.199.250>;tag=95ef4362-75f9-4faf-ae01-3fcd294149a0-20447335
P-Asserted-Identity: <sip:1001@10.10.199.250>
Content-Length: 0
User-Agent: Cisco-CUCM7.1
To: <sip:2001@10.10.199.251>;tag=e7a2b54c-403c-42f2-986a-ef3df579135a-20446713
Call-ID: af949080-88e112ae-4d-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK555fa5124b
CSeq: 104 BYE
Max-Forwards: 70

[diagram]   Call-ID:[prev][next]
[58] SIP/2.0 200 OK
Date: Mon, 28 Jul 2008 18:43:04 GMT
From: <sip:1001@10.10.199.250>;tag=95ef4362-75f9-4faf-ae01-3fcd294149a0-20447335
Content-Length: 0
To: <sip:2001@10.10.199.251>;tag=e7a2b54c-403c-42f2-986a-ef3df579135a-20446713
Call-ID: af949080-88e112ae-4d-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK555fa5124b
```

CISCO CONFIDENTIAL

```
CSeq: 104 BYE

[diagram]   Call-ID:[prev][next]
[59] INVITE sip:1003@10.10.199.250:5060;transport=tcp SIP/2.0
Date: Mon, 28 Jul 2008 18:43:05 GMT
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:2001@10.10.199.251>;tag=e7a2b54c-403c-42f2-986a-ef3df579135a-20446717
Allow-Events: presence
P-Asserted-Identity: "Conference" <sip:10.10.199.251>
Supported: timer,resource-priority,replaces
Min-SE:  1800
Remote-Party-ID: "Conference" <sip:10.10.199.251>;party=calling;screen=yes;privacy=off
Content-Length: 221
User-Agent: Cisco-CUCM7.1
To: <sip:1003@10.10.199.250>;tag=95ef4362-75f9-4faf-ae01-3fcd294149a0-20447336
Contact: <sip:2001@10.10.199.251:5060;transport=tcp>
Expires: 180
Content-Type: application/sdp
Call-ID: f8e4e000-88e11329-4b-fbc712ac@10.10.199.251
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bK5b69445843
CSeq: 105 INVITE
Session-Expires:  1800;refresher=uas
Max-Forwards: 70

v=0
o=CiscoSystemsCCM-SIP 2000 6 IN IP4 10.10.199.251
s=SIP Call
c=IN IP4 0.0.0.0
t=0 0
m=audio 24588 RTP/AVP 0 101
a=rtpmap:0 PCMU/8000
a=ptime:20
a=inactive
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15

[diagram]   Call-ID:[prev][next]
[60] SIP/2.0 100 Trying
Date: Mon, 28 Jul 2008 18:41:17 GMT
From: <sip:2001@10.10.199.251>;tag=e7a2b54c-403c-42f2-986a-ef3df579135a-20446717
Allow-Events: presence
Content-Length: 0
To: <sip:1003@10.10.199.250>;tag=95ef4362-75f9-4faf-ae01-3fcd294149a0-20447336
Call-ID: f8e4e000-88e11329-4b-fbc712ac@10.10.199.251
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bK5b69445843
CSeq: 105 INVITE

[diagram]   Call-ID:[prev][next]
[61] SIP/2.0 200 OK
Date: Mon, 28 Jul 2008 18:41:17 GMT
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:2001@10.10.199.251>;tag=e7a2b54c-403c-42f2-986a-ef3df579135a-20446717
Allow-Events: presence
P-Asserted-Identity: <sip:1003@10.10.199.250>
Supported: replaces
Remote-Party-ID: <sip:1003@10.10.199.250>;party=called;screen=yes;privacy=off
Content-Length: 227
Require:  timer
To: <sip:1003@10.10.199.250>;tag=95ef4362-75f9-4faf-ae01-3fcd294149a0-20447336
Contact: <sip:2001@10.10.199.250:5060;transport=tcp>
Content-Type: application/sdp
Call-ID: f8e4e000-88e11329-4b-fbc712ac@10.10.199.251
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bK5b69445843
CSeq: 105 INVITE
Session-Expires:  1800;refresher=uas

v=0
o=CiscoSystemsCCM-SIP 2000 6 IN IP4 10.10.199.250
s=SIP Call
c=IN IP4 10.10.199.66
t=0 0
m=audio 18746 RTP/AVP 0 101
a=rtpmap:0 PCMU/8000
a=ptime:20
a=inactive
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15

[diagram]   Call-ID:[prev][next]
[62] ACK sip:2001@10.10.199.250:5060;transport=tcp SIP/2.0
```

CISCO CONFIDENTIAL

```
Date: Mon, 28 Jul 2008 18:43:05 GMT
From: <sip:2001@10.10.199.251>;tag=e7a2b54c-403c-42f2-986a-ef3df579135a-20446717
Allow-Events: presence
Content-Length: 0
To: <sip:1003@10.10.199.250>;tag=95ef4362-75f9-4faf-ae01-3fcd294149a0-20447336
Call-ID: f8e4e000-88e11329-4b-fbc712ac@10.10.199.251
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bK5c7732a53e
CSeq: 105 ACK
Max-Forwards: 70
```

[diagram] Call-ID:[prev][next]

[63] UPDATE sip:2001@10.10.199.250:5060;transport=tcp SIP/2.0

```
Date: Mon, 28 Jul 2008 18:43:05 GMT
From: <sip:2001@10.10.199.251>;tag=e7a2b54c-403c-42f2-986a-ef3df579135a-20446717
P-Asserted-Identity: <sip:2001@10.10.199.251>
Remote-Party-ID: <sip:2001@10.10.199.251>;party=calling;screen=yes;privacy=off
Content-Length: 0
User-Agent: Cisco-CUCM7.1
To: <sip:1003@10.10.199.250>;tag=95ef4362-75f9-4faf-ae01-3fcd294149a0-20447336
Contact: <sip:2001@10.10.199.251:5060;transport=tcp>
Call-ID: f8e4e000-88e11329-4b-fbc712ac@10.10.199.251
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bK5d8b27320
CSeq: 106 UPDATE
Max-Forwards: 70
```

[diagram] Call-ID:[prev][next]

[64] SIP/2.0 200 OK

```
Date: Mon, 28 Jul 2008 18:41:17 GMT
From: <sip:2001@10.10.199.251>;tag=e7a2b54c-403c-42f2-986a-ef3df579135a-20446717
Allow-Events: presence
P-Asserted-Identity: <sip:1003@10.10.199.250>
Remote-Party-ID: <sip:1003@10.10.199.250>;party=called;screen=yes;privacy=off
Content-Length: 0
Require:  timer
To: <sip:1003@10.10.199.250>;tag=95ef4362-75f9-4faf-ae01-3fcd294149a0-20447336
Contact: <sip:1003@10.10.199.250:5060;transport=tcp>
Call-ID: f8e4e000-88e11329-4b-fbc712ac@10.10.199.251
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bK5d8b27320
CSeq: 106 UPDATE
Session-Expires:  1800;refresher=uas
```

[diagram] Call-ID:[prev][next]

[65] INVITE sip:2001@10.10.199.250:5060;transport=tcp SIP/2.0

```
Date: Mon, 28 Jul 2008 18:43:05 GMT
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:2001@10.10.199.251>;tag=e7a2b54c-403c-42f2-986a-ef3df579135a-20446717
Allow-Events: presence
P-Asserted-Identity: <sip:2001@10.10.199.251>
Supported: timer,resource-priority,replaces
Min-SE:  1800
Remote-Party-ID: <sip:2001@10.10.199.251>;party=calling;screen=yes;privacy=off
Content-Length: 0
User-Agent: Cisco-CUCM7.1
To: <sip:1003@10.10.199.250>;tag=95ef4362-75f9-4faf-ae01-3fcd294149a0-20447336
Contact: <sip:2001@10.10.199.251:5060;transport=tcp>
Expires: 180
Call-ID: f8e4e000-88e11329-4b-fbc712ac@10.10.199.251
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bK617a8a3cd0
CSeq: 107 INVITE
Session-Expires:  1800;refresher=uas
Max-Forwards: 70
```

[diagram] Call-ID:[prev][next]

[66] SIP/2.0 100 Trying

```
Date: Mon, 28 Jul 2008 18:41:17 GMT
From: <sip:2001@10.10.199.251>;tag=e7a2b54c-403c-42f2-986a-ef3df579135a-20446717
Allow-Events: presence
Content-Length: 0
To: <sip:1003@10.10.199.250>;tag=95ef4362-75f9-4faf-ae01-3fcd294149a0-20447336
Call-ID: f8e4e000-88e11329-4b-fbc712ac@10.10.199.251
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bK617a8a3cd0
CSeq: 107 INVITE
```

[diagram] Call-ID:[prev][next]

[67] SIP/2.0 200 OK

```
Date: Mon, 28 Jul 2008 18:41:17 GMT
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:2001@10.10.199.251>;tag=e7a2b54c-403c-42f2-986a-ef3df579135a-20446717
Allow-Events: presence
P-Asserted-Identity: <sip:1003@10.10.199.250>
```

CISCO CONFIDENTIAL

```
Supported: replaces
Remote-Party-ID: <sip:1003@10.10.199.250>;party=called;screen=yes;privacy=off
Content-Length: 347
Require:  timer
To: <sip:1003@10.10.199.250>;tag=95ef4362-75f9-4faf-ae01-3fcd294149a0-20447336
Contact: <sip:2001@10.10.199.250:5060;transport=tcp>
Content-Type: application/sdp
Call-ID: f8e4e000-88e11329-4b-fbc712ac@10.10.199.251
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bK617a8a3cd0
CSeq: 107 INVITE
Session-Expires:  1800;refresher=uas

v=0
o=CiscoSystemsCCM-SIP 2000 7 IN IP4 10.10.199.250
s=SIP Call
c=IN IP4 10.10.199.66
t=0 0
m=audio 4000 RTP/AVP 9 0 8 18 101
a=rtpmap:9 G722/8000
a=ptime:20
a=rtpmap:0 PCMU/8000
a=ptime:20
a=rtpmap:8 PCMA/8000
a=ptime:20
a=rtpmap:18 G729/8000
a=ptime:20
a=fmtp:0
a=sendonly
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
```

[diagram] Call-ID:[prev][next]

[68] ACK sip:2001@10.10.199.250:5060;transport=tcp SIP/2.0

```
Date: Mon, 28 Jul 2008 18:43:05 GMT
From: <sip:2001@10.10.199.251>;tag=e7a2b54c-403c-42f2-986a-ef3df579135a-20446717
Allow-Events: presence
Content-Length: 228
To: <sip:1003@10.10.199.250>;tag=95ef4362-75f9-4faf-ae01-3fcd294149a0-20447336
Content-Type: application/sdp
Call-ID: f8e4e000-88e11329-4b-fbc712ac@10.10.199.251
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bK6358b0ac9f
CSeq: 107 ACK
Max-Forwards: 70

v=0
o=CiscoSystemsCCM-SIP 2000 7 IN IP4 10.10.199.251
s=SIP Call
c=IN IP4 10.10.199.171
t=0 0
m=audio 26882 RTP/AVP 9 101
a=rtpmap:9 G722/8000
a=ptime:20
a=recvonly
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
```

[diagram] Call-ID:[prev][next]

[69] INVITE sip:2001@10.10.199.251:5060;transport=tcp SIP/2.0

```
Date: Mon, 28 Jul 2008 18:41:17 GMT
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:1003@10.10.199.250>;tag=95ef4362-75f9-4faf-ae01-3fcd294149a0-20447336
Allow-Events: presence
P-Asserted-Identity: <sip:1003@10.10.199.250>
Supported: 100rel,timer,resource-priority,replaces
Min-SE:  1800
Cisco-Guid: 3095749120-2296451773-78-4207350444
Remote-Party-ID: <sip:1003@10.10.199.250>;party=calling;screen=yes;privacy=off
Content-Length: 215
User-Agent: Cisco-CUCM7.1
To: <sip:2001@10.10.199.251>;tag=e7a2b54c-403c-42f2-986a-ef3df579135a-20446717
Contact: <sip:1003@10.10.199.250:5060;transport=tcp>
Expires: 180
Content-Type: application/sdp
Call-ID: f8e4e000-88e11329-4b-fbc712ac@10.10.199.251
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK564f453dc9
CSeq: 103 INVITE
Session-Expires:  1800;refresher=uac
Max-Forwards: 70

v=0
```

CISCO CONFIDENTIAL

```
o=CiscoSystemsCCM-SIP 2000 8 IN IP4 10.10.199.250
s=SIP Call
c=IN IP4 10.10.199.66
t=0 0
m=audio 19746 RTP/AVP 9 101
a=rtpmap:9 G722/8000
a=ptime:20
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
```

[diagram] Call-ID:[prev][next]

[70] SIP/2.0 100 Trying

```
Date: Mon, 28 Jul 2008 18:43:05 GMT
From: <sip:1003@10.10.199.250>;tag=95ef4362-75f9-4faf-ae01-3fcd294149a0-20447336
Allow-Events: presence
Content-Length: 0
To: <sip:2001@10.10.199.251>;tag=e7a2b54c-403c-42f2-986a-ef3df579135a-20446717
Call-ID: f8e4e000-88e11329-4b-fbc712ac@10.10.199.251
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK564f453dc9
CSeq: 103 INVITE
```

[diagram] Call-ID:[prev][next]

[71] SIP/2.0 200 OK

```
Date: Mon, 28 Jul 2008 18:43:05 GMT
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:1003@10.10.199.250>;tag=95ef4362-75f9-4faf-ae01-3fcd294149a0-20447336
Allow-Events: presence
P-Asserted-Identity: <sip:2001@10.10.199.251>
Supported: replaces
Remote-Party-ID: <sip:2001@10.10.199.251>;party=called;screen=yes;privacy=off
Content-Length: 216
Require:  timer
To: <sip:2001@10.10.199.251>;tag=e7a2b54c-403c-42f2-986a-ef3df579135a-20446717
Contact: <sip:2001@10.10.199.251:5060;transport=tcp>
Content-Type: application/sdp
Call-ID: f8e4e000-88e11329-4b-fbc712ac@10.10.199.251
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK564f453dc9
CSeq: 103 INVITE
Session-Expires:  1800;refresher=uac

v=0
o=CiscoSystemsCCM-SIP 2000 8 IN IP4 10.10.199.251
s=SIP Call
c=IN IP4 10.10.199.171
t=0 0
m=audio 26882 RTP/AVP 9 101
a=rtpmap:9 G722/8000
a=ptime:20
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
```

[diagram] Call-ID:[prev][next]

[72] ACK sip:2001@10.10.199.251:5060;transport=tcp SIP/2.0

```
Date: Mon, 28 Jul 2008 18:41:17 GMT
From: <sip:1003@10.10.199.250>;tag=95ef4362-75f9-4faf-ae01-3fcd294149a0-20447336
Allow-Events: presence
Content-Length: 0
To: <sip:2001@10.10.199.251>;tag=e7a2b54c-403c-42f2-986a-ef3df579135a-20446717
Call-ID: f8e4e000-88e11329-4b-fbc712ac@10.10.199.251
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK577271c427
CSeq: 103 ACK
Max-Forwards: 70
```

[diagram] Call-ID:[prev][next]

[73] BYE sip:1003@10.10.199.250:5060;transport=tcp SIP/2.0

```
Date: Mon, 28 Jul 2008 18:43:05 GMT
From: <sip:2001@10.10.199.251>;tag=e7a2b54c-403c-42f2-986a-ef3df579135a-20446717
P-Asserted-Identity: <sip:2001@10.10.199.251>
Content-Length: 0
User-Agent: Cisco-CUCM7.1
To: <sip:1003@10.10.199.250>;tag=95ef4362-75f9-4faf-ae01-3fcd294149a0-20447336
Call-ID: f8e4e000-88e11329-4b-fbc712ac@10.10.199.251
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bK665dedecdc
CSeq: 108 BYE
Max-Forwards: 70
```

[diagram] Call-ID:[prev][next]

[74] SIP/2.0 200 OK

```
Date: Mon, 28 Jul 2008 18:41:22 GMT
From: <sip:2001@10.10.199.251>;tag=e7a2b54c-403c-42f2-986a-ef3df579135a-20446717
```

CISCO CONFIDENTIAL

```
Content-Length: 0
To: <sip:1003@10.10.199.250>;tag=95ef4362-75f9-4faf-ae01-3fcd294149a0-20447336
Call-ID: f8e4e000-88e11329-4b-fbc712ac@10.10.199.251
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bK665dedecdc
CSeq: 108 BYE
```

CISCO CONFIDENTIAL

2. DTMF

2.1 Call between Cisco Unified CM SCCP Phone and SIP Gateway using OOB Notify

Title: Call between Cisco Unified CM SCCP Phone and SIP Gateway using OOB Notify

Description:

The following call flow illustrates the SIP messaging that takes place between a SCCP phone hosted by a Cisco Unified CM and a SIP Gateway via a SIP trunk. The SIP trunk DTMF Signaling Method is configured for NoPreference and the SIP GW dtmf-relay for the associated dial peer is configured for sip-notify.

Use of OOB Notify messages to pass DTMF digits is negotiated using the Call-Info header.

Configuration:

Node = Unified CM1, IP = 10.10.199.250
Node = Gateway, IP = 10.10.199.93

Phone = A, Line = 1003, IP = 10.10.199.66, Model = SCCP
Phone = B, Line = 3601, Model = FXPS

SIP Trunk between Unified CM1 & Gateway has
a) route pattern 3.XXXX
b) DTMF Signaling "No preference"
"dtmf-relay" on the SIP Gateway is configured to "sip-notify"

Scenario:

Phone A DN 1003 calls Phone B DN 3601 over the SIP Trunk by dialing 33601
Phone B DN 3601 Answers
Phone A DN 1003 goes onHook

End of Scenario

CISCO CONFIDENTIAL

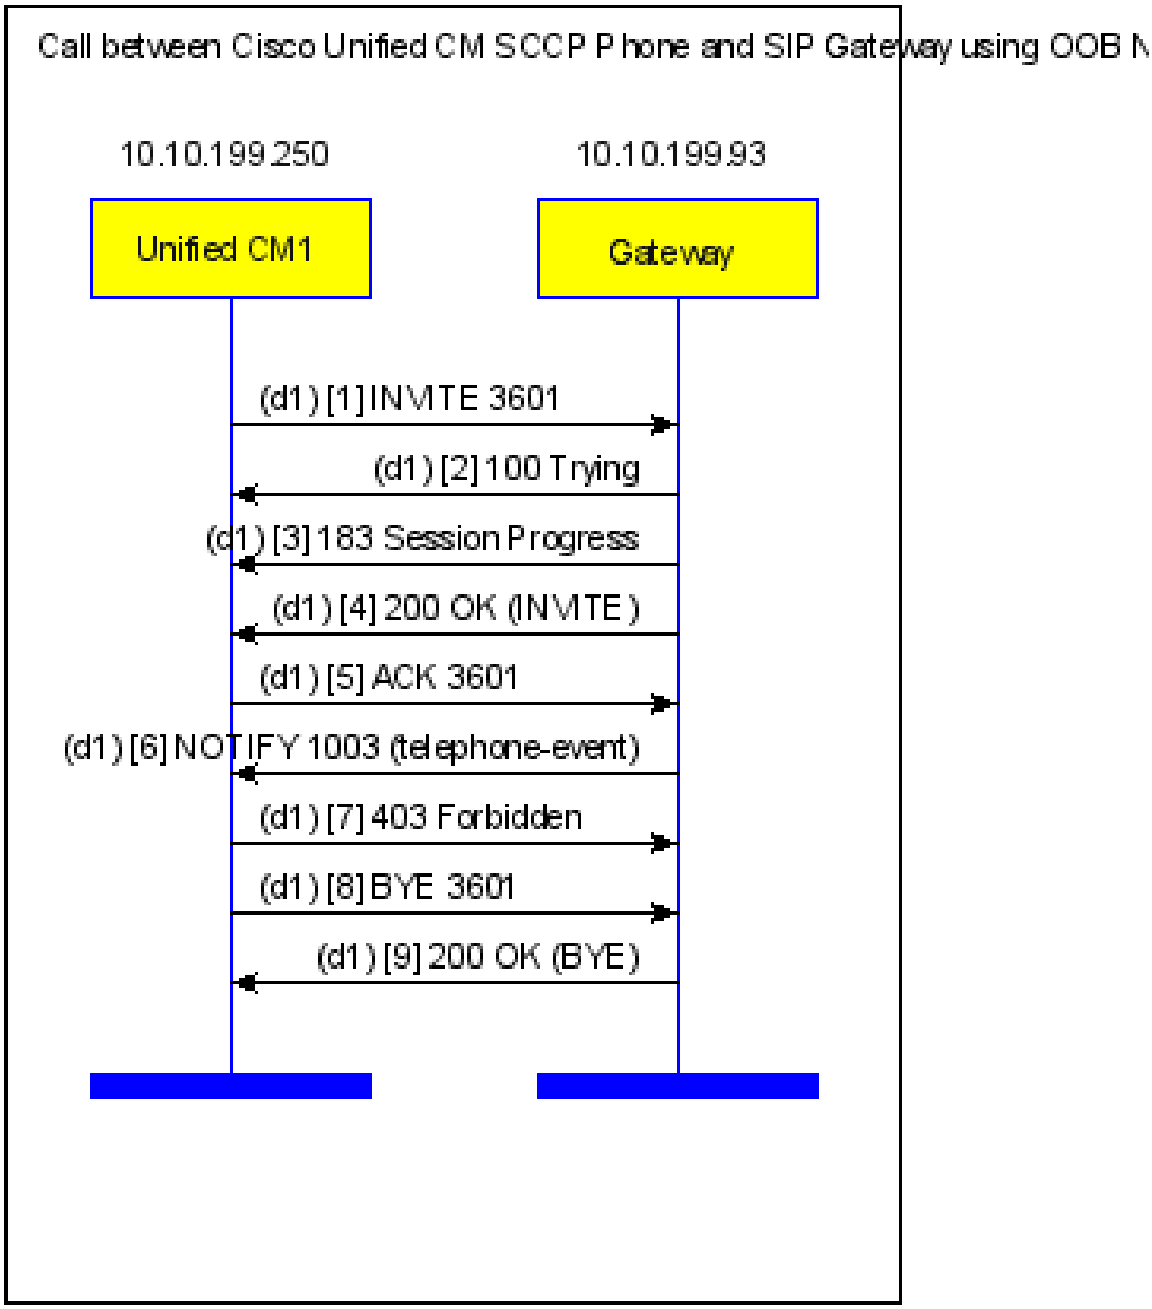

CISCO CONFIDENTIAL

```
[diagram]   Call-ID:[prev][next]
[1] INVITE sip:3601@10.10.199.93:5060 SIP/2.0
Date: Thu, 04 Jun 2009 14:41:57 GMT
Call-Info: <sip:10.10.199.250:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:1003@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763502
Allow-Events: presence, kpml
P-Asserted-Identity: <sip:1003@10.10.199.250>
Supported: timer,resource-priority,replaces
Supported: Geolocation
Min-SE:  1800
Remote-Party-ID: <sip:1003@10.10.199.250>;party=calling;screen=yes;privacy=off
Content-Length: 0
User-Agent: Cisco-CUCM7.1
To: <sip:3601@10.10.199.93>
Contact: <sip:1003@10.10.199.250:5060;transport=tcp>
Expires: 180
Call-ID: d94cee00-a271dd35-14-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK4c220b01
CSeq: 101 INVITE
Session-Expires:  1800
Max-Forwards: 70

[diagram]   Call-ID:[prev][next]
[2] SIP/2.0 100 Trying
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK4c220b01
From: <sip:1003@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763502
To: <sip:3601@10.10.199.93>;tag=8E9BF84-1C1D
Date: Thu, 04 Jun 2009 14:42:40 GMT
Call-ID: d94cee00-a271dd35-14-fac712ac@10.10.199.250
Server: Cisco-SIPGateway/IOS-12.x
CSeq: 101 INVITE
Allow-Events: telephone-event
Content-Length: 0

[diagram]   Call-ID:[prev][next]
[3] SIP/2.0 183 Session Progress
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK4c220b01
From: <sip:1003@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763502
To: <sip:3601@10.10.199.93>;tag=8E9BF84-1C1D
Date: Thu, 04 Jun 2009 14:42:40 GMT
Call-ID: d94cee00-a271dd35-14-fac712ac@10.10.199.250
Server: Cisco-SIPGateway/IOS-12.x
CSeq: 101 INVITE
Allow: INVITE, OPTIONS, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY, INFO, REGISTER
Allow-Events: telephone-event
Contact: <sip:3601@10.10.199.93:5060;transport=tcp>
Call-Info: <sip:10.10.199.93:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Content-Type: application/sdp
Content-Disposition: session;handling=required
Content-Length: 277

v=0
o=CiscoSystemsSIP-GW-UserAgent 7741 1946 IN IP4 10.10.199.93
s=SIP Call
c=IN IP4 10.10.199.93
t=0 0
m=audio 18102 RTP/AVP 0 8 18 19
c=IN IP4 10.10.199.93
a=rtpmap:0 PCMU/8000
a=rtpmap:8 PCMA/8000
a=rtpmap:18 G729/8000
a=fmtp:18 annexb=no
a=rtpmap:19 CN/8000

[diagram]   Call-ID:[prev][next]
[4] SIP/2.0 200 OK
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK4c220b01
From: <sip:1003@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763502
To: <sip:3601@10.10.199.93>;tag=8E9BF84-1C1D
Date: Thu, 04 Jun 2009 14:42:40 GMT
Call-ID: d94cee00-a271dd35-14-fac712ac@10.10.199.250
Server: Cisco-SIPGateway/IOS-12.x
CSeq: 101 INVITE
Allow: INVITE, OPTIONS, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY, INFO, REGISTER
Allow-Events: telephone-event
Contact: <sip:3601@10.10.199.93:5060;transport=tcp>
Call-Info: <sip:10.10.199.93:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Session-Expires:  1800;refresher=uac
Require: timer
```

CISCO CONFIDENTIAL

```
Content-Type: application/sdp
Content-Disposition: session;handling=required
Content-Length: 277

v=0
o=CiscoSystemsSIP-GW-UserAgent 7741 1946 IN IP4 10.10.199.93
s=SIP Call
c=IN IP4 10.10.199.93
t=0 0
m=audio 18102 RTP/AVP 0 8 18 19
c=IN IP4 10.10.199.93
a=rtpmap:0 PCMU/8000
a=rtpmap:8 PCMA/8000
a=rtpmap:18 G729/8000
a=fmtp:18 annexb=no
a=rtpmap:19 CN/8000
```

[diagram] Call-ID:[prev][next]

[5] ACK sip:3601@10.10.199.93:5060;transport=tcp SIP/2.0

```
Date: Thu, 04 Jun 2009 14:41:57 GMT
From: <sip:1003@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763502
Allow-Events: presence, kpml
Content-Length: 159
To: <sip:3601@10.10.199.93>;tag=8E9BF84-1C1D
Content-Type: application/sdp
Call-ID: d94cee00-a271dd35-14-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK4d146b1e59
CSeq: 101 ACK
Max-Forwards: 70

v=0
o=CiscoSystemsCCM-SIP 2000 1 IN IP4 10.10.199.250
s=SIP Call
c=IN IP4 10.10.199.66
t=0 0
m=audio 31728 RTP/AVP 0
a=rtpmap:0 PCMU/8000
a=ptime:20
```

[diagram] Call-ID:[prev][next]

[6] NOTIFY sip:1003@10.10.199.250:5060;transport=tcp SIP/2.0

```
Via: SIP/2.0/TCP 10.10.199.93;branch=z9hG4bK31EA4
From: <sip:3601@10.10.199.93>;tag=8E9BF84-1C1D
To: <sip:1003@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763502
Call-ID: d94cee00-a271dd35-14-fac712ac@10.10.199.250
CSeq: 101 NOTIFY
Max-Forwards: 70
Date: Thu, 04 Jun 2009 14:42:49 GMT
User-Agent: Cisco-SIPGateway/IOS-12.x
Event: telephone-event
Subscription-State: active
Contact: <sip:10.10.199.93:5060;transport=tcp>
Content-Type: audio/telephone-event
Content-Length: 4

{binary content not shown}
```

[diagram] Call-ID:[prev][next]

[7] SIP/2.0 403 Forbidden

```
Date: Thu, 04 Jun 2009 14:42:07 GMT
From: <sip:3601@10.10.199.93>;tag=8E9BF84-1C1D
Content-Length: 0
To: <sip:1003@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763502
Call-ID: d94cee00-a271dd35-14-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.93;branch=z9hG4bK31EA4
CSeq: 101 NOTIFY
```

[diagram] Call-ID:[prev][next]

[8] BYE sip:3601@10.10.199.93:5060;transport=tcp SIP/2.0

```
Date: Thu, 04 Jun 2009 14:41:57 GMT
From: <sip:1003@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763502
P-Asserted-Identity: <sip:1003@10.10.199.250>
Content-Length: 0
User-Agent: Cisco-CUCM7.1
To: <sip:3601@10.10.199.93>;tag=8E9BF84-1C1D
Call-ID: d94cee00-a271dd35-14-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK4e60e21500
CSeq: 102 BYE
Max-Forwards: 70
```

CISCO CONFIDENTIAL

```
[diagram]   Call-ID:[prev][next]
[9] SIP/2.0 200 OK
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK4e60e21500
From: <sip:1003@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763502
To: <sip:3601@10.10.199.93>;tag=8E9BF84-1C1D
Date: Thu, 04 Jun 2009 14:43:01 GMT
Call-ID: d94cee00-a271dd35-14-fac712ac@10.10.199.250
Server: Cisco-SIPGateway/IOS-12.x
CSeq: 102 BYE
Reason: Q.850;cause=16
Content-Length: 0
```

CISCO CONFIDENTIAL

2.2 Call between Cisco Unified CM SCCP Phone and SIP Gateway using KPML

Title: Call between Cisco Unified CM SCCP Phone and SIP Gateway using KPML

Description:

The following call flow illustrates the SIP messaging that takes place between a SCCP phone hosted by a Cisco Unified CM and a SIP Gateway via a SIP trunk. The SIP trunk DTMF Signaling Method is configured for NoPreference and the SIP GW dtmf-relay for the associated dial peer is configured for sip-kpml.

Traces to note are the bi-directional subscriptions for DTMF notification between the Cisco Unified CM and the Gateway and the NOTIFY methods exchanged when the digit 1 is pressed from the called and calling party phones. Note that once the call is released the Cisco Unified CM and the SIP GW will terminate both local and remote KPML subscriptions. Therefore, it is normal to see the Cisco Unified CM either send or receive a 489 Bad Event. This signifies that the subscription has already been removed.

Configuration:

Node = Unified CM1, IP = 10.10.199.250
Node = Gateway, IP = 10.10.199.93

Phone = A, Line = 1003, IP = 10.10.199.66, Model = SCCP
Phone = B, Line = 3601, Model = FXPS

SIP Trunk between Unified CM1 & Gateway has
a) route pattern 3.XXXX
b) DTMF Signaling "No preference"
"dtmf-relay" on the SIP Gateway is configured to "sip-kpml"

Scenario:

Phone A DN 1003 calls Phone B DN 3601 over the SIP Trunk by dialing 33601
Phone B DN 3601 Answers
Phone A DN 1003 goes onHook

End of Scenario

CISCO CONFIDENTIAL

CISCO CONFIDENTIAL

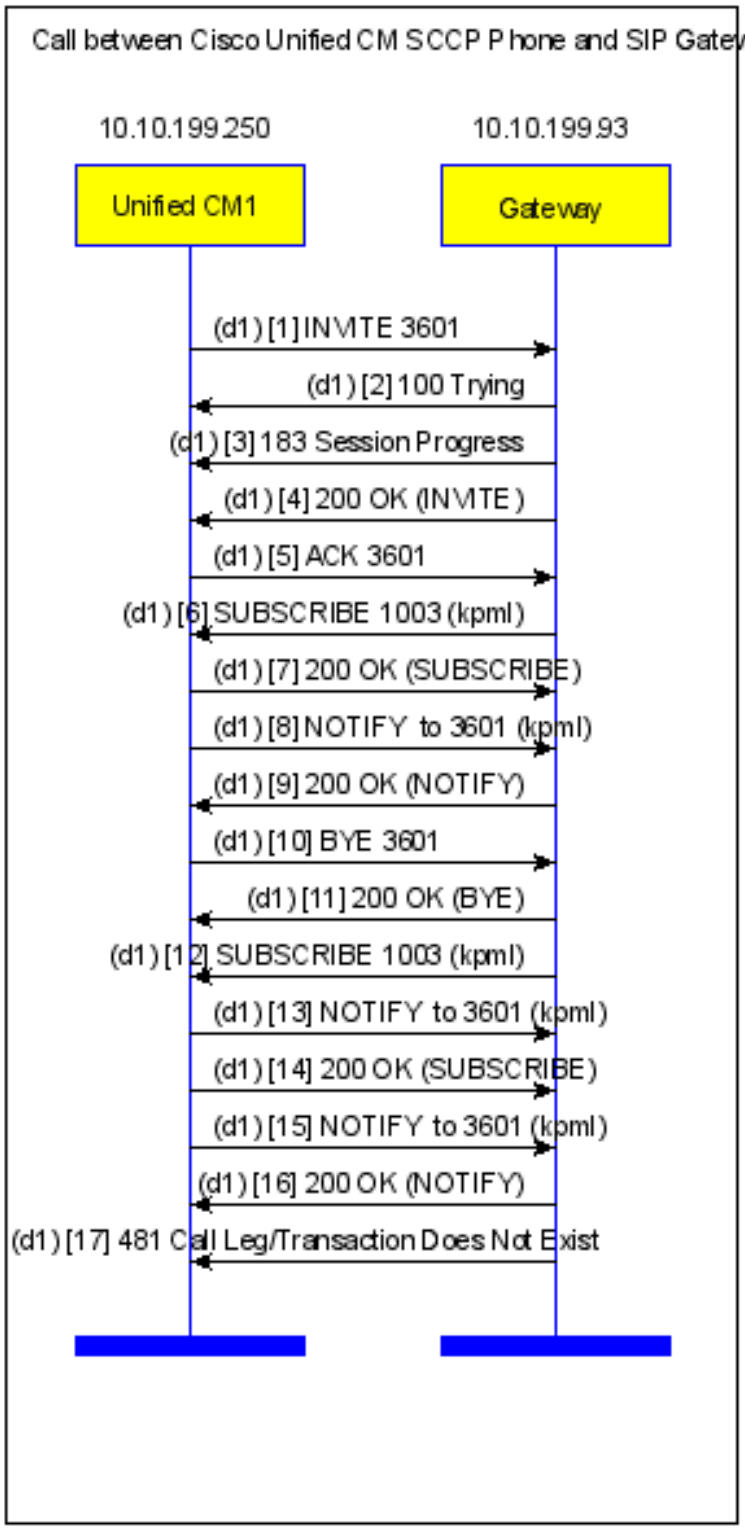

CISCO CONFIDENTIAL

[diagram] Call-ID:[prev][next]
[1] INVITE sip:3601@10.10.199.93:5060 SIP/2.0
Date: Thu, 04 Jun 2009 14:45:32 GMT
Call-Info: <sip:10.10.199.250:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:1003@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763504
Allow-Events: presence, kpml
P-Asserted-Identity: <sip:1003@10.10.199.250>
Supported: timer,resource-priority,replaces
Supported: Geolocation
Min-SE: 1800
Remote-Party-ID: <sip:1003@10.10.199.250>;party=calling;screen=yes;privacy=off
Content-Length: 0
User-Agent: Cisco-CUCM7.1
To: <sip:3601@10.10.199.93>
Contact: <sip:1003@10.10.199.250:5060;transport=tcp>
Expires: 180
Call-ID: 59735380-a271de0c-15-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK4f698f989c
CSeq: 101 INVITE
Session-Expires: 1800
Max-Forwards: 70

[diagram] Call-ID:[prev][next]
[2] SIP/2.0 100 Trying
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK4f698f989c
From: <sip:1003@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763504
To: <sip:3601@10.10.199.93>;tag=8ED0734-26B1
Date: Thu, 04 Jun 2009 14:46:15 GMT
Call-ID: 59735380-a271de0c-15-fac712ac@10.10.199.250
Server: Cisco-SIPGateway/IOS-12.x
CSeq: 101 INVITE
Allow-Events: kpml, telephone-event
Content-Length: 0

[diagram] Call-ID:[prev][next]
[3] SIP/2.0 183 Session Progress
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK4f698f989c
From: <sip:1003@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763504
To: <sip:3601@10.10.199.93>;tag=8ED0734-26B1
Date: Thu, 04 Jun 2009 14:46:15 GMT
Call-ID: 59735380-a271de0c-15-fac712ac@10.10.199.250
Server: Cisco-SIPGateway/IOS-12.x
CSeq: 101 INVITE
Allow: INVITE, OPTIONS, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY, INFO, REGISTER
Allow-Events: kpml, telephone-event
Contact: <sip:3601@10.10.199.93:5060;transport=tcp>
Content-Type: application/sdp
Content-Disposition: session;handling=required
Content-Length: 277

v=0
o=CiscoSystemsSIP-GW-UserAgent 5239 9107 IN IP4 10.10.199.93
s=SIP Call
c=IN IP4 10.10.199.93
t=0 0
m=audio 17948 RTP/AVP 0 8 18 19
c=IN IP4 10.10.199.93
a=rtpmap:0 PCMU/8000
a=rtpmap:8 PCMA/8000
a=rtpmap:18 G729/8000
a=fmtp:18 annexb=no
a=rtpmap:19 CN/8000

[diagram] Call-ID:[prev][next]
[4] SIP/2.0 200 OK
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK4f698f989c
From: <sip:1003@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763504
To: <sip:3601@10.10.199.93>;tag=8ED0734-26B1
Date: Thu, 04 Jun 2009 14:46:15 GMT
Call-ID: 59735380-a271de0c-15-fac712ac@10.10.199.250
Server: Cisco-SIPGateway/IOS-12.x
CSeq: 101 INVITE
Allow: INVITE, OPTIONS, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY, INFO, REGISTER
Allow-Events: kpml, telephone-event
Contact: <sip:3601@10.10.199.93:5060;transport=tcp>
Session-Expires: 1800;refresher=uac
Require: timer
Content-Type: application/sdp
Content-Disposition: session;handling=required

CISCO CONFIDENTIAL

```
Content-Length: 277

v=0
o=CiscoSystemsSIP-GW-UserAgent 5239 9107 IN IP4 10.10.199.93
s=SIP Call
c=IN IP4 10.10.199.93
t=0 0
m=audio 17948 RTP/AVP 0 8 18 19
c=IN IP4 10.10.199.93
a=rtpmap:0 PCMU/8000
a=rtpmap:8 PCMA/8000
a=rtpmap:18 G729/8000
a=fmtp:18 annexb=no
a=rtpmap:19 CN/8000
```

[diagram] Call-ID:[prev][next]

[5] ACK sip:3601@10.10.199.93:5060;transport=tcp SIP/2.0

```
Date: Thu, 04 Jun 2009 14:45:32 GMT
From: <sip:1003@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763504
Allow-Events: presence, kpml
Content-Length: 159
To: <sip:3601@10.10.199.93>;tag=8ED0734-26B1
Content-Type: application/sdp
Call-ID: 59735380-a271de0c-15-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK5019ed0953
CSeq: 101 ACK
Max-Forwards: 70

v=0
o=CiscoSystemsCCM-SIP 2000 1 IN IP4 10.10.199.250
s=SIP Call
c=IN IP4 10.10.199.66
t=0 0
m=audio 20150 RTP/AVP 0
a=rtpmap:0 PCMU/8000
a=ptime:20
```

[diagram] Call-ID:[prev][next]

[6] SUBSCRIBE sip:1003@10.10.199.250:5060;transport=tcp SIP/2.0

```
Via: SIP/2.0/TCP 10.10.199.93;branch=z9hG4bK4B54
From: <sip:3601@10.10.199.93>;tag=8ED0734-26B1
To: <sip:1003@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763504
Call-ID: 59735380-a271de0c-15-fac712ac@10.10.199.250
CSeq: 101 SUBSCRIBE
Max-Forwards: 70
Date: Thu, 04 Jun 2009 14:46:19 GMT
User-Agent: Cisco-SIPGateway/IOS-12.x
Event: kpml
Expires: 7200
Contact: <sip:10.10.199.93:5060;transport=tcp>
Content-Type: application/kpml-request+xml
Content-Length: 327

<?xml version="1.0" encoding="UTF-8"?><kpml-request xmlns="urn:ietf:params:xml:ns:kpml-request"
xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance" xsi:schemaLocation="urn:ietf:params:xml:ns:kpml-
request kpml-request.xsd" version="1.0"><pattern persist="persist"><regex
tag="dtmf">[x*#ABCD]</regex></pattern></kpml-request>
```

[diagram] Call-ID:[prev][next]

[7] SIP/2.0 200 OK

```
Date: Thu, 04 Jun 2009 14:45:37 GMT
From: <sip:3601@10.10.199.93>;tag=8ED0734-26B1
Content-Length: 0
To: <sip:1003@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763504
Contact: <sip:1003@10.10.199.250:5060;transport=tcp>
Expires: 7200
Call-ID: 59735380-a271de0c-15-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.93;branch=z9hG4bK4B54
CSeq: 101 SUBSCRIBE
```

[diagram] Call-ID:[prev][next]

[8] NOTIFY sip:10.10.199.93:5060;transport=tcp SIP/2.0

```
Date: Thu, 04 Jun 2009 14:45:37 GMT
From: <sip:1003@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763504
P-Asserted-Identity: <sip:1003@10.10.199.250>
Event: kpml
Content-Length: 0
User-Agent: Cisco-CUCM7.1
To: <sip:3601@10.10.199.93>;tag=8ED0734-26B1
Contact: <sip:1003@10.10.199.250:5060;transport=tcp>
```

CISCO CONFIDENTIAL

```
Call-ID: 59735380-a271de0c-15-fac712ac@10.10.199.250
Subscription-State: active;expires=7200
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK515403e5bf
CSeq: 102 NOTIFY
Max-Forwards: 70
```

[diagram] Call-ID:[prev][next]

[9] SIP/2.0 200 OK

```
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK515403e5bf
From: <sip:1003@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763504
To: <sip:3601@10.10.199.93>;tag=8ED0734-26B1
Date: Thu, 04 Jun 2009 14:46:19 GMT
Call-ID: 59735380-a271de0c-15-fac712ac@10.10.199.250
CSeq: 102 NOTIFY
Content-Length: 0
```

[diagram] Call-ID:[prev][next]

[10] BYE sip:3601@10.10.199.93:5060;transport=tcp SIP/2.0

```
Date: Thu, 04 Jun 2009 14:45:32 GMT
From: <sip:1003@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763504
P-Asserted-Identity: <sip:1003@10.10.199.250>
Content-Length: 0
User-Agent: Cisco-CUCM7.1
To: <sip:3601@10.10.199.93>;tag=8ED0734-26B1
Call-ID: 59735380-a271de0c-15-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK52426f36a5
CSeq: 103 BYE
Max-Forwards: 70
```

[diagram] Call-ID:[prev][next]

[11] SIP/2.0 200 OK

```
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK52426f36a5
From: <sip:1003@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763504
To: <sip:3601@10.10.199.93>;tag=8ED0734-26B1
Date: Thu, 04 Jun 2009 14:46:29 GMT
Call-ID: 59735380-a271de0c-15-fac712ac@10.10.199.250
Server: Cisco-SIPGateway/IOS-12.x
CSeq: 103 BYE
Reason: Q.850;cause=16
Content-Length: 0
```

[diagram] Call-ID:[prev][next]

[12] SUBSCRIBE sip:1003@10.10.199.250:5060;transport=tcp SIP/2.0

```
Via: SIP/2.0/TCP 10.10.199.93;branch=z9hG4bK52615
From: <sip:3601@10.10.199.93>;tag=8ED0734-26B1
To: <sip:1003@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763504
Call-ID: 59735380-a271de0c-15-fac712ac@10.10.199.250
CSeq: 102 SUBSCRIBE
Max-Forwards: 70
Date: Thu, 04 Jun 2009 14:46:29 GMT
User-Agent: Cisco-SIPGateway/IOS-12.x
Event: kpml
Expires: 0
Contact: <sip:10.10.199.93:5060;transport=tcp>
Content-Length: 0
```

[diagram] Call-ID:[prev][next]

[13] NOTIFY sip:10.10.199.93:5060;transport=tcp SIP/2.0

```
Date: Thu, 04 Jun 2009 14:45:47 GMT
From: <sip:1003@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763504
P-Asserted-Identity: <sip:1003@10.10.199.250>
Event: kpml
Content-Length: 0
User-Agent: Cisco-CUCM7.1
To: <sip:3601@10.10.199.93>;tag=8ED0734-26B1
Contact: <sip:1003@10.10.199.250:5060;transport=tcp>
Call-ID: 59735380-a271de0c-15-fac712ac@10.10.199.250
Subscription-State: terminated
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK535a579783
CSeq: 104 NOTIFY
Max-Forwards: 70
```

[diagram] Call-ID:[prev][next]

[14] SIP/2.0 200 OK

```
Date: Thu, 04 Jun 2009 14:45:47 GMT
From: <sip:3601@10.10.199.93>;tag=8ED0734-26B1
Content-Length: 0
To: <sip:1003@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763504
Contact: <sip:1003@10.10.199.250:5060;transport=tcp>
Expires: 0
```

CISCO CONFIDENTIAL

```
Call-ID: 59735380-a271de0c-15-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.93;branch=z9hG4bK52615
CSeq: 102 SUBSCRIBE

[diagram]   Call-ID:[prev][next]
[15] NOTIFY sip:10.10.199.93:5060;transport=tcp SIP/2.0
Date: Thu, 04 Jun 2009 14:45:47 GMT
From: <sip:1003@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763504
P-Asserted-Identity: <sip:1003@10.10.199.250>
Event: kpml
Content-Length: 348
User-Agent: Cisco-CUCM7.1
To: <sip:3601@10.10.199.93>;tag=8ED0734-26B1
Contact: <sip:1003@10.10.199.250:5060;transport=tcp>
Content-Type: application/kpml-response+xml
Call-ID: 59735380-a271de0c-15-fac712ac@10.10.199.250
Subscription-State: terminated;reason=timeout
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK546961d78b
CSeq: 105 NOTIFY
Max-Forwards: 70

<?xml version="1.0" encoding="UTF-8" ?>
<kpml-response xmlns="urn:ietf:params:xml:ns:kpml-response" xmlns:xsi="http://www.w3.org/2001/XMLSchema-
instance" xsi:schemaLocation="urn:ietf:params:xml:ns:kpml-response kpml-response.xsd" code="487" digits=""
forced_flush="false" suppressed="false" tag="dtmf" text="Subscription Expired" version="1.0"/>

[diagram]   Call-ID:[prev][next]
[16] SIP/2.0 200 OK
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK535a579783
From: <sip:1003@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763504
To: <sip:3601@10.10.199.93>;tag=8ED0734-26B1
Date: Thu, 04 Jun 2009 14:46:29 GMT
Call-ID: 59735380-a271de0c-15-fac712ac@10.10.199.250
CSeq: 104 NOTIFY
Content-Length: 0

[diagram]   Call-ID:[prev][next]
[17] SIP/2.0 481 Call Leg/Transaction Does Not Exist
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK546961d78b
From: <sip:1003@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763504
To: <sip:3601@10.10.199.93>;tag=8ED0734-26B1
Date: Thu, 04 Jun 2009 14:46:29 GMT
Call-ID: 59735380-a271de0c-15-fac712ac@10.10.199.250
CSeq: 105 NOTIFY
Content-Length: 0
```

CISCO CONFIDENTIAL

2.3 Call between Cisco Unified CM SCCP Phone and SIP Gateway using RFC2833

Title: Call between Cisco Unified CM SCCP Phone and SIP Gateway using RFC2833

Description:

The following call flow illustrates the SIP messaging that takes place between a SCCP phone hosted by a Cisco Unified CM and a SIP Gateway via a SIP trunk. The SIP trunk DTMF Signaling Method is configured for NoPreference and the SIP GW dtmf-relay for the associated dial peer is configured for rtp-nte.

Because both SCCP phone and SIP Gateway support RFC2833 style DTMF signaling no out-of-band DTMF signaling takes place. The DTMF will be strictly negotiated in SDP and signaled via media. In this example DTMF tones are sent in the media stream using a Payload Type of 101 (as shown in the SDP).

Configuration:

Node = Unified CM1, IP = 10.10.199.250
Node = Gateway, IP = 10.10.199.93

Phone = A, Line = 1001, IP = 10.10.199.130, Model = SCCP
Phone = B, Line = 3600, Model = FXPS

SIP Trunk between Unified CM1 & Gateway has
a) route pattern 3.XXXX
b) DTMF Signaling "No preference"
"dtmf-relay" on the SIP Gateway is configured to "rtp-nte"

Scenario:

Phone A DN 1001 calls Phone B DN 3600 over the SIP Trunk by dialing 33600
Phone B DN 3600 Answers
Phone A DN 1001 goes onHook
End of Scenario

CISCO CONFIDENTIAL

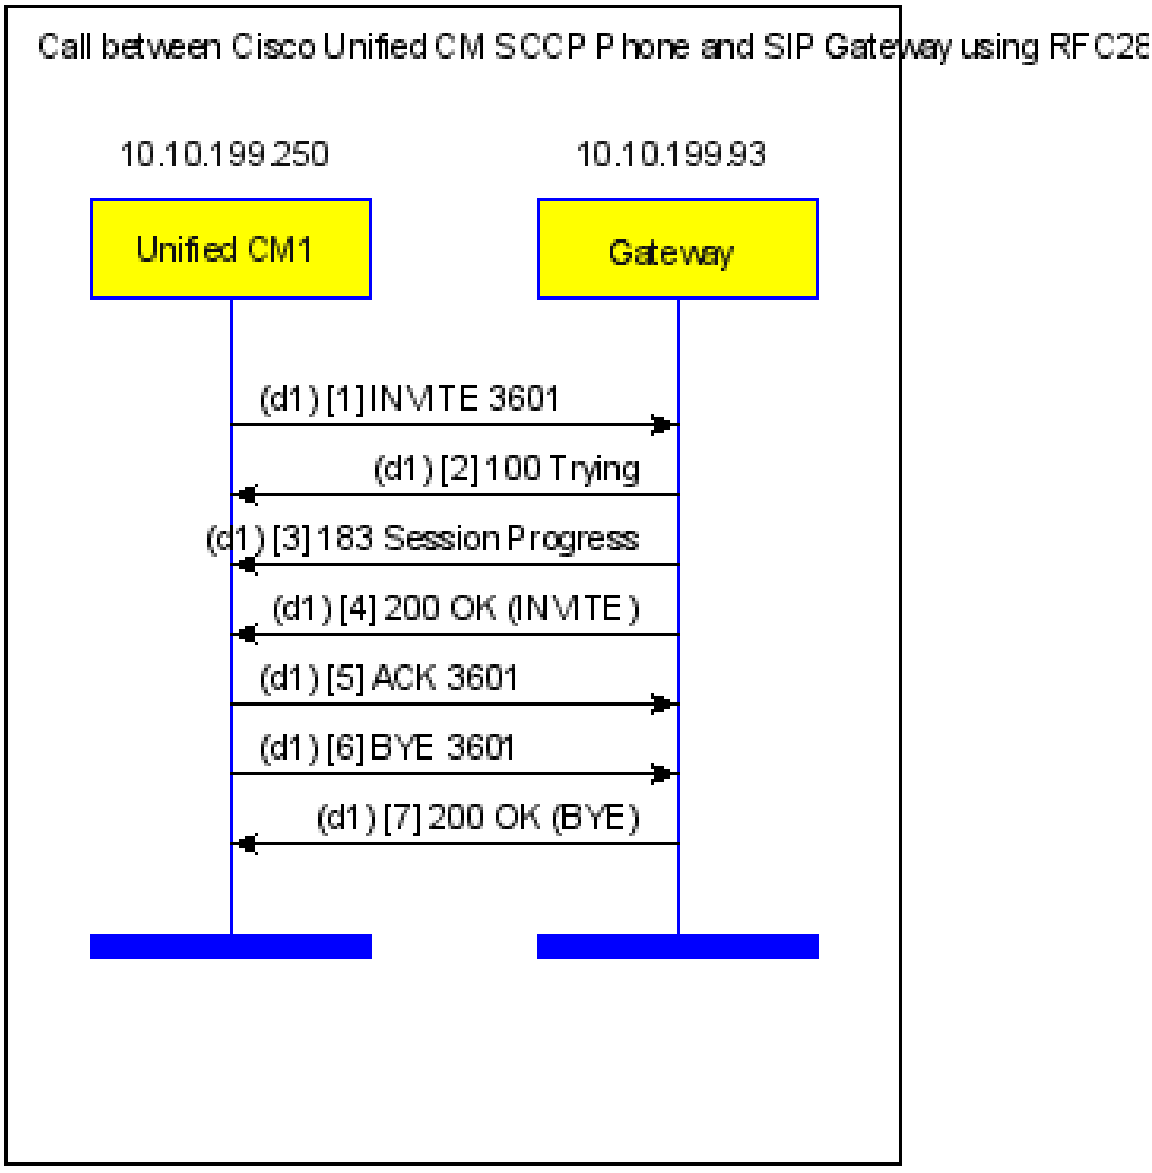

CISCO CONFIDENTIAL

[diagram] Call-ID:[prev][next]
[1] INVITE sip:3601@10.10.199.93:5060 SIP/2.0
Date: Thu, 04 Jun 2009 14:51:56 GMT
Call-Info: <sip:10.10.199.250:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763508
Allow-Events: presence, kpml
P-Asserted-Identity: <sip:1001@10.10.199.250>
Supported: timer,resource-priority,replaces
Supported: Geolocation
Min-SE: 1800
Remote-Party-ID: <sip:1001@10.10.199.250>;party=calling;screen=yes;privacy=off
Content-Length: 0
User-Agent: Cisco-CUCM7.1
To: <sip:3601@10.10.199.93>
Contact: <sip:1001@10.10.199.250:5060;transport=tcp>
Expires: 180
Call-ID: 3e551380-a271df8c-17-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK58705ecbc5
CSeq: 101 INVITE
Session-Expires: 1800
Max-Forwards: 70

[diagram] Call-ID:[prev][next]
[2] SIP/2.0 100 Trying
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK58705ecbc5
From: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763508
To: <sip:3601@10.10.199.93>;tag=8F2E3D4-2201
Date: Thu, 04 Jun 2009 14:52:39 GMT
Call-ID: 3e551380-a271df8c-17-fac712ac@10.10.199.250
Server: Cisco-SIPGateway/IOS-12.x
CSeq: 101 INVITE
Allow-Events: telephone-event
Content-Length: 0

[diagram] Call-ID:[prev][next]
[3] SIP/2.0 183 Session Progress
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK58705ecbc5
From: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763508
To: <sip:3601@10.10.199.93>;tag=8F2E3D4-2201
Date: Thu, 04 Jun 2009 14:52:39 GMT
Call-ID: 3e551380-a271df8c-17-fac712ac@10.10.199.250
Server: Cisco-SIPGateway/IOS-12.x
CSeq: 101 INVITE
Allow: INVITE, OPTIONS, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY, INFO, REGISTER
Allow-Events: telephone-event
Contact: <sip:3601@10.10.199.93:5060;transport=tcp>
Content-Type: application/sdp
Content-Disposition: session;handling=required
Content-Length: 333

v=0
o=CiscoSystemsSIP-GW-UserAgent 5126 7620 IN IP4 10.10.199.93
s=SIP Call
c=IN IP4 10.10.199.93
t=0 0
m=audio 17002 RTP/AVP 0 8 18 101 19
c=IN IP4 10.10.199.93
a=rtpmap:0 PCMU/8000
a=rtpmap:8 PCMA/8000
a=rtpmap:18 G729/8000
a=fmtp:18 annexb=no
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-16
a=rtpmap:19 CN/8000

[diagram] Call-ID:[prev][next]
[4] SIP/2.0 200 OK
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK58705ecbc5
From: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763508
To: <sip:3601@10.10.199.93>;tag=8F2E3D4-2201
Date: Thu, 04 Jun 2009 14:52:39 GMT
Call-ID: 3e551380-a271df8c-17-fac712ac@10.10.199.250
Server: Cisco-SIPGateway/IOS-12.x
CSeq: 101 INVITE
Allow: INVITE, OPTIONS, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY, INFO, REGISTER
Allow-Events: telephone-event
Contact: <sip:3601@10.10.199.93:5060;transport=tcp>
Session-Expires: 1800;refresher=uac
Require: timer

CISCO CONFIDENTIAL

```
Content-Type: application/sdp
Content-Disposition: session;handling=required
Content-Length: 333

v=0
o=CiscoSystemsSIP-GW-UserAgent 5126 7620 IN IP4 10.10.199.93
s=SIP Call
c=IN IP4 10.10.199.93
t=0 0
m=audio 17002 RTP/AVP 0 8 18 101 19
c=IN IP4 10.10.199.93
a=rtpmap:0 PCMU/8000
a=rtpmap:8 PCMA/8000
a=rtpmap:18 G729/8000
a=fmtp:18 annexb=no
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-16
a=rtpmap:19 CN/8000
```

[diagram] Call-ID:[prev][next]

[5] ACK sip:3601@10.10.199.93:5060;transport=tcp SIP/2.0

```
Date: Thu, 04 Jun 2009 14:51:56 GMT
From: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763508
Allow-Events: presence, kpml
Content-Length: 216
To: <sip:3601@10.10.199.93>;tag=8F2E3D4-2201
Content-Type: application/sdp
Call-ID: 3e551380-a271df8c-17-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK592e81b347
CSeq: 101 ACK
Max-Forwards: 70

v=0
o=CiscoSystemsCCM-SIP 2000 1 IN IP4 10.10.199.250
s=SIP Call
c=IN IP4 10.10.199.130
t=0 0
m=audio 25256 RTP/AVP 0 101
a=rtpmap:0 PCMU/8000
a=ptime:20
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
```

[diagram] Call-ID:[prev][next]

[6] BYE sip:3601@10.10.199.93:5060;transport=tcp SIP/2.0

```
Date: Thu, 04 Jun 2009 14:51:56 GMT
From: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763508
P-Asserted-Identity: <sip:1001@10.10.199.250>
Content-Length: 0
User-Agent: Cisco-CUCM7.1
To: <sip:3601@10.10.199.93>;tag=8F2E3D4-2201
Call-ID: 3e551380-a271df8c-17-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK5a75ba1957
CSeq: 102 BYE
Max-Forwards: 70
```

[diagram] Call-ID:[prev][next]

[7] SIP/2.0 200 OK

```
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK5a75ba1957
From: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763508
To: <sip:3601@10.10.199.93>;tag=8F2E3D4-2201
Date: Thu, 04 Jun 2009 14:52:55 GMT
Call-ID: 3e551380-a271df8c-17-fac712ac@10.10.199.250
Server: Cisco-SIPGateway/IOS-12.x
CSeq: 102 BYE
Reason: Q.850;cause=16
Content-Length: 0
```

CISCO CONFIDENTIAL

3. Presence

3.1 Outgoing Presence Subscription

Title: Outgoing Presence Subscription

Description:

The scenario showing the outgoing BLF subscription for Presence from SCCP phone (1001) on "Cisco Unified CM1" through SIP Trunk t "Cisco Unified CM2" for remote party (DN 2002).

1) The "Cisco Unified CM2" sends the 200 OK for Subscriber, then it sends a NOTIFY with Subscription-State: active;expires=3600 and PIDF XML with status 'open'.
2) When the remote party (DN 2002) is offhook then "Cisco Unified CM2" sends a NOTIFY with PIDF XML containing status <e:activities>on-the-phone</e:activities>.
3) When the remote party (DN 2002) is onhook, then "Cisco Unified CM" sends a NOTIFY with PIDF XML containing status 'open'.

Configuration:

Node = Unified CM1, IP = 10.10.199.250
Node = Unified CM2, IP = 10.10.199.251

Phone = A, Line = 1003, IP = 10.10.199.66, Model = SCCP
Phone = B, Line = 2002, IP = 10.10.199.179, Model = SCCP

SIP Trunk between Unified CM1 & Unified CM2 has route pattern 2.XXXX

Scenario:

Phone A DN 1001 configures the BLF-SD set to 22002
Phone A DN 1001 sends Subscription for Phone B DN 2002 events.
Phone B DN 2002 goes offHook
Phone A receives Notification that Phone B DN 2002 is offHook
Phone B DN 1002 goes onHook
Phone A receives Notification that Phone B DN 2002 is onHook

End of Scenario

CISCO CONFIDENTIAL

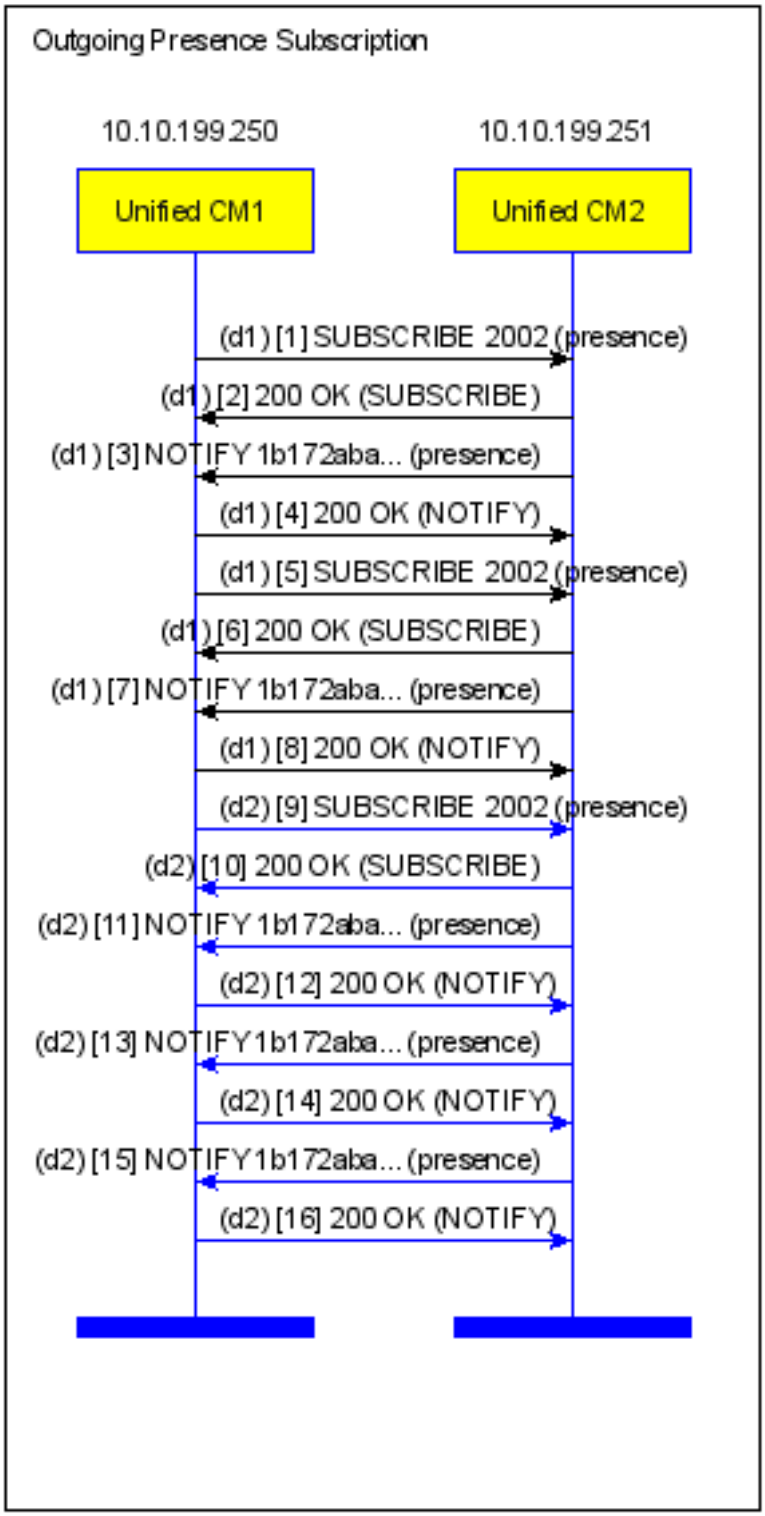

CISCO CONFIDENTIAL

[diagram] Call-ID:[prev][next]
[1] SUBSCRIBE sip:2002@10.10.199.251:5060 SIP/2.0
Date: Mon, 28 Jul 2008 22:07:44 GMT
From: <sip:1b172aba-b79b-0cde-437f-9be286673483@10.10.199.250>;tag=1590417290
Event: presence
Content-Length: 0
User-Agent: Cisco-CUCM7.1
To: <sip:2002@10.10.199.251>
Contact: <sip:1b172aba-b79b-0cde-437f-9be286673483@10.10.199.250:5060;transport=tcp>
Expires: 43200
Call-ID: 9948fd80-88e14330-54-fac712ac@10.10.199.250
Accept: application/pidf+xml
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK3394f8dd7
CSeq: 101 SUBSCRIBE
Max-Forwards: 69

[diagram] Call-ID:[prev][next]
[2] SIP/2.0 200 OK
Date: Mon, 28 Jul 2008 22:09:33 GMT
From: <sip:1b172aba-b79b-0cde-437f-9be286673483@10.10.199.250>;tag=1590417290
Content-Length: 0
To: <sip:2002@10.10.199.251>;tag=1564885346
Contact: <sip:2002@10.10.199.251:5060;transport=tcp>
Expires: 43200
Call-ID: 9948fd80-88e14330-54-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK3394f8dd7
CSeq: 101 SUBSCRIBE

[diagram] Call-ID:[prev][next]
[3] NOTIFY sip:1b172aba-b79b-0cde-437f-9be286673483@10.10.199.250:5060;transport=tcp SIP/2.0
Date: Mon, 28 Jul 2008 22:09:33 GMT
From: <sip:2002@10.10.199.251>;tag=1564885346
Event: presence
Content-Length: 737
User-Agent: Cisco-CUCM7.1
To: <sip:1b172aba-b79b-0cde-437f-9be286673483@10.10.199.250>;tag=1590417290
Contact: <sip:2002@10.10.199.251:5060;transport=tcp>
Content-Type: application/pidf+xml
Call-ID: 9948fd80-88e14330-54-fac712ac@10.10.199.250
Subscription-State: active;expires=43200
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bK35e7f3c5
CSeq: 101 NOTIFY
Max-Forwards: 70

```
<?xml version="1.0" encoding="UTF-8" standalone="no" ?>
<presence xmlns="urn:ietf:params:xml:ns:pidf" entity="sip:2002@10.10.199.251"
xmlns:e="urn:ietf:params:xml:ns:pidf:status:rpid" xmlns:dm="urn:ietf:params:xml:ns:pidf:data-model"
xmlns:ce="urn:cisco:params:xml:ns:pidf:rpid" xmlns:sc="urn:ietf:params:xml:ns:pidf:servcaps">
  <dm:person>
    <status>
    <basic>open</basic>
    </status>
    <e:activities>
    </e:activities>
  </dm:person>
  <tuple id="cmp-2002-85">
    <status>
      <basic>open</basic>
    </status>
    <sc:servcaps>
      <sc:audio>true</sc:audio>
    </sc:servcaps>
    <contact priority="0.8">sip:2002@10.10.199.251:5060</contact>
    <timestamp>2008-07-28T22:09:33Z</timestamp>
  </tuple>
</presence>
```

[diagram] Call-ID:[prev][next]
[4] SIP/2.0 200 OK
Date: Mon, 28 Jul 2008 22:07:44 GMT
From: <sip:2002@10.10.199.251>;tag=1564885346
Content-Length: 0
To: <sip:1b172aba-b79b-0cde-437f-9be286673483@10.10.199.250>;tag=1590417290
Call-ID: 9948fd80-88e14330-54-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bK35e7f3c5
CSeq: 101 NOTIFY

[diagram] Call-ID:[prev][next]
[5] SUBSCRIBE sip:2002@10.10.199.251:5060;transport=tcp SIP/2.0
Date: Mon, 28 Jul 2008 22:08:10 GMT

CISCO CONFIDENTIAL

```
From: <sip:1b172aba-b79b-0cde-437f-9be286673483@10.10.199.250>;tag=1590417290
Event: presence
Content-Length: 0
User-Agent: Cisco-CUCM7.1
To: <sip:2002@10.10.199.251>;tag=1564885346
Contact: <sip:1b172aba-b79b-0cde-437f-9be286673483@10.10.199.250:5060;transport=tcp>
Expires: 0
Call-ID: 9948fd80-88e14330-54-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK448ef4f54
CSeq: 102 SUBSCRIBE
Max-Forwards: 69
```

[diagram] Call-ID:[prev][next]

[6] SIP/2.0 200 OK

```
Date: Mon, 28 Jul 2008 22:09:59 GMT
From: <sip:1b172aba-b79b-0cde-437f-9be286673483@10.10.199.250>;tag=1590417290
Content-Length: 0
To: <sip:2002@10.10.199.251>;tag=1564885346
Contact: <sip:2002@10.10.199.251:5060;transport=tcp>
Expires: 0
Call-ID: 9948fd80-88e14330-54-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK448ef4f54
CSeq: 102 SUBSCRIBE
```

[diagram] Call-ID:[prev][next]

[7] NOTIFY sip:1b172aba-b79b-0cde-437f-9be286673483@10.10.199.250:5060;transport=tcp SIP/2.0

```
Date: Mon, 28 Jul 2008 22:09:59 GMT
From: <sip:2002@10.10.199.251>;tag=1564885346
Event: presence
Content-Length: 0
User-Agent: Cisco-CUCM7.1
To: <sip:1b172aba-b79b-0cde-437f-9be286673483@10.10.199.250>;tag=1590417290
Contact: <sip:2002@10.10.199.251:5060;transport=tcp>
Call-ID: 9948fd80-88e14330-54-fac712ac@10.10.199.250
Subscription-State: terminated;reason=timeout
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bK42c7c20a9
CSeq: 102 NOTIFY
Max-Forwards: 70
```

[diagram] Call-ID:[prev][next]

[8] SIP/2.0 200 OK

```
Date: Mon, 28 Jul 2008 22:08:10 GMT
From: <sip:2002@10.10.199.251>;tag=1564885346
Content-Length: 0
To: <sip:1b172aba-b79b-0cde-437f-9be286673483@10.10.199.250>;tag=1590417290
Call-ID: 9948fd80-88e14330-54-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bK42c7c20a9
CSeq: 102 NOTIFY
```

[diagram] Call-ID:[prev][next]

[9] SUBSCRIBE sip:2002@10.10.199.251:5060 SIP/2.0

```
Date: Mon, 28 Jul 2008 22:09:04 GMT
From: <sip:1b172aba-b79b-0cde-437f-9be286673483@10.10.199.250>;tag=56650824
Event: presence
Content-Length: 0
User-Agent: Cisco-CUCM7.1
To: <sip:2002@10.10.199.251>
Contact: <sip:1b172aba-b79b-0cde-437f-9be286673483@10.10.199.250:5060;transport=tcp>
Expires: 43200
Call-ID: c8f80580-88e14380-56-fac712ac@10.10.199.250
Accept: application/pidf+xml
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK51d8e29b4
CSeq: 101 SUBSCRIBE
Max-Forwards: 69
```

[diagram] Call-ID:[prev][next]

[10] SIP/2.0 200 OK

```
Date: Mon, 28 Jul 2008 22:10:52 GMT
From: <sip:1b172aba-b79b-0cde-437f-9be286673483@10.10.199.250>;tag=56650824
Content-Length: 0
To: <sip:2002@10.10.199.251>;tag=208021721
Contact: <sip:2002@10.10.199.251:5060;transport=tcp>
Expires: 43200
Call-ID: c8f80580-88e14380-56-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK51d8e29b4
CSeq: 101 SUBSCRIBE
```

[diagram] Call-ID:[prev][next]

[11] NOTIFY sip:1b172aba-b79b-0cde-437f-9be286673483@10.10.199.250:5060;transport=tcp SIP/2.0

```
Date: Mon, 28 Jul 2008 22:10:52 GMT
```

CISCO CONFIDENTIAL

```
From: <sip:2002@10.10.199.251>;tag=208021721
Event: presence
Content-Length: 737
User-Agent: Cisco-CUCM7.1
To: <sip:1b172aba-b79b-0cde-437f-9be286673483@10.10.199.250>;tag=56650824
Contact: <sip:2002@10.10.199.251:5060;transport=tcp>
Content-Type: application/pidf+xml
Call-ID: c8f80580-88e14380-56-fac712ac@10.10.199.250
Subscription-State: active;expires=43200
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bK518d821b3
CSeq: 101 NOTIFY
Max-Forwards: 70

<?xml version="1.0" encoding="UTF-8" standalone="no" ?>
<presence xmlns="urn:ietf:params:xml:ns:pidf" entity="sip:2002@10.10.199.251"
xmlns:e="urn:ietf:params:xml:ns:pidf:status:rpid" xmlns:dm="urn:ietf:params:xml:ns:pidf:data-model"
xmlns:ce="urn:cisco:params:xml:ns:pidf:rpid" xmlns:sc="urn:ietf:params:xml:ns:pidf:servcaps">
  <dm:person>
    <status>
    <basic>open</basic>
    </status>
    <e:activities>
    </e:activities>
  </dm:person>
  <tuple id="cmp-2002-87">
    <status>
      <basic>open</basic>
    </status>
    <sc:servcaps>
      <sc:audio>true</sc:audio>
    </sc:servcaps>
    <contact priority="0.8">sip:2002@10.10.199.251:5060</contact>
    <timestamp>2008-07-28T22:10:52Z</timestamp>
  </tuple>
</presence>

[diagram]   Call-ID:[prev][next]
[12] SIP/2.0 200 OK
Date: Mon, 28 Jul 2008 22:09:04 GMT
From: <sip:2002@10.10.199.251>;tag=208021721
Content-Length: 0
To: <sip:1b172aba-b79b-0cde-437f-9be286673483@10.10.199.250>;tag=56650824
Call-ID: c8f80580-88e14380-56-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bK518d821b3
CSeq: 101 NOTIFY

[diagram]   Call-ID:[prev][next]
[13] NOTIFY sip:1b172aba-b79b-0cde-437f-9be286673483@10.10.199.250:5060;transport=tcp SIP/2.0
Date: Mon, 28 Jul 2008 22:11:20 GMT
From: <sip:2002@10.10.199.251>;tag=208021721
Event: presence
Content-Length: 830
User-Agent: Cisco-CUCM7.1
To: <sip:1b172aba-b79b-0cde-437f-9be286673483@10.10.199.250>;tag=56650824
Contact: <sip:2002@10.10.199.251:5060;transport=tcp>
Content-Type: application/pidf+xml
Call-ID: c8f80580-88e14380-56-fac712ac@10.10.199.250
Subscription-State: active;expires=43172
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bK63ebd4cd6
CSeq: 102 NOTIFY
Max-Forwards: 70

<?xml version="1.0" encoding="UTF-8" standalone="no" ?>
<presence xmlns="urn:ietf:params:xml:ns:pidf" entity="sip:2002@10.10.199.251"
xmlns:e="urn:ietf:params:xml:ns:pidf:status:rpid" xmlns:dm="urn:ietf:params:xml:ns:pidf:data-model"
xmlns:ce="urn:cisco:params:xml:ns:pidf:rpid" xmlns:sc="urn:ietf:params:xml:ns:pidf:servcaps">
  <dm:person>
    <status>
    <basic>open</basic>
    </status>
    <e:activities>
      <e:on-the-phone/>
    </e:activities>
  </dm:person>
  <tuple id="cmp-2002-87">
    <status>
      <basic>open</basic>
      <e:activities>
        <e:on-the-phone/>
      </e:activities>
```

CISCO CONFIDENTIAL

```
    </status>
    <sc:servcaps>
      <sc:audio>true</sc:audio>
    </sc:servcaps>
    <contact priority="0.8">sip:2002@10.10.199.251:5060</contact>
    <timestamp>2008-07-28T22:11:20Z</timestamp>
  </tuple>
</presence>
```

[diagram] Call-ID: [prev][next]

[14] SIP/2.0 200 OK

```
Date: Mon, 28 Jul 2008 22:09:32 GMT
From: <sip:2002@10.10.199.251>;tag=208021721
Content-Length: 0
To: <sip:1b172aba-b79b-0cde-437f-9be286673483@10.10.199.250>;tag=56650824
Call-ID: c8f80580-88e14380-56-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bK63ebd4cd6
CSeq: 102 NOTIFY
```

[diagram] Call-ID: [prev][next]

[15] NOTIFY sip:1b172aba-b79b-0cde-437f-9be286673483@10.10.199.250:5060;transport=tcp SIP/2.0

```
Date: Mon, 28 Jul 2008 22:11:23 GMT
From: <sip:2002@10.10.199.251>;tag=208021721
Event: presence
Content-Length: 737
User-Agent: Cisco-CUCM7.1
To: <sip:1b172aba-b79b-0cde-437f-9be286673483@10.10.199.250>;tag=56650824
Contact: <sip:2002@10.10.199.251:5060;transport=tcp>
Content-Type: application/pidf+xml
Call-ID: c8f80580-88e14380-56-fac712ac@10.10.199.250
Subscription-State: active;expires=43169
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bK742018531
CSeq: 103 NOTIFY
Max-Forwards: 70

<?xml version="1.0" encoding="UTF-8" standalone="no" ?>
<presence xmlns="urn:ietf:params:xml:ns:pidf" entity="sip:2002@10.10.199.251"
xmlns:e="urn:ietf:params:xml:ns:pidf:status:rpid" xmlns:dm="urn:ietf:params:xml:ns:pidf:data-model"
xmlns:ce="urn:cisco:params:xml:ns:pidf:rpid" xmlns:sc="urn:ietf:params:xml:ns:pidf:servcaps">
  <dm:person>
    <status>
    <basic>open</basic>
    </status>
    <e:activities>
    </e:activities>
  </dm:person>
  <tuple id="cmp-2002-87">
    <status>
      <basic>open</basic>
    </status>
    <sc:servcaps>
      <sc:audio>true</sc:audio>
    </sc:servcaps>
    <contact priority="0.8">sip:2002@10.10.199.251:5060</contact>
    <timestamp>2008-07-28T22:11:23Z</timestamp>
  </tuple>
</presence>
```

[diagram] Call-ID: [prev][next]

[16] SIP/2.0 200 OK

```
Date: Mon, 28 Jul 2008 22:09:35 GMT
From: <sip:2002@10.10.199.251>;tag=208021721
Content-Length: 0
To: <sip:1b172aba-b79b-0cde-437f-9be286673483@10.10.199.250>;tag=56650824
Call-ID: c8f80580-88e14380-56-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bK742018531
CSeq: 103 NOTIFY
```

CISCO CONFIDENTIAL

3.2 Incoming Presence Subscription

Title: Incoming Presence Subscription

Description:

The scenario for incoming 'presence' subscription on Cisco Unified CM's SIP trunk for the SIP phone's (DN:1001) BLF status.

The SUBSCRIBE request with header 'Event: presence' is received by the sip trunk.

1) The request is forwarded to the Notifier/SubscriptionManager modules for processing.
2) The Notifier/SM authorizes the request & sends the 200 OK (for Subscribe).
3) On getting the notification with info about the subscribee, Notifier sends the Notify request on sip trunk, carrying the BLF status in PIDF XML.
4) The remote (Cisco Unified CM2) responds by sending 200 OK for Notify.
5) When the SCCP 1001 is offhook another NOTIFY with "on-the-phone" in the PIDF is sent on the sip trunk.
6) When the SCCP 1001 is onhook again, another NOTIFY to update the status is sent.

Configuration:

Node = Unified CM1, IP = 10.10.199.250
Node = Unified CM2, IP = 10.10.199.251

Phone = A, Line = 1001, IP = 10.10.199.130, Model = SCCP
Phone = B, Line = 2002, IP = 10.10.199.179, Model = SCCP

SIP Trunk between Unified CM2 & Unified CM1 has route pattern 1.XXXX

Scenario:

Phone B DN 2002 configures the BLF-SD set to 11001
Unified CM2 sends Subscription for Event:presence for phone 1001 to Unified CM1.
Phone A DN 1001 goes offHook
Phone B DN 2002 receives Notification that Phone A DN 1001 went offHook
Phone A DN 1001 goes onHook
Phone B receives Notification that Phone A DN 1001 is onHook

End of Scenario

CISCO CONFIDENTIAL

CISCO CONFIDENTIAL

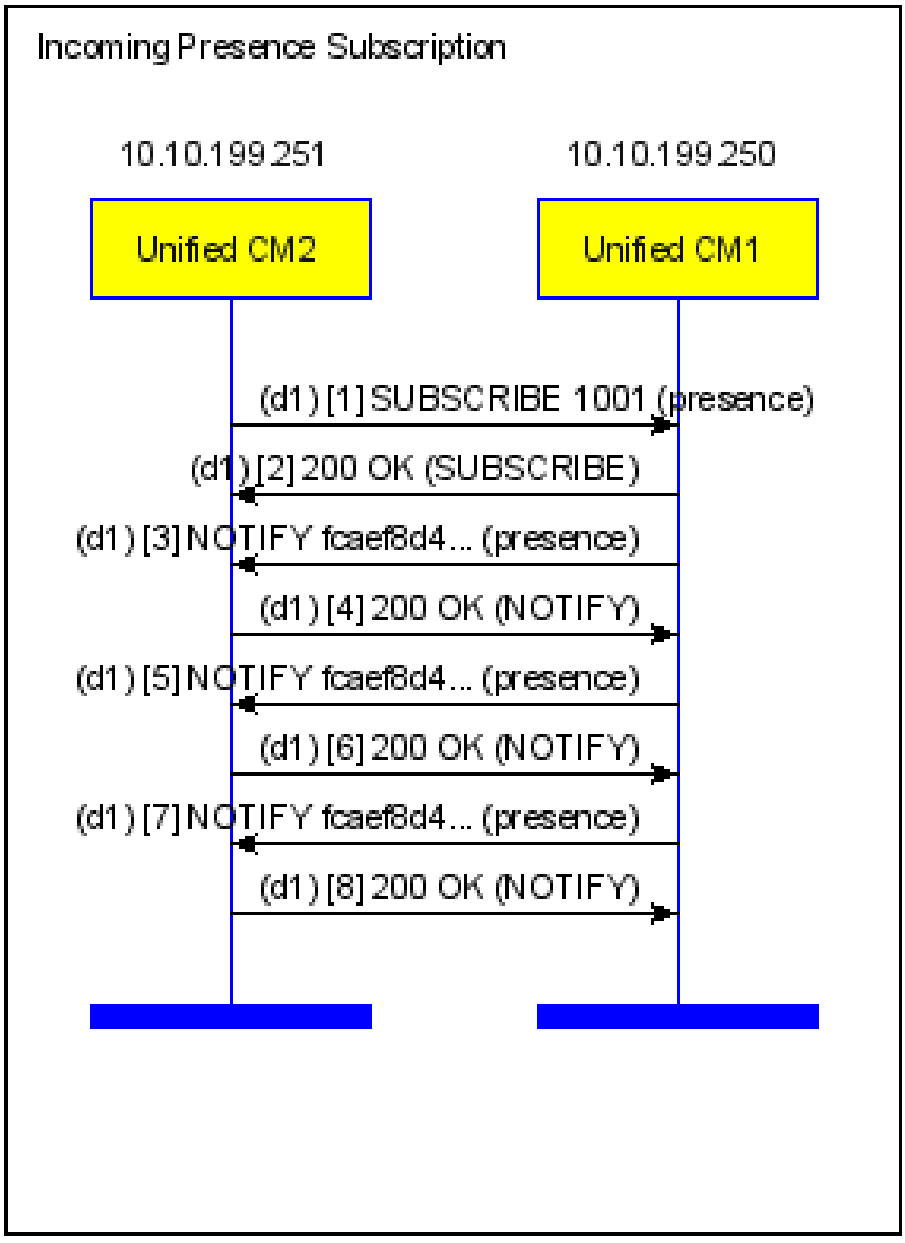

CISCO CONFIDENTIAL

[diagram] Call-ID:[prev][next]
[1] SUBSCRIBE sip:1001@10.10.199.250:5060 SIP/2.0
Date: Mon, 28 Jul 2008 22:22:04 GMT
From: <sip:fcaef8d4-5eba-69c6-8578-05896dba8059@10.10.199.251>;tag=755425497
Event: presence
Content-Length: 0
User-Agent: Cisco-CUCM7.1
To: <sip:1001@10.10.199.250>
Contact: <sip:fcaef8d4-5eba-69c6-8578-05896dba8059@10.10.199.251:5060;transport=tcp>
Expires: 43200
Call-ID: 99e29380-88e1468c-59-fbc712ac@10.10.199.251
Accept: application/pidf+xml
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bK967e9af16
CSeq: 101 SUBSCRIBE
Max-Forwards: 69

[diagram] Call-ID:[prev][next]
[2] SIP/2.0 200 OK
Date: Mon, 28 Jul 2008 22:20:16 GMT
From: <sip:fcaef8d4-5eba-69c6-8578-05896dba8059@10.10.199.251>;tag=755425497
Content-Length: 0
To: <sip:1001@10.10.199.250>;tag=2087460644
Contact: <sip:1001@10.10.199.250:5060;transport=tcp>
Expires: 43200
Call-ID: 99e29380-88e1468c-59-fbc712ac@10.10.199.251
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bK967e9af16
CSeq: 101 SUBSCRIBE

[diagram] Call-ID:[prev][next]
[3] NOTIFY sip:fcaef8d4-5eba-69c6-8578-05896dba8059@10.10.199.251:5060;transport=tcp SIP/2.0
Date: Mon, 28 Jul 2008 22:20:16 GMT
From: <sip:1001@10.10.199.250>;tag=2087460644
Event: presence
Content-Length: 737
User-Agent: Cisco-CUCM7.1
To: <sip:fcaef8d4-5eba-69c6-8578-05896dba8059@10.10.199.251>;tag=755425497
Contact: <sip:1001@10.10.199.250:5060;transport=tcp>
Content-Type: application/pidf+xml
Call-ID: 99e29380-88e1468c-59-fbc712ac@10.10.199.251
Subscription-State: active;expires=43200
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK73d408c0b
CSeq: 101 NOTIFY
Max-Forwards: 70

```
<?xml version="1.0" encoding="UTF-8" standalone="no" ?>
<presence xmlns="urn:ietf:params:xml:ns:pidf" entity="sip:1001@10.10.199.250"
xmlns:e="urn:ietf:params:xml:ns:pidf:status:rpid" xmlns:dm="urn:ietf:params:xml:ns:pidf:data-model"
xmlns:ce="urn:cisco:params:xml:ns:pidf:rpid" xmlns:sc="urn:ietf:params:xml:ns:pidf:servcaps">
  <dm:person>
    <status>
    <basic>open</basic>
    </status>
    <e:activities>
    </e:activities>
  </dm:person>
  <tuple id="cmp-1001-94">
    <status>
      <basic>open</basic>
    </status>
    <sc:servcaps>
      <sc:audio>true</sc:audio>
    </sc:servcaps>
    <contact priority="0.8">sip:1001@10.10.199.250:5060</contact>
    <timestamp>2008-07-28T22:20:16Z</timestamp>
  </tuple>
</presence>
```

[diagram] Call-ID:[prev][next]
[4] SIP/2.0 200 OK
Date: Mon, 28 Jul 2008 22:22:04 GMT
From: <sip:1001@10.10.199.250>;tag=2087460644
Content-Length: 0
To: <sip:fcaef8d4-5eba-69c6-8578-05896dba8059@10.10.199.251>;tag=755425497
Call-ID: 99e29380-88e1468c-59-fbc712ac@10.10.199.251
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK73d408c0b
CSeq: 101 NOTIFY

[diagram] Call-ID:[prev][next]
[5] NOTIFY sip:fcaef8d4-5eba-69c6-8578-05896dba8059@10.10.199.251:5060;transport=tcp SIP/2.0
Date: Mon, 28 Jul 2008 22:20:31 GMT

CISCO CONFIDENTIAL

```
From: <sip:1001@10.10.199.250>;tag=2087460644
Event: presence
Content-Length: 830
User-Agent: Cisco-CUCM7.1
To: <sip:fcaef8d4-5eba-69c6-8578-05896dba8059@10.10.199.251>;tag=755425497
Contact: <sip:1001@10.10.199.250:5060;transport=tcp>
Content-Type: application/pidf+xml
Call-ID: 99e29380-88e1468c-59-fbc712ac@10.10.199.251
Subscription-State: active;expires=43185
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK820559673
CSeq: 102 NOTIFY
Max-Forwards: 70

<?xml version="1.0" encoding="UTF-8" standalone="no" ?>
<presence xmlns="urn:ietf:params:xml:ns:pidf" entity="sip:1001@10.10.199.250"
xmlns:e="urn:ietf:params:xml:ns:pidf:status:rpid" xmlns:dm="urn:ietf:params:xml:ns:pidf:data-model"
xmlns:ce="urn:cisco:params:xml:ns:pidf:rpid" xmlns:sc="urn:ietf:params:xml:ns:pidf:servcaps">
  <dm:person>
    <status>
    <basic>open</basic>
    </status>
    <e:activities>
      <e:on-the-phone/>
    </e:activities>
  </dm:person>
  <tuple id="cmp-1001-94">
    <status>
      <basic>open</basic>
      <e:activities>
        <e:on-the-phone/>
      </e:activities>
    </status>
    <sc:servcaps>
      <sc:audio>true</sc:audio>
    </sc:servcaps>
    <contact priority="0.8">sip:1001@10.10.199.250:5060</contact>
    <timestamp>2008-07-28T22:20:31Z</timestamp>
  </tuple>
</presence>
```

[diagram] Call-ID:[prev][next]

[6] SIP/2.0 200 OK

```
Date: Mon, 28 Jul 2008 22:22:19 GMT
From: <sip:1001@10.10.199.250>;tag=2087460644
Content-Length: 0
To: <sip:fcaef8d4-5eba-69c6-8578-05896dba8059@10.10.199.251>;tag=755425497
Call-ID: 99e29380-88e1468c-59-fbc712ac@10.10.199.251
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK820559673
CSeq: 102 NOTIFY
```

[diagram] Call-ID:[prev][next]

[7] NOTIFY sip:fcaef8d4-5eba-69c6-8578-05896dba8059@10.10.199.251:5060;transport=tcp SIP/2.0

```
Date: Mon, 28 Jul 2008 22:20:33 GMT
From: <sip:1001@10.10.199.250>;tag=2087460644
Event: presence
Content-Length: 737
User-Agent: Cisco-CUCM7.1
To: <sip:fcaef8d4-5eba-69c6-8578-05896dba8059@10.10.199.251>;tag=755425497
Contact: <sip:1001@10.10.199.250:5060;transport=tcp>
Content-Type: application/pidf+xml
Call-ID: 99e29380-88e1468c-59-fbc712ac@10.10.199.251
Subscription-State: active;expires=43183
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK9515a2433
CSeq: 103 NOTIFY
Max-Forwards: 70

<?xml version="1.0" encoding="UTF-8" standalone="no" ?>
<presence xmlns="urn:ietf:params:xml:ns:pidf" entity="sip:1001@10.10.199.250"
xmlns:e="urn:ietf:params:xml:ns:pidf:status:rpid" xmlns:dm="urn:ietf:params:xml:ns:pidf:data-model"
xmlns:ce="urn:cisco:params:xml:ns:pidf:rpid" xmlns:sc="urn:ietf:params:xml:ns:pidf:servcaps">
  <dm:person>
    <status>
    <basic>open</basic>
    </status>
    <e:activities>
    </e:activities>
  </dm:person>
  <tuple id="cmp-1001-94">
    <status>
      <basic>open</basic>
```

CISCO CONFIDENTIAL

```
    </status>
    <sc:servcaps>
      <sc:audio>true</sc:audio>
    </sc:servcaps>
    <contact priority="0.8">sip:1001@10.10.199.250:5060</contact>
    <timestamp>2008-07-28T22:20:33Z</timestamp>
  </tuple>
</presence>
```

[diagram] Call-ID: [prev][next]

[8] SIP/2.0 200 OK

```
Date: Mon, 28 Jul 2008 22:22:22 GMT
From: <sip:1001@10.10.199.250>;tag=2087460644
Content-Length: 0
To: <sip:fcaef8d4-5eba-69c6-8578-05896dba8059@10.10.199.251>;tag=755425497
Call-ID: 99e29380-88e1468c-59-fbc712ac@10.10.199.251
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK9515a2433
CSeq: 103 NOTIFY
```

CISCO CONFIDENTIAL

3.3 Incoming Presence Forbidden for Authorization Failure

Title: Incoming Presence Forbidden for Authorization Failure

Description:

The presence authorization failure for the scenario when incoming 'presence' subscription is received on Cisco Unified CM's SIP trunk for the SCCP phone's (DN:1001) BLF status.

The SUBSCRIBE request with header 'Event: presence' is received by the sip trunk. The request is forwarded to the Notifier/SubscriptionManager modules in Cisco Unified CM for processing. The Notifier/SM fails the authorization due to presence group mismatch & sends the "403 Forbidden" to remote for Subscribe.

Configuration:

Node = Remote UA, IP = 10.10.200.179
Node = Unified CM1, IP = 10.10.199.250

Unified CM1 has its SIP Trunk Security Profile configured to have "Accept Presence Subscription" unchecked.

Scenario:

Remote UA sends Presence Subscription message to Unified CM1
Unified CM1 rejects the message with 403

CISCO CONFIDENTIAL

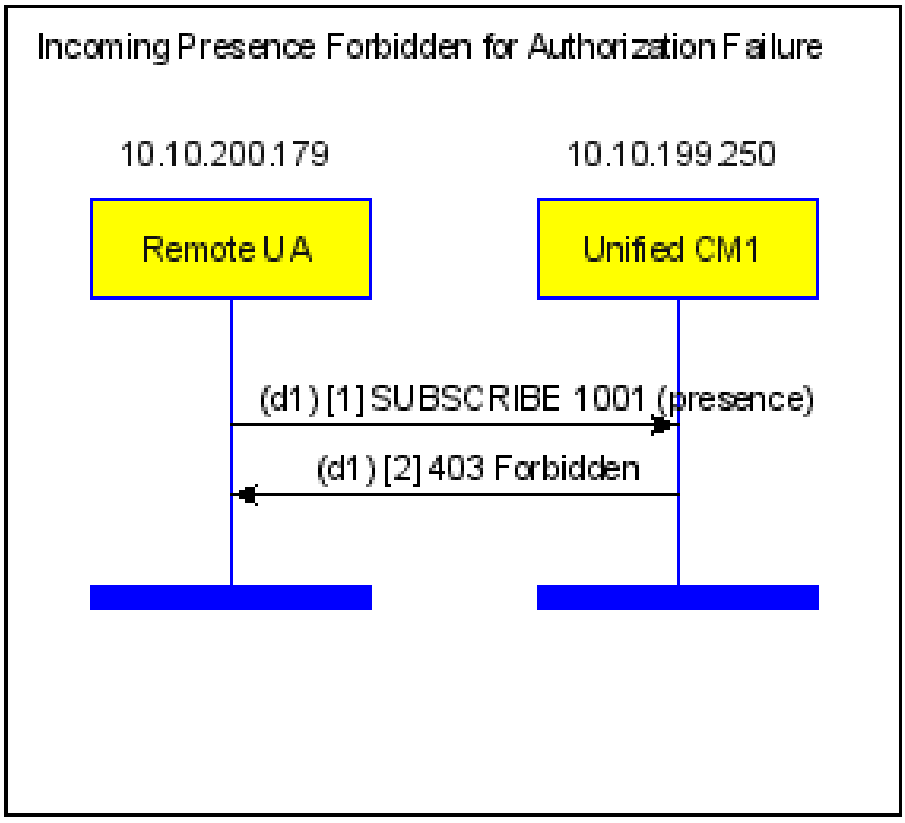

CISCO CONFIDENTIAL

```
[diagram]   Call-ID:[prev][next]
[1] SUBSCRIBE sip:1001@10.10.199.250:5060 SIP/2.0
Via: SIP/2.0/TCP 10.10.200.179:5060
From: <sip:5678@10.10.200.179:5060>;tag=1
To: <sip:1001@10.10.199.250:5060>
Call-ID: 1-5399@10.10.200.179
CSeq: 101 SUBSCRIBE
Event: presence
Accept: application/pidf+xml
Expires: 7200
Contact: sip:5678@10.10.200.179:5060
Max-Forwards: 70
Content-Length: 0

[diagram]   Call-ID:[prev][next]
[2] SIP/2.0 403 Forbidden
Date: Mon, 28 Jul 2008 22:27:55 GMT
From: <sip:5678@10.10.200.179:5060>;tag=1
Content-Length: 0
To: <sip:1001@10.10.199.250:5060>;tag=1270378786
Call-ID: 1-5399@10.10.200.179
Via: SIP/2.0/TCP 10.10.200.179:5060
CSeq: 101 SUBSCRIBE
```

CISCO CONFIDENTIAL

4. Transfer

4.1 Basic Attended Transfer Call via an Inter Cluster SIP Trunk

Title: Basic Attended Transfer Call via an Inter Cluster SIP Trunk

Description:

The following basic call flow illustrates the SIP messaging that takes place between two Cisco Unified CMs via an Inter Cluster SIP Trunk.

Cisco Unified IP Phone 1001 (registered with Unified CM1) calls Cisco Unified IP Phone 2002 (registered with Unified CM2) and Cisco Unified IP Phone IP Phone 2002 made an attended transfer to Cisco Unified IP Phone IP Phone 2001 (registered with Unified CM2 as well)

Configuration:

Node = Unified CM1, IP = 10.10.199.250
Node = Unified CM2, IP = 10.10.199.251

Phone = A, Line = 1001, IP = 10.10.199.130, Model = SCCP
Phone = B, Line = 2002, IP = 10.10.199.179, Model = SCCP
Phone = C, Line = 2001, IP = 10.10.199.171, Model = SIP TNP

SIP Trunk between Unified CM1 & Unified CM2 has route pattern 2.XXXX

Scenario:

Phone A DN 1001 calls Phone B DN 2002 over the SIP Trunk by dialing 22002
Phone B DN 2002 Answers
Phone B DN 2002 presses transfer softkey and dials Phone C DN 2001
Phone C DN 2001 is ringing
Phone C DN 2001 answers
Phone B DN 2002 presses Transfer softkey to complete the transfer
Phone A DN 1001 and Phone C DN 2001 are connected
Phone A DN 1001 goes onHook
Phone C DN 2001 goes onHook

End of Scenario

CISCO CONFIDENTIAL

CISCO CONFIDENTIAL

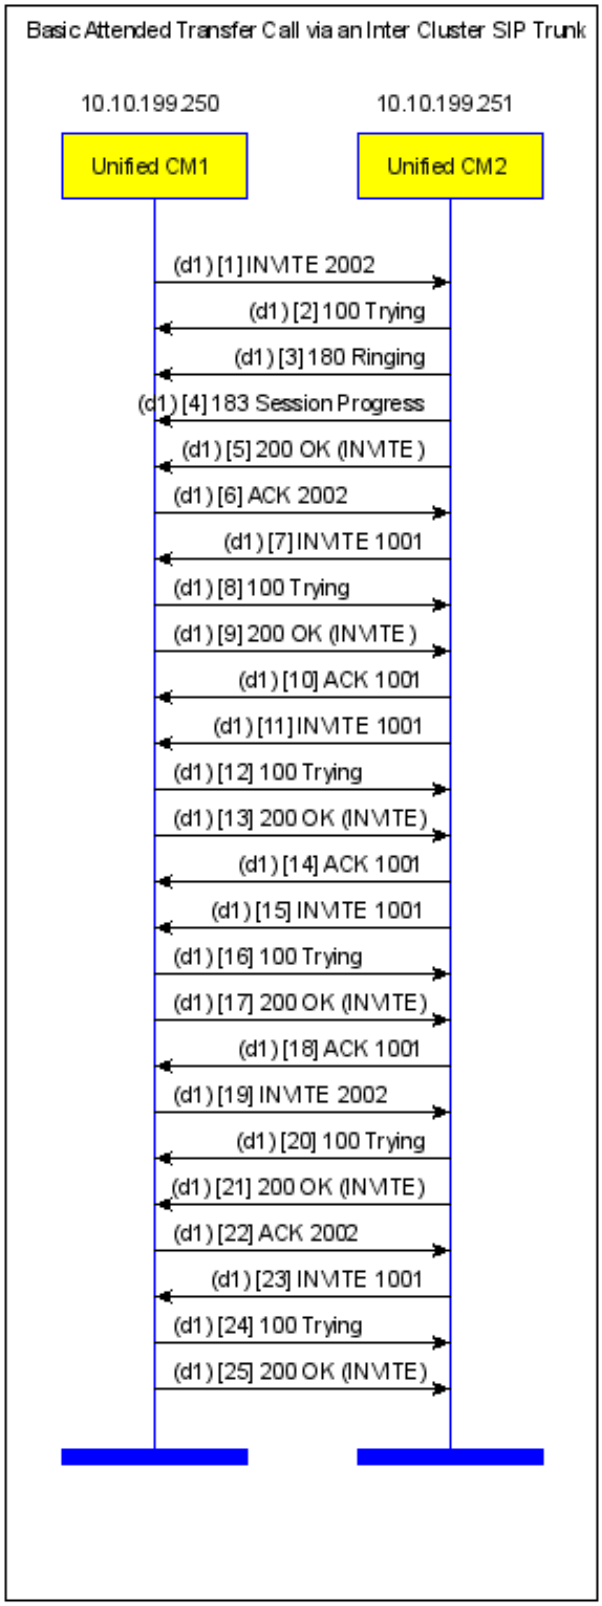

CISCO CONFIDENTIAL

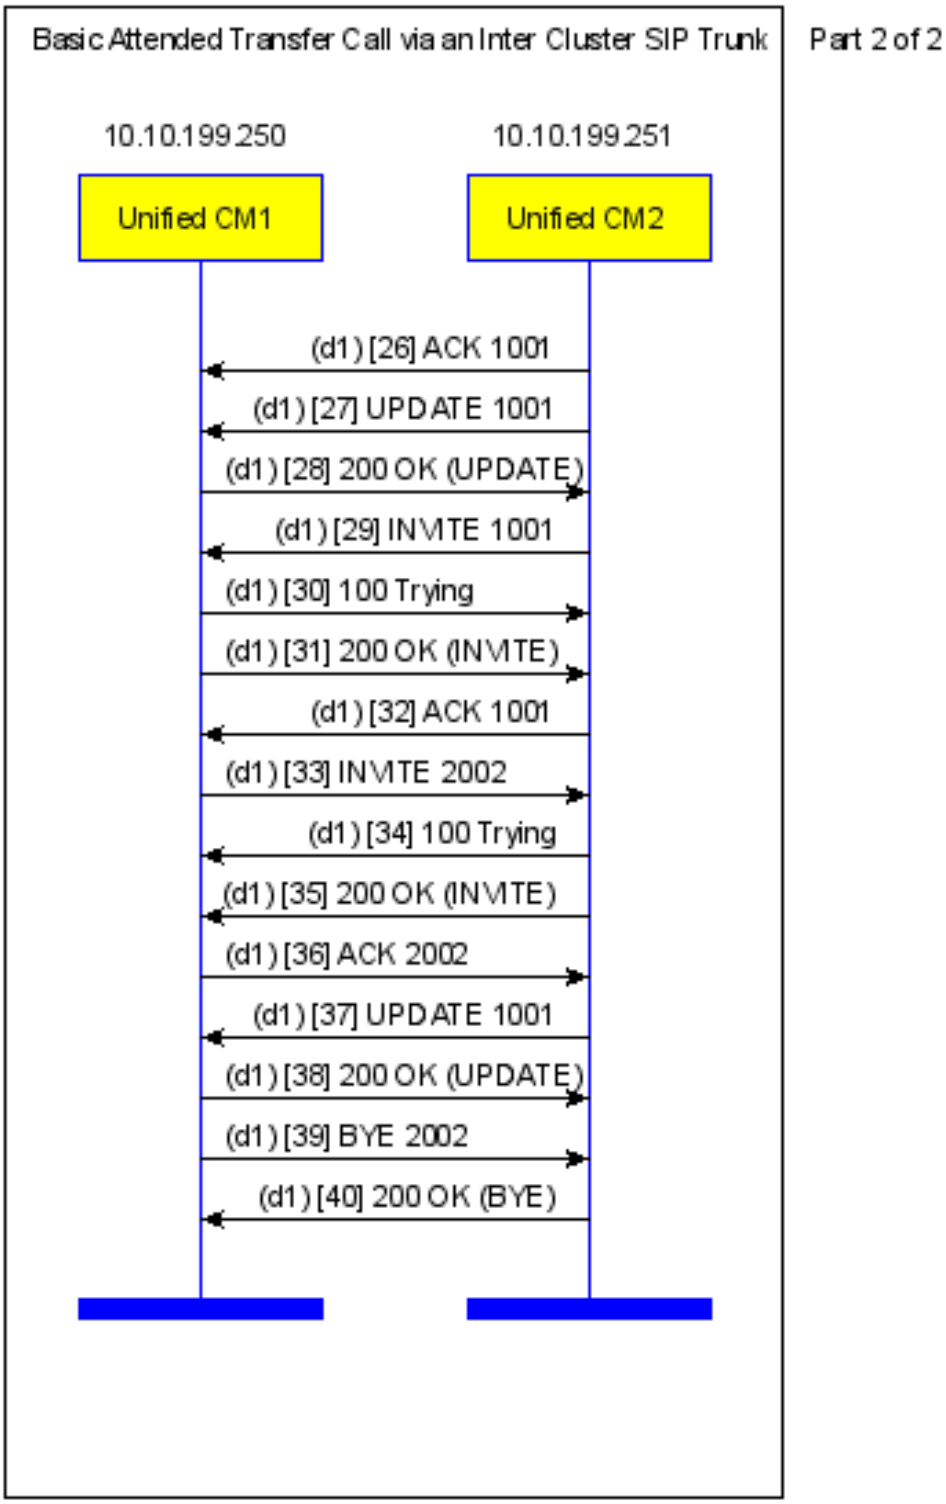

CISCO CONFIDENTIAL

[diagram] Call-ID:[prev][next]
[1] INVITE sip:2002@10.10.199.251:5060 SIP/2.0
Date: Fri, 05 Jun 2009 14:15:11 GMT
Call-Info: <sip:10.10.199.250:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763587
Allow-Events: presence, kpml
P-Asserted-Identity: <sip:1001@10.10.199.250>
Supported: timer,resource-priority,replaces
Supported: Geolocation
Min-SE: 1800
Remote-Party-ID: <sip:1001@10.10.199.250>;party=calling;screen=yes;privacy=off
Content-Length: 0
User-Agent: Cisco-CUCM7.1
To: <sip:2002@10.10.199.251>
Contact: <sip:1001@10.10.199.250:5060;transport=tcp>
Expires: 180
Call-ID: 46768700-a291286f-38-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK1039af23a9
CSeq: 101 INVITE
Session-Expires: 1800
Max-Forwards: 70

[diagram] Call-ID:[prev][next]
[2] SIP/2.0 100 Trying
Date: Fri, 05 Jun 2009 14:16:15 GMT
From: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763587
Allow-Events: presence
Content-Length: 0
To: <sip:2002@10.10.199.251>
Call-ID: 46768700-a291286f-38-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK1039af23a9
CSeq: 101 INVITE

[diagram] Call-ID:[prev][next]
[3] SIP/2.0 180 Ringing
Date: Fri, 05 Jun 2009 14:16:15 GMT
Call-Info: <sip:10.10.199.251:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763587
Allow-Events: presence
P-Asserted-Identity: <sip:2002@10.10.199.251>
Supported: Geolocation
Remote-Party-ID: <sip:2002@10.10.199.251>;party=called;screen=yes;privacy=off
Content-Length: 0
To: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763485
Contact: <sip:2002@10.10.199.251:5060;transport=tcp>
Call-ID: 46768700-a291286f-38-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK1039af23a9
CSeq: 101 INVITE

[diagram] Call-ID:[prev][next]
[4] SIP/2.0 183 Session Progress
Date: Fri, 05 Jun 2009 14:16:15 GMT
Call-Info: <sip:10.10.199.251:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763587
Allow-Events: presence, kpml
P-Asserted-Identity: <sip:2002@10.10.199.251>
Supported: Geolocation
Remote-Party-ID: <sip:2002@10.10.199.251>;party=called;screen=yes;privacy=off
Content-Length: 337
To: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763485
Contact: <sip:2002@10.10.199.251:5060;transport=tcp>
Content-Type: application/sdp
Call-ID: 46768700-a291286f-38-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK1039af23a9
CSeq: 101 INVITE

v=0
o=CiscoSystemsCCM-SIP 2000 1 IN IP4 10.10.199.251
s=SIP Call
c=IN IP4 10.10.199.179
t=0 0
m=audio 4000 RTP/AVP 9 0 8 18 101
a=rtpmap:9 G722/8000
a=ptime:20
a=rtpmap:0 PCMU/8000
a=ptime:20
a=rtpmap:8 PCMA/8000

CISCO CONFIDENTIAL

```
a=ptime:20
a=rtpmap:18 G729/8000
a=ptime:20
a=sendonly
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
```

[diagram] Call-ID:[prev][next]

[5] SIP/2.0 200 OK

```
Date: Fri, 05 Jun 2009 14:16:15 GMT
Call-Info: <sip:10.10.199.251:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763587
Allow-Events: presence, kpml
P-Asserted-Identity: <sip:2002@10.10.199.251>
Supported: replaces
Supported: Geolocation
Remote-Party-ID: <sip:2002@10.10.199.251>;party=called;screen=yes;privacy=off
Content-Length: 337
Require:  timer
To: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763485
Contact: <sip:2002@10.10.199.251:5060;transport=tcp>
Content-Type: application/sdp
Call-ID: 46768700-a291286f-38-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK1039af23a9
CSeq: 101 INVITE
Session-Expires:  1800;refresher=uas

v=0
o=CiscoSystemsCCM-SIP 2000 1 IN IP4 10.10.199.251
s=SIP Call
c=IN IP4 10.10.199.179
t=0 0
m=audio 4000 RTP/AVP 9 0 8 18 101
a=rtpmap:9 G722/8000
a=ptime:20
a=rtpmap:0 PCMU/8000
a=ptime:20
a=rtpmap:8 PCMA/8000
a=ptime:20
a=rtpmap:18 G729/8000
a=ptime:20
a=sendonly
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
```

[diagram] Call-ID:[prev][next]

[6] ACK sip:2002@10.10.199.251:5060;transport=tcp SIP/2.0

```
Date: Fri, 05 Jun 2009 14:15:11 GMT
From: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763587
Allow-Events: presence, kpml
Content-Length: 228
To: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763485
Content-Type: application/sdp
Call-ID: 46768700-a291286f-38-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK10453273dbc
CSeq: 101 ACK
Max-Forwards: 70

v=0
o=CiscoSystemsCCM-SIP 2000 1 IN IP4 10.10.199.250
s=SIP Call
c=IN IP4 10.10.199.130
t=0 0
m=audio 26974 RTP/AVP 9 101
a=rtpmap:9 G722/8000
a=ptime:20
a=recvonly
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
```

[diagram] Call-ID:[prev][next]

[7] INVITE sip:1001@10.10.199.250:5060;transport=tcp SIP/2.0

```
Date: Fri, 05 Jun 2009 14:16:19 GMT
Call-Info: <sip:10.10.199.251:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763485
Allow-Events: presence, kpml
P-Asserted-Identity: <sip:2002@10.10.199.251>
Supported: timer,resource-priority,replaces
```

CISCO CONFIDENTIAL

```
Min-SE:  1800
Remote-Party-ID: <sip:2002@10.10.199.251>;party=calling;screen=yes;privacy=off
Content-Length: 216
User-Agent: Cisco-CUCM7.1
To: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763587
Contact: <sip:2002@10.10.199.251:5060;transport=tcp>
Expires: 180
Content-Type: application/sdp
Call-ID: 46768700-a291286f-38-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bKe7485b384
CSeq: 101 INVITE
Session-Expires:  1800;refresher=uac
Max-Forwards: 70

v=0
o=CiscoSystemsCCM-SIP 2000 2 IN IP4 10.10.199.251
s=SIP Call
c=IN IP4 10.10.199.179
t=0 0
m=audio 19396 RTP/AVP 9 101
a=rtpmap:9 G722/8000
a=ptime:20
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
```

[diagram] Call-ID:[prev][next]

[8] SIP/2.0 100 Trying

```
Date: Fri, 05 Jun 2009 14:15:15 GMT
From: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763485
Allow-Events: presence, kpml
Content-Length: 0
To: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763587
Call-ID: 46768700-a291286f-38-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bKe7485b384
CSeq: 101 INVITE
```

[diagram] Call-ID:[prev][next]

[9] SIP/2.0 200 OK

```
Date: Fri, 05 Jun 2009 14:15:15 GMT
Call-Info: <sip:10.10.199.250:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763485
Allow-Events: presence, kpml
P-Asserted-Identity: <sip:1001@10.10.199.250>
Supported: replaces
Supported: Geolocation
Remote-Party-ID: <sip:1001@10.10.199.250>;party=called;screen=yes;privacy=off
Content-Length: 216
Require:  timer
To: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763587
Contact: <sip:1001@10.10.199.250:5060;transport=tcp>
Content-Type: application/sdp
Call-ID: 46768700-a291286f-38-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bKe7485b384
CSeq: 101 INVITE
Session-Expires:  1800;refresher=uac

v=0
o=CiscoSystemsCCM-SIP 2000 2 IN IP4 10.10.199.250
s=SIP Call
c=IN IP4 10.10.199.130
t=0 0
m=audio 26974 RTP/AVP 9 101
a=rtpmap:9 G722/8000
a=ptime:20
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
```

[diagram] Call-ID:[prev][next]

[10] ACK sip:1001@10.10.199.250:5060;transport=tcp SIP/2.0

```
Date: Fri, 05 Jun 2009 14:16:19 GMT
From: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763485
Allow-Events: presence, kpml
Content-Length: 0
To: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763587
Call-ID: 46768700-a291286f-38-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bKe84fefff77
CSeq: 101 ACK
Max-Forwards: 70
```

CISCO CONFIDENTIAL

```
[diagram]   Call-ID:[prev][next]
[11] INVITE sip:1001@10.10.199.250:5060;transport=tcp SIP/2.0
Date: Fri, 05 Jun 2009 14:16:22 GMT
Call-Info: <sip:10.10.199.251:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763485
Allow-Events: presence, kpml
P-Asserted-Identity: <sip:2002@10.10.199.251>
Supported: timer,resource-priority,replaces
Min-SE:  1800
Remote-Party-ID: <sip:2002@10.10.199.251>;party=calling;screen=yes;privacy=off
Content-Length: 221
User-Agent: Cisco-CUCM7.1
To: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763587
Contact: <sip:2002@10.10.199.251:5060;transport=tcp>
Expires: 180
Content-Type: application/sdp
Call-ID: 46768700-a291286f-38-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bKe93ca9a102
CSeq: 102 INVITE
Session-Expires:  1800;refresher=uac
Max-Forwards: 70

v=0
o=CiscoSystemsCCM-SIP 2000 3 IN IP4 10.10.199.251
s=SIP Call
c=IN IP4 0.0.0.0
t=0 0
m=audio 19396 RTP/AVP 9 101
a=rtpmap:9 G722/8000
a=ptime:20
a=inactive
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15

[diagram]   Call-ID:[prev][next]
[12] SIP/2.0 100 Trying
Date: Fri, 05 Jun 2009 14:15:18 GMT
From: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763485
Allow-Events: presence, kpml
Content-Length: 0
To: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763587
Call-ID: 46768700-a291286f-38-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bKe93ca9a102
CSeq: 102 INVITE

[diagram]   Call-ID:[prev][next]
[13] SIP/2.0 200 OK
Date: Fri, 05 Jun 2009 14:15:18 GMT
Call-Info: <sip:10.10.199.250:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763485
Allow-Events: presence, kpml
P-Asserted-Identity: <sip:1001@10.10.199.250>
Supported: replaces
Supported: Geolocation
Remote-Party-ID: <sip:1001@10.10.199.250>;party=called;screen=yes;privacy=off
Content-Length: 228
Require:  timer
To: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763587
Contact: <sip:1001@10.10.199.250:5060;transport=tcp>
Content-Type: application/sdp
Call-ID: 46768700-a291286f-38-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bKe93ca9a102
CSeq: 102 INVITE
Session-Expires:  1800;refresher=uac

v=0
o=CiscoSystemsCCM-SIP 2000 3 IN IP4 10.10.199.250
s=SIP Call
c=IN IP4 10.10.199.130
t=0 0
m=audio 26974 RTP/AVP 9 101
a=rtpmap:9 G722/8000
a=ptime:20
a=inactive
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
```

CISCO CONFIDENTIAL

[diagram] Call-ID:[prev][next]
[14] ACK sip:1001@10.10.199.250:5060;transport=tcp SIP/2.0
```
Date: Fri, 05 Jun 2009 14:16:22 GMT
From: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763485
Allow-Events: presence, kpml
Content-Length: 0
To: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763587
Call-ID: 46768700-a291286f-38-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bKea30ea47e0
CSeq: 102 ACK
Max-Forwards: 70
```

[diagram] Call-ID:[prev][next]
[15] INVITE sip:1001@10.10.199.250:5060;transport=tcp SIP/2.0
```
Date: Fri, 05 Jun 2009 14:16:22 GMT
Call-Info: <sip:10.10.199.251:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763485
Allow-Events: presence, kpml
P-Asserted-Identity: <sip:2002@10.10.199.251>
Supported: timer,resource-priority,replaces
Min-SE:  1800
Remote-Party-ID: <sip:2002@10.10.199.251>;party=calling;screen=yes;privacy=off
Content-Length: 0
User-Agent: Cisco-CUCM7.1
To: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763587
Contact: <sip:2002@10.10.199.251:5060;transport=tcp>
Expires: 180
Call-ID: 46768700-a291286f-38-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bKeb73bf351c
CSeq: 103 INVITE
Session-Expires:  1800;refresher=uac
Max-Forwards: 70
```

[diagram] Call-ID:[prev][next]
[16] SIP/2.0 100 Trying
```
Date: Fri, 05 Jun 2009 14:15:18 GMT
From: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763485
Allow-Events: presence, kpml
Content-Length: 0
To: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763587
Call-ID: 46768700-a291286f-38-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bKeb73bf351c
CSeq: 103 INVITE
```

[diagram] Call-ID:[prev][next]
[17] SIP/2.0 200 OK
```
Date: Fri, 05 Jun 2009 14:15:18 GMT
Call-Info: <sip:10.10.199.250:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763485
Allow-Events: presence, kpml
P-Asserted-Identity: <sip:1001@10.10.199.250>
Supported: replaces
Remote-Party-ID: <sip:1001@10.10.199.250>;party=called;screen=yes;privacy=off
Content-Length: 337
Require:  timer
To: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763587
Contact: <sip:1001@10.10.199.250:5060;transport=tcp>
Content-Type: application/sdp
Call-ID: 46768700-a291286f-38-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bKeb73bf351c
CSeq: 103 INVITE
Session-Expires:  1800;refresher=uac

v=0
o=CiscoSystemsCCM-SIP 2000 4 IN IP4 10.10.199.250
s=SIP Call
c=IN IP4 10.10.199.130
t=0 0
m=audio 4000 RTP/AVP 9 0 8 18 101
a=rtpmap:9 G722/8000
a=ptime:20
a=rtpmap:0 PCMU/8000
a=ptime:20
a=rtpmap:8 PCMA/8000
a=ptime:20
a=rtpmap:18 G729/8000
a=ptime:20
a=sendonly
```

CISCO CONFIDENTIAL

```
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15

[diagram]   Call-ID:[prev][next]
[18] ACK sip:1001@10.10.199.250:5060;transport=tcp SIP/2.0
Date: Fri, 05 Jun 2009 14:16:22 GMT
From: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763485
Allow-Events: presence, kpml
Content-Length: 171
To: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763587
Content-Type: application/sdp
Call-ID: 46768700-a291286f-38-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bKec34e55a4d
CSeq: 103 ACK
Max-Forwards: 70

v=0
o=CiscoSystemsCCM-SIP 2000 4 IN IP4 10.10.199.251
s=SIP Call
c=IN IP4 10.10.199.251
t=0 0
m=audio 4000 RTP/AVP 0
a=rtpmap:0 PCMU/8000
a=ptime:20
a=inactive

[diagram]   Call-ID:[prev][next]
[19] INVITE sip:2002@10.10.199.251:5060;transport=tcp SIP/2.0
Date: Fri, 05 Jun 2009 14:15:18 GMT
Call-Info: <sip:10.10.199.250:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763587
Allow-Events: presence, kpml
P-Asserted-Identity: <sip:1001@10.10.199.250>
Supported: timer,resource-priority,replaces
Min-SE:  1800
Remote-Party-ID: <sip:1001@10.10.199.250>;party=calling;screen=yes;privacy=off
Content-Length: 160
User-Agent: Cisco-CUCM7.1
To: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763485
Contact: <sip:1001@10.10.199.250:5060;transport=tcp>
Expires: 180
Content-Type: application/sdp
Call-ID: 46768700-a291286f-38-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK1054bd305e
CSeq: 102 INVITE
Session-Expires:  1800;refresher=uas
Max-Forwards: 70

v=0
o=CiscoSystemsCCM-SIP 2000 5 IN IP4 10.10.199.250
s=SIP Call
c=IN IP4 10.10.199.130
t=0 0
m=audio 27304 RTP/AVP 0
a=rtpmap:0 PCMU/8000
a=ptime:20

[diagram]   Call-ID:[prev][next]
[20] SIP/2.0 100 Trying
Date: Fri, 05 Jun 2009 14:16:22 GMT
From: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763587
Allow-Events: presence, kpml
Content-Length: 0
To: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763485
Call-ID: 46768700-a291286f-38-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK1054bd305e
CSeq: 102 INVITE

[diagram]   Call-ID:[prev][next]
[21] SIP/2.0 200 OK
Date: Fri, 05 Jun 2009 14:16:22 GMT
Call-Info: <sip:10.10.199.251:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763587
Allow-Events: presence, kpml
P-Asserted-Identity: <sip:2002@10.10.199.251>
Supported: replaces
Supported: Geolocation
Remote-Party-ID: <sip:2002@10.10.199.251>;party=called;screen=yes;privacy=off
```

CISCO CONFIDENTIAL

```
Content-Length: 171
Require:  timer
To: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763485
Contact: <sip:2002@10.10.199.251:5060;transport=tcp>
Content-Type: application/sdp
Call-ID: 46768700-a291286f-38-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK1054bd305e
CSeq: 102 INVITE
Session-Expires:  1800;refresher=uas

v=0
o=CiscoSystemsCCM-SIP 2000 5 IN IP4 10.10.199.251
s=SIP Call
c=IN IP4 10.10.199.251
t=0 0
m=audio 4000 RTP/AVP 0
a=rtpmap:0 PCMU/8000
a=ptime:20
a=sendonly
```

[diagram] Call-ID:[prev][next]

[22] ACK sip:2002@10.10.199.251:5060;transport=tcp SIP/2.0

```
Date: Fri, 05 Jun 2009 14:15:18 GMT
From: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763587
Allow-Events: presence, kpml
Content-Length: 0
To: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763485
Call-ID: 46768700-a291286f-38-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK106276cd417
CSeq: 102 ACK
Max-Forwards: 70
```

[diagram] Call-ID:[prev][next]

[23] INVITE sip:1001@10.10.199.250:5060;transport=tcp SIP/2.0

```
Date: Fri, 05 Jun 2009 14:16:29 GMT
Call-Info: <sip:10.10.199.251:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763485
Allow-Events: presence, kpml
P-Asserted-Identity: <sip:2002@10.10.199.251>
Supported: timer,resource-priority,replaces
Min-SE:  1800
Remote-Party-ID: <sip:2002@10.10.199.251>;party=calling;screen=yes;privacy=off
Content-Length: 164
User-Agent: Cisco-CUCM7.1
To: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763587
Contact: <sip:2002@10.10.199.251:5060;transport=tcp>
Expires: 180
Content-Type: application/sdp
Call-ID: 46768700-a291286f-38-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bKef74b3311c
CSeq: 104 INVITE
Session-Expires:  1800;refresher=uac
Max-Forwards: 70

v=0
o=CiscoSystemsCCM-SIP 2000 6 IN IP4 10.10.199.251
s=SIP Call
c=IN IP4 0.0.0.0
t=0 0
m=audio 4000 RTP/AVP 0
a=rtpmap:0 PCMU/8000
a=ptime:20
a=inactive
```

[diagram] Call-ID:[prev][next]

[24] SIP/2.0 100 Trying

```
Date: Fri, 05 Jun 2009 14:15:25 GMT
From: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763485
Allow-Events: presence, kpml
Content-Length: 0
To: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763587
Call-ID: 46768700-a291286f-38-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bKef74b3311c
CSeq: 104 INVITE
```

[diagram] Call-ID:[prev][next]

[25] SIP/2.0 200 OK

```
Date: Fri, 05 Jun 2009 14:15:25 GMT
Call-Info: <sip:10.10.199.250:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
```

CISCO CONFIDENTIAL

```
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763485
Allow-Events: presence, kpml
P-Asserted-Identity: <sip:1001@10.10.199.250>
Supported: replaces
Supported: Geolocation
Remote-Party-ID: <sip:1001@10.10.199.250>;party=called;screen=yes;privacy=off
Content-Length: 172
Require:  timer
To: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763587
Contact: <sip:1001@10.10.199.250:5060;transport=tcp>
Content-Type: application/sdp
Call-ID: 46768700-a291286f-38-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bKef74b3311c
CSeq: 104 INVITE
Session-Expires:  1800;refresher=uac

v=0
o=CiscoSystemsCCM-SIP 2000 6 IN IP4 10.10.199.250
s=SIP Call
c=IN IP4 10.10.199.130
t=0 0
m=audio 27304 RTP/AVP 0
a=rtpmap:0 PCMU/8000
a=ptime:20
a=inactive

[diagram]   Call-ID:[prev][next]
[26] ACK sip:1001@10.10.199.250:5060;transport=tcp SIP/2.0
Date: Fri, 05 Jun 2009 14:16:29 GMT
From: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763485
Allow-Events: presence, kpml
Content-Length: 0
To: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763587
Call-ID: 46768700-a291286f-38-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bKf06c1e6f99
CSeq: 104 ACK
Max-Forwards: 70

[diagram]   Call-ID:[prev][next]
[27] UPDATE sip:1001@10.10.199.250:5060;transport=tcp SIP/2.0
Date: Fri, 05 Jun 2009 14:16:29 GMT
Call-Info: <sip:10.10.199.251:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763485
Allow-Events: presence, kpml
P-Asserted-Identity: <sip:2001@10.10.199.251>
Supported: timer,resource-priority,replaces
Remote-Party-ID: <sip:2001@10.10.199.251>;party=calling;screen=yes;privacy=off
Content-Length: 0
User-Agent: Cisco-CUCM7.1
To: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763587
Contact: <sip:2002@10.10.199.251:5060;transport=tcp>
Call-ID: 46768700-a291286f-38-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bKf31469c9ea
CSeq: 105 UPDATE
Max-Forwards: 70

[diagram]   Call-ID:[prev][next]
[28] SIP/2.0 200 OK
Date: Fri, 05 Jun 2009 14:15:25 GMT
From: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763485
Allow-Events: presence, kpml
P-Asserted-Identity: <sip:1001@10.10.199.250>
Remote-Party-ID: <sip:1001@10.10.199.250>;party=called;screen=yes;privacy=off
Content-Length: 0
Require:  timer
To: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763587
Contact: <sip:1001@10.10.199.250:5060;transport=tcp>
Call-ID: 46768700-a291286f-38-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bKf31469c9ea
CSeq: 105 UPDATE
Session-Expires:  1800;refresher=uac

[diagram]   Call-ID:[prev][next]
[29] INVITE sip:1001@10.10.199.250:5060;transport=tcp SIP/2.0
Date: Fri, 05 Jun 2009 14:16:29 GMT
Call-Info: <sip:10.10.199.251:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763485
```

CISCO CONFIDENTIAL

```
Allow-Events: presence, kpml
P-Asserted-Identity: <sip:2001@10.10.199.251>
Supported: timer,resource-priority,replaces
Min-SE:  1800
Remote-Party-ID: <sip:2001@10.10.199.251>;party=calling;screen=yes;privacy=off
Content-Length: 0
User-Agent: Cisco-CUCM7.1
To: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763587
Contact: <sip:2002@10.10.199.251:5060;transport=tcp>
Expires: 180
Call-ID: 46768700-a291286f-38-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bKf5296f85d
CSeq: 106 INVITE
Session-Expires:  1800;refresher=uac
Max-Forwards: 70
```

[diagram] Call-ID:[prev][next]

[30] SIP/2.0 100 Trying

```
Date: Fri, 05 Jun 2009 14:15:25 GMT
From: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763485
Allow-Events: presence, kpml
Content-Length: 0
To: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763587
Call-ID: 46768700-a291286f-38-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bKf5296f85d
CSeq: 106 INVITE
```

[diagram] Call-ID:[prev][next]

[31] SIP/2.0 200 OK

```
Date: Fri, 05 Jun 2009 14:15:25 GMT
Call-Info: <sip:10.10.199.250:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763485
Allow-Events: presence, kpml
P-Asserted-Identity: <sip:1001@10.10.199.250>
Supported: replaces
Remote-Party-ID: <sip:1001@10.10.199.250>;party=called;screen=yes;privacy=off
Content-Length: 337
Require:  timer
To: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763587
Contact: <sip:1001@10.10.199.250:5060;transport=tcp>
Content-Type: application/sdp
Call-ID: 46768700-a291286f-38-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bKf5296f85d
CSeq: 106 INVITE
Session-Expires:  1800;refresher=uac

v=0
o=CiscoSystemsCCM-SIP 2000 7 IN IP4 10.10.199.250
s=SIP Call
c=IN IP4 10.10.199.130
t=0 0
m=audio 4000 RTP/AVP 9 0 8 18 101
a=rtpmap:9 G722/8000
a=ptime:20
a=rtpmap:0 PCMU/8000
a=ptime:20
a=rtpmap:8 PCMA/8000
a=ptime:20
a=rtpmap:18 G729/8000
a=ptime:20
a=sendonly
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
```

[diagram] Call-ID:[prev][next]

[32] ACK sip:1001@10.10.199.250:5060;transport=tcp SIP/2.0

```
Date: Fri, 05 Jun 2009 14:16:29 GMT
From: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763485
Allow-Events: presence, kpml
Content-Length: 228
To: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763587
Content-Type: application/sdp
Call-ID: 46768700-a291286f-38-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bKf9784c3bbd
CSeq: 106 ACK
Max-Forwards: 70

v=0
o=CiscoSystemsCCM-SIP 2000 7 IN IP4 10.10.199.251
```

CISCO CONFIDENTIAL

```
s=SIP Call
c=IN IP4 10.10.199.171
t=0 0
m=audio 28560 RTP/AVP 9 101
a=rtpmap:9 G722/8000
a=ptime:20
a=recvonly
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
```

[diagram] Call-ID:[prev][next]

[33] INVITE sip:2002@10.10.199.251:5060;transport=tcp SIP/2.0

```
Date: Fri, 05 Jun 2009 14:15:25 GMT
Call-Info: <sip:10.10.199.250:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763587
Allow-Events: presence, kpml
P-Asserted-Identity: <sip:1001@10.10.199.250>
Supported: timer,resource-priority,replaces
Min-SE:  1800
Remote-Party-ID: <sip:1001@10.10.199.250>;party=calling;screen=yes;privacy=off
Content-Length: 216
User-Agent: Cisco-CUCM7.1
To: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763485
Contact: <sip:1001@10.10.199.250:5060;transport=tcp>
Expires: 180
Content-Type: application/sdp
Call-ID: 46768700-a291286f-38-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK107467f5f0c
CSeq: 103 INVITE
Session-Expires:  1800;refresher=uas
Max-Forwards: 70

v=0
o=CiscoSystemsCCM-SIP 2000 8 IN IP4 10.10.199.250
s=SIP Call
c=IN IP4 10.10.199.130
t=0 0
m=audio 27996 RTP/AVP 9 101
a=rtpmap:9 G722/8000
a=ptime:20
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
```

[diagram] Call-ID:[prev][next]

[34] SIP/2.0 100 Trying

```
Date: Fri, 05 Jun 2009 14:16:29 GMT
From: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763587
Allow-Events: presence, kpml
Content-Length: 0
To: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763485
Call-ID: 46768700-a291286f-38-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK107467f5f0c
CSeq: 103 INVITE
```

[diagram] Call-ID:[prev][next]

[35] SIP/2.0 200 OK

```
Date: Fri, 05 Jun 2009 14:16:29 GMT
Call-Info: <sip:10.10.199.251:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763587
Allow-Events: presence, kpml
P-Asserted-Identity: <sip:2001@10.10.199.251>
Supported: replaces
Supported: Geolocation
Remote-Party-ID: <sip:2001@10.10.199.251>;party=called;screen=yes;privacy=off
Content-Length: 216
Require:  timer
To: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763485
Contact: <sip:2002@10.10.199.251:5060;transport=tcp>
Content-Type: application/sdp
Call-ID: 46768700-a291286f-38-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK107467f5f0c
CSeq: 103 INVITE
Session-Expires:  1800;refresher=uas

v=0
o=CiscoSystemsCCM-SIP 2000 8 IN IP4 10.10.199.251
s=SIP Call
c=IN IP4 10.10.199.171
```

CISCO CONFIDENTIAL

```
t=0 0
m=audio 28560 RTP/AVP 9 101
a=rtpmap:9 G722/8000
a=ptime:20
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15

[diagram]   Call-ID:[prev][next]
[36] ACK sip:2002@10.10.199.251:5060;transport=tcp SIP/2.0
Date: Fri, 05 Jun 2009 14:15:25 GMT
From: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763587
Allow-Events: presence, kpml
Content-Length: 0
To: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763485
Call-ID: 46768700-a291286f-38-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK1085c7d840c
CSeq: 103 ACK
Max-Forwards: 70

[diagram]   Call-ID:[prev][next]
[37] UPDATE sip:1001@10.10.199.250:5060;transport=tcp SIP/2.0
Date: Fri, 05 Jun 2009 14:16:29 GMT
Call-Info: <sip:10.10.199.251:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763485
Allow-Events: presence, kpml
P-Asserted-Identity: <sip:2001@10.10.199.251>
Supported: timer,resource-priority,replaces
Remote-Party-ID: <sip:2001@10.10.199.251>;party=calling;screen=yes;privacy=off
Content-Length: 0
User-Agent: Cisco-CUCM7.1
To: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763587
Contact: <sip:2002@10.10.199.251:5060;transport=tcp>
Call-ID: 46768700-a291286f-38-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bKfc2999bc32
CSeq: 107 UPDATE
Max-Forwards: 70

[diagram]   Call-ID:[prev][next]
[38] SIP/2.0 200 OK
Date: Fri, 05 Jun 2009 14:15:25 GMT
From: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763485
Allow-Events: presence, kpml
P-Asserted-Identity: <sip:1001@10.10.199.250>
Remote-Party-ID: <sip:1001@10.10.199.250>;party=called;screen=yes;privacy=off
Content-Length: 0
Require:  timer
To: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763587
Contact: <sip:1001@10.10.199.250:5060;transport=tcp>
Call-ID: 46768700-a291286f-38-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bKfc2999bc32
CSeq: 107 UPDATE
Session-Expires:  1800;refresher=uac

[diagram]   Call-ID:[prev][next]
[39] BYE sip:2002@10.10.199.251:5060;transport=tcp SIP/2.0
Date: Fri, 05 Jun 2009 14:15:25 GMT
From: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763587
P-Asserted-Identity: <sip:1001@10.10.199.250>
Content-Length: 0
User-Agent: Cisco-CUCM7.1
To: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763485
Call-ID: 46768700-a291286f-38-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK10927c97b6e
CSeq: 104 BYE
Max-Forwards: 70

[diagram]   Call-ID:[prev][next]
[40] SIP/2.0 200 OK
Date: Fri, 05 Jun 2009 14:16:35 GMT
From: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763587
Content-Length: 0
To: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763485
Call-ID: 46768700-a291286f-38-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK10927c97b6e
CSeq: 104 BYE
```

4.2 Basic Early Transfer Call via an Inter Cluster SIP Trunk

Title: Basic Early Transfer Call via an Inter Cluster SIP Trunk

Description:

The following basic call flow illustrates the SIP messaging that takes place between two Cisco Unified CMs via an Inter Cluster SIP Trunk.

Cisco Unified IP Phone 1001 (registered with Unified CM1) calls Cisco Unified IP Phone 2002 (registered with Unified CM2) and Cisco Unified IP Phone IP Phone 2002 made an early transfer to Cisco Unified IP Phone IP Phone 2001 (registered with Unified CM2 as well)

Configuration:

Node = Unified CM1, IP = 10.10.199.250
Node = Unified CM2, IP = 10.10.199.251

Phone = A, Line = 1001, IP = 10.10.199.130, Model = SCCP
Phone = B, Line = 2002, IP = 10.10.199.179, Model = SCCP
Phone = C, Line = 2001, IP = 10.10.199.171, Model = SIP TNP

SIP Trunk between Unified CM1 & Unified CM2 has route pattern 2.XXXX

Scenario:

Phone A DN 1001 calls Phone B DN 2002 over the SIP Trunk by dialing 22002
Phone B DN 2002 Answers
Phone B DN 2002 presses transfer softkey and dials Phone C DN 2001
Phone C DN 2001 is ringing
Phone B DN 2002 presses Transfer softkey to complete the transfer
Phone C DN 2001 answers
Phone A DN 1001 and Phone C DN 2001 are connected
Phone A DN 1001 goes onHook
Phone C DN 2001 goes onHook

End of Scenario

CISCO CONFIDENTIAL

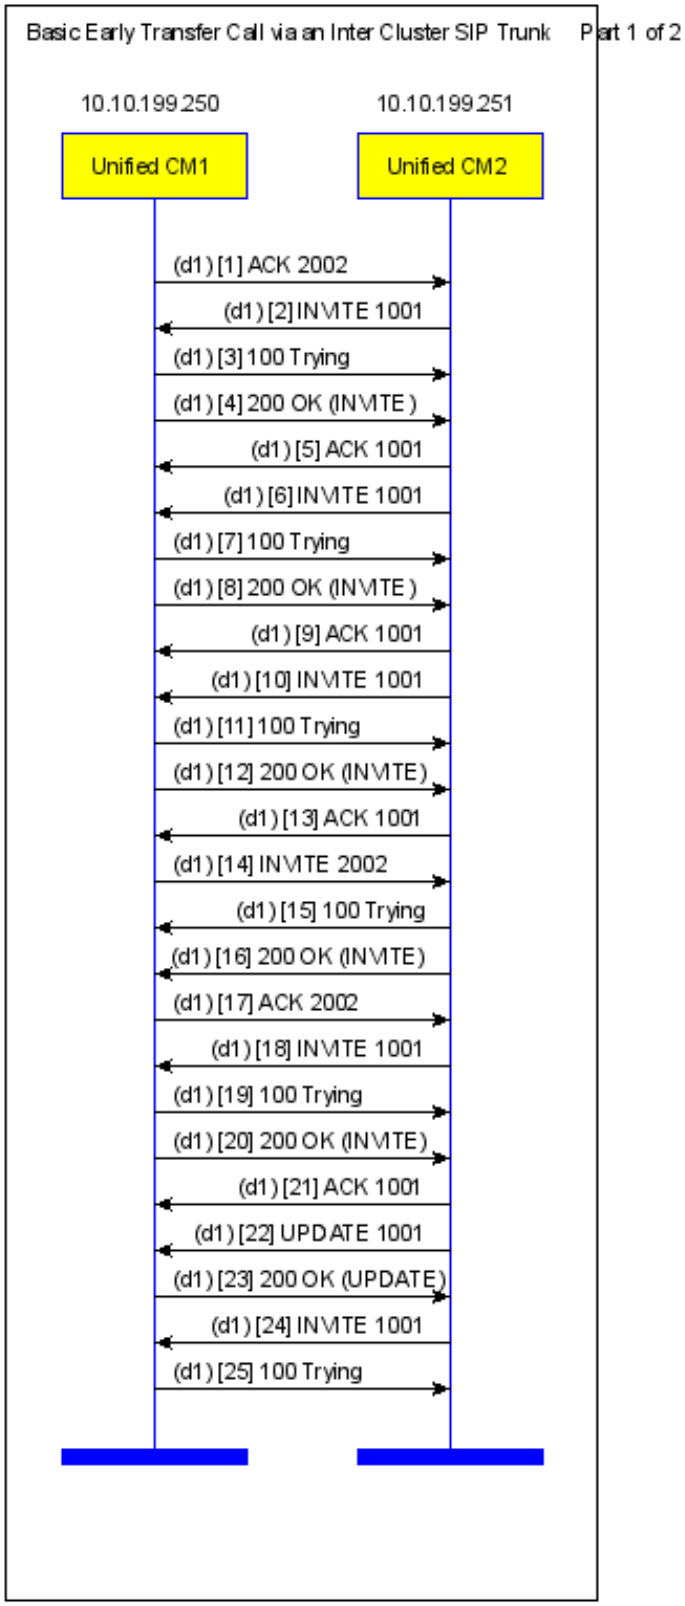

CISCO CONFIDENTIAL

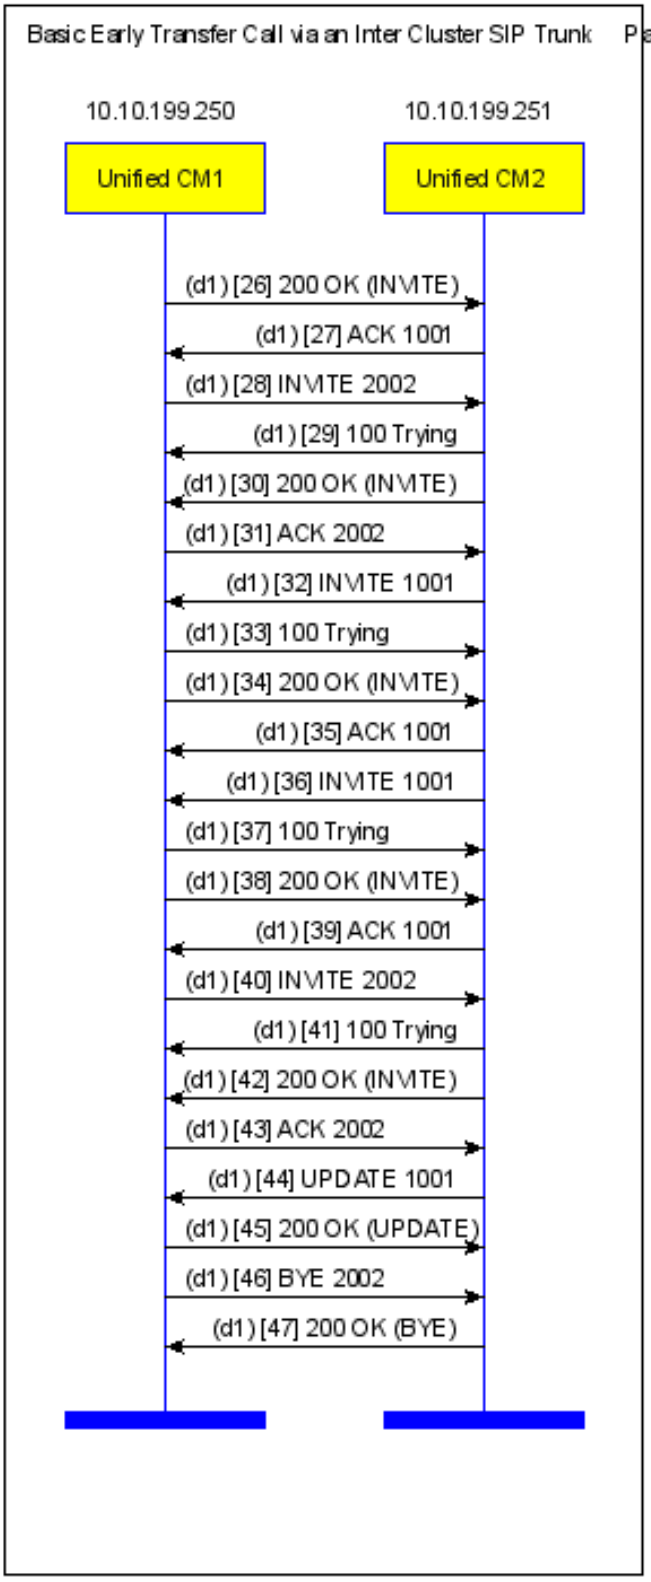

CISCO CONFIDENTIAL

[diagram] Call-ID:[prev][next]
[1] ACK sip:2002@10.10.199.251:5060;transport=tcp SIP/2.0
Date: Fri, 05 Jun 2009 14:10:17 GMT
From: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763585
Allow-Events: presence, kpml
Content-Length: 228
To: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763479
Content-Type: application/sdp
Call-ID: 9739b000-a2912749-37-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bKfb4178ea2
CSeq: 101 ACK
Max-Forwards: 70

v=0
o=CiscoSystemsCCM-SIP 2000 1 IN IP4 10.10.199.250
s=SIP Call
c=IN IP4 10.10.199.130
t=0 0
m=audio 30352 RTP/AVP 9 101
a=rtpmap:9 G722/8000
a=ptime:20
a=recvonly
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15

[diagram] Call-ID:[prev][next]
[2] INVITE sip:1001@10.10.199.250:5060;transport=tcp SIP/2.0
Date: Fri, 05 Jun 2009 14:11:25 GMT
Call-Info: <sip:10.10.199.251:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763479
Allow-Events: presence, kpml
P-Asserted-Identity: <sip:2002@10.10.199.251>
Supported: timer,resource-priority,replaces
Min-SE: 1800
Remote-Party-ID: <sip:2002@10.10.199.251>;party=calling;screen=yes;privacy=off
Content-Length: 216
User-Agent: Cisco-CUCM7.1
To: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763585
Contact: <sip:2002@10.10.199.251:5060;transport=tcp>
Expires: 180
Content-Type: application/sdp
Call-ID: 9739b000-a2912749-37-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bKcf16a16894
CSeq: 101 INVITE
Session-Expires: 1800;refresher=uac
Max-Forwards: 70

v=0
o=CiscoSystemsCCM-SIP 2000 2 IN IP4 10.10.199.251
s=SIP Call
c=IN IP4 10.10.199.179
t=0 0
m=audio 22774 RTP/AVP 9 101
a=rtpmap:9 G722/8000
a=ptime:20
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15

[diagram] Call-ID:[prev][next]
[3] SIP/2.0 100 Trying
Date: Fri, 05 Jun 2009 14:10:21 GMT
From: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763479
Allow-Events: presence, kpml
Content-Length: 0
To: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763585
Call-ID: 9739b000-a2912749-37-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bKcf16a16894
CSeq: 101 INVITE

[diagram] Call-ID:[prev][next]
[4] SIP/2.0 200 OK
Date: Fri, 05 Jun 2009 14:10:21 GMT
Call-Info: <sip:10.10.199.250:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763479
Allow-Events: presence, kpml
P-Asserted-Identity: <sip:1001@10.10.199.250>
Supported: replaces
Supported: Geolocation

CISCO CONFIDENTIAL

```
Remote-Party-ID: <sip:1001@10.10.199.250>;party=called;screen=yes;privacy=off
Content-Length: 216
Require:  timer
To: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763585
Contact: <sip:1001@10.10.199.250:5060;transport=tcp>
Content-Type: application/sdp
Call-ID: 9739b000-a2912749-37-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bKcf16a16894
CSeq: 101 INVITE
Session-Expires:  1800;refresher=uac

v=0
o=CiscoSystemsCCM-SIP 2000 2 IN IP4 10.10.199.250
s=SIP Call
c=IN IP4 10.10.199.130
t=0 0
m=audio 30352 RTP/AVP 9 101
a=rtpmap:9 G722/8000
a=ptime:20
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15

[diagram]   Call-ID:[prev][next]
[5] ACK sip:1001@10.10.199.250:5060;transport=tcp SIP/2.0
Date: Fri, 05 Jun 2009 14:11:25 GMT
From: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763479
Allow-Events: presence, kpml
Content-Length: 0
To: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763585
Call-ID: 9739b000-a2912749-37-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bKd04cb53385
CSeq: 101 ACK
Max-Forwards: 70

[diagram]   Call-ID:[prev][next]
[6] INVITE sip:1001@10.10.199.250:5060;transport=tcp SIP/2.0
Date: Fri, 05 Jun 2009 14:11:29 GMT
Call-Info: <sip:10.10.199.251:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763479
Allow-Events: presence, kpml
P-Asserted-Identity: <sip:2002@10.10.199.251>
Supported: timer,resource-priority,replaces
Min-SE:  1800
Remote-Party-ID: <sip:2002@10.10.199.251>;party=calling;screen=yes;privacy=off
Content-Length: 221
User-Agent: Cisco-CUCM7.1
To: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763585
Contact: <sip:2002@10.10.199.251:5060;transport=tcp>
Expires: 180
Content-Type: application/sdp
Call-ID: 9739b000-a2912749-37-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bKd139a45dba
CSeq: 102 INVITE
Session-Expires:  1800;refresher=uac
Max-Forwards: 70

v=0
o=CiscoSystemsCCM-SIP 2000 3 IN IP4 10.10.199.251
s=SIP Call
c=IN IP4 0.0.0.0
t=0 0
m=audio 22774 RTP/AVP 9 101
a=rtpmap:9 G722/8000
a=ptime:20
a=inactive
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15

[diagram]   Call-ID:[prev][next]
[7] SIP/2.0 100 Trying
Date: Fri, 05 Jun 2009 14:10:26 GMT
From: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763479
Allow-Events: presence, kpml
Content-Length: 0
To: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763585
Call-ID: 9739b000-a2912749-37-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bKd139a45dba
CSeq: 102 INVITE
```

CISCO CONFIDENTIAL

```
[diagram]   Call-ID:[prev][next]
[8] SIP/2.0 200 OK
Date: Fri, 05 Jun 2009 14:10:26 GMT
Call-Info: <sip:10.10.199.250:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763479
Allow-Events: presence, kpml
P-Asserted-Identity: <sip:1001@10.10.199.250>
Supported: replaces
Supported: Geolocation
Remote-Party-ID: <sip:1001@10.10.199.250>;party=called;screen=yes;privacy=off
Content-Length: 228
Require:  timer
To: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763585
Contact: <sip:1001@10.10.199.250:5060;transport=tcp>
Content-Type: application/sdp
Call-ID: 9739b000-a2912749-37-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bKd139a45dba
CSeq: 102 INVITE
Session-Expires:  1800;refresher=uac

v=0
o=CiscoSystemsCCM-SIP 2000 3 IN IP4 10.10.199.250
s=SIP Call
c=IN IP4 10.10.199.130
t=0 0
m=audio 30352 RTP/AVP 9 101
a=rtpmap:9 G722/8000
a=ptime:20
a=inactive
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15

[diagram]   Call-ID:[prev][next]
[9] ACK sip:1001@10.10.199.250:5060;transport=tcp SIP/2.0
Date: Fri, 05 Jun 2009 14:11:29 GMT
From: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763479
Allow-Events: presence, kpml
Content-Length: 0
To: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763585
Call-ID: 9739b000-a2912749-37-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bKd23e712075
CSeq: 102 ACK
Max-Forwards: 70

[diagram]   Call-ID:[prev][next]
[10] INVITE sip:1001@10.10.199.250:5060;transport=tcp SIP/2.0
Date: Fri, 05 Jun 2009 14:11:30 GMT
Call-Info: <sip:10.10.199.251:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763479
Allow-Events: presence, kpml
P-Asserted-Identity: <sip:2002@10.10.199.251>
Supported: timer,resource-priority,replaces
Min-SE:  1800
Remote-Party-ID: <sip:2002@10.10.199.251>;party=calling;screen=yes;privacy=off
Content-Length: 0
User-Agent: Cisco-CUCM7.1
To: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763585
Contact: <sip:2002@10.10.199.251:5060;transport=tcp>
Expires: 180
Call-ID: 9739b000-a2912749-37-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bKd3244b1ef8
CSeq: 103 INVITE
Session-Expires:  1800;refresher=uac
Max-Forwards: 70

[diagram]   Call-ID:[prev][next]
[11] SIP/2.0 100 Trying
Date: Fri, 05 Jun 2009 14:10:26 GMT
From: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763479
Allow-Events: presence, kpml
Content-Length: 0
To: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763585
Call-ID: 9739b000-a2912749-37-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bKd3244b1ef8
CSeq: 103 INVITE

[diagram]   Call-ID:[prev][next]
[12] SIP/2.0 200 OK
```

CISCO CONFIDENTIAL

```
Date: Fri, 05 Jun 2009 14:10:26 GMT
Call-Info: <sip:10.10.199.250:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763479
Allow-Events: presence, kpml
P-Asserted-Identity: <sip:1001@10.10.199.250>
Supported: replaces
Remote-Party-ID: <sip:1001@10.10.199.250>;party=called;screen=yes;privacy=off
Content-Length: 337
Require:  timer
To: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763585
Contact: <sip:1001@10.10.199.250:5060;transport=tcp>
Content-Type: application/sdp
Call-ID: 9739b000-a2912749-37-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bKd3244b1ef8
CSeq: 103 INVITE
Session-Expires:  1800;refresher=uac

v=0
o=CiscoSystemsCCM-SIP 2000 4 IN IP4 10.10.199.250
s=SIP Call
c=IN IP4 10.10.199.130
t=0 0
m=audio 4000 RTP/AVP 9 0 8 18 101
a=rtpmap:9 G722/8000
a=ptime:20
a=rtpmap:0 PCMU/8000
a=ptime:20
a=rtpmap:8 PCMA/8000
a=ptime:20
a=rtpmap:18 G729/8000
a=ptime:20
a=sendonly
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
```

[diagram] Call-ID:[prev][next]

[13] ACK sip:1001@10.10.199.250:5060;transport=tcp SIP/2.0

```
Date: Fri, 05 Jun 2009 14:11:30 GMT
From: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763479
Allow-Events: presence, kpml
Content-Length: 171
To: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763585
Content-Type: application/sdp
Call-ID: 9739b000-a2912749-37-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bKd412b6734e
CSeq: 103 ACK
Max-Forwards: 70

v=0
o=CiscoSystemsCCM-SIP 2000 4 IN IP4 10.10.199.251
s=SIP Call
c=IN IP4 10.10.199.251
t=0 0
m=audio 4000 RTP/AVP 0
a=rtpmap:0 PCMU/8000
a=ptime:20
a=inactive
```

[diagram] Call-ID:[prev][next]

[14] INVITE sip:2002@10.10.199.251:5060;transport=tcp SIP/2.0

```
Date: Fri, 05 Jun 2009 14:10:26 GMT
Call-Info: <sip:10.10.199.250:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763585
Allow-Events: presence, kpml
P-Asserted-Identity: <sip:1001@10.10.199.250>
Supported: timer,resource-priority,replaces
Min-SE:  1800
Remote-Party-ID: <sip:1001@10.10.199.250>;party=calling;screen=yes;privacy=off
Content-Length: 160
User-Agent: Cisco-CUCM7.1
To: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763479
Contact: <sip:1001@10.10.199.250:5060;transport=tcp>
Expires: 180
Content-Type: application/sdp
Call-ID: 9739b000-a2912749-37-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bKfcac4ebe7
CSeq: 102 INVITE
Session-Expires:  1800;refresher=uas
```

CISCO CONFIDENTIAL

```
Max-Forwards: 70

v=0
o=CiscoSystemsCCM-SIP 2000 5 IN IP4 10.10.199.250
s=SIP Call
c=IN IP4 10.10.199.130
t=0 0
m=audio 30848 RTP/AVP 0
a=rtpmap:0 PCMU/8000
a=ptime:20
```

[diagram] Call-ID:[prev][next]

[15] SIP/2.0 100 Trying

```
Date: Fri, 05 Jun 2009 14:11:30 GMT
From: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763585
Allow-Events: presence, kpml
Content-Length: 0
To: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763479
Call-ID: 9739b000-a2912749-37-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bKfcac4ebe7
CSeq: 102 INVITE
```

[diagram] Call-ID:[prev][next]

[16] SIP/2.0 200 OK

```
Date: Fri, 05 Jun 2009 14:11:30 GMT
Call-Info: <sip:10.10.199.251:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763585
Allow-Events: presence, kpml
P-Asserted-Identity: <sip:2002@10.10.199.251>
Supported: replaces
Supported: Geolocation
Remote-Party-ID: <sip:2002@10.10.199.251>;party=called;screen=yes;privacy=off
Content-Length: 171
Require:  timer
To: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763479
Contact: <sip:2002@10.10.199.251:5060;transport=tcp>
Content-Type: application/sdp
Call-ID: 9739b000-a2912749-37-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bKfcac4ebe7
CSeq: 102 INVITE
Session-Expires:  1800;refresher=uas

v=0
o=CiscoSystemsCCM-SIP 2000 5 IN IP4 10.10.199.251
s=SIP Call
c=IN IP4 10.10.199.251
t=0 0
m=audio 4000 RTP/AVP 0
a=rtpmap:0 PCMU/8000
a=ptime:20
a=sendonly
```

[diagram] Call-ID:[prev][next]

[17] ACK sip:2002@10.10.199.251:5060;transport=tcp SIP/2.0

```
Date: Fri, 05 Jun 2009 14:10:26 GMT
From: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763585
Allow-Events: presence, kpml
Content-Length: 0
To: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763479
Call-ID: 9739b000-a2912749-37-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bKfd77035b98
CSeq: 102 ACK
Max-Forwards: 70
```

[diagram] Call-ID:[prev][next]

[18] INVITE sip:1001@10.10.199.250:5060;transport=tcp SIP/2.0

```
Date: Fri, 05 Jun 2009 14:11:34 GMT
Call-Info: <sip:10.10.199.251:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763479
Allow-Events: presence, kpml
P-Asserted-Identity: <sip:2002@10.10.199.251>
Supported: timer,resource-priority,replaces
Min-SE:  1800
Remote-Party-ID: <sip:2002@10.10.199.251>;party=calling;screen=yes;privacy=off
Content-Length: 164
User-Agent: Cisco-CUCM7.1
To: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763585
Contact: <sip:2002@10.10.199.251:5060;transport=tcp>
```

CISCO CONFIDENTIAL

```
Expires: 180
Content-Type: application/sdp
Call-ID: 9739b000-a2912749-37-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bKd670f433da
CSeq: 104 INVITE
Session-Expires:  1800;refresher=uac
Max-Forwards: 70

v=0
o=CiscoSystemsCCM-SIP 2000 6 IN IP4 10.10.199.251
s=SIP Call
c=IN IP4 0.0.0.0
t=0 0
m=audio 4000 RTP/AVP 0
a=rtpmap:0 PCMU/8000
a=ptime:20
a=inactive
```

[diagram] Call-ID:[prev][next]

[19] SIP/2.0 100 Trying

```
Date: Fri, 05 Jun 2009 14:10:30 GMT
From: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763479
Allow-Events: presence, kpml
Content-Length: 0
To: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763585
Call-ID: 9739b000-a2912749-37-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bKd670f433da
CSeq: 104 INVITE
```

[diagram] Call-ID:[prev][next]

[20] SIP/2.0 200 OK

```
Date: Fri, 05 Jun 2009 14:10:30 GMT
Call-Info: <sip:10.10.199.250:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763479
Allow-Events: presence, kpml
P-Asserted-Identity: <sip:1001@10.10.199.250>
Supported: replaces
Supported: Geolocation
Remote-Party-ID: <sip:1001@10.10.199.250>;party=called;screen=yes;privacy=off
Content-Length: 172
Require:  timer
To: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763585
Contact: <sip:1001@10.10.199.250:5060;transport=tcp>
Content-Type: application/sdp
Call-ID: 9739b000-a2912749-37-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bKd670f433da
CSeq: 104 INVITE
Session-Expires:  1800;refresher=uac

v=0
o=CiscoSystemsCCM-SIP 2000 6 IN IP4 10.10.199.250
s=SIP Call
c=IN IP4 10.10.199.130
t=0 0
m=audio 30848 RTP/AVP 0
a=rtpmap:0 PCMU/8000
a=ptime:20
a=inactive
```

[diagram] Call-ID:[prev][next]

[21] ACK sip:1001@10.10.199.250:5060;transport=tcp SIP/2.0

```
Date: Fri, 05 Jun 2009 14:11:34 GMT
From: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763479
Allow-Events: presence, kpml
Content-Length: 0
To: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763585
Call-ID: 9739b000-a2912749-37-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bKd73178c438
CSeq: 104 ACK
Max-Forwards: 70
```

[diagram] Call-ID:[prev][next]

[22] UPDATE sip:1001@10.10.199.250:5060;transport=tcp SIP/2.0

```
Date: Fri, 05 Jun 2009 14:11:34 GMT
Call-Info: <sip:10.10.199.251:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763479
Allow-Events: presence, kpml
P-Asserted-Identity: <sip:2001@10.10.199.251>
```

CISCO CONFIDENTIAL

```
Supported: timer,resource-priority,replaces
Remote-Party-ID: <sip:2001@10.10.199.251>;party=calling;screen=yes;privacy=off
Content-Length: 0
User-Agent: Cisco-CUCM7.1
To: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763585
Contact: <sip:2002@10.10.199.251:5060;transport=tcp>
Call-ID: 9739b000-a2912749-37-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bKd816d58fa9
CSeq: 105 UPDATE
Max-Forwards: 70
```

[diagram] Call-ID:[prev][next]

[23] SIP/2.0 200 OK

```
Date: Fri, 05 Jun 2009 14:10:30 GMT
From: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763479
Allow-Events: presence, kpml
P-Asserted-Identity: <sip:1001@10.10.199.250>
Remote-Party-ID: <sip:1001@10.10.199.250>;party=called;screen=yes;privacy=off
Content-Length: 0
Require:  timer
To: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763585
Contact: <sip:1001@10.10.199.250:5060;transport=tcp>
Call-ID: 9739b000-a2912749-37-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bKd816d58fa9
CSeq: 105 UPDATE
Session-Expires:  1800;refresher=uac
```

[diagram] Call-ID:[prev][next]

[24] INVITE sip:1001@10.10.199.250:5060;transport=tcp SIP/2.0

```
Date: Fri, 05 Jun 2009 14:11:34 GMT
Call-Info: <sip:10.10.199.251:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763479
Allow-Events: presence, kpml
P-Asserted-Identity: <sip:2001@10.10.199.251>
Supported: timer,resource-priority,replaces
Min-SE:  1800
Remote-Party-ID: <sip:2001@10.10.199.251>;party=calling;screen=yes;privacy=off
Content-Length: 0
User-Agent: Cisco-CUCM7.1
To: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763585
Contact: <sip:2002@10.10.199.251:5060;transport=tcp>
Expires: 180
Call-ID: 9739b000-a2912749-37-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bKda635a717a
CSeq: 106 INVITE
Session-Expires:  1800;refresher=uac
Max-Forwards: 70
```

[diagram] Call-ID:[prev][next]

[25] SIP/2.0 100 Trying

```
Date: Fri, 05 Jun 2009 14:10:30 GMT
From: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763479
Allow-Events: presence, kpml
Content-Length: 0
To: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763585
Call-ID: 9739b000-a2912749-37-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bKda635a717a
CSeq: 106 INVITE
```

[diagram] Call-ID:[prev][next]

[26] SIP/2.0 200 OK

```
Date: Fri, 05 Jun 2009 14:10:30 GMT
Call-Info: <sip:10.10.199.250:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763479
Allow-Events: presence, kpml
P-Asserted-Identity: <sip:1001@10.10.199.250>
Supported: replaces
Remote-Party-ID: <sip:1001@10.10.199.250>;party=called;screen=yes;privacy=off
Content-Length: 337
Require:  timer
To: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763585
Contact: <sip:1001@10.10.199.250:5060;transport=tcp>
Content-Type: application/sdp
Call-ID: 9739b000-a2912749-37-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bKda635a717a
CSeq: 106 INVITE
Session-Expires:  1800;refresher=uac
```

CISCO CONFIDENTIAL

```
v=0
o=CiscoSystemsCCM-SIP 2000 7 IN IP4 10.10.199.250
s=SIP Call
c=IN IP4 10.10.199.130
t=0 0
m=audio 4000 RTP/AVP 9 0 8 18 101
a=rtpmap:9 G722/8000
a=ptime:20
a=rtpmap:0 PCMU/8000
a=ptime:20
a=rtpmap:8 PCMA/8000
a=ptime:20
a=rtpmap:18 G729/8000
a=ptime:20
a=sendonly
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
```

[diagram] Call-ID:[prev][next]

[27] ACK sip:1001@10.10.199.250:5060;transport=tcp SIP/2.0

```
Date: Fri, 05 Jun 2009 14:11:34 GMT
From: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763479
Allow-Events: presence, kpml
Content-Length: 171
To: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763585
Content-Type: application/sdp
Call-ID: 9739b000-a2912749-37-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bKdb6a907a25
CSeq: 106 ACK
Max-Forwards: 70

v=0
o=CiscoSystemsCCM-SIP 2000 7 IN IP4 10.10.199.251
s=SIP Call
c=IN IP4 10.10.199.251
t=0 0
m=audio 4000 RTP/AVP 0
a=rtpmap:0 PCMU/8000
a=ptime:20
a=inactive
```

[diagram] Call-ID:[prev][next]

[28] INVITE sip:2002@10.10.199.251:5060;transport=tcp SIP/2.0

```
Date: Fri, 05 Jun 2009 14:10:30 GMT
Call-Info: <sip:10.10.199.250:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763585
Allow-Events: presence, kpml
P-Asserted-Identity: <sip:1001@10.10.199.250>
Supported: timer,resource-priority,replaces
Min-SE:  1800
Remote-Party-ID: <sip:1001@10.10.199.250>;party=calling;screen=yes;privacy=off
Content-Length: 160
User-Agent: Cisco-CUCM7.1
To: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763479
Contact: <sip:1001@10.10.199.250:5060;transport=tcp>
Expires: 180
Content-Type: application/sdp
Call-ID: 9739b000-a2912749-37-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bKfe322f1072
CSeq: 103 INVITE
Session-Expires:  1800;refresher=uas
Max-Forwards: 70

v=0
o=CiscoSystemsCCM-SIP 2000 8 IN IP4 10.10.199.250
s=SIP Call
c=IN IP4 10.10.199.130
t=0 0
m=audio 31312 RTP/AVP 0
a=rtpmap:0 PCMU/8000
a=ptime:20
```

[diagram] Call-ID:[prev][next]

[29] SIP/2.0 100 Trying

```
Date: Fri, 05 Jun 2009 14:11:34 GMT
From: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763585
Allow-Events: presence, kpml
Content-Length: 0
To: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763479
```

CISCO CONFIDENTIAL

```
Call-ID: 9739b000-a2912749-37-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bKfe322f1072
CSeq: 103 INVITE

[diagram]   Call-ID:[prev][next]
[30] SIP/2.0 200 OK
Date: Fri, 05 Jun 2009 14:11:34 GMT
Call-Info: <sip:10.10.199.251:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763585
Allow-Events: presence, kpml
P-Asserted-Identity: <sip:2001@10.10.199.251>
Supported: replaces
Supported: Geolocation
Remote-Party-ID: <sip:2001@10.10.199.251>;party=called;screen=yes;privacy=off
Content-Length: 171
Require:  timer
To: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763479
Contact: <sip:2002@10.10.199.251:5060;transport=tcp>
Content-Type: application/sdp
Call-ID: 9739b000-a2912749-37-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bKfe322f1072
CSeq: 103 INVITE
Session-Expires:  1800;refresher=uas

v=0
o=CiscoSystemsCCM-SIP 2000 8 IN IP4 10.10.199.251
s=SIP Call
c=IN IP4 10.10.199.251
t=0 0
m=audio 4000 RTP/AVP 0
a=rtpmap:0 PCMU/8000
a=ptime:20
a=sendonly

[diagram]   Call-ID:[prev][next]
[31] ACK sip:2002@10.10.199.251:5060;transport=tcp SIP/2.0
Date: Fri, 05 Jun 2009 14:10:30 GMT
From: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763585
Allow-Events: presence, kpml
Content-Length: 0
To: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763479
Call-ID: 9739b000-a2912749-37-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bKff9b54568
CSeq: 103 ACK
Max-Forwards: 70

[diagram]   Call-ID:[prev][next]
[32] INVITE sip:1001@10.10.199.250:5060;transport=tcp SIP/2.0
Date: Fri, 05 Jun 2009 14:11:38 GMT
Call-Info: <sip:10.10.199.251:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763479
Allow-Events: presence, kpml
P-Asserted-Identity: <sip:2001@10.10.199.251>
Supported: timer,resource-priority,replaces
Min-SE:  1800
Remote-Party-ID: <sip:2001@10.10.199.251>;party=calling;screen=yes;privacy=off
Content-Length: 164
User-Agent: Cisco-CUCM7.1
To: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763585
Contact: <sip:2002@10.10.199.251:5060;transport=tcp>
Expires: 180
Content-Type: application/sdp
Call-ID: 9739b000-a2912749-37-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bKdc7ccd5e11
CSeq: 107 INVITE
Session-Expires:  1800;refresher=uac
Max-Forwards: 70

v=0
o=CiscoSystemsCCM-SIP 2000 9 IN IP4 10.10.199.251
s=SIP Call
c=IN IP4 0.0.0.0
t=0 0
m=audio 4000 RTP/AVP 0
a=rtpmap:0 PCMU/8000
a=ptime:20
a=inactive
```

CISCO CONFIDENTIAL

```
[diagram]   Call-ID:[prev][next]
[33] SIP/2.0 100 Trying
Date: Fri, 05 Jun 2009 14:10:34 GMT
From: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763479
Allow-Events: presence, kpml
Content-Length: 0
To: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763585
Call-ID: 9739b000-a2912749-37-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bKdc7ccd5e11
CSeq: 107 INVITE

[diagram]   Call-ID:[prev][next]
[34] SIP/2.0 200 OK
Date: Fri, 05 Jun 2009 14:10:34 GMT
Call-Info: <sip:10.10.199.250:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763479
Allow-Events: presence, kpml
P-Asserted-Identity: <sip:1001@10.10.199.250>
Supported: replaces
Supported: Geolocation
Remote-Party-ID: <sip:1001@10.10.199.250>;party=called;screen=yes;privacy=off
Content-Length: 172
Require:  timer
To: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763585
Contact: <sip:1001@10.10.199.250:5060;transport=tcp>
Content-Type: application/sdp
Call-ID: 9739b000-a2912749-37-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bKdc7ccd5e11
CSeq: 107 INVITE
Session-Expires:  1800;refresher=uac

v=0
o=CiscoSystemsCCM-SIP 2000 9 IN IP4 10.10.199.250
s=SIP Call
c=IN IP4 10.10.199.130
t=0 0
m=audio 31312 RTP/AVP 0
a=rtpmap:0 PCMU/8000
a=ptime:20
a=inactive

[diagram]   Call-ID:[prev][next]
[35] ACK sip:1001@10.10.199.250:5060;transport=tcp SIP/2.0
Date: Fri, 05 Jun 2009 14:11:38 GMT
From: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763479
Allow-Events: presence, kpml
Content-Length: 0
To: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763585
Call-ID: 9739b000-a2912749-37-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bKdd2b45c10d
CSeq: 107 ACK
Max-Forwards: 70

[diagram]   Call-ID:[prev][next]
[36] INVITE sip:1001@10.10.199.250:5060;transport=tcp SIP/2.0
Date: Fri, 05 Jun 2009 14:11:38 GMT
Call-Info: <sip:10.10.199.251:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763479
Allow-Events: presence, kpml
P-Asserted-Identity: <sip:2001@10.10.199.251>
Supported: timer,resource-priority,replaces
Min-SE:  1800
Remote-Party-ID: <sip:2001@10.10.199.251>;party=calling;screen=yes;privacy=off
Content-Length: 0
User-Agent: Cisco-CUCM7.1
To: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763585
Contact: <sip:2002@10.10.199.251:5060;transport=tcp>
Expires: 180
Call-ID: 9739b000-a2912749-37-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bKde3bee6147
CSeq: 108 INVITE
Session-Expires:  1800;refresher=uac
Max-Forwards: 70

[diagram]   Call-ID:[prev][next]
[37] SIP/2.0 100 Trying
Date: Fri, 05 Jun 2009 14:10:34 GMT
From: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763479
```

CISCO CONFIDENTIAL

```
Allow-Events: presence, kpml
Content-Length: 0
To: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763585
Call-ID: 9739b000-a2912749-37-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bKde3bee6147
CSeq: 108 INVITE
```

[diagram] Call-ID:[prev][next]

[38] SIP/2.0 200 OK

```
Date: Fri, 05 Jun 2009 14:10:34 GMT
Call-Info: <sip:10.10.199.250:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763479
Allow-Events: presence, kpml
P-Asserted-Identity: <sip:1001@10.10.199.250>
Supported: replaces
Remote-Party-ID: <sip:1001@10.10.199.250>;party=called;screen=yes;privacy=off
Content-Length: 338
Require:  timer
To: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763585
Contact: <sip:1001@10.10.199.250:5060;transport=tcp>
Content-Type: application/sdp
Call-ID: 9739b000-a2912749-37-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bKde3bee6147
CSeq: 108 INVITE
Session-Expires:  1800;refresher=uac

v=0
o=CiscoSystemsCCM-SIP 2000 10 IN IP4 10.10.199.250
s=SIP Call
c=IN IP4 10.10.199.130
t=0 0
m=audio 4000 RTP/AVP 9 0 8 18 101
a=rtpmap:9 G722/8000
a=ptime:20
a=rtpmap:0 PCMU/8000
a=ptime:20
a=rtpmap:8 PCMA/8000
a=ptime:20
a=rtpmap:18 G729/8000
a=ptime:20
a=sendonly
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
```

[diagram] Call-ID:[prev][next]

[39] ACK sip:1001@10.10.199.250:5060;transport=tcp SIP/2.0

```
Date: Fri, 05 Jun 2009 14:11:38 GMT
From: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763479
Allow-Events: presence, kpml
Content-Length: 229
To: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763585
Content-Type: application/sdp
Call-ID: 9739b000-a2912749-37-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bKdf1838c989
CSeq: 108 ACK
Max-Forwards: 70

v=0
o=CiscoSystemsCCM-SIP 2000 10 IN IP4 10.10.199.251
s=SIP Call
c=IN IP4 10.10.199.171
t=0 0
m=audio 20216 RTP/AVP 9 101
a=rtpmap:9 G722/8000
a=ptime:20
a=recvonly
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
```

[diagram] Call-ID:[prev][next]

[40] INVITE sip:2002@10.10.199.251:5060;transport=tcp SIP/2.0

```
Date: Fri, 05 Jun 2009 14:10:34 GMT
Call-Info: <sip:10.10.199.250:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763585
Allow-Events: presence, kpml
P-Asserted-Identity: <sip:1001@10.10.199.250>
Supported: timer,resource-priority,replaces
Min-SE:  1800
```

CISCO CONFIDENTIAL

```
Remote-Party-ID: <sip:1001@10.10.199.250>;party=calling;screen=yes;privacy=off
Content-Length: 217
User-Agent: Cisco-CUCM7.1
To: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763479
Contact: <sip:1001@10.10.199.250:5060;transport=tcp>
Expires: 180
Content-Type: application/sdp
Call-ID: 9739b000-a2912749-37-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK10022fd6b1d
CSeq: 104 INVITE
Session-Expires:  1800;refresher=uas
Max-Forwards: 70

v=0
o=CiscoSystemsCCM-SIP 2000 11 IN IP4 10.10.199.250
s=SIP Call
c=IN IP4 10.10.199.130
t=0 0
m=audio 31662 RTP/AVP 9 101
a=rtpmap:9 G722/8000
a=ptime:20
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15

[diagram]   Call-ID:[prev][next]
[41] SIP/2.0 100 Trying
Date: Fri, 05 Jun 2009 14:11:38 GMT
From: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763585
Allow-Events: presence, kpml
Content-Length: 0
To: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763479
Call-ID: 9739b000-a2912749-37-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK10022fd6b1d
CSeq: 104 INVITE

[diagram]   Call-ID:[prev][next]
[42] SIP/2.0 200 OK
Date: Fri, 05 Jun 2009 14:11:38 GMT
Call-Info: <sip:10.10.199.251:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763585
Allow-Events: presence, kpml
P-Asserted-Identity: <sip:2001@10.10.199.251>
Supported: replaces
Supported: Geolocation
Remote-Party-ID: <sip:2001@10.10.199.251>;party=called;screen=yes;privacy=off
Content-Length: 217
Require:  timer
To: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763479
Contact: <sip:2002@10.10.199.251:5060;transport=tcp>
Content-Type: application/sdp
Call-ID: 9739b000-a2912749-37-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK10022fd6b1d
CSeq: 104 INVITE
Session-Expires:  1800;refresher=uas

v=0
o=CiscoSystemsCCM-SIP 2000 11 IN IP4 10.10.199.251
s=SIP Call
c=IN IP4 10.10.199.171
t=0 0
m=audio 20216 RTP/AVP 9 101
a=rtpmap:9 G722/8000
a=ptime:20
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15

[diagram]   Call-ID:[prev][next]
[43] ACK sip:2002@10.10.199.251:5060;transport=tcp SIP/2.0
Date: Fri, 05 Jun 2009 14:10:34 GMT
From: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763585
Allow-Events: presence, kpml
Content-Length: 0
To: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763479
Call-ID: 9739b000-a2912749-37-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK1016b9a4b6f
CSeq: 104 ACK
Max-Forwards: 70
```

CISCO CONFIDENTIAL

[diagram] Call-ID:[prev][next]
[44] UPDATE sip:1001@10.10.199.250:5060;transport=tcp SIP/2.0
Date: Fri, 05 Jun 2009 14:11:38 GMT
Call-Info: <sip:10.10.199.251:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763479
Allow-Events: presence, kpml
P-Asserted-Identity: <sip:2001@10.10.199.251>
Supported: timer,resource-priority,replaces
Remote-Party-ID: <sip:2001@10.10.199.251>;party=calling;screen=yes;privacy=off
Content-Length: 0
User-Agent: Cisco-CUCM7.1
To: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763585
Contact: <sip:2002@10.10.199.251:5060;transport=tcp>
Call-ID: 9739b000-a2912749-37-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bKe4bb13fc9
CSeq: 109 UPDATE
Max-Forwards: 70

[diagram] Call-ID:[prev][next]
[45] SIP/2.0 200 OK
Date: Fri, 05 Jun 2009 14:10:34 GMT
From: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763479
Allow-Events: presence, kpml
P-Asserted-Identity: <sip:1001@10.10.199.250>
Remote-Party-ID: <sip:1001@10.10.199.250>;party=called;screen=yes;privacy=off
Content-Length: 0
Require: timer
To: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763585
Contact: <sip:1001@10.10.199.250:5060;transport=tcp>
Call-ID: 9739b000-a2912749-37-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bKe4bb13fc9
CSeq: 109 UPDATE
Session-Expires: 1800;refresher=uac

[diagram] Call-ID:[prev][next]
[46] BYE sip:2002@10.10.199.251:5060;transport=tcp SIP/2.0
Date: Fri, 05 Jun 2009 14:10:34 GMT
From: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763585
P-Asserted-Identity: <sip:1001@10.10.199.250>
Content-Length: 0
User-Agent: Cisco-CUCM7.1
To: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763479
Call-ID: 9739b000-a2912749-37-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK10275cce791
CSeq: 105 BYE
Max-Forwards: 70

[diagram] Call-ID:[prev][next]
[47] SIP/2.0 200 OK
Date: Fri, 05 Jun 2009 14:11:46 GMT
From: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763585
Content-Length: 0
To: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763479
Call-ID: 9739b000-a2912749-37-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK10275cce791
CSeq: 105 BYE

4.3 Attended Transfer Call using the Cisco Unified CM SIP Trunk

Title: Attended Transfer Call using the Cisco Unified CM SIP Trunk

Description:

The following basic call flow illustrates the SIP messaging that takes place between Cisco Unified IP SCCP Phones and a SIP Proxy via a SIP trunk.

Cisco Unified IP Phone 1001 (registered with Unified CM1) calls Cisco Unified IP Phone 1003 (registered with Unified CM1) and makes an attended transfer to SIP Proxy Phone 3002 (registered with SIP Proxy)

Configuration:

Node = Unified CM1, IP = 10.10.199.250
Node = SIP Proxy, IP = 10.10.199.32

Phone = A, Line = 1001, IP = 10.10.199.130, Model = SCCP
Phone = B, Line = 1003, IP = 10.10.199.66, Model = SCCP
Phone = C, Line = 3002, IP = 10.10.199.78, Model = SIP TNP

SIP Trunk between Unified CM1 & SIP Proxy has route pattern 4.XXXX

Scenario:

Phone A DN 1001 calls Phone B DN 1003 over the SIP Trunk by dialing 1003
Phone B DN 1003 answers
Phone A DN 1001 presses transfer softkey and dials Phone C DN 43002
Phone C DN 3002 is ringing
Phone C DN 3002 answers
Phone A DN 1001 presses Transfer softkey to complete the transfer
Phone B DN 1003 and Phone C DN 3002 are connected
Phone B DN 1003 goes onHook
Phone C DN 3002 goes onHook

End of Scenario

CISCO CONFIDENTIAL

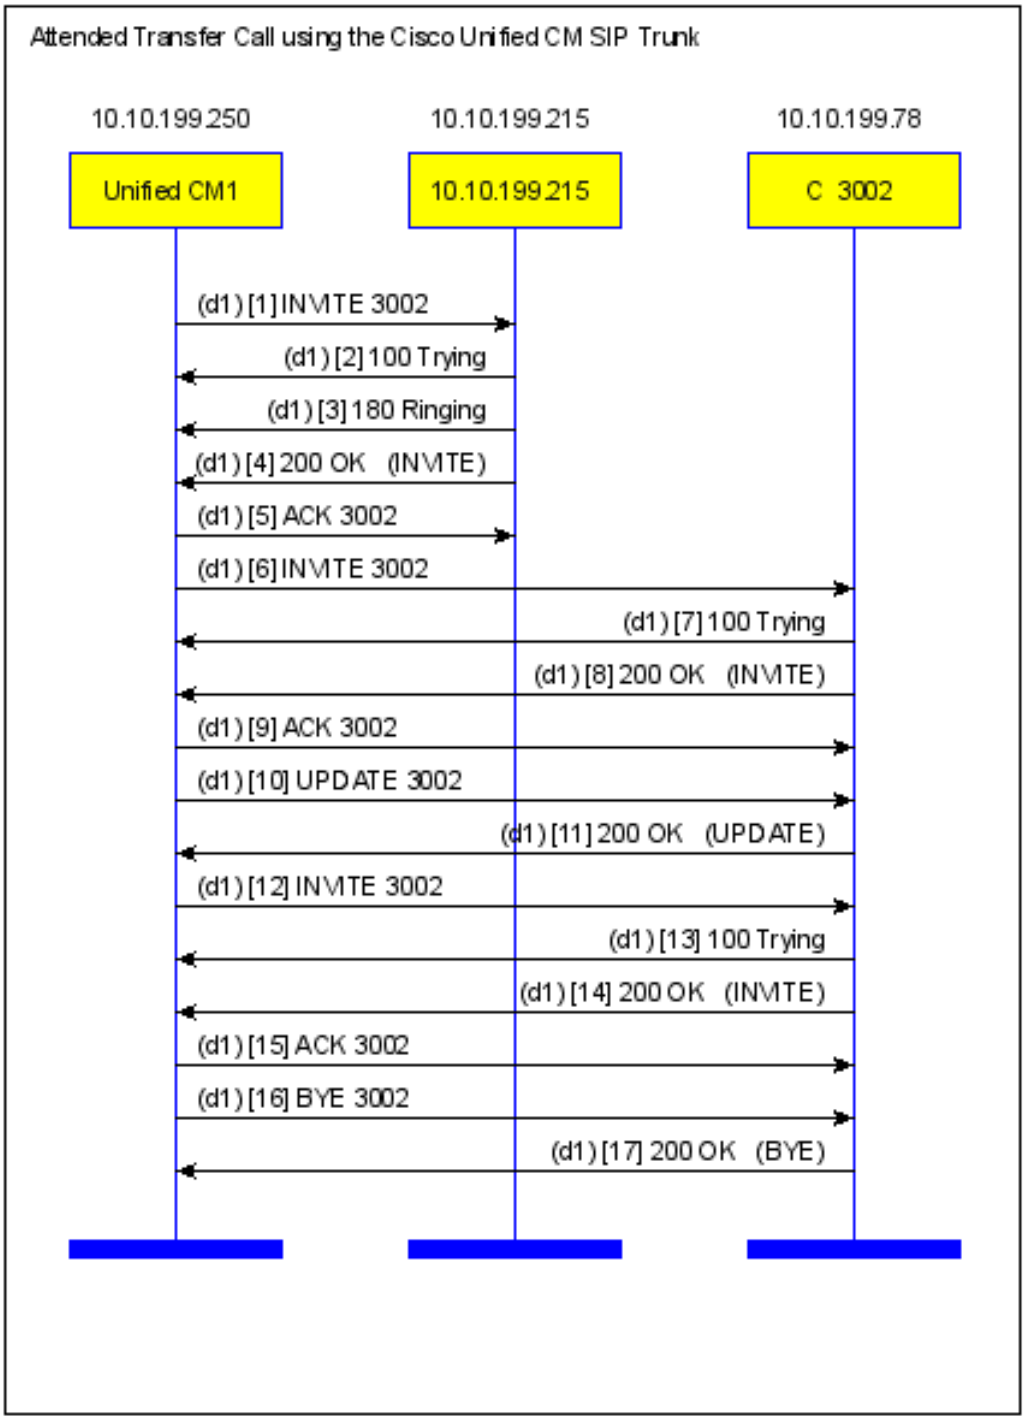

CISCO CONFIDENTIAL

```
[diagram]   Call-ID:[prev][next]
[1] INVITE sip:3002@10.10.199.215:5060 SIP/2.0
Date: Mon, 08 Jun 2009 14:06:34 GMT
Call-Info: <sip:10.10.199.250:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763646
Allow-Events: presence, kpml
P-Asserted-Identity: <sip:1001@10.10.199.250>
Supported: timer,resource-priority,replaces
Supported: Geolocation
Min-SE:  1800
Remote-Party-ID: <sip:1001@10.10.199.250>;party=calling;screen=yes;privacy=off
Content-Length: 0
User-Agent: Cisco-CUCM7.1
To: <sip:3002@10.10.199.215>
Contact: <sip:1001@10.10.199.250:5060;transport=tcp>
Expires: 180
Call-ID: 918bd680-a2d11aea-46-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK15947d9e2cd
CSeq: 101 INVITE
Session-Expires:  1800
Max-Forwards: 70

[diagram]   Call-ID:[prev][next]
[2] SIP/2.0 100 Trying
Via: SIP/2.0/TCP 10.10.199.250:5060;received=10.10.199.250;branch=z9hG4bK15947d9e2cd
Call-ID: 918bd680-a2d11aea-46-fac712ac@10.10.199.250
From: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763646
To: <sip:3002@10.10.199.215>
CSeq: 101 INVITE
Content-Length: 0

[diagram]   Call-ID:[prev][next]
[3] SIP/2.0 180 Ringing
Via: SIP/2.0/TCP 10.10.199.250:5060;received=10.10.199.250;branch=z9hG4bK15947d9e2cd
From: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763646
To: <sip:3002@10.10.199.215>;tag=000f24aa92ac00555355a353-7598242a
Call-ID: 918bd680-a2d11aea-46-fac712ac@10.10.199.250
CSeq: 101 INVITE
Server: Cisco-CP7960G/8.0
Contact: <sip:3002@10.10.199.78:5060;transport=udp>
Record-Route: <sip:3002@10.10.199.215:5060;maddr=10.10.199.215;transport=tcp;lr>
Allow: ACK,BYE,CANCEL,INVITE,NOTIFY,OPTIONS,REFER,REGISTER,UPDATE
Remote-Party-ID: "3002" <sip:3002@10.10.199.215>;party=called;id-type=subscriber;privacy=off;screen=yes
Content-Length: 0

[diagram]   Call-ID:[prev][next]
[4] SIP/2.0 200 OK
Via: SIP/2.0/TCP 10.10.199.250:5060;received=10.10.199.250;branch=z9hG4bK15947d9e2cd
From: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763646
To: <sip:3002@10.10.199.215>;tag=000f24aa92ac00555355a353-7598242a
Call-ID: 918bd680-a2d11aea-46-fac712ac@10.10.199.250
CSeq: 101 INVITE
Server: Cisco-CP7960G/8.0
Contact: <sip:3002@10.10.199.78:5060;transport=udp>
Record-Route: <sip:3002@10.10.199.215:5060;maddr=10.10.199.215;transport=tcp;lr>
Allow: ACK,BYE,CANCEL,INVITE,NOTIFY,OPTIONS,REFER,REGISTER,UPDATE
Remote-Party-ID: "3002" <sip:3002@10.10.199.215>;party=called;id-type=subscriber;privacy=off;screen=yes
Content-Length: 278
Content-Type: application/sdp
Content-Disposition: session;handling=optional

v=0
o=Cisco-SIPUA 19770 0 IN IP4 10.10.199.78
s=SIP Call
t=0 0
m=audio 26910 RTP/AVP 0 8 18 101
c=IN IP4 10.10.199.78
a=rtpmap:0 PCMU/8000
a=rtpmap:8 PCMA/8000
a=rtpmap:18 G729/8000
a=fmtp:18 annexb=no
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
a=sendrecv

[diagram]   Call-ID:[prev][next]
[5] ACK sip:3002@10.10.199.78:5060;transport=udp SIP/2.0
Route: <sip:3002@10.10.199.215:5060;maddr=10.10.199.215;transport=tcp;lr>
Date: Mon, 08 Jun 2009 14:06:34 GMT
```

CISCO CONFIDENTIAL

```
From: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763646
Allow-Events: presence, kpml
Content-Length: 216
To: <sip:3002@10.10.199.215>;tag=000f24aa92ac00555355a353-7598242a
Content-Type: application/sdp
Call-ID: 918bd680-a2d11aea-46-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK15a71dfb115
CSeq: 101 ACK
Max-Forwards: 70

v=0
o=CiscoSystemsCCM-SIP 2000 1 IN IP4 10.10.199.250
s=SIP Call
c=IN IP4 10.10.199.130
t=0 0
m=audio 25398 RTP/AVP 0 101
a=rtpmap:0 PCMU/8000
a=ptime:20
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
```

[diagram] Call-ID:[prev][next]

[6] INVITE sip:3002@10.10.199.78:5060;transport=udp SIP/2.0

```
Route: <sip:3002@10.10.199.215:5060;maddr=10.10.199.215;transport=tcp;lr>
Date: Mon, 08 Jun 2009 14:06:41 GMT
Call-Info: <sip:10.10.199.250:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763646
Allow-Events: presence, kpml
P-Asserted-Identity: <sip:1001@10.10.199.250>
Supported: timer,resource-priority,replaces
Min-SE:  1800
Remote-Party-ID: <sip:1001@10.10.199.250>;party=calling;screen=yes;privacy=off
Content-Length: 221
User-Agent: Cisco-CUCM7.1
To: <sip:3002@10.10.199.215>;tag=000f24aa92ac00555355a353-7598242a
Contact: <sip:1001@10.10.199.250:5060;transport=tcp>
Expires: 180
Content-Type: application/sdp
Call-ID: 918bd680-a2d11aea-46-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK15b252ea717
CSeq: 102 INVITE
Max-Forwards: 70

v=0
o=CiscoSystemsCCM-SIP 2000 2 IN IP4 10.10.199.250
s=SIP Call
c=IN IP4 0.0.0.0
t=0 0
m=audio 25398 RTP/AVP 0 101
a=rtpmap:0 PCMU/8000
a=ptime:20
a=inactive
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
```

[diagram] Call-ID:[prev][next]

[7] SIP/2.0 100 Trying

```
Via: SIP/2.0/TCP 10.10.199.250:5060;received=10.10.199.250;branch=z9hG4bK15b252ea717
Call-ID: 918bd680-a2d11aea-46-fac712ac@10.10.199.250
From: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763646
To: <sip:3002@10.10.199.215>;tag=000f24aa92ac00555355a353-7598242a
CSeq: 102 INVITE
Content-Length: 0
```

[diagram] Call-ID:[prev][next]

[8] SIP/2.0 200 OK

```
Via: SIP/2.0/TCP 10.10.199.250:5060;received=10.10.199.250;branch=z9hG4bK15b252ea717
From: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763646
To: <sip:3002@10.10.199.215>;tag=000f24aa92ac00555355a353-7598242a
Call-ID: 918bd680-a2d11aea-46-fac712ac@10.10.199.250
CSeq: 102 INVITE
Server: Cisco-CP7960G/8.0
Contact: <sip:3002@10.10.199.78:5060;transport=udp>
Record-Route: <sip:3002@10.10.199.78:5060;maddr=10.10.199.215;transport=tcp;lr>
Allow: ACK,BYE,CANCEL,INVITE,NOTIFY,OPTIONS,REFER,REGISTER,UPDATE
Remote-Party-ID: "3002" <sip:3002@10.10.199.215>;party=called;id-type=subscriber;privacy=off;screen=yes
Content-Length: 207
Content-Type: application/sdp
Content-Disposition: session;handling=optional
```

CISCO CONFIDENTIAL

```
v=0
o=Cisco-SIPUA 19770 1 IN IP4 10.10.199.78
s=SIP Call
t=0 0
m=audio 26910 RTP/AVP 0 101
c=IN IP4 10.10.199.78
a=rtpmap:0 PCMU/8000
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
a=inactive
```

[diagram] Call-ID:[prev][next]

[9] ACK sip:3002@10.10.199.78:5060;transport=udp SIP/2.0

```
Route: <sip:3002@10.10.199.215:5060;maddr=10.10.199.215;transport=tcp;lr>
Date: Mon, 08 Jun 2009 14:06:41 GMT
From: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763646
Allow-Events: presence, kpml
Content-Length: 0
To: <sip:3002@10.10.199.215>;tag=000f24aa92ac00555355a353-7598242a
Call-ID: 918bd680-a2d11aea-46-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK15c5922672a
CSeq: 102 ACK
Max-Forwards: 70
```

[diagram] Call-ID:[prev][next]

[10] UPDATE sip:3002@10.10.199.78:5060;transport=udp SIP/2.0

```
Route: <sip:3002@10.10.199.215:5060;maddr=10.10.199.215;transport=tcp;lr>
Date: Mon, 08 Jun 2009 14:06:41 GMT
Call-Info: <sip:10.10.199.250:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763646
Allow-Events: presence, kpml
P-Asserted-Identity: <sip:1003@10.10.199.250>
Supported: timer,resource-priority,replaces
Remote-Party-ID: <sip:1003@10.10.199.250>;party=calling;screen=yes;privacy=off
Content-Length: 0
User-Agent: Cisco-CUCM7.1
To: <sip:3002@10.10.199.215>;tag=000f24aa92ac00555355a353-7598242a
Contact: <sip:1001@10.10.199.250:5060;transport=tcp>
Call-ID: 918bd680-a2d11aea-46-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK15d68b07bf2
CSeq: 103 UPDATE
Max-Forwards: 70
```

[diagram] Call-ID:[prev][next]

[11] SIP/2.0 200 OK

```
Via: SIP/2.0/TCP 10.10.199.250:5060;received=10.10.199.250;branch=z9hG4bK15d68b07bf2
From: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763646
To: <sip:3002@10.10.199.215>;tag=000f24aa92ac00555355a353-7598242a
Call-ID: 918bd680-a2d11aea-46-fac712ac@10.10.199.250
CSeq: 103 UPDATE
Server: Cisco-CP7960G/8.0
Contact: <sip:3002@10.10.199.78:5060;transport=udp>
Allow: ACK,BYE,CANCEL,INVITE,NOTIFY,OPTIONS,REFER,REGISTER,UPDATE
Content-Length: 0
```

[diagram] Call-ID:[prev][next]

[12] INVITE sip:3002@10.10.199.78:5060;transport=udp SIP/2.0

```
Route: <sip:3002@10.10.199.215:5060;maddr=10.10.199.215;transport=tcp;lr>
Date: Mon, 08 Jun 2009 14:06:42 GMT
Call-Info: <sip:10.10.199.250:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763646
Allow-Events: presence, kpml
P-Asserted-Identity: <sip:1003@10.10.199.250>
Supported: timer,resource-priority,replaces
Min-SE:  1800
Remote-Party-ID: <sip:1003@10.10.199.250>;party=calling;screen=yes;privacy=off
Content-Length: 0
User-Agent: Cisco-CUCM7.1
To: <sip:3002@10.10.199.215>;tag=000f24aa92ac00555355a353-7598242a
Contact: <sip:1001@10.10.199.250:5060;transport=tcp>
Expires: 180
Call-ID: 918bd680-a2d11aea-46-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK15e53f5e9fd
CSeq: 104 INVITE
Max-Forwards: 70
```

CISCO CONFIDENTIAL

```
[diagram]   Call-ID:[prev][next]
[13] SIP/2.0 100 Trying
Via: SIP/2.0/TCP 10.10.199.250:5060;received=10.10.199.250;branch=z9hG4bK15e53f5e9fd
Call-ID: 918bd680-a2d11aea-46-fac712ac@10.10.199.250
From: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763646
To: <sip:3002@10.10.199.215>;tag=000f24aa92ac00555355a353-7598242a
CSeq: 104 INVITE
Content-Length: 0

[diagram]   Call-ID:[prev][next]
[14] SIP/2.0 200 OK
Via: SIP/2.0/TCP 10.10.199.250:5060;received=10.10.199.250;branch=z9hG4bK15e53f5e9fd
From: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763646
To: <sip:3002@10.10.199.215>;tag=000f24aa92ac00555355a353-7598242a
Call-ID: 918bd680-a2d11aea-46-fac712ac@10.10.199.250
CSeq: 104 INVITE
Server: Cisco-CP7960G/8.0
Contact: <sip:3002@10.10.199.78:5060;transport=udp>
Record-Route: <sip:3002@10.10.199.78:5060;maddr=10.10.199.215;transport=tcp;lr>
Allow: ACK,BYE,CANCEL,INVITE,NOTIFY,OPTIONS,REFER,REGISTER,UPDATE
Remote-Party-ID: "3002" <sip:3002@10.10.199.215>;party=called;id-type=subscriber;privacy=off;screen=yes
Content-Length: 278
Content-Type: application/sdp
Content-Disposition: session;handling=optional

v=0
o=Cisco-SIPUA 19770 2 IN IP4 10.10.199.78
s=SIP Call
t=0 0
m=audio 26910 RTP/AVP 0 8 18 101
c=IN IP4 10.10.199.78
a=rtpmap:0 PCMU/8000
a=rtpmap:8 PCMA/8000
a=rtpmap:18 G729/8000
a=fmtp:18 annexb=no
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
a=sendrecv

[diagram]   Call-ID:[prev][next]
[15] ACK sip:3002@10.10.199.78:5060;transport=udp SIP/2.0
Route: <sip:3002@10.10.199.215:5060;maddr=10.10.199.215;transport=tcp;lr>
Date: Mon, 08 Jun 2009 14:06:42 GMT
From: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763646
Allow-Events: presence, kpml
Content-Length: 215
To: <sip:3002@10.10.199.215>;tag=000f24aa92ac00555355a353-7598242a
Content-Type: application/sdp
Call-ID: 918bd680-a2d11aea-46-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK15f6286e656
CSeq: 104 ACK
Max-Forwards: 70

v=0
o=CiscoSystemsCCM-SIP 2000 3 IN IP4 10.10.199.250
s=SIP Call
c=IN IP4 10.10.199.66
t=0 0
m=audio 18312 RTP/AVP 0 101
a=rtpmap:0 PCMU/8000
a=ptime:20
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15

[diagram]   Call-ID:[prev][next]
[16] BYE sip:3002@10.10.199.78:5060;transport=udp SIP/2.0
Route: <sip:3002@10.10.199.215:5060;maddr=10.10.199.215;transport=tcp;lr>
Date: Mon, 08 Jun 2009 14:06:42 GMT
From: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763646
P-Asserted-Identity: <sip:1001@10.10.199.250>
Content-Length: 0
User-Agent: Cisco-CUCM7.1
To: <sip:3002@10.10.199.215>;tag=000f24aa92ac00555355a353-7598242a
Call-ID: 918bd680-a2d11aea-46-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK1607ef1fae5
CSeq: 105 BYE
Max-Forwards: 70

[diagram]   Call-ID:[prev][next]
[17] SIP/2.0 200 OK
```

CISCO CONFIDENTIAL

```
Via: SIP/2.0/TCP 10.10.199.250:5060;received=10.10.199.250;branch=z9hG4bK1607ef1fae5
From: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763646
To: <sip:3002@10.10.199.215>;tag=000f24aa92ac00555355a353-7598242a
Call-ID: 918bd680-a2d11aea-46-fac712ac@10.10.199.250
CSeq: 105 BYE
Server: Cisco-CP7960G/8.0
Content-Length: 0
```

4.4 Early Attended Transfer To SIP Proxy via Cisco Unified CM SIP Trunk

Title: Early Attended Transfer To SIP Proxy via Cisco Unified CM SIP Trunk

Description:

The following basic call flow illustrates the SIP messaging that takes place between Cisco Unified IP SCCP Phones and a SIP Proxy via a SIP trunk.

Cisco Unified IP Phone 1001 (registered with Unified CM1) calls Cisco Unified IP Phone 1003 (registered with Unified CM1) and makes an attended transfer to SIP Proxy Phone 3002 (registered with SIP Proxy)

Configuration:

Node = Unified CM1, IP = 10.10.199.250
Node = SIP Proxy, IP = 10.10.199.32

Phone = A, Line = 1001, IP = 10.10.199.130, Model = SCCP
Phone = B, Line = 1003, IP = 10.10.199.66, Model = SCCP
Phone = C, Line = 3002, IP = 10.10.199.78, Model = SIP TNP

SIP Trunk between Unified CM1 & SIP Proxy has route pattern 4.XXXX

Scenario:

Phone A DN 1001 calls Phone B DN 1003 over the SIP Trunk by dialing 1003
Phone B DN 1003 answers
Phone A DN 1001 presses transfer softkey and dials Phone C DN 43002
Phone C DN 3002 is ringing
Phone A DN 1001 presses Transfer softkey to complete the transfer
Phone B DN 1003 hears Phone C DN 3002 ringing
Phone C DN 3002 answers
Phone B DN 1003 and Phone C DN 3002 are connected
Phone B DN 1003 goes onHook
Phone C DN 3002 goes onHook

End of Scenario

CISCO CONFIDENTIAL

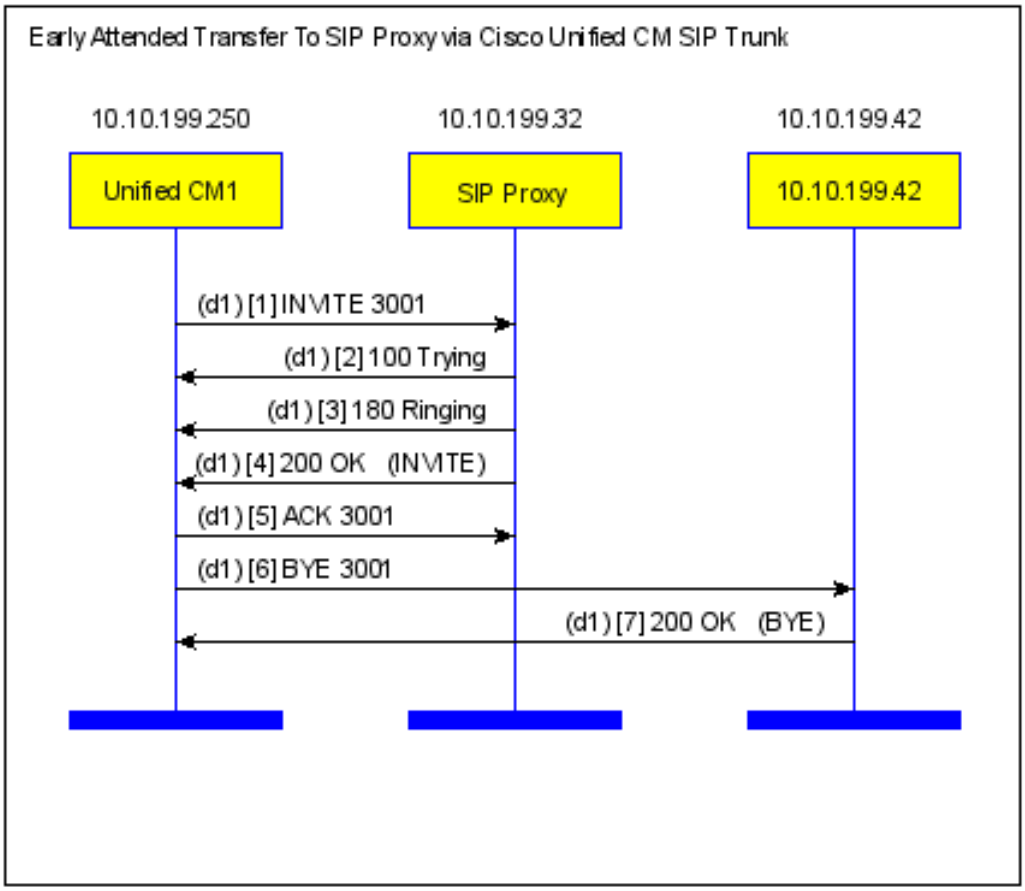

CISCO CONFIDENTIAL

```
[diagram]   Call-ID:[prev][next]
[1] INVITE sip:3001@10.10.199.32:5060 SIP/2.0
Date: Tue, 29 Jul 2008 00:45:08 GMT
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:1001@10.10.199.250>;tag=95ef4362-75f9-4faf-ae01-3fcd294149a0-20479245
Allow-Events: presence
P-Asserted-Identity: <sip:1001@10.10.199.250>
Supported: 100rel,timer,resource-priority,replaces
Min-SE:  1800
Remote-Party-ID: <sip:1001@10.10.199.250>;party=calling;screen=yes;privacy=off
Content-Length: 0
User-Agent: Cisco-CUCM7.1
To: <sip:3001@10.10.199.32>
Contact: <sip:1001@10.10.199.250:5060;transport=tcp>
Expires: 180
Call-ID: 96590780-88e16814-ac-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK25217a184f
CSeq: 101 INVITE
Session-Expires:  1800
Max-Forwards: 70

[diagram]   Call-ID:[prev][next]
[2] SIP/2.0 100 Trying
Via: SIP/2.0/TCP 10.10.199.250:5060;received=10.10.199.250;branch=z9hG4bK25217a184f
Call-ID: 96590780-88e16814-ac-fac712ac@10.10.199.250
From: <sip:1001@10.10.199.250>;tag=95ef4362-75f9-4faf-ae01-3fcd294149a0-20479245
To: <sip:3001@10.10.199.32>
CSeq: 101 INVITE
Content-Length: 0

[diagram]   Call-ID:[prev][next]
[3] SIP/2.0 180 Ringing
Via: SIP/2.0/TCP 10.10.199.250:5060;received=10.10.199.250;branch=z9hG4bK25217a184f
From: <sip:1001@10.10.199.250>;tag=95ef4362-75f9-4faf-ae01-3fcd294149a0-20479245
To: <sip:3001@10.10.199.32>;tag=000f24aa92b90006051a9a1d-7b702076
Call-ID: 96590780-88e16814-ac-fac712ac@10.10.199.250
Date: Mon, 28 Jul 2008 21:46:47 GMT
CSeq: 101 INVITE
Server: CSCO/7
Contact: <sip:3001@10.10.199.42:5060>
Record-Route: <sip:3001@10.10.199.32:5060;maddr=10.10.199.32;transport=tcp;lr>
Content-Length: 0

[diagram]   Call-ID:[prev][next]
[4] SIP/2.0 200 OK
Via: SIP/2.0/TCP 10.10.199.250:5060;received=10.10.199.250;branch=z9hG4bK25217a184f
From: <sip:1001@10.10.199.250>;tag=95ef4362-75f9-4faf-ae01-3fcd294149a0-20479245
To: <sip:3001@10.10.199.32>;tag=000f24aa92b90006051a9a1d-7b702076
Call-ID: 96590780-88e16814-ac-fac712ac@10.10.199.250
Date: Mon, 28 Jul 2008 21:46:57 GMT
CSeq: 101 INVITE
Server: CSCO/7
Contact: <sip:3001@10.10.199.42:5060>
Record-Route: <sip:3001@10.10.199.32:5060;maddr=10.10.199.32;transport=tcp;lr>
Content-Type: application/sdp
Content-Length: 249

v=0
o=Cisco-SIPUA 16609 18236 IN IP4 10.10.199.42
s=SIP Call
c=IN IP4 10.10.199.42
t=0 0
m=audio 23356 RTP/AVP 0 8 18 101
a=rtpmap:0 PCMU/8000
a=rtpmap:8 PCMA/8000
a=rtpmap:18 G729/8000
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15

[diagram]   Call-ID:[prev][next]
[5] ACK sip:3001@10.10.199.42:5060 SIP/2.0
Route: <sip:3001@10.10.199.32:5060;maddr=10.10.199.32;transport=tcp;lr>
Date: Tue, 29 Jul 2008 00:45:08 GMT
From: <sip:1001@10.10.199.250>;tag=95ef4362-75f9-4faf-ae01-3fcd294149a0-20479245
Allow-Events: presence
Content-Length: 215
To: <sip:3001@10.10.199.32>;tag=000f24aa92b90006051a9a1d-7b702076
Content-Type: application/sdp
Call-ID: 96590780-88e16814-ac-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK267b502f17
```

CISCO CONFIDENTIAL

```
CSeq: 101 ACK
Max-Forwards: 70

v=0
o=CiscoSystemsCCM-SIP 2000 1 IN IP4 10.10.199.250
s=SIP Call
c=IN IP4 10.10.199.66
t=0 0
m=audio 24644 RTP/AVP 0 101
a=rtpmap:0 PCMU/8000
a=ptime:20
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
```

[diagram] Call-ID:[prev][next]

[6] BYE sip:3001@10.10.199.42:5060 SIP/2.0

```
Route: <sip:3001@10.10.199.32:5060;maddr=10.10.199.32;transport=tcp;lr>
Date: Tue, 29 Jul 2008 00:45:08 GMT
From: <sip:1001@10.10.199.250>;tag=95ef4362-75f9-4faf-ae01-3fcd294149a0-20479245
P-Asserted-Identity: <sip:1001@10.10.199.250>
Content-Length: 0
User-Agent: Cisco-CUCM7.1
To: <sip:3001@10.10.199.32>;tag=000f24aa92b90006051a9a1d-7b702076
Call-ID: 96590780-88e16814-ac-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK27409059e0
CSeq: 102 BYE
Max-Forwards: 70
```

[diagram] Call-ID:[prev][next]

[7] SIP/2.0 200 OK

```
Via: SIP/2.0/TCP 10.10.199.250:5060;received=10.10.199.250;branch=z9hG4bK27409059e0
From: <sip:1001@10.10.199.250>;tag=95ef4362-75f9-4faf-ae01-3fcd294149a0-20479245
To: <sip:3001@10.10.199.32>;tag=000f24aa92b90006051a9a1d-7b702076
Call-ID: 96590780-88e16814-ac-fac712ac@10.10.199.250
Date: Mon, 28 Jul 2008 21:47:05 GMT
CSeq: 102 BYE
Server: CSCO/7
Content-Length: 0
```

CISCO CONFIDENTIAL

5. Update

5.1 Early Transfer Call to SIP Gateway No PRACK via Cisco Unified CM SIP Trunk

Title: Early Transfer Call to SIP Gateway No PRACK via Cisco Unified CM SIP Trunk

Description:

The following call flow illustrates the SIP messaging that takes place between Cisco Unified CM SCCP phones hosted by a CIsco Unified CM, and a SIP GW via a Cisco Unified CM SIP Trunk

Configuration:

Node = Unified CM1, IP = 10.10.199.250

Node = Gateway, IP = 10.10.199.93

Phone = A, Line = 1001, IP = 10.10.199.130, Model = SCCP

Phone = B, Line = 1003, IP = 10.10.199.66, Model = SCCP

Phone = C, Line = 3601, Model = FXPS

SIP Trunk between Unified CM1 & Gateway has

a) route pattern 3.XXXX

Scenario:

Cisco Unified IP SCCP Phone A DN 1001 calls Cisco Unified IP SCCP Phone B DN 1003

Phone B DN 1003 Answers

Phone B DN 1003 presses transfer softkey and calls Phone C DN 3601 which is a SIP GW phone

Phone C DN 3601 is ringing

Phone B DN 1003 presses Transfer softkey to complete the transfer

Phone C DN 3601 answers

Phone A DN 1001 and Phone C DN 3601 are connected

Phone C DN 3601 ends the call

End of Scenario

CISCO CONFIDENTIAL

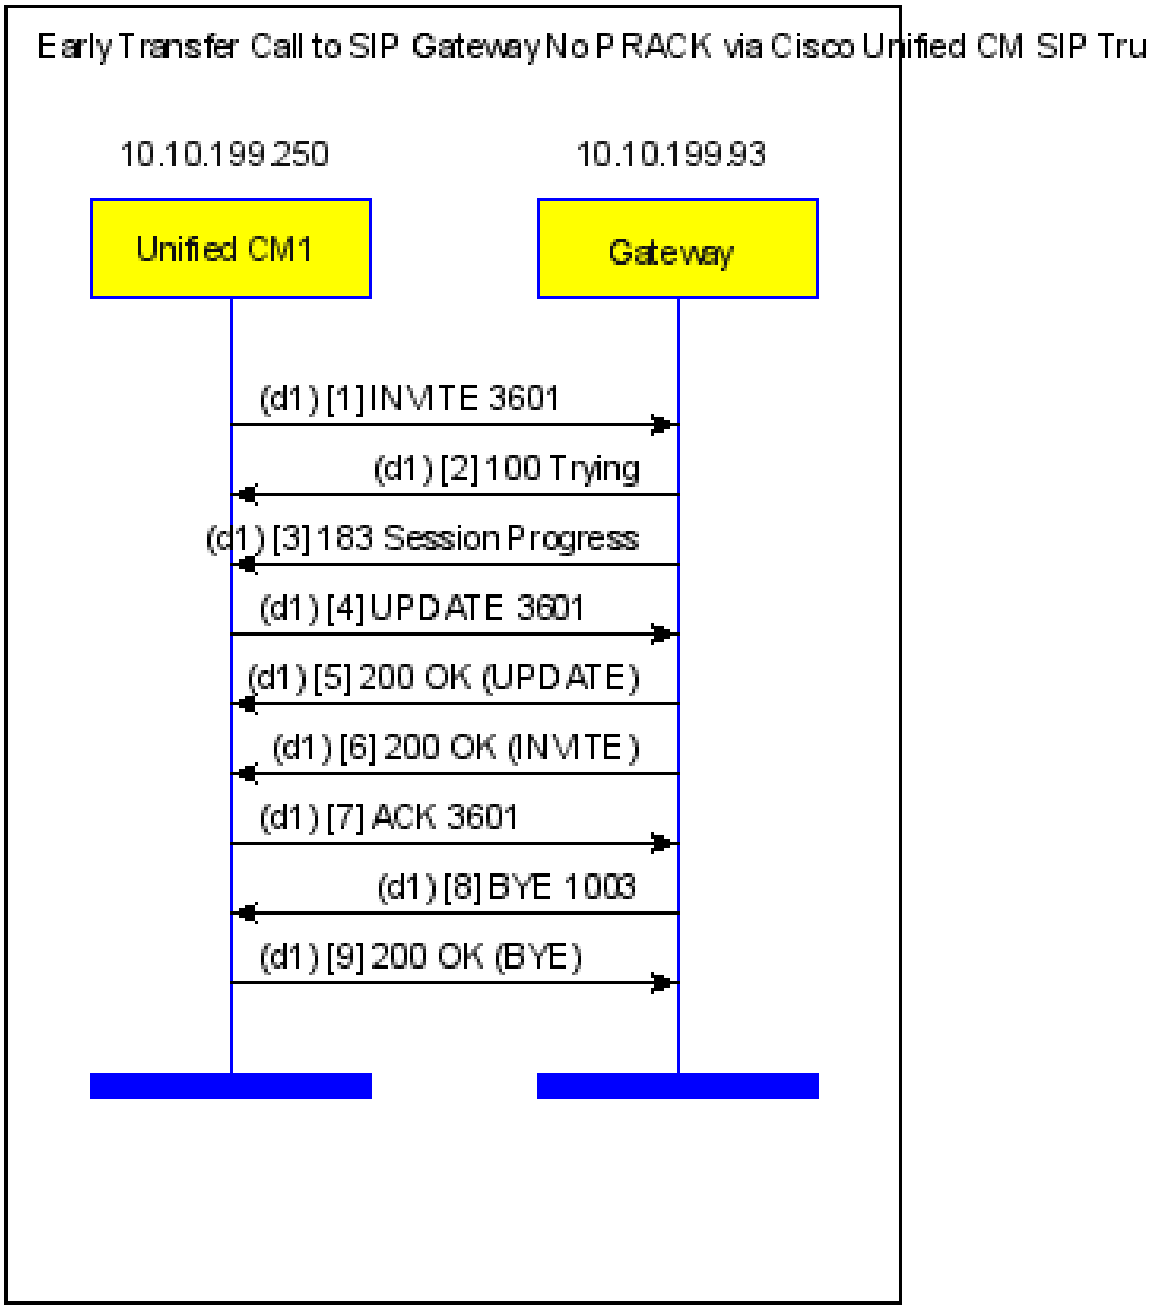

CISCO CONFIDENTIAL

```
[diagram]   Call-ID:[prev][next]
[1] INVITE sip:3601@10.10.199.93:5060 SIP/2.0
Date: Fri, 05 Jun 2009 14:26:17 GMT
Call-Info: <sip:10.10.199.250:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:1003@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763592
Allow-Events: presence, kpml
P-Asserted-Identity: <sip:1003@10.10.199.250>
Supported: timer,resource-priority,replaces
Supported: Geolocation
Min-SE:  1800
Remote-Party-ID: <sip:1003@10.10.199.250>;party=calling;screen=yes;privacy=off
Content-Length: 0
User-Agent: Cisco-CUCM7.1
To: <sip:3601@10.10.199.93>
Contact: <sip:1003@10.10.199.250:5060;transport=tcp>
Expires: 180
Call-ID: d36e1000-a2912b09-39-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK10a1f2b2a18
CSeq: 101 INVITE
Session-Expires:  1800
Max-Forwards: 70

[diagram]   Call-ID:[prev][next]
[2] SIP/2.0 100 Trying
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK10a1f2b2a18
From: <sip:1003@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763592
To: <sip:3601@10.10.199.93>;tag=E01C48C-24DD
Date: Fri, 05 Jun 2009 14:27:01 GMT
Call-ID: d36e1000-a2912b09-39-fac712ac@10.10.199.250
Server: Cisco-SIPGateway/IOS-12.x
CSeq: 101 INVITE
Allow-Events: telephone-event
Content-Length: 0

[diagram]   Call-ID:[prev][next]
[3] SIP/2.0 183 Session Progress
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK10a1f2b2a18
From: <sip:1003@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763592
To: <sip:3601@10.10.199.93>;tag=E01C48C-24DD
Date: Fri, 05 Jun 2009 14:27:01 GMT
Call-ID: d36e1000-a2912b09-39-fac712ac@10.10.199.250
Server: Cisco-SIPGateway/IOS-12.x
CSeq: 101 INVITE
Allow: INVITE, OPTIONS, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY, INFO, REGISTER
Allow-Events: telephone-event
Contact: <sip:3601@10.10.199.93:5060;transport=tcp>
Content-Type: application/sdp
Content-Disposition: session;handling=required
Content-Length: 333

v=0
o=CiscoSystemsSIP-GW-UserAgent 2752 6781 IN IP4 10.10.199.93
s=SIP Call
c=IN IP4 10.10.199.93
t=0 0
m=audio 17622 RTP/AVP 0 8 18 101 19
c=IN IP4 10.10.199.93
a=rtpmap:0 PCMU/8000
a=rtpmap:8 PCMA/8000
a=rtpmap:18 G729/8000
a=fmtp:18 annexb=no
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-16
a=rtpmap:19 CN/8000

[diagram]   Call-ID:[prev][next]
[4] UPDATE sip:3601@10.10.199.93:5060;transport=tcp SIP/2.0
Date: Fri, 05 Jun 2009 14:26:17 GMT
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:1003@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763592
Allow-Events: presence, kpml
P-Asserted-Identity: <sip:1001@10.10.199.250>
Supported: timer,resource-priority,replaces
Remote-Party-ID: <sip:1001@10.10.199.250>;party=calling;screen=yes;privacy=off
Content-Length: 0
User-Agent: Cisco-CUCM7.1
To: <sip:3601@10.10.199.93>;tag=E01C48C-24DD
Contact: <sip:1003@10.10.199.250:5060;transport=tcp>
Call-ID: d36e1000-a2912b09-39-fac712ac@10.10.199.250
```

CISCO CONFIDENTIAL

```
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK10b53ab01ef
CSeq: 102 UPDATE
Max-Forwards: 70
```

[diagram] Call-ID:[prev][next]

[5] SIP/2.0 200 OK

```
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK10b53ab01ef
From: <sip:1003@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763592
To: <sip:3601@10.10.199.93>;tag=E01C48C-24DD
Date: Fri, 05 Jun 2009 14:27:10 GMT
Call-ID: d36e1000-a2912b09-39-fac712ac@10.10.199.250
Server: Cisco-SIPGateway/IOS-12.x
CSeq: 102 UPDATE
Allow-Events: telephone-event
Contact: <sip:3601@10.10.199.93:5060;transport=tcp>
Content-Length: 0
```

[diagram] Call-ID:[prev][next]

[6] SIP/2.0 200 OK

```
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK10a1f2b2a18
From: <sip:1003@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763592
To: <sip:3601@10.10.199.93>;tag=E01C48C-24DD
Date: Fri, 05 Jun 2009 14:27:10 GMT
Call-ID: d36e1000-a2912b09-39-fac712ac@10.10.199.250
Server: Cisco-SIPGateway/IOS-12.x
CSeq: 101 INVITE
Allow: INVITE, OPTIONS, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY, INFO, REGISTER
Allow-Events: telephone-event
Contact: <sip:3601@10.10.199.93:5060;transport=tcp>
Session-Expires:  1800;refresher=uac
Require: timer
Content-Type: application/sdp
Content-Disposition: session;handling=required
Content-Length: 333

v=0
o=CiscoSystemsSIP-GW-UserAgent 2752 6781 IN IP4 10.10.199.93
s=SIP Call
c=IN IP4 10.10.199.93
t=0 0
m=audio 17622 RTP/AVP 0 8 18 101 19
c=IN IP4 10.10.199.93
a=rtpmap:0 PCMU/8000
a=rtpmap:8 PCMA/8000
a=rtpmap:18 G729/8000
a=fmtp:18 annexb=no
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-16
a=rtpmap:19 CN/8000
```

[diagram] Call-ID:[prev][next]

[7] ACK sip:3601@10.10.199.93:5060;transport=tcp SIP/2.0

```
Date: Fri, 05 Jun 2009 14:26:17 GMT
From: <sip:1003@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763592
Allow-Events: presence, kpml
Content-Length: 216
To: <sip:3601@10.10.199.93>;tag=E01C48C-24DD
Content-Type: application/sdp
Call-ID: d36e1000-a2912b09-39-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK10c3c52eebd
CSeq: 101 ACK
Max-Forwards: 70

v=0
o=CiscoSystemsCCM-SIP 2000 1 IN IP4 10.10.199.250
s=SIP Call
c=IN IP4 10.10.199.130
t=0 0
m=audio 28986 RTP/AVP 0 101
a=rtpmap:0 PCMU/8000
a=ptime:20
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
```

[diagram] Call-ID:[prev][next]

[8] BYE sip:1003@10.10.199.250:5060;transport=tcp SIP/2.0

```
Via: SIP/2.0/TCP 10.10.199.93;branch=z9hG4bK62EC
From: <sip:3601@10.10.199.93>;tag=E01C48C-24DD
To: <sip:1003@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763592
Date: Fri, 05 Jun 2009 14:27:15 GMT
```

CISCO CONFIDENTIAL

```
Call-ID: d36e1000-a2912b09-39-fac712ac@10.10.199.250
User-Agent: Cisco-SIPGateway/IOS-12.x
Max-Forwards: 70
Timestamp: 1244212048
CSeq: 101 BYE
Reason: Q.850;cause=16
Content-Length: 0

[diagram]   Call-ID:[prev][next]
[9] SIP/2.0 200 OK
Date: Fri, 05 Jun 2009 14:26:44 GMT
From: <sip:3601@10.10.199.93>;tag=E01C48C-24DD
Content-Length: 0
To: <sip:1003@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763592
Call-ID: d36e1000-a2912b09-39-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.93;branch=z9hG4bK62EC
CSeq: 101 BYE
```

5.2 Early Transfer Call to SIP Gateway with PRACK via Cisco Unified CM SIP Trunk

Title: Early Transfer Call to SIP Gateway with PRACK via Cisco Unified CM SIP Trunk

Description:

The following call flow illustrates the SIP messaging that takes place between Cisco Unified CM SCCP phones hosted by a CIsco Unified CM, and a SIP GW via a Cisco Unified CM SIP Trunk

Configuration:

Node = Unified CM1, IP = 10.10.199.250

Node = Gateway, IP = 10.10.199.93

Phone = A, Line = 1001, IP = 10.10.199.130, Model = SCCP

Phone = B, Line = 1003, IP = 10.10.199.66, Model = SCCP

Phone = C, Line = 3601, Model = FXPS

SIP Trunk between Unified CM1 & Gateway has

a) route pattern 3.XXXX

Scenario:

Cisco Unified IP SCCP Phone A DN 1001 calls Cisco Unified IP SCCP Phone B DN 1003

Phone B DN 1003 Answers

Phone B DN 1003 presses transfer softkey and calls Phone C DN 3601 which is a SIP GW phone

Phone C DN 3601 is ringing

Phone B DN 1003 presses Transfer softkey to complete the transfer

Phone C DN 3601 answers

Phone A DN 1001 and Phone C DN 3601 are connected

Phone C DN 3601 ends the call

End of Scenario

CISCO CONFIDENTIAL

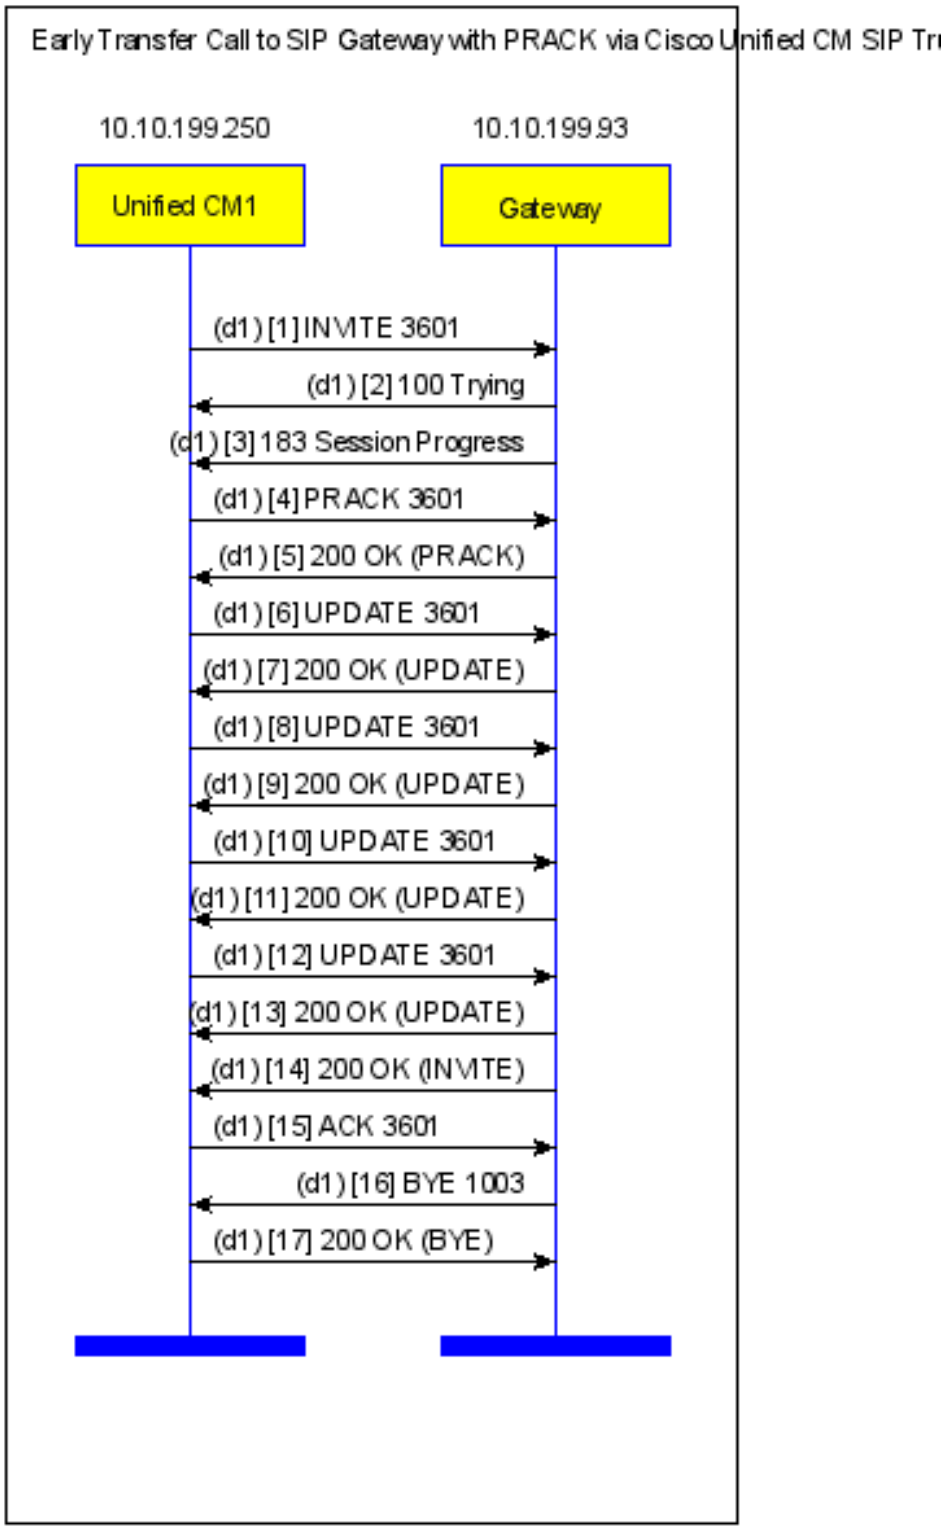

CISCO CONFIDENTIAL

[diagram] Call-ID:[prev][next]
[1] INVITE sip:3601@10.10.199.93:5060 SIP/2.0
Date: Fri, 05 Jun 2009 14:31:01 GMT
Call-Info: <sip:10.10.199.250:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:1003@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763597
Allow-Events: presence, kpml
P-Asserted-Identity: <sip:1003@10.10.199.250>
Supported: 100rel,timer,resource-priority,replaces
Supported: Geolocation
Min-SE: 1800
Remote-Party-ID: <sip:1003@10.10.199.250>;party=calling;screen=yes;privacy=off
Content-Length: 0
User-Agent: Cisco-CUCM7.1
To: <sip:3601@10.10.199.93>
Contact: <sip:1003@10.10.199.250:5060;transport=tcp>
Expires: 180
Call-ID: 7cb50600-a2912c25-3a-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK10d7fdf55e0
CSeq: 101 INVITE
Session-Expires: 1800
Max-Forwards: 70

[diagram] Call-ID:[prev][next]
[2] SIP/2.0 100 Trying
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK10d7fdf55e0
From: <sip:1003@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763597
To: <sip:3601@10.10.199.93>;tag=E061984-1EAD
Date: Fri, 05 Jun 2009 14:31:45 GMT
Call-ID: 7cb50600-a2912c25-3a-fac712ac@10.10.199.250
Server: Cisco-SIPGateway/IOS-12.x
CSeq: 101 INVITE
Allow-Events: telephone-event
Content-Length: 0

[diagram] Call-ID:[prev][next]
[3] SIP/2.0 183 Session Progress
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK10d7fdf55e0
From: <sip:1003@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763597
To: <sip:3601@10.10.199.93>;tag=E061984-1EAD
Date: Fri, 05 Jun 2009 14:31:45 GMT
Call-ID: 7cb50600-a2912c25-3a-fac712ac@10.10.199.250
Server: Cisco-SIPGateway/IOS-12.x
CSeq: 101 INVITE
Allow: INVITE, OPTIONS, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY, INFO, REGISTER
Require: 100rel
RSeq: 3921
Allow-Events: telephone-event
Contact: <sip:3601@10.10.199.93:5060;transport=tcp>
Content-Type: application/sdp
Content-Disposition: session;handling=required
Content-Length: 333

v=0
o=CiscoSystemsSIP-GW-UserAgent 2137 2527 IN IP4 10.10.199.93
s=SIP Call
c=IN IP4 10.10.199.93
t=0 0
m=audio 18986 RTP/AVP 0 8 18 101 19
c=IN IP4 10.10.199.93
a=rtpmap:0 PCMU/8000
a=rtpmap:8 PCMA/8000
a=rtpmap:18 G729/8000
a=fmtp:18 annexb=no
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-16
a=rtpmap:19 CN/8000

[diagram] Call-ID:[prev][next]
[4] PRACK sip:3601@10.10.199.93:5060;transport=tcp SIP/2.0
Date: Fri, 05 Jun 2009 14:31:01 GMT
From: <sip:1003@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763597
RAck: 3921 101 INVITE
Allow-Events: presence, kpml
Content-Length: 215
To: <sip:3601@10.10.199.93>;tag=E061984-1EAD
Content-Type: application/sdp
Call-ID: 7cb50600-a2912c25-3a-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK10e2c406870
CSeq: 102 PRACK

CISCO CONFIDENTIAL

```
Max-Forwards: 70

v=0
o=CiscoSystemsCCM-SIP 2000 1 IN IP4 10.10.199.250
s=SIP Call
c=IN IP4 10.10.199.66
t=0 0
m=audio 17538 RTP/AVP 0 101
a=rtpmap:0 PCMU/8000
a=ptime:20
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
```

[diagram] Call-ID:[prev][next]

[5] SIP/2.0 200 OK

```
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK10e2c406870
From: <sip:1003@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763597
To: <sip:3601@10.10.199.93>;tag=E061984-1EAD
Date: Fri, 05 Jun 2009 14:31:45 GMT
Call-ID: 7cb50600-a2912c25-3a-fac712ac@10.10.199.250
Server: Cisco-SIPGateway/IOS-12.x
CSeq: 102 PRACK
Content-Length: 0
```

[diagram] Call-ID:[prev][next]

[6] UPDATE sip:3601@10.10.199.93:5060;transport=tcp SIP/2.0

```
Date: Fri, 05 Jun 2009 14:31:01 GMT
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:1003@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763597
Allow-Events: presence, kpml
P-Asserted-Identity: <sip:1003@10.10.199.250>
Supported: 100rel,timer,resource-priority,replaces
Remote-Party-ID: <sip:1003@10.10.199.250>;party=calling;screen=yes;privacy=off
Content-Length: 221
User-Agent: Cisco-CUCM7.1
To: <sip:3601@10.10.199.93>;tag=E061984-1EAD
Contact: <sip:1003@10.10.199.250:5060;transport=tcp>
Content-Type: application/sdp
Call-ID: 7cb50600-a2912c25-3a-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK10f212859cb
CSeq: 103 UPDATE
Max-Forwards: 70

v=0
o=CiscoSystemsCCM-SIP 2000 2 IN IP4 10.10.199.250
s=SIP Call
c=IN IP4 0.0.0.0
t=0 0
m=audio 17538 RTP/AVP 0 101
a=rtpmap:0 PCMU/8000
a=ptime:20
a=inactive
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
```

[diagram] Call-ID:[prev][next]

[7] SIP/2.0 200 OK

```
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK10f212859cb
From: <sip:1003@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763597
To: <sip:3601@10.10.199.93>;tag=E061984-1EAD
Date: Fri, 05 Jun 2009 14:31:51 GMT
Call-ID: 7cb50600-a2912c25-3a-fac712ac@10.10.199.250
Server: Cisco-SIPGateway/IOS-12.x
CSeq: 103 UPDATE
Allow-Events: telephone-event
Contact: <sip:3601@10.10.199.93:5060;transport=tcp>
Session-Expires:  1800;refresher=uac
Require: timer
Content-Type: application/sdp
Content-Length: 262

v=0
o=CiscoSystemsSIP-GW-UserAgent 2137 2527 IN IP4 10.10.199.93
s=SIP Call
c=IN IP4 10.10.199.93
t=0 0
m=audio 18986 RTP/AVP 0 101
c=IN IP4 10.10.199.93
a=inactive
a=rtpmap:0 PCMU/8000
```

CISCO CONFIDENTIAL

```
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-16
a=ptime:20
```

[diagram] Call-ID:[prev][next]

[8] UPDATE sip:3601@10.10.199.93:5060;transport=tcp SIP/2.0

```
Date: Fri, 05 Jun 2009 14:31:01 GMT
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:1003@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763597
Allow-Events: presence, kpml
P-Asserted-Identity: <sip:1001@10.10.199.250>
Supported: 100rel,timer,resource-priority,replaces
Remote-Party-ID: <sip:1001@10.10.199.250>;party=calling;screen=yes;privacy=off
Content-Length: 0
User-Agent: Cisco-CUCM7.1
To: <sip:3601@10.10.199.93>;tag=E061984-1EAD
Contact: <sip:1003@10.10.199.250:5060;transport=tcp>
Call-ID: 7cb50600-a2912c25-3a-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK110878fabf
CSeq: 104 UPDATE
Max-Forwards: 70
```

[diagram] Call-ID:[prev][next]

[9] SIP/2.0 200 OK

```
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK110878fabf
From: <sip:1003@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763597
To: <sip:3601@10.10.199.93>;tag=E061984-1EAD
Date: Fri, 05 Jun 2009 14:31:51 GMT
Call-ID: 7cb50600-a2912c25-3a-fac712ac@10.10.199.250
Server: Cisco-SIPGateway/IOS-12.x
CSeq: 104 UPDATE
Allow-Events: telephone-event
Contact: <sip:3601@10.10.199.93:5060;transport=tcp>
Content-Length: 0
```

[diagram] Call-ID:[prev][next]

[10] UPDATE sip:3601@10.10.199.93:5060;transport=tcp SIP/2.0

```
Date: Fri, 05 Jun 2009 14:31:01 GMT
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:1003@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763597
Allow-Events: presence, kpml
P-Asserted-Identity: <sip:1001@10.10.199.250>
Supported: 100rel,timer,resource-priority,replaces
Remote-Party-ID: <sip:1001@10.10.199.250>;party=calling;screen=yes;privacy=off
Content-Length: 337
User-Agent: Cisco-CUCM7.1
To: <sip:3601@10.10.199.93>;tag=E061984-1EAD
Contact: <sip:1003@10.10.199.250:5060;transport=tcp>
Content-Type: application/sdp
Call-ID: 7cb50600-a2912c25-3a-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK111501eea09
CSeq: 105 UPDATE
Max-Forwards: 70

v=0
o=CiscoSystemsCCM-SIP 2000 3 IN IP4 10.10.199.250
s=SIP Call
c=IN IP4 10.10.199.130
t=0 0
m=audio 4000 RTP/AVP 9 0 8 18 101
a=rtpmap:9 G722/8000
a=ptime:20
a=rtpmap:0 PCMU/8000
a=ptime:20
a=rtpmap:8 PCMA/8000
a=ptime:20
a=rtpmap:18 G729/8000
a=ptime:20
a=sendonly
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
```

[diagram] Call-ID:[prev][next]

[11] SIP/2.0 200 OK

```
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK111501eea09
From: <sip:1003@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763597
To: <sip:3601@10.10.199.93>;tag=E061984-1EAD
Date: Fri, 05 Jun 2009 14:31:51 GMT
Call-ID: 7cb50600-a2912c25-3a-fac712ac@10.10.199.250
Server: Cisco-SIPGateway/IOS-12.x
```

CISCO CONFIDENTIAL

```
CSeq: 105 UPDATE
Allow-Events: telephone-event
Contact: <sip:3601@10.10.199.93:5060;transport=tcp>
Session-Expires:  1800;refresher=uac
Require: timer
Content-Type: application/sdp
Content-Length: 250

v=0
o=CiscoSystemsSIP-GW-UserAgent 2137 2528 IN IP4 10.10.199.93
s=SIP Call
c=IN IP4 10.10.199.93
t=0 0
m=audio 18986 RTP/AVP 0 101
c=IN IP4 10.10.199.93
a=recvonly
a=rtpmap:0 PCMU/8000
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-16
```

[diagram] Call-ID:[prev][next]

[12] UPDATE sip:3601@10.10.199.93:5060;transport=tcp SIP/2.0

```
Date: Fri, 05 Jun 2009 14:31:01 GMT
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:1003@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763597
Allow-Events: presence, kpml
P-Asserted-Identity: <sip:1001@10.10.199.250>
Supported: 100rel,timer,resource-priority,replaces
Remote-Party-ID: <sip:1001@10.10.199.250>;party=calling;screen=yes;privacy=off
Content-Length: 216
User-Agent: Cisco-CUCM7.1
To: <sip:3601@10.10.199.93>;tag=E061984-1EAD
Contact: <sip:1003@10.10.199.250:5060;transport=tcp>
Content-Type: application/sdp
Call-ID: 7cb50600-a2912c25-3a-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK11216e087c1
CSeq: 106 UPDATE
Max-Forwards: 70

v=0
o=CiscoSystemsCCM-SIP 2000 4 IN IP4 10.10.199.250
s=SIP Call
c=IN IP4 10.10.199.130
t=0 0
m=audio 23862 RTP/AVP 0 101
a=rtpmap:0 PCMU/8000
a=ptime:20
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
```

[diagram] Call-ID:[prev][next]

[13] SIP/2.0 200 OK

```
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK11216e087c1
From: <sip:1003@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763597
To: <sip:3601@10.10.199.93>;tag=E061984-1EAD
Date: Fri, 05 Jun 2009 14:31:51 GMT
Call-ID: 7cb50600-a2912c25-3a-fac712ac@10.10.199.250
Server: Cisco-SIPGateway/IOS-12.x
CSeq: 106 UPDATE
Allow-Events: telephone-event
Contact: <sip:3601@10.10.199.93:5060;transport=tcp>
Session-Expires:  1800;refresher=uac
Require: timer
Content-Type: application/sdp
Content-Length: 250

v=0
o=CiscoSystemsSIP-GW-UserAgent 2137 2529 IN IP4 10.10.199.93
s=SIP Call
c=IN IP4 10.10.199.93
t=0 0
m=audio 18986 RTP/AVP 0 101
c=IN IP4 10.10.199.93
a=rtpmap:0 PCMU/8000
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-16
a=ptime:20
```

[diagram] Call-ID:[prev][next]

[14] SIP/2.0 200 OK

CISCO CONFIDENTIAL

```
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK10d7fdf55e0
From: <sip:1003@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763597
To: <sip:3601@10.10.199.93>;tag=E061984-1EAD
Date: Fri, 05 Jun 2009 14:31:51 GMT
Call-ID: 7cb50600-a2912c25-3a-fac712ac@10.10.199.250
Server: Cisco-SIPGateway/IOS-12.x
CSeq: 101 INVITE
Allow: INVITE, OPTIONS, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY, INFO, REGISTER
Allow-Events: telephone-event
Contact: <sip:3601@10.10.199.93:5060;transport=tcp>
Session-Expires:  1800;refresher=uac
Require: timer
Content-Type: application/sdp
Content-Disposition: session;handling=required
Content-Length: 250

v=0
o=CiscoSystemsSIP-GW-UserAgent 2137 2529 IN IP4 10.10.199.93
s=SIP Call
c=IN IP4 10.10.199.93
t=0 0
m=audio 18986 RTP/AVP 0 101
c=IN IP4 10.10.199.93
a=rtpmap:0 PCMU/8000
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-16
a=ptime:20

[diagram]   Call-ID:[prev][next]
[15] ACK sip:3601@10.10.199.93:5060;transport=tcp SIP/2.0
Date: Fri, 05 Jun 2009 14:31:01 GMT
From: <sip:1003@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763597
Allow-Events: presence, kpml
Content-Length: 216
To: <sip:3601@10.10.199.93>;tag=E061984-1EAD
Content-Type: application/sdp
Call-ID: 7cb50600-a2912c25-3a-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK11327335338
CSeq: 101 ACK
Max-Forwards: 70

v=0
o=CiscoSystemsCCM-SIP 2000 4 IN IP4 10.10.199.250
s=SIP Call
c=IN IP4 10.10.199.130
t=0 0
m=audio 23862 RTP/AVP 0 101
a=rtpmap:0 PCMU/8000
a=ptime:20
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15

[diagram]   Call-ID:[prev][next]
[16] BYE sip:1003@10.10.199.250:5060;transport=tcp SIP/2.0
Via: SIP/2.0/TCP 10.10.199.93;branch=z9hG4bK7647
From: <sip:3601@10.10.199.93>;tag=E061984-1EAD
To: <sip:1003@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763597
Date: Fri, 05 Jun 2009 14:32:00 GMT
Call-ID: 7cb50600-a2912c25-3a-fac712ac@10.10.199.250
User-Agent: Cisco-SIPGateway/IOS-12.x
Max-Forwards: 70
Timestamp: 1244212330
CSeq: 101 BYE
Reason: Q.850;cause=16
Content-Length: 0

[diagram]   Call-ID:[prev][next]
[17] SIP/2.0 200 OK
Date: Fri, 05 Jun 2009 14:31:26 GMT
From: <sip:3601@10.10.199.93>;tag=E061984-1EAD
Content-Length: 0
To: <sip:1003@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763597
Call-ID: 7cb50600-a2912c25-3a-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.93;branch=z9hG4bK7647
CSeq: 101 BYE
```

CISCO CONFIDENTIAL

6. TLS

6.1 TLS Rejection with X509 Subject Name Mismatch

Title: TLS Rejection with X509 Subject Name Mismatch

Description:
Incoming TLS is from a trusted peer but the X509 subject name or the cipher string from the peer's certificate doesn't match the values from the SIP trunk security profile on Cisco Unified CM.

Configuration:
Node = Unified CM1, IP = 10.10.199.250
Node = Unified CM2, IP = 10.10.199.251

Phone = A, Line = 1001, IP = 10.10.199.130, Model = SCCP
Phone = B, Line = 2002, IP = 10.10.199.179, Model = SCCP

SIP Trunk between Unified CM2 & Unified CM1 has
a) route pattern 1.XXXX
b) Has destination port configured to be 5061
c) Has "SIP Trunk Security Profile" point to the "TLS Sip Trunk Secure Profile", which is already configured to have correct X509 Subject Name.
d) "TLS Sip Trunk Security Profile" has a different X509 Subject Name.

Scenario:
Phone B DN 2002 calls Phone A DN 1001 over the SIP Trunk by dialing 11001
Call gets rejected by Unified CM1 because of mismatch in X509 subject name in Sip Trunk Security Profile.
End of Scenario

CISCO CONFIDENTIAL

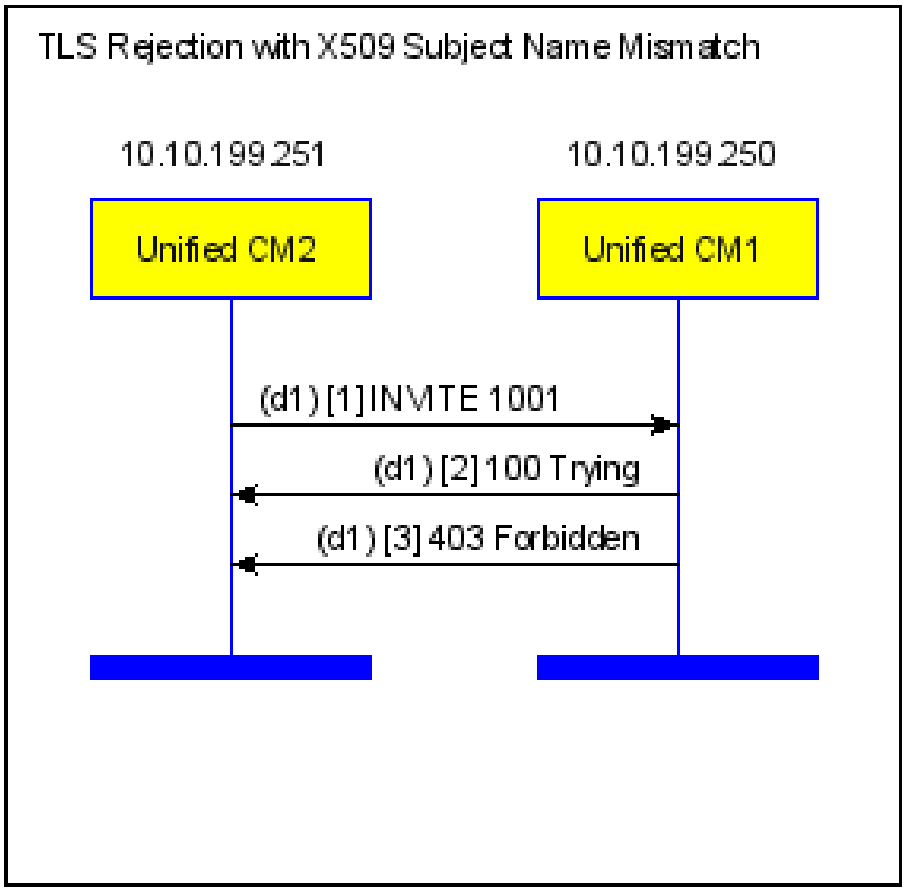

CISCO CONFIDENTIAL

```
[diagram]   Call-ID:[prev][next]
[1] INVITE sip:1001@10.10.199.250:5061 SIP/2.0
Date: Fri, 05 Jun 2009 16:11:22 GMT
Call-Info: <sip:10.10.199.251:5061>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763525
Allow-Events: presence, kpml
P-Asserted-Identity: <sip:2002@10.10.199.251>
Supported: timer,resource-priority,replaces
Supported: Geolocation
Min-SE:  1800
Remote-Party-ID: <sip:2002@10.10.199.251>;party=calling;screen=yes;privacy=off
Content-Length: 0
User-Agent: Cisco-CUCM7.1
To: <sip:1001@10.10.199.250>
Contact: <sip:2002@10.10.199.251:5061;transport=tls>
Expires: 180
Call-ID: 8180b680-a29143aa-30-fbc712ac@10.10.199.251
Via: SIP/2.0/TLS 10.10.199.251:5061;branch=z9hG4bK12c3679affc
CSeq: 101 INVITE
Session-Expires:  1800
Max-Forwards: 70

[diagram]   Call-ID:[prev][next]
[2] SIP/2.0 100 Trying
Date: Fri, 05 Jun 2009 16:10:18 GMT
From: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763525
Allow-Events: presence
Content-Length: 0
To: <sip:1001@10.10.199.250>
Call-ID: 8180b680-a29143aa-30-fbc712ac@10.10.199.251
Via: SIP/2.0/TLS 10.10.199.251:5061;branch=z9hG4bK12c3679affc
CSeq: 101 INVITE

[diagram]   Call-ID:[prev][next]
[3] SIP/2.0 403 Forbidden
Date: Fri, 05 Jun 2009 16:10:18 GMT
From: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763525
Allow-Events: presence
Content-Length: 0
To: <sip:1001@10.10.199.250>;tag=270792453
Call-ID: 8180b680-a29143aa-30-fbc712ac@10.10.199.251
Via: SIP/2.0/TLS 10.10.199.251:5061;branch=z9hG4bK12c3679affc
CSeq: 101 INVITE
```

CISCO CONFIDENTIAL

6.2 TLS Basic Incoming Call

Title: TLS Basic Incoming Call

Description:
The following basic call flow illustrates the SIP messaging when the SIP trunk is acting as a UAS.

Unified CM1 received an INVITE via the SIP Trunk.
Incoming TLS is from a trusted peer, where the X509 subject name from the peer's certificate matches
the values from the SIP trunk security profile on Cisco Unified CM1.

Configuration:
Node = Unified CM1, IP = 10.10.199.250
Node = Unified CM2, IP = 10.10.199.251

Phone = A, Line = 1001, IP = 10.10.199.130, Model = SCCP
Phone = B, Line = 2002, IP = 10.10.199.179, Model = SCCP

SIP Trunk between Unified CM2 & Unified CM1 has
a) route pattern 1.XXXX
b) Has destination port configured to be 5061
c) Has "SIP Trunk Security Profile" point to the "TLS Sip Trunk Secure Profile", which is already configured to have correct X509 Subject Name.

Scenario:
Phone B DN 2002 calls Phone A DN 1001 over the SIP Trunk by dialing 11001
Phone A DN 1001 Answers
Phone A DN 1001 goes onHook
End of Scenario

CISCO CONFIDENTIAL

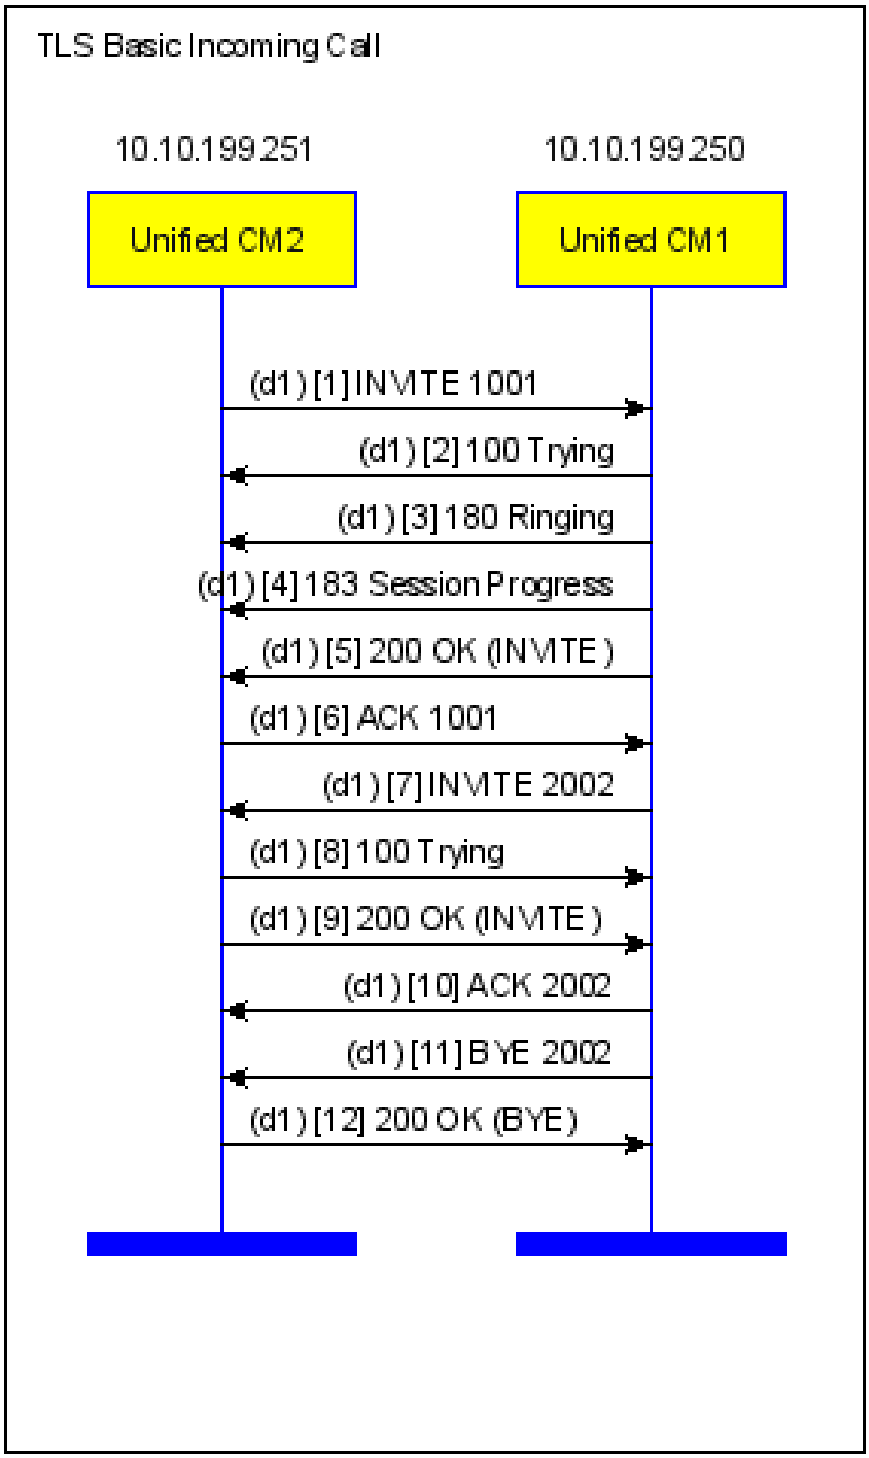

CISCO CONFIDENTIAL

[diagram] Call-ID:[prev][next]
[1] INVITE sip:1001@10.10.199.250:5061 SIP/2.0
Date: Fri, 05 Jun 2009 16:07:07 GMT
Call-Info: <sip:10.10.199.251:5061>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763521
Allow-Events: presence, kpml
P-Asserted-Identity: <sip:2002@10.10.199.251>
Supported: timer,resource-priority,replaces
Supported: Geolocation
Min-SE: 1800
Remote-Party-ID: <sip:2002@10.10.199.251>;party=calling;screen=yes;privacy=off
Content-Length: 0
User-Agent: Cisco-CUCM7.1
To: <sip:1001@10.10.199.250>
Contact: <sip:2002@10.10.199.251:5061;transport=tls>
Expires: 180
Call-ID: e982cd00-a29142ab-2e-fbc712ac@10.10.199.251
Via: SIP/2.0/TLS 10.10.199.251:5061;branch=z9hG4bK12977d162a5
CSeq: 101 INVITE
Session-Expires: 1800
Max-Forwards: 70

[diagram] Call-ID:[prev][next]
[2] SIP/2.0 100 Trying
Date: Fri, 05 Jun 2009 16:06:03 GMT
From: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763521
Allow-Events: presence
Content-Length: 0
To: <sip:1001@10.10.199.250>
Call-ID: e982cd00-a29142ab-2e-fbc712ac@10.10.199.251
Via: SIP/2.0/TLS 10.10.199.251:5061;branch=z9hG4bK12977d162a5
CSeq: 101 INVITE

[diagram] Call-ID:[prev][next]
[3] SIP/2.0 180 Ringing
Date: Fri, 05 Jun 2009 16:06:03 GMT
Call-Info: <sip:10.10.199.250:5061>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763521
Allow-Events: presence
P-Asserted-Identity: <sip:1001@10.10.199.250>
Supported: Geolocation
Remote-Party-ID: <sip:1001@10.10.199.250>;party=called;screen=yes;privacy=off
Content-Length: 0
To: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763620
Contact: <sip:1001@10.10.199.250:5061;transport=tls>
Call-ID: e982cd00-a29142ab-2e-fbc712ac@10.10.199.251
Via: SIP/2.0/TLS 10.10.199.251:5061;branch=z9hG4bK12977d162a5
CSeq: 101 INVITE

[diagram] Call-ID:[prev][next]
[4] SIP/2.0 183 Session Progress
Date: Fri, 05 Jun 2009 16:06:03 GMT
Call-Info: <sip:10.10.199.250:5061>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763521
Allow-Events: presence, kpml
P-Asserted-Identity: <sip:1001@10.10.199.250>
Supported: Geolocation
Remote-Party-ID: <sip:1001@10.10.199.250>;party=called;screen=yes;privacy=off
Content-Length: 337
To: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763620
Contact: <sip:1001@10.10.199.250:5061;transport=tls>
Content-Type: application/sdp
Call-ID: e982cd00-a29142ab-2e-fbc712ac@10.10.199.251
Via: SIP/2.0/TLS 10.10.199.251:5061;branch=z9hG4bK12977d162a5
CSeq: 101 INVITE

v=0
o=CiscoSystemsCCM-SIP 2000 1 IN IP4 10.10.199.250
s=SIP Call
c=IN IP4 10.10.199.130
t=0 0
m=audio 4000 RTP/AVP 9 0 8 18 101
a=rtpmap:9 G722/8000
a=ptime:20
a=rtpmap:0 PCMU/8000
a=ptime:20
a=rtpmap:8 PCMA/8000

CISCO CONFIDENTIAL

```
a=ptime:20
a=rtpmap:18 G729/8000
a=ptime:20
a=sendonly
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15

[diagram]   Call-ID:[prev][next]
[5] SIP/2.0 200 OK
Date: Fri, 05 Jun 2009 16:06:03 GMT
Call-Info: <sip:10.10.199.250:5061>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763521
Allow-Events: presence, kpml
P-Asserted-Identity: <sip:1001@10.10.199.250>
Supported: replaces
Supported: Geolocation
Remote-Party-ID: <sip:1001@10.10.199.250>;party=called;screen=yes;privacy=off
Content-Length: 337
Require:  timer
To: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763620
Contact: <sip:1001@10.10.199.250:5061;transport=tls>
Content-Type: application/sdp
Call-ID: e982cd00-a29142ab-2e-fbc712ac@10.10.199.251
Via: SIP/2.0/TLS 10.10.199.251:5061;branch=z9hG4bK12977d162a5
CSeq: 101 INVITE
Session-Expires:  1800;refresher=uas

v=0
o=CiscoSystemsCCM-SIP 2000 1 IN IP4 10.10.199.250
s=SIP Call
c=IN IP4 10.10.199.130
t=0 0
m=audio 4000 RTP/AVP 9 0 8 18 101
a=rtpmap:9 G722/8000
a=ptime:20
a=rtpmap:0 PCMU/8000
a=ptime:20
a=rtpmap:8 PCMA/8000
a=ptime:20
a=rtpmap:18 G729/8000
a=ptime:20
a=sendonly
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15

[diagram]   Call-ID:[prev][next]
[6] ACK sip:1001@10.10.199.250:5061;transport=tls SIP/2.0
Date: Fri, 05 Jun 2009 16:07:07 GMT
From: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763521
Allow-Events: presence, kpml
Content-Length: 228
To: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763620
Content-Type: application/sdp
Call-ID: e982cd00-a29142ab-2e-fbc712ac@10.10.199.251
Via: SIP/2.0/TLS 10.10.199.251:5061;branch=z9hG4bK12a4bf77037
CSeq: 101 ACK
Max-Forwards: 70

v=0
o=CiscoSystemsCCM-SIP 2000 1 IN IP4 10.10.199.251
s=SIP Call
c=IN IP4 10.10.199.179
t=0 0
m=audio 28034 RTP/AVP 9 101
a=rtpmap:9 G722/8000
a=ptime:20
a=recvonly
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15

[diagram]   Call-ID:[prev][next]
[7] INVITE sip:2002@10.10.199.251:5061;transport=tls SIP/2.0
Date: Fri, 05 Jun 2009 16:06:05 GMT
Call-Info: <sip:10.10.199.250:5061>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763620
Allow-Events: presence, kpml
P-Asserted-Identity: <sip:1001@10.10.199.250>
Supported: timer,resource-priority,replaces
```

CISCO CONFIDENTIAL

```
Min-SE:  1800
Remote-Party-ID: <sip:1001@10.10.199.250>;party=calling;screen=yes;privacy=off
Content-Length: 216
User-Agent: Cisco-CUCM7.1
To: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763521
Contact: <sip:1001@10.10.199.250:5061;transport=tls>
Expires: 180
Content-Type: application/sdp
Call-ID: e982cd00-a29142ab-2e-fbc712ac@10.10.199.251
Via: SIP/2.0/TLS 10.10.199.250:5061;branch=z9hG4bK13637a2f482
CSeq: 101 INVITE
Session-Expires:  1800;refresher=uac
Max-Forwards: 70

v=0
o=CiscoSystemsCCM-SIP 2000 2 IN IP4 10.10.199.250
s=SIP Call
c=IN IP4 10.10.199.130
t=0 0
m=audio 21882 RTP/AVP 9 101
a=rtpmap:9 G722/8000
a=ptime:20
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15

[diagram]   Call-ID:[prev][next]
[8] SIP/2.0 100 Trying
Date: Fri, 05 Jun 2009 16:07:09 GMT
From: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763620
Allow-Events: presence, kpml
Content-Length: 0
To: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763521
Call-ID: e982cd00-a29142ab-2e-fbc712ac@10.10.199.251
Via: SIP/2.0/TLS 10.10.199.250:5061;branch=z9hG4bK13637a2f482
CSeq: 101 INVITE

[diagram]   Call-ID:[prev][next]
[9] SIP/2.0 200 OK
Date: Fri, 05 Jun 2009 16:07:09 GMT
Call-Info: <sip:10.10.199.251:5061>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763620
Allow-Events: presence, kpml
P-Asserted-Identity: <sip:2002@10.10.199.251>
Supported: replaces
Supported: Geolocation
Remote-Party-ID: <sip:2002@10.10.199.251>;party=called;screen=yes;privacy=off
Content-Length: 216
Require:  timer
To: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763521
Contact: <sip:2002@10.10.199.251:5061;transport=tls>
Content-Type: application/sdp
Call-ID: e982cd00-a29142ab-2e-fbc712ac@10.10.199.251
Via: SIP/2.0/TLS 10.10.199.250:5061;branch=z9hG4bK13637a2f482
CSeq: 101 INVITE
Session-Expires:  1800;refresher=uac

v=0
o=CiscoSystemsCCM-SIP 2000 2 IN IP4 10.10.199.251
s=SIP Call
c=IN IP4 10.10.199.179
t=0 0
m=audio 28034 RTP/AVP 9 101
a=rtpmap:9 G722/8000
a=ptime:20
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15

[diagram]   Call-ID:[prev][next]
[10] ACK sip:2002@10.10.199.251:5061;transport=tls SIP/2.0
Date: Fri, 05 Jun 2009 16:06:05 GMT
From: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763620
Allow-Events: presence, kpml
Content-Length: 0
To: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763521
Call-ID: e982cd00-a29142ab-2e-fbc712ac@10.10.199.251
Via: SIP/2.0/TLS 10.10.199.250:5061;branch=z9hG4bK137e56c951
CSeq: 101 ACK
Max-Forwards: 70
```

CISCO CONFIDENTIAL

[diagram] Call-ID:[prev][next]
[11] BYE sip:2002@10.10.199.251:5061;transport=tls SIP/2.0
Date: Fri, 05 Jun 2009 16:06:05 GMT
From: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763620
Content-Length: 0
User-Agent: Cisco-CUCM7.1
To: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763521
Call-ID: e982cd00-a29142ab-2e-fbc712ac@10.10.199.251
Via: SIP/2.0/TLS 10.10.199.250:5061;branch=z9hG4bK13847a1ecf7
CSeq: 102 BYE
Max-Forwards: 70

[diagram] Call-ID:[prev][next]
[12] SIP/2.0 200 OK
Date: Fri, 05 Jun 2009 16:07:19 GMT
From: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763620
Content-Length: 0
To: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763521
Call-ID: e982cd00-a29142ab-2e-fbc712ac@10.10.199.251
Via: SIP/2.0/TLS 10.10.199.250:5061;branch=z9hG4bK13847a1ecf7
CSeq: 102 BYE

CISCO CONFIDENTIAL

7. T38

7.1 SIP Trunk Passes through T38 Fax Call between SIP Gateways

Title: SIP Trunk Passes through T38 Fax Call between SIP Gateways

Description:

Cisco Unified CM can pass through T38 fax calls using SIP trunk. This call flow shows how to SIP trunks let a fax call pass the Unified CM between a SIP gateway.

Current design does not support audio switch back from the fax, therefore the last reINVITE from SIP Gateway is rejected with 415.

Configuration:

Node = Unified CM1, IP = 10.10.199.250

Node = SIP Gateway1, IP = 10.10.197.154

Node = SIP Gateway2, IP = 10.10.201.173

Fax = A, DN = 4444

Fax = B, DN = 5555

Scenario:

Fax A DN 4444 calls Fax B DN 5555 over Gateway then SIP Trunk.

Fax B DN 5555 Answers

Fax A DN 4444 goes onHook

End of scenario

CISCO CONFIDENTIAL

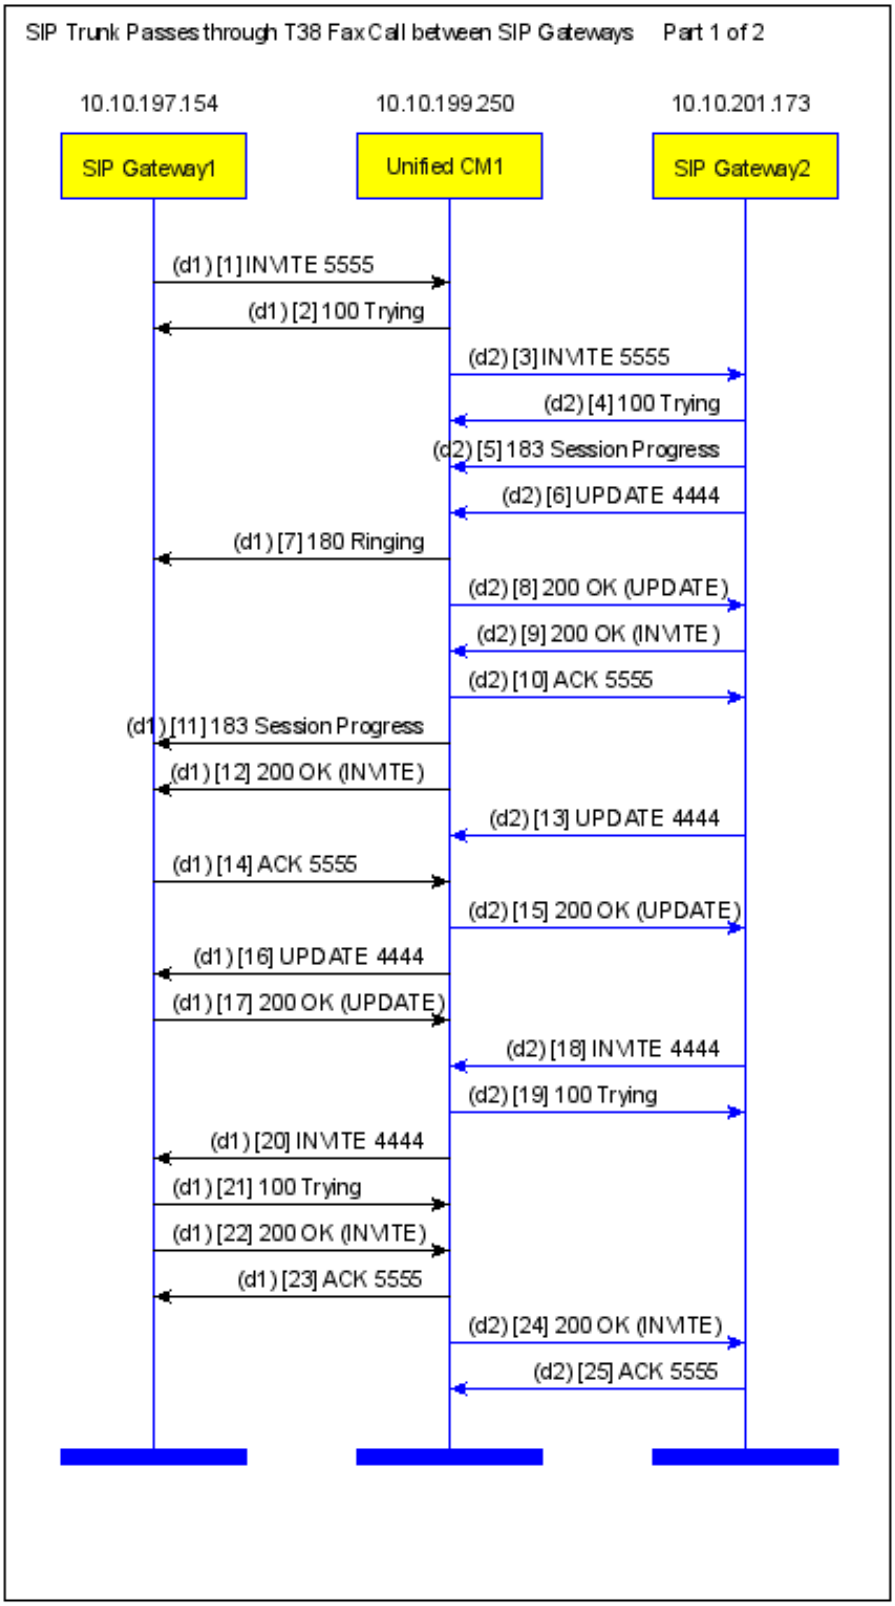

CISCO CONFIDENTIAL

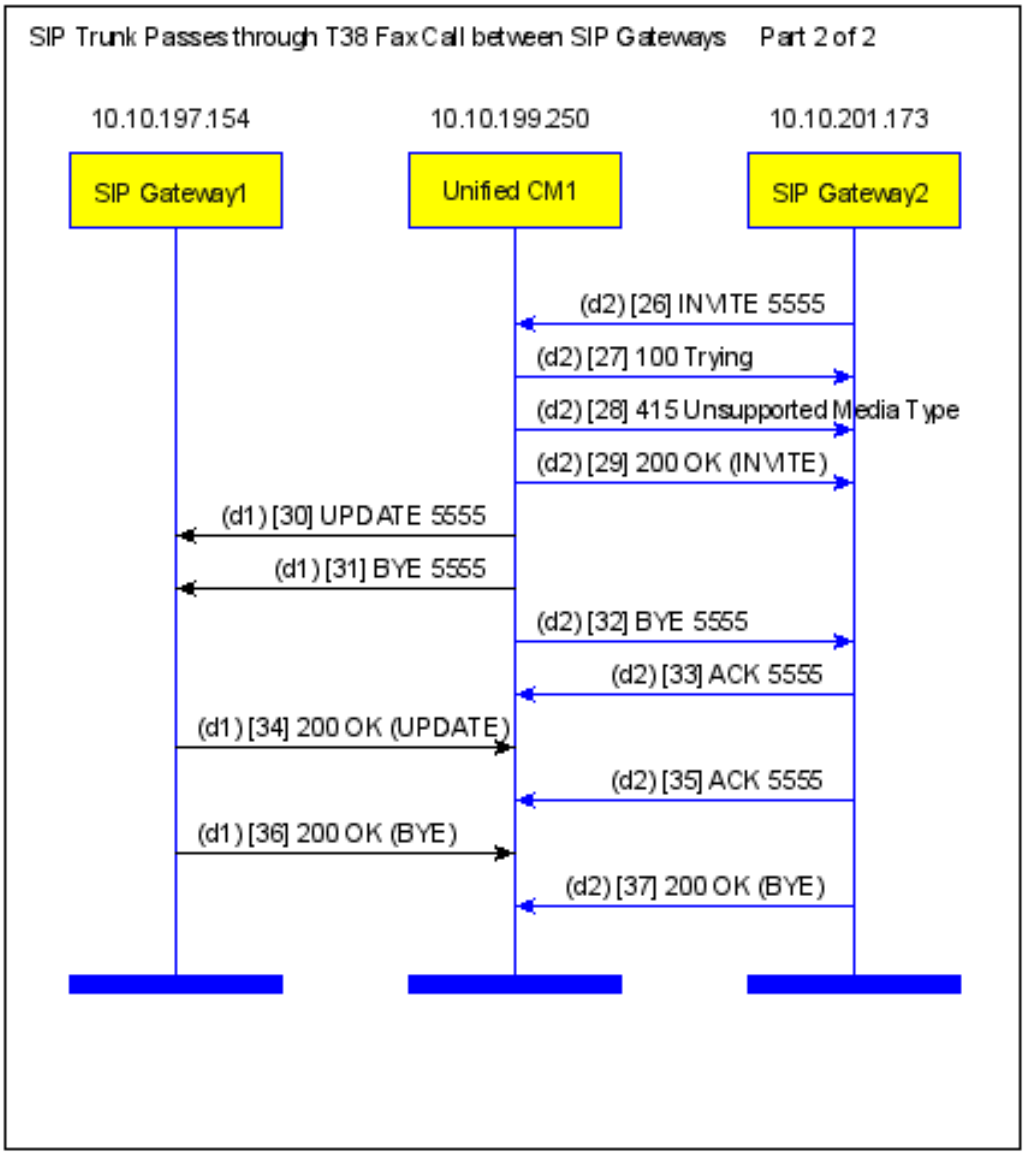

CISCO CONFIDENTIAL

[diagram] Call-ID:[prev][next]
[1] INVITE sip:5555@10.10.199.250:5060 SIP/2.0
```
Via: SIP/2.0/UDP 10.10.197.154:5060;branch=z9hG4bK12CF587
Remote-Party-ID: <sip:4444@10.10.197.154>;party=calling;screen=no;privacy=off
From: <sip:4444@10.10.197.154>;tag=1A25A6E0-1551
To: <sip:5555@10.10.199.250>
Date: Mon, 02 Jul 2007 22:31:37 GMT
Call-ID: D474D375-282211DC-803AC3AF-CDD97D1E@10.10.197.154
Supported: 100rel,timer,resource-priority,replaces
Min-SE:  90
Cisco-Guid: 3519585899-673321436-2151007151-3453582622
User-Agent: Cisco-SIPGateway/IOS-12.x
Allow: INVITE, OPTIONS, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY, INFO, REGISTER
CSeq: 101 INVITE
Max-Forwards: 70
Timestamp: 1183415497
Contact: <sip:4444@10.10.197.154:5060>
Expires: 1800
Allow-Events: telephone-event
Content-Type: application/sdp
Content-Disposition: session;handling=required
Content-Length: 244

v=0
o=CiscoSystemsSIP-GW-UserAgent 5572 2057 IN IP4 10.10.197.154
s=SIP Call
c=IN IP4 10.10.197.154
t=0 0
m=audio 18714 RTP/AVP 18 19
c=IN IP4 10.10.197.154
a=rtpmap:18 G729/8000
a=fmtp:18 annexb=no
a=rtpmap:19 CN/8000
a=ptime:20
```

[diagram] Call-ID:[prev][next]
[2] SIP/2.0 100 Trying
```
Via: SIP/2.0/UDP 10.10.197.154:5060;branch=z9hG4bK12CF587
From: <sip:4444@10.10.197.154>;tag=1A25A6E0-1551
To: <sip:5555@10.10.199.250>
Date: Mon, 02 Jul 2007 22:29:41 GMT
Call-ID: D474D375-282211DC-803AC3AF-CDD97D1E@10.10.197.154
Timestamp: 1183415497
CSeq: 101 INVITE
Allow-Events: presence
Content-Length: 0
```

[diagram] Call-ID:[prev][next]
[3] INVITE sip:5555@10.10.201.173:5060 SIP/2.0
```
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK6d5ec9f5cb
Remote-Party-ID: <sip:4444@10.10.199.250>;party=calling;screen=yes;privacy=off
From: <sip:4444@10.10.199.250>;tag=03f840d7-6aad-4124-bf92-ad483e762201-18226829
To: <sip:5555@10.10.201.173>
Date: Mon, 02 Jul 2007 22:29:41 GMT
Call-ID: b8593e00-68917c55-8ef-fac712ac@10.10.199.250
Supported: timer,replaces
Min-SE:  1800
User-Agent: Cisco-CUCM7.1
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY, PUBLISH
CSeq: 101 INVITE
Contact: <sip:4444@10.10.199.250:5060;transport=tcp>
Expires: 180
Allow-Events: presence
Session-Expires:  1800
Max-Forwards: 69
Content-Length: 0
```

[diagram] Call-ID:[prev][next]
[4] SIP/2.0 100 Trying
```
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK6d5ec9f5cb
From: <sip:4444@10.10.199.250>;tag=03f840d7-6aad-4124-bf92-ad483e762201-18226829
To: <sip:5555@10.10.201.173>
Date: Mon, 02 Jul 2007 22:28:59 GMT
Call-ID: b8593e00-68917c55-8ef-fac712ac@10.10.199.250
Server: Cisco-SIPGateway/IOS-12.x
CSeq: 101 INVITE
Allow-Events: telephone-event
Content-Length: 0
```

CISCO CONFIDENTIAL

[diagram] Call-ID:[prev][next]
[5] SIP/2.0 183 Session Progress
```
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK6d5ec9f5cb
From: <sip:4444@10.10.199.250>;tag=03f840d7-6aad-4124-bf92-ad483e762201-18226829
To: <sip:5555@10.10.201.173>;tag=107EA538-17C5
Date: Mon, 02 Jul 2007 22:28:59 GMT
Call-ID: b8593e00-68917c55-8ef-fac712ac@10.10.199.250
Server: Cisco-SIPGateway/IOS-12.x
CSeq: 101 INVITE
Allow: INVITE, OPTIONS, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY, INFO, REGISTER
Allow-Events: telephone-event
Contact: <sip:5555@10.10.201.173:5060;transport=tcp>
Content-Type: application/sdp
Content-Disposition: session;handling=required
Content-Length: 244

v=0
o=CiscoSystemsSIP-GW-UserAgent 5206 5659 IN IP4 10.10.201.173
s=SIP Call
c=IN IP4 10.10.201.173
t=0 0
m=audio 16588 RTP/AVP 18 19
c=IN IP4 10.10.201.173
a=rtpmap:18 G729/8000
a=fmtp:18 annexb=no
a=rtpmap:19 CN/8000
a=ptime:20
```

[diagram] Call-ID:[prev][next]
[6] UPDATE sip:4444@10.10.199.250:5060;transport=tcp SIP/2.0
```
Via: SIP/2.0/TCP 10.10.201.173:5060;branch=z9hG4bK702264
From: <sip:5555@10.10.201.173>;tag=107EA538-17C5
To: <sip:4444@10.10.199.250>;tag=03f840d7-6aad-4124-bf92-ad483e762201-18226829
Date: Mon, 02 Jul 2007 22:28:59 GMT
Call-ID: b8593e00-68917c55-8ef-fac712ac@10.10.199.250
User-Agent: Cisco-SIPGateway/IOS-12.x
Max-Forwards: 6
Timestamp: 1183415339
CSeq: 101 UPDATE
Contact: <sip:5555@10.10.201.173:5060;transport=tcp>
Remote-Party-ID: <sip:5555@10.10.201.173>;party=calling;screen=yes;privacy=off
Content-Length: 0
```

[diagram] Call-ID:[prev][next]
[7] SIP/2.0 180 Ringing
```
Via: SIP/2.0/UDP 10.10.197.154:5060;branch=z9hG4bK12CF587
From: <sip:4444@10.10.197.154>;tag=1A25A6E0-1551
To: <sip:5555@10.10.199.250>;tag=03f840d7-6aad-4124-bf92-ad483e762201-18226828
Date: Mon, 02 Jul 2007 22:29:41 GMT
Call-ID: D474D375-282211DC-803AC3AF-CDD97D1E@10.10.197.154
Timestamp: 1183415497
CSeq: 101 INVITE
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY, PUBLISH
Allow-Events: presence
Remote-Party-ID: <sip:5555@10.10.199.250>;party=called;screen=yes;privacy=off
Contact: <sip:5555@10.10.199.250:5060>
Content-Length: 0
```

[diagram] Call-ID:[prev][next]
[8] SIP/2.0 200 OK
```
Via: SIP/2.0/TCP 10.10.201.173:5060;branch=z9hG4bK702264
From: <sip:5555@10.10.201.173>;tag=107EA538-17C5
To: <sip:4444@10.10.199.250>;tag=03f840d7-6aad-4124-bf92-ad483e762201-18226829
Date: Mon, 02 Jul 2007 22:29:41 GMT
Call-ID: b8593e00-68917c55-8ef-fac712ac@10.10.199.250
Timestamp: 1183415339
CSeq: 101 UPDATE
Allow-Events: presence
Contact: <sip:5555@10.10.199.250:5060;transport=tcp>
Session-Expires:  1800;refresher=uac
Require:  timer
Content-Length: 0
```

[diagram] Call-ID:[prev][next]
[9] SIP/2.0 200 OK
```
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK6d5ec9f5cb
From: <sip:4444@10.10.199.250>;tag=03f840d7-6aad-4124-bf92-ad483e762201-18226829
To: <sip:5555@10.10.201.173>;tag=107EA538-17C5
Date: Mon, 02 Jul 2007 22:28:59 GMT
Call-ID: b8593e00-68917c55-8ef-fac712ac@10.10.199.250
```

CISCO CONFIDENTIAL

```
Server: Cisco-SIPGateway/IOS-12.x
CSeq: 101 INVITE
Allow: INVITE, OPTIONS, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY, INFO, REGISTER
Allow-Events: telephone-event
Contact: <sip:5555@10.10.201.173:5060;transport=tcp>
Supported: replaces
Session-Expires:  1800;refresher=uac
Require: timer
Content-Type: application/sdp
Content-Disposition: session;handling=required
Content-Length: 244

v=0
o=CiscoSystemsSIP-GW-UserAgent 5206 5659 IN IP4 10.10.201.173
s=SIP Call
c=IN IP4 10.10.201.173
t=0 0
m=audio 16588 RTP/AVP 18 19
c=IN IP4 10.10.201.173
a=rtpmap:18 G729/8000
a=fmtp:18 annexb=no
a=rtpmap:19 CN/8000
a=ptime:20
```

[diagram] Call-ID:[prev][next]

[10] ACK sip:5555@10.10.201.173:5060;transport=tcp SIP/2.0

```
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK6e137f0889
From: <sip:4444@10.10.199.250>;tag=03f840d7-6aad-4124-bf92-ad483e762201-18226829
To: <sip:5555@10.10.201.173>;tag=107EA538-17C5
Date: Mon, 02 Jul 2007 22:29:41 GMT
Call-ID: b8593e00-68917c55-8ef-fac712ac@10.10.199.250
Max-Forwards: 70
CSeq: 101 ACK
Allow-Events: presence
Content-Type: application/sdp
Content-Length: 183

v=0
o=CiscoSystemsCCM-SIP 2000 1 IN IP4 10.10.199.250
s=SIP Call
c=IN IP4 10.10.197.154
t=0 0
m=audio 18714 RTP/AVP 18
a=rtpmap:18 G729/8000
a=ptime:20
a=fmtp:18 annexb=no
```

[diagram] Call-ID:[prev][next]

[11] SIP/2.0 183 Session Progress

```
Via: SIP/2.0/UDP 10.10.197.154:5060;branch=z9hG4bK12CF587
From: <sip:4444@10.10.197.154>;tag=1A25A6E0-1551
To: <sip:5555@10.10.199.250>;tag=03f840d7-6aad-4124-bf92-ad483e762201-18226828
Date: Mon, 02 Jul 2007 22:29:41 GMT
Call-ID: D474D375-282211DC-803AC3AF-CDD97D1E@10.10.197.154
Timestamp: 1183415497
CSeq: 101 INVITE
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY, PUBLISH
Allow-Events: presence
Remote-Party-ID: <sip:5555@10.10.199.250>;party=called;screen=yes;privacy=off
Contact: <sip:5555@10.10.199.250:5060>
Content-Type: application/sdp
Content-Length: 183

v=0
o=CiscoSystemsCCM-SIP 2000 1 IN IP4 10.10.199.250
s=SIP Call
c=IN IP4 10.10.201.173
t=0 0
m=audio 16588 RTP/AVP 18
a=rtpmap:18 G729/8000
a=ptime:20
a=fmtp:18 annexb=no
```

[diagram] Call-ID:[prev][next]

[12] SIP/2.0 200 OK

```
Via: SIP/2.0/UDP 10.10.197.154:5060;branch=z9hG4bK12CF587
From: <sip:4444@10.10.197.154>;tag=1A25A6E0-1551
To: <sip:5555@10.10.199.250>;tag=03f840d7-6aad-4124-bf92-ad483e762201-18226828
Date: Mon, 02 Jul 2007 22:29:41 GMT
Call-ID: D474D375-282211DC-803AC3AF-CDD97D1E@10.10.197.154
```

CISCO CONFIDENTIAL

```
Timestamp: 1183415497
CSeq: 101 INVITE
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY, PUBLISH
Allow-Events: presence
Remote-Party-ID: <sip:5555@10.10.199.250>;party=called;screen=yes;privacy=off
Contact: <sip:5555@10.10.199.250:5060>
Supported: replaces
Session-Expires:  1800;refresher=uas
Require:  timer
Content-Type: application/sdp
Content-Length: 183

v=0
o=CiscoSystemsCCM-SIP 2000 1 IN IP4 10.10.199.250
s=SIP Call
c=IN IP4 10.10.201.173
t=0 0
m=audio 16588 RTP/AVP 18
a=rtpmap:18 G729/8000
a=ptime:20
a=fmtp:18 annexb=no
```

[diagram] Call-ID:[prev][next]

```
[13] UPDATE sip:4444@10.10.199.250:5060;transport=tcp SIP/2.0
Via: SIP/2.0/TCP 10.10.201.173:5060;branch=z9hG4bK71174F
From: <sip:5555@10.10.201.173>;tag=107EA538-17C5
To: <sip:4444@10.10.199.250>;tag=03f840d7-6aad-4124-bf92-ad483e762201-18226829
Date: Mon, 02 Jul 2007 22:29:06 GMT
Call-ID: b8593e00-68917c55-8ef-fac712ac@10.10.199.250
User-Agent: Cisco-SIPGateway/IOS-12.x
Max-Forwards: 6
Timestamp: 1183415346
CSeq: 102 UPDATE
Contact: <sip:5555@10.10.201.173:5060;transport=tcp>
Remote-Party-ID: <sip:5555@10.10.201.173>;party=calling;screen=no;privacy=off
Content-Length: 0
```

[diagram] Call-ID:[prev][next]

```
[14] ACK sip:5555@10.10.199.250:5060 SIP/2.0
Via: SIP/2.0/UDP 10.10.197.154:5060;branch=z9hG4bK12D0D6
From: <sip:4444@10.10.197.154>;tag=1A25A6E0-1551
To: <sip:5555@10.10.199.250>;tag=03f840d7-6aad-4124-bf92-ad483e762201-18226828
Date: Mon, 02 Jul 2007 22:31:37 GMT
Call-ID: D474D375-282211DC-803AC3AF-CDD97D1E@10.10.197.154
Max-Forwards: 70
CSeq: 101 ACK
Allow-Events: telephone-event
Content-Length: 0
```

[diagram] Call-ID:[prev][next]

```
[15] SIP/2.0 200 OK
Via: SIP/2.0/TCP 10.10.201.173:5060;branch=z9hG4bK71174F
From: <sip:5555@10.10.201.173>;tag=107EA538-17C5
To: <sip:4444@10.10.199.250>;tag=03f840d7-6aad-4124-bf92-ad483e762201-18226829
Date: Mon, 02 Jul 2007 22:29:48 GMT
Call-ID: b8593e00-68917c55-8ef-fac712ac@10.10.199.250
Timestamp: 1183415346
CSeq: 102 UPDATE
Allow-Events: presence
Contact: <sip:5555@10.10.199.250:5060;transport=tcp>
Session-Expires:  1800;refresher=uas
Require:  timer
Content-Length: 0
```

[diagram] Call-ID:[prev][next]

```
[16] UPDATE sip:4444@10.10.197.154:5060 SIP/2.0
Via: SIP/2.0/UDP 10.10.199.250:5060;branch=z9hG4bK6f1745df1c
From: <sip:5555@10.10.199.250>;tag=03f840d7-6aad-4124-bf92-ad483e762201-18226828
To: <sip:4444@10.10.197.154>;tag=1A25A6E0-1551
Date: Mon, 02 Jul 2007 22:29:48 GMT
Call-ID: D474D375-282211DC-803AC3AF-CDD97D1E@10.10.197.154
User-Agent: Cisco-CUCM7.1
Max-Forwards: 70
CSeq: 101 UPDATE
Contact: <sip:5555@10.10.199.250:5060>
Remote-Party-ID: <sip:5555@10.10.199.250>;party=calling;screen=yes;privacy=off
Content-Length: 0
```

[diagram] Call-ID:[prev][next]

```
[17] SIP/2.0 200 OK
```

CISCO CONFIDENTIAL

```
Via: SIP/2.0/UDP 10.10.199.250:5060;branch=z9hG4bK6f1745df1c
From: <sip:5555@10.10.199.250>;tag=03f840d7-6aad-4124-bf92-ad483e762201-18226828
To: <sip:4444@10.10.197.154>;tag=1A25A6E0-1551
Date: Mon, 02 Jul 2007 22:31:44 GMT
Call-ID: D474D375-282211DC-803AC3AF-CDD97D1E@10.10.197.154
Server: Cisco-SIPGateway/IOS-12.x
CSeq: 101 UPDATE
Allow-Events: telephone-event
Contact: <sip:5555@10.10.197.154:5060>
Content-Length: 0
```

[diagram] Call-ID:[prev][next]

[18] INVITE sip:4444@10.10.199.250:5060;transport=tcp SIP/2.0

```
Via: SIP/2.0/TCP 10.10.201.173:5060;branch=z9hG4bK722491
Remote-Party-ID: <sip:5555@10.10.201.173>;party=calling;screen=no;privacy=off
From: <sip:5555@10.10.201.173>;tag=107EA538-17C5
To: <sip:4444@10.10.199.250>;tag=03f840d7-6aad-4124-bf92-ad483e762201-18226829
Date: Mon, 02 Jul 2007 22:29:42 GMT
Call-ID: b8593e00-68917c55-8ef-fac712ac@10.10.199.250
Supported: 100rel,timer,resource-priority,replaces
Min-SE:  1800
Cisco-Guid: 1982097883-673321436-2150949515-1341985076
User-Agent: Cisco-SIPGateway/IOS-12.x
Allow: INVITE, OPTIONS, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY, INFO, REGISTER
CSeq: 103 INVITE
Max-Forwards: 6
Timestamp: 1183415382
Contact: <sip:5555@10.10.201.173:5060;transport=tcp>
Expires: 1800
Allow-Events: telephone-event
Session-Expires:  1800;refresher=uas
Content-Type: application/sdp
Content-Length: 401

v=0
o=CiscoSystemsSIP-GW-UserAgent 5206 5661 IN IP4 10.10.201.173
s=SIP Call
c=IN IP4 10.10.201.173
t=0 0
m=image 16588 udptl t38
c=IN IP4 10.10.201.173
a=T38FaxVersion:0
a=T38MaxBitRate:7200
a=T38FaxFillBitRemoval:0
a=T38FaxTranscodingMMR:0
a=T38FaxTranscodingJBIG:0
a=T38FaxRateManagement:transferredTCF
a=T38FaxMaxBuffer:200
a=T38FaxMaxDatagram:72
a=T38FaxUdpEC:t38UDPRedundancy
```

[diagram] Call-ID:[prev][next]

[19] SIP/2.0 100 Trying

```
Via: SIP/2.0/TCP 10.10.201.173:5060;branch=z9hG4bK722491
From: <sip:5555@10.10.201.173>;tag=107EA538-17C5
To: <sip:4444@10.10.199.250>;tag=03f840d7-6aad-4124-bf92-ad483e762201-18226829
Date: Mon, 02 Jul 2007 22:30:25 GMT
Call-ID: b8593e00-68917c55-8ef-fac712ac@10.10.199.250
CSeq: 103 INVITE
Allow-Events: presence
Content-Length: 0
```

[diagram] Call-ID:[prev][next]

[20] INVITE sip:4444@10.10.197.154:5060 SIP/2.0

```
Via: SIP/2.0/UDP 10.10.199.250:5060;branch=z9hG4bK701e6de0ae
Remote-Party-ID: <sip:5555@10.10.199.250>;party=calling;screen=yes;privacy=off
From: <sip:5555@10.10.199.250>;tag=03f840d7-6aad-4124-bf92-ad483e762201-18226828
To: <sip:4444@10.10.197.154>;tag=1A25A6E0-1551
Date: Mon, 02 Jul 2007 22:30:25 GMT
Call-ID: D474D375-282211DC-803AC3AF-CDD97D1E@10.10.197.154
Supported: timer,replaces
Min-SE:  1800
Cisco-Guid: 3519585899-673321436-2151007151-3453582622
User-Agent: Cisco-CUCM7.1
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY, PUBLISH
CSeq: 102 INVITE
Max-Forwards: 70
Contact: <sip:5555@10.10.199.250:5060>
Expires: 180
Allow-Events: presence
```

CISCO CONFIDENTIAL

```
Session-Expires:  1800;refresher=uac
Content-Type: application/sdp
Content-Length: 364

v=0
o=CiscoSystemsCCM-SIP 2000 2 IN IP4 10.10.199.250
s=SIP Call
t=0 0
m=image 16588 udptl t38
c=IN IP4 10.10.201.173
a=T38FaxVersion:0
a=T38MaxBitRate:7200
a=T38FaxFillBitRemoval:0
a=T38FaxTranscodingMMR:0
a=T38FaxTranscodingJBIG:0
a=T38FaxRateManagement:transferredTCF
a=T38FaxUdpEC:t38UDPRedundancy
a=T38FaxMaxBuffer:200
a=T38FaxMaxDatagram:72
```

[diagram] Call-ID:[prev][next]

[21] SIP/2.0 100 Trying

```
Via: SIP/2.0/UDP 10.10.199.250:5060;branch=z9hG4bK701e6de0ae
From: <sip:5555@10.10.199.250>;tag=03f840d7-6aad-4124-bf92-ad483e762201-18226828
To: <sip:4444@10.10.197.154>;tag=1A25A6E0-1551
Date: Mon, 02 Jul 2007 22:32:20 GMT
Call-ID: D474D375-282211DC-803AC3AF-CDD97D1E@10.10.197.154
Server: Cisco-SIPGateway/IOS-12.x
CSeq: 102 INVITE
Allow-Events: telephone-event
Content-Length: 0
```

[diagram] Call-ID:[prev][next]

[22] SIP/2.0 200 OK

```
Via: SIP/2.0/UDP 10.10.199.250:5060;branch=z9hG4bK701e6de0ae
From: <sip:5555@10.10.199.250>;tag=03f840d7-6aad-4124-bf92-ad483e762201-18226828
To: <sip:4444@10.10.197.154>;tag=1A25A6E0-1551
Date: Mon, 02 Jul 2007 22:32:20 GMT
Call-ID: D474D375-282211DC-803AC3AF-CDD97D1E@10.10.197.154
Server: Cisco-SIPGateway/IOS-12.x
CSeq: 102 INVITE
Allow: INVITE, OPTIONS, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY, INFO, REGISTER
Allow-Events: telephone-event
Remote-Party-ID: <sip:4444@10.10.197.154>;party=called;screen=no;privacy=off
Contact: <sip:5555@10.10.197.154:5060>
Supported: replaces
Session-Expires:  1800;refresher=uac
Require: timer
Content-Type: application/sdp
Content-Length: 163

v=0
o=CiscoSystemsSIP-GW-UserAgent 5572 2058 IN IP4 10.10.197.154
s=SIP Call
c=IN IP4 10.10.197.154
t=0 0
m=image 18714 udptl t38
c=IN IP4 10.10.197.154
```

[diagram] Call-ID:[prev][next]

[23] ACK sip:5555@10.10.197.154:5060 SIP/2.0

```
Via: SIP/2.0/UDP 10.10.199.250:5060;branch=z9hG4bK71201cf9b2
From: <sip:5555@10.10.199.250>;tag=03f840d7-6aad-4124-bf92-ad483e762201-18226828
To: <sip:4444@10.10.197.154>;tag=1A25A6E0-1551
Date: Mon, 02 Jul 2007 22:30:25 GMT
Call-ID: D474D375-282211DC-803AC3AF-CDD97D1E@10.10.197.154
Max-Forwards: 70
CSeq: 102 ACK
Allow-Events: presence
Content-Length: 0
```

[diagram] Call-ID:[prev][next]

[24] SIP/2.0 200 OK

```
Via: SIP/2.0/TCP 10.10.201.173:5060;branch=z9hG4bK722491
From: <sip:5555@10.10.201.173>;tag=107EA538-17C5
To: <sip:4444@10.10.199.250>;tag=03f840d7-6aad-4124-bf92-ad483e762201-18226829
Date: Mon, 02 Jul 2007 22:30:25 GMT
Call-ID: b8593e00-68917c55-8ef-fac712ac@10.10.199.250
CSeq: 103 INVITE
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY, PUBLISH
```

CISCO CONFIDENTIAL

```
Allow-Events: presence
Remote-Party-ID: <sip:4444@10.10.199.250>;party=called;screen=yes;privacy=off
Contact: <sip:5555@10.10.199.250:5060;transport=tcp>
Supported: replaces
Session-Expires:  1800;refresher=uas
Require:  timer
Content-Type: application/sdp
Content-Length: 227

v=0
o=CiscoSystemsCCM-SIP 2000 2 IN IP4 10.10.199.250
s=SIP Call
t=0 0
m=image 18714 udptl t38
c=IN IP4 10.10.197.154
a=T38MaxBitRate:7200
a=T38FaxFillBitRemoval:0
a=T38FaxTranscodingMMR:0
a=T38FaxTranscodingJBIG:0
```

[diagram] Call-ID:[prev][next]

[25] ACK sip:5555@10.10.199.250:5060;transport=tcp SIP/2.0

```
Via: SIP/2.0/TCP 10.10.201.173:5060;branch=z9hG4bK7321C7
From: <sip:5555@10.10.201.173>;tag=107EA538-17C5
To: <sip:4444@10.10.199.250>;tag=03f840d7-6aad-4124-bf92-ad483e762201-18226829
Date: Mon, 02 Jul 2007 22:29:42 GMT
Call-ID: b8593e00-68917c55-8ef-fac712ac@10.10.199.250
Max-Forwards: 6
CSeq: 103 ACK
Allow-Events: telephone-event
Content-Length: 0
```

[diagram] Call-ID:[prev][next]

[26] INVITE sip:5555@10.10.199.250:5060;transport=tcp SIP/2.0

```
Via: SIP/2.0/TCP 10.10.201.173:5060;branch=z9hG4bK7410A4
Remote-Party-ID: <sip:5555@10.10.201.173>;party=calling;screen=no;privacy=off
From: <sip:5555@10.10.201.173>;tag=107EA538-17C5
To: <sip:4444@10.10.199.250>;tag=03f840d7-6aad-4124-bf92-ad483e762201-18226829
Date: Mon, 02 Jul 2007 22:30:18 GMT
Call-ID: b8593e00-68917c55-8ef-fac712ac@10.10.199.250
Supported: 100rel,timer,resource-priority,replaces
Min-SE:  1800
Cisco-Guid: 1982097883-673321436-2150949515-1341985076
User-Agent: Cisco-SIPGateway/IOS-12.x
Allow: INVITE, OPTIONS, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY, INFO, REGISTER
CSeq: 104 INVITE
Max-Forwards: 6
Timestamp: 1183415418
Contact: <sip:5555@10.10.201.173:5060;transport=tcp>
Expires: 1800
Allow-Events: telephone-event
Session-Expires:  1800;refresher=uas
Content-Type: application/sdp
Content-Length: 244

v=0
o=CiscoSystemsSIP-GW-UserAgent 5206 5662 IN IP4 10.10.201.173
s=SIP Call
c=IN IP4 10.10.201.173
t=0 0
m=audio 16588 RTP/AVP 18 19
c=IN IP4 10.10.201.173
a=rtpmap:18 G729/8000
a=fmtp:18 annexb=no
a=rtpmap:19 CN/8000
a=ptime:20
```

[diagram] Call-ID:[prev][next]

[27] SIP/2.0 100 Trying

```
Via: SIP/2.0/TCP 10.10.201.173:5060;branch=z9hG4bK7410A4
From: <sip:5555@10.10.201.173>;tag=107EA538-17C5
To: <sip:4444@10.10.199.250>;tag=03f840d7-6aad-4124-bf92-ad483e762201-18226829
Date: Mon, 02 Jul 2007 22:31:00 GMT
Call-ID: b8593e00-68917c55-8ef-fac712ac@10.10.199.250
CSeq: 104 INVITE
Allow-Events: presence
Content-Length: 0
```

[diagram] Call-ID:[prev][next]

[28] SIP/2.0 415 Unsupported Media Type

CISCO CONFIDENTIAL

```
Via: SIP/2.0/TCP 10.10.201.173:5060;branch=z9hG4bK7410A4
From: <sip:5555@10.10.201.173>;tag=107EA538-17C5
To: <sip:4444@10.10.199.250>;tag=03f840d7-6aad-4124-bf92-ad483e762201-18226829
Date: Mon, 02 Jul 2007 22:31:00 GMT
Call-ID: b8593e00-68917c55-8ef-fac712ac@10.10.199.250
CSeq: 104 INVITE
Allow-Events: presence
Content-Length: 0
```

[diagram] Call-ID:[prev][next]

[29] SIP/2.0 200 OK

```
Via: SIP/2.0/TCP 10.10.201.173:5060;branch=z9hG4bK7410A4
From: <sip:5555@10.10.201.173>;tag=107EA538-17C5
To: <sip:4444@10.10.199.250>;tag=03f840d7-6aad-4124-bf92-ad483e762201-18226829
Date: Mon, 02 Jul 2007 22:31:00 GMT
Call-ID: b8593e00-68917c55-8ef-fac712ac@10.10.199.250
CSeq: 104 INVITE
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY, PUBLISH
Allow-Events: presence
Remote-Party-ID: <sip:4444@10.10.199.250>;party=called;screen=yes;privacy=off
Contact: <sip:5555@10.10.199.250:5060;transport=tcp>
Supported: replaces
Session-Expires:  1800;refresher=uas
Require:  timer
Content-Type: application/sdp
Content-Length: 195

v=0
o=CiscoSystemsCCM-SIP 2000 3 IN IP4 10.10.199.250
s=SIP Call
c=IN IP4 10.10.201.173
t=0 0
m=audio 16588 RTP/AVP 18
a=rtpmap:18 G729/8000
a=ptime:20
a=fmtp:18 annexb=no
a=inactive
```

[diagram] Call-ID:[prev][next]

[30] UPDATE sip:5555@10.10.197.154:5060 SIP/2.0

```
Via: SIP/2.0/UDP 10.10.199.250:5060;branch=z9hG4bK727b88f070
From: <sip:5555@10.10.199.250>;tag=03f840d7-6aad-4124-bf92-ad483e762201-18226828
To: <sip:4444@10.10.197.154>;tag=1A25A6E0-1551
Date: Mon, 02 Jul 2007 22:30:25 GMT
Call-ID: D474D375-282211DC-803AC3AF-CDD97D1E@10.10.197.154
User-Agent: Cisco-CUCM7.1
Max-Forwards: 70
CSeq: 103 UPDATE
Contact: <sip:5555@10.10.199.250:5060>
Remote-Party-ID: <sip:5555@10.10.199.250>;party=calling;screen=yes;privacy=off
Content-Length: 0
```

[diagram] Call-ID:[prev][next]

[31] BYE sip:5555@10.10.197.154:5060 SIP/2.0

```
Via: SIP/2.0/UDP 10.10.199.250:5060;branch=z9hG4bK73378de66c
From: <sip:5555@10.10.199.250>;tag=03f840d7-6aad-4124-bf92-ad483e762201-18226828
To: <sip:4444@10.10.197.154>;tag=1A25A6E0-1551
Date: Mon, 02 Jul 2007 22:30:25 GMT
Call-ID: D474D375-282211DC-803AC3AF-CDD97D1E@10.10.197.154
User-Agent: Cisco-CUCM7.1
Max-Forwards: 70
CSeq: 104 BYE
Reason: Q.850;cause=47
Content-Length: 0
```

[diagram] Call-ID:[prev][next]

[32] BYE sip:5555@10.10.201.173:5060;transport=tcp SIP/2.0

```
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK745dabe0f9
From: <sip:4444@10.10.199.250>;tag=03f840d7-6aad-4124-bf92-ad483e762201-18226829
To: <sip:5555@10.10.201.173>;tag=107EA538-17C5
Date: Mon, 02 Jul 2007 22:31:00 GMT
Call-ID: b8593e00-68917c55-8ef-fac712ac@10.10.199.250
User-Agent: Cisco-CUCM7.1
Max-Forwards: 70
CSeq: 102 BYE
Reason: Q.850;cause=47
Content-Length: 0
```

[diagram] Call-ID:[prev][next]

[33] ACK sip:5555@10.10.199.250:5060;transport=tcp SIP/2.0

CISCO CONFIDENTIAL

```
Via: SIP/2.0/TCP 10.10.201.173:5060;branch=z9hG4bK7410A4
From: <sip:5555@10.10.201.173>;tag=107EA538-17C5
To: <sip:4444@10.10.199.250>;tag=03f840d7-6aad-4124-bf92-ad483e762201-18226829
Date: Mon, 02 Jul 2007 22:30:18 GMT
Call-ID: b8593e00-68917c55-8ef-fac712ac@10.10.199.250
Max-Forwards: 6
CSeq: 104 ACK
Allow-Events: telephone-event
Content-Length: 0
```

[diagram] Call-ID:[prev][next]

[34] SIP/2.0 200 OK

```
Via: SIP/2.0/UDP 10.10.199.250:5060;branch=z9hG4bK727b88f070
From: <sip:5555@10.10.199.250>;tag=03f840d7-6aad-4124-bf92-ad483e762201-18226828
To: <sip:4444@10.10.197.154>;tag=1A25A6E0-1551
Date: Mon, 02 Jul 2007 22:32:56 GMT
Call-ID: D474D375-282211DC-803AC3AF-CDD97D1E@10.10.197.154
Server: Cisco-SIPGateway/IOS-12.x
CSeq: 103 UPDATE
Allow-Events: telephone-event
Contact: <sip:5555@10.10.197.154:5060>
Content-Length: 0
```

[diagram] Call-ID:[prev][next]

[35] ACK sip:5555@10.10.199.250:5060;transport=tcp SIP/2.0

```
Via: SIP/2.0/TCP 10.10.201.173:5060;branch=z9hG4bK7321C7
From: <sip:5555@10.10.201.173>;tag=107EA538-17C5
To: <sip:4444@10.10.199.250>;tag=03f840d7-6aad-4124-bf92-ad483e762201-18226829
Date: Mon, 02 Jul 2007 22:30:18 GMT
Call-ID: b8593e00-68917c55-8ef-fac712ac@10.10.199.250
Max-Forwards: 6
CSeq: 104 ACK
Allow-Events: telephone-event
Content-Length: 0
```

[diagram] Call-ID:[prev][next]

[36] SIP/2.0 200 OK

```
Via: SIP/2.0/UDP 10.10.199.250:5060;branch=z9hG4bK73378de66c
From: <sip:5555@10.10.199.250>;tag=03f840d7-6aad-4124-bf92-ad483e762201-18226828
To: <sip:4444@10.10.197.154>;tag=1A25A6E0-1551
Date: Mon, 02 Jul 2007 22:32:56 GMT
Call-ID: D474D375-282211DC-803AC3AF-CDD97D1E@10.10.197.154
Server: Cisco-SIPGateway/IOS-12.x
CSeq: 104 BYE
Reason: Q.850;cause=16
Content-Length: 0
```

[diagram] Call-ID:[prev][next]

[37] SIP/2.0 200 OK

```
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK745dabe0f9
From: <sip:4444@10.10.199.250>;tag=03f840d7-6aad-4124-bf92-ad483e762201-18226829
To: <sip:5555@10.10.201.173>;tag=107EA538-17C5
Date: Mon, 02 Jul 2007 22:30:18 GMT
Call-ID: b8593e00-68917c55-8ef-fac712ac@10.10.199.250
Server: Cisco-SIPGateway/IOS-12.x
CSeq: 102 BYE
Reason: Q.850;cause=0
Content-Length: 0
```

CISCO CONFIDENTIAL

8. SipsUri

8.1 Incoming SIPS URI Request Redirected by Cisco Unified CM

Title: Incoming SIPS URI Request Redirected by Cisco Unified CM

Description:
SIPS URI is handled but not officially supported by Cisco Unified CM.
This scenario shows the CM behavior when the SIP URI Handling service parameter is set to "redirect".
Incoming SIP URI request is redirected to the same address but with SIP URI as directed by the SIPS URI service parameter.

Configuration:
Node = Unified CM1, IP = 10.10.199.250
Node = Gateway, IP = 10.10.197.25

Phone = A, Line = 4040, Model = FXPS
Phone = B, Line = 1002, IP = 10.10.199.238, Model = SIP TNP

SIP Trunk between Unified CM1 & Gateway
a) Has destination port configured to be 5061
b) Has "SIP Trunk Security Profile" point to the Gateway Sip Trunk Secure Profile, which is already
configured to have correct X509 Subject Name.

In Call Manager Unified CM1, Service Parameter "SIPS_URI_HANDLING" is set to "Redirect".

Scenario:
Phone A DN 4040 calls Phone B DN 1002
Call gets redirected directly to Phone B DN 1002 because of SIPS_URI_HANDLING Service Parameter.
Phone B DN 1002 answers the Call
Phone A DN 4040 goes onHook
End of Scenario

CISCO CONFIDENTIAL

CISCO CONFIDENTIAL

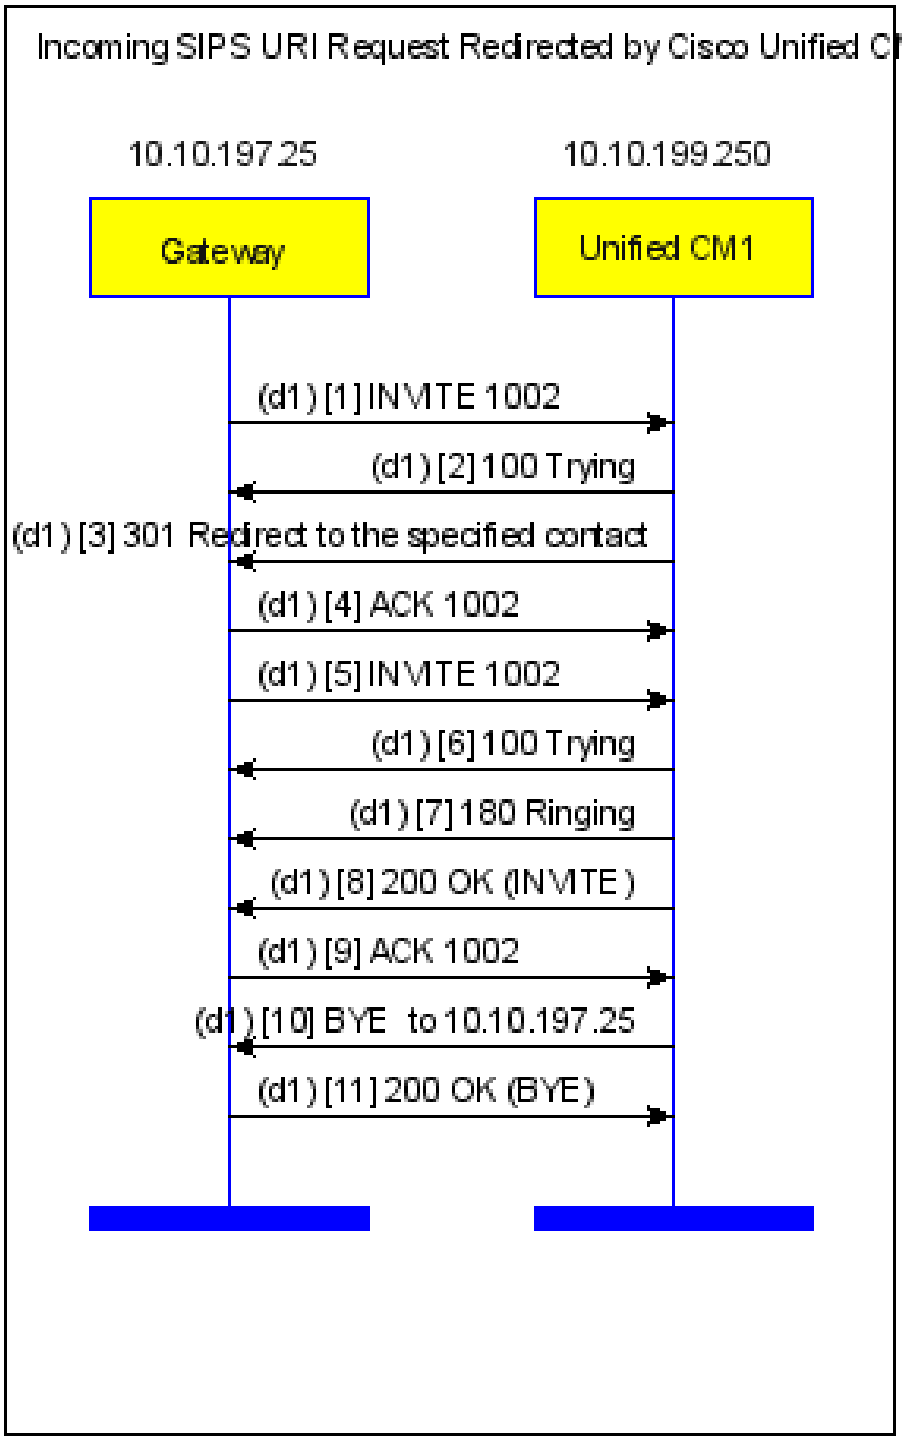

CISCO CONFIDENTIAL

[diagram] Call-ID:[prev][next]
[1] INVITE sips:1002@10.10.199.250:5061 SIP/2.0
```
Via: SIP/2.0/TLS 10.10.197.25:5061;branch=z9hG4bK7B253B
From: <sips:10.10.197.25>;tag=96836BC4-ED5
To: <sips:1002@10.10.199.250>
Date: Thu, 28 Jun 2007 20:46:46 GMT
Call-ID: 85412548-24EF11DC-81BCE83B-9D0579C6@10.10.197.25
Supported: 100rel,timer,resource-priority,replaces
Min-SE:  1800
Cisco-Guid: 2235598983-619647452-2176444475-2634381766
User-Agent: Cisco-SIPGateway/IOS-12.x
Allow: INVITE, OPTIONS, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY, INFO, REGISTER
CSeq: 101 INVITE
Max-Forwards: 70
Timestamp: 1183063606
Contact: <sips:10.10.197.25:5061>
Expires: 180
Allow-Events: telephone-event
Content-Type: application/sdp
Content-Disposition: session;handling=required
Content-Length: 241

v=0
o=CiscoSystemsSIP-GW-UserAgent 3238 4753 IN IP4 10.10.197.25
s=SIP Call
c=IN IP4 10.10.197.25
t=0 0
m=audio 17126 RTP/AVP 18 19
c=IN IP4 10.10.197.25
a=rtpmap:18 G729/8000
a=fmtp:18 annexb=no
a=rtpmap:19 CN/8000
a=ptime:20
```

[diagram] Call-ID:[prev][next]
[2] SIP/2.0 100 Trying
```
Via: SIP/2.0/TLS 10.10.197.25:5061;branch=z9hG4bK7B253B
From: <sips:10.10.197.25>;tag=96836BC4-ED5
To: <sips:1002@10.10.199.250>
Date: Thu, 28 Jun 2007 20:46:46 GMT
Call-ID: 85412548-24EF11DC-81BCE83B-9D0579C6@10.10.197.25
Timestamp: 1183063606
CSeq: 101 INVITE
Allow-Events: presence
Content-Length: 0
```

[diagram] Call-ID:[prev][next]
[3] SIP/2.0 301 Redirect to the specified contact
```
Via: SIP/2.0/TLS 10.10.197.25:5061;branch=z9hG4bK7B253B
From: <sips:10.10.197.25>;tag=96836BC4-ED5
To: <sips:1002@10.10.199.250>;tag=1095486251
Date: Thu, 28 Jun 2007 20:46:46 GMT
Call-ID: 85412548-24EF11DC-81BCE83B-9D0579C6@10.10.197.25
Timestamp: 1183063606
CSeq: 101 INVITE
Allow-Events: presence
Contact: <sip:1002@10.10.199.250:5061;transport=tls>
Diversion: sips:1002@10.10.199.250:5061
Content-Length: 0
```

[diagram] Call-ID:[prev][next]
[4] ACK sips:1002@10.10.199.250:5061 SIP/2.0
```
Via: SIP/2.0/TLS 10.10.197.25:5061;branch=z9hG4bK7B253B
From: <sips:10.10.197.25>;tag=96836BC4-ED5
To: <sips:1002@10.10.199.250>;tag=1095486251
Date: Thu, 28 Jun 2007 20:46:46 GMT
Call-ID: 85412548-24EF11DC-81BCE83B-9D0579C6@10.10.197.25
Max-Forwards: 70
CSeq: 101 ACK
Allow-Events: telephone-event
Content-Length: 0
```

[diagram] Call-ID:[prev][next]
[5] INVITE sip:1002@10.10.199.250:5061;transport=tls SIP/2.0
```
Via: SIP/2.0/TLS 10.10.197.25:5061;branch=z9hG4bK7C136A
From: <sip:10.10.197.25>;tag=96836BD4-1287
To: <sip:1002@10.10.199.250>
Date: Thu, 28 Jun 2007 20:46:46 GMT
Call-ID: 85412548-24EF11DC-81BCE83B-9D0579C6@10.10.197.25
Supported: 100rel,timer,resource-priority,replaces
```

CISCO CONFIDENTIAL

```
Min-SE:  1800
Cisco-Guid: 2235598983-619647452-2176444475-2634381766
User-Agent: Cisco-SIPGateway/IOS-12.x
Allow: INVITE, OPTIONS, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY, INFO, REGISTER
CSeq: 102 INVITE
Max-Forwards: 70
Timestamp: 1183063606
Contact: <sip:10.10.197.25:5061;transport=tls>
Diversion: <sip:1002@10.10.199.250>
Expires: 180
Allow-Events: telephone-event
Content-Type: application/sdp
Content-Disposition: session;handling=required
Content-Length: 241

v=0
o=CiscoSystemsSIP-GW-UserAgent 3238 4753 IN IP4 10.10.197.25
s=SIP Call
c=IN IP4 10.10.197.25
t=0 0
m=audio 17126 RTP/AVP 18 19
c=IN IP4 10.10.197.25
a=rtpmap:18 G729/8000
a=fmtp:18 annexb=no
a=rtpmap:19 CN/8000
a=ptime:20
```

[diagram] Call-ID:[prev][next]

[6] SIP/2.0 100 Trying

```
Via: SIP/2.0/TLS 10.10.197.25:5061;branch=z9hG4bK7C136A
From: <sip:10.10.197.25>;tag=96836BD4-1287
To: <sip:1002@10.10.199.250>
Date: Thu, 28 Jun 2007 20:46:46 GMT
Call-ID: 85412548-24EF11DC-81BCE83B-9D0579C6@10.10.197.25
Timestamp: 1183063606
CSeq: 102 INVITE
Allow-Events: presence
Content-Length: 0
```

[diagram] Call-ID:[prev][next]

[7] SIP/2.0 180 Ringing

```
Via: SIP/2.0/TLS 10.10.197.25:5061;branch=z9hG4bK7C136A
From: <sip:10.10.197.25>;tag=96836BD4-1287
To: <sip:1002@10.10.199.250>;tag=03f840d7-6aad-4124-bf92-ad483e762201-17470600
Date: Thu, 28 Jun 2007 20:46:46 GMT
Call-ID: 85412548-24EF11DC-81BCE83B-9D0579C6@10.10.197.25
Timestamp: 1183063606
CSeq: 102 INVITE
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY, PUBLISH
Allow-Events: presence
Remote-Party-ID: <sip:1002@10.10.199.250>;party=called;screen=yes;privacy=off
Contact: <sip:1002@10.10.199.250:5061;transport=tls>
Content-Length: 0
```

[diagram] Call-ID:[prev][next]

[8] SIP/2.0 200 OK

```
Via: SIP/2.0/TLS 10.10.197.25:5061;branch=z9hG4bK7C136A
From: <sip:10.10.197.25>;tag=96836BD4-1287
To: <sip:1002@10.10.199.250>;tag=03f840d7-6aad-4124-bf92-ad483e762201-17470600
Date: Thu, 28 Jun 2007 20:46:46 GMT
Call-ID: 85412548-24EF11DC-81BCE83B-9D0579C6@10.10.197.25
Timestamp: 1183063606
CSeq: 102 INVITE
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY, PUBLISH
Allow-Events: presence, kpml
Remote-Party-ID: <sip:1002@10.10.199.250>;party=called;screen=yes;privacy=off
Contact: <sip:1002@10.10.199.250:5061;transport=tls>
Supported: replaces
Session-Expires:  1800;refresher=uas
Require:  timer
Content-Type: application/sdp
Content-Length: 183

v=0
o=CiscoSystemsCCM-SIP 2000 1 IN IP4 10.10.199.250
s=SIP Call
c=IN IP4 10.10.199.251
t=0 0
m=audio 18916 RTP/AVP 18
a=rtpmap:18 G729/8000
```

CISCO CONFIDENTIAL

```
a=ptime:20
a=fmtp:18 annexb=no

[diagram]   Call-ID:[prev][next]
[9] ACK sip:1002@10.10.199.250:5061;transport=tls SIP/2.0
Via: SIP/2.0/TLS 10.10.197.25:5061;branch=z9hG4bK7DD7
From: <sip:10.10.197.25>;tag=96836BD4-1287
To: <sip:1002@10.10.199.250>;tag=03f840d7-6aad-4124-bf92-ad483e762201-17470600
Date: Thu, 28 Jun 2007 20:46:46 GMT
Call-ID: 85412548-24EF11DC-81BCE83B-9D0579C6@10.10.197.25
Max-Forwards: 70
CSeq: 102 ACK
Allow-Events: telephone-event
Content-Length: 0

[diagram]   Call-ID:[prev][next]
[10] BYE sip:10.10.197.25:5061;transport=tls SIP/2.0
Via: SIP/2.0/TLS 10.10.199.250:5061;branch=z9hG4bK2740dfbabb
From: <sip:1002@10.10.199.250>;tag=03f840d7-6aad-4124-bf92-ad483e762201-17470600
To: <sip:10.10.197.25>;tag=96836BD4-1287
Date: Thu, 28 Jun 2007 20:46:51 GMT
Call-ID: 85412548-24EF11DC-81BCE83B-9D0579C6@10.10.197.25
User-Agent: Cisco-CUCM7.1
Max-Forwards: 70
CSeq: 101 BYE
Content-Length: 0

[diagram]   Call-ID:[prev][next]
[11] SIP/2.0 200 OK
Via: SIP/2.0/TLS 10.10.199.250:5061;branch=z9hG4bK2740dfbabb
From: <sip:1002@10.10.199.250>;tag=03f840d7-6aad-4124-bf92-ad483e762201-17470600
To: <sip:10.10.197.25>;tag=96836BD4-1287
Date: Thu, 28 Jun 2007 20:47:01 GMT
Call-ID: 85412548-24EF11DC-81BCE83B-9D0579C6@10.10.197.25
Server: Cisco-SIPGateway/IOS-12.x
CSeq: 101 BYE
Reason: Q.850;cause=16
Content-Length: 0
```

CISCO CONFIDENTIAL

8.2 Incoming SIPS URI Request Rejected by Cisco Unified CM

Title: Incoming SIPS URI Request Rejected by Cisco Unified CM

Description:
Incoming SIPS URI request is rejected as directed by the SIPS URI service parameter.

Configuration:
Node = Unified CM1, IP = 10.10.199.250
Node = Gateway, IP = 10.10.197.25

Phone = A, Line = 4040, Model = FXPS
Phone = B, Line = 1002, IP = 10.10.199.238, Model = SIP TNP

SIP Trunk between Unified CM1 & Gateway
a) Has destination port configured to be 5061
b) Has "SIP Trunk Security Profile" point to the Gateway Sip Trunk Secure Profile, which is already
configured to have correct X509 Subject Name.

Scenario:
Phone A DN 4040 calls Phone B DN 1002
Call gets rejected because of SIPS_URI_HANDLING Service Parameter default Configuration.
Phone A DN 4040 goes onHook
End of Scenario

CISCO CONFIDENTIAL

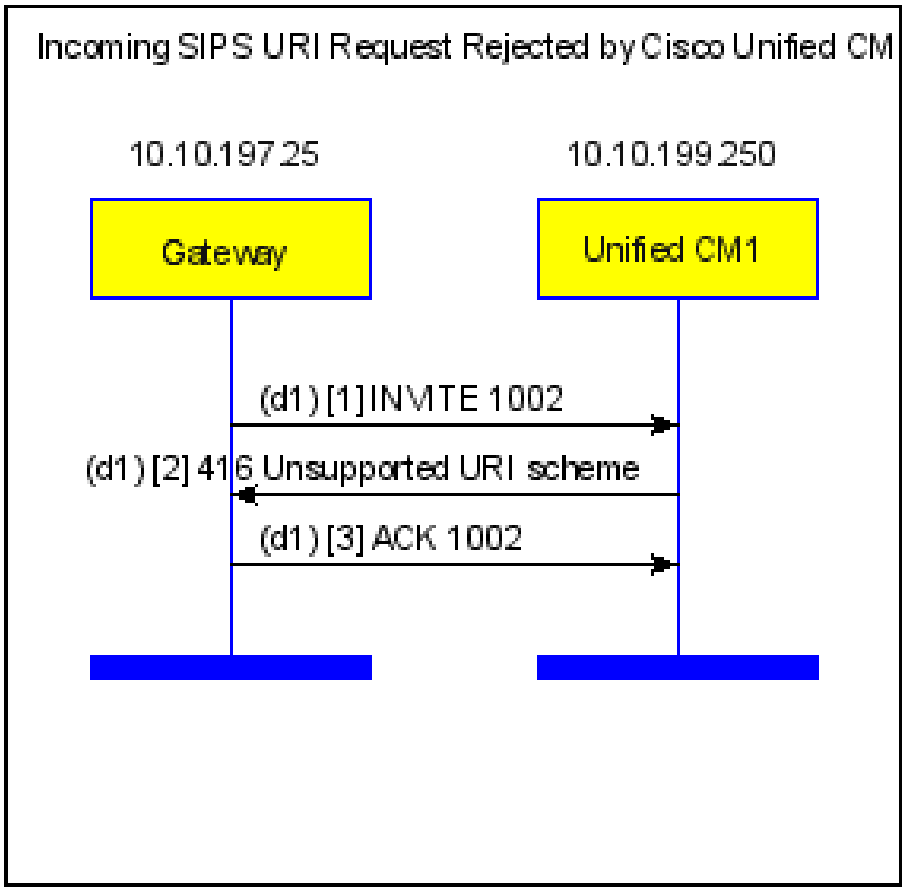

CISCO CONFIDENTIAL

```
[diagram]   Call-ID:[prev][next]
[1] INVITE sips:1002@10.10.199.250:5061 SIP/2.0
Via: SIP/2.0/TLS 10.10.197.25:5061;branch=z9hG4bK7A5E0
From: <sips:10.10.197.25>;tag=968119B8-1F62
To: <sips:1002@10.10.199.250>
Date: Thu, 28 Jun 2007 20:44:14 GMT
Call-ID: 2A9B32A0-24EF11DC-81B8E83B-9D0579C6@10.10.197.25
Supported: 100rel,timer,resource-priority,replaces
Min-SE:  1800
Cisco-Guid: 714774136-619647452-2176182331-2634381766
User-Agent: Cisco-SIPGateway/IOS-12.x
Allow: INVITE, OPTIONS, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY, INFO, REGISTER
CSeq: 101 INVITE
Max-Forwards: 70
Timestamp: 1183063454
Contact: <sips:10.10.197.25:5061>
Expires: 180
Allow-Events: telephone-event
Content-Type: application/sdp
Content-Disposition: session;handling=required
Content-Length: 241

v=0
o=CiscoSystemsSIP-GW-UserAgent 9205 6146 IN IP4 10.10.197.25
s=SIP Call
c=IN IP4 10.10.197.25
t=0 0
m=audio 16762 RTP/AVP 18 19
c=IN IP4 10.10.197.25
a=rtpmap:18 G729/8000
a=fmtp:18 annexb=no
a=rtpmap:19 CN/8000
a=ptime:20

[diagram]   Call-ID:[prev][next]
[2] SIP/2.0 416 Unsupported URI scheme
Via: SIP/2.0/TLS 10.10.197.25:5061;branch=z9hG4bK7A5E0
From: <sips:10.10.197.25>;tag=968119B8-1F62
To: <sips:1002@10.10.199.250>;tag=74282742
Call-ID: 2A9B32A0-24EF11DC-81B8E83B-9D0579C6@10.10.197.25
CSeq: 101 INVITE
Timestamp: 1183063454
Reason: Q.850;cause=97
Content-Length: 0

[diagram]   Call-ID:[prev][next]
[3] ACK sips:1002@10.10.199.250:5061 SIP/2.0
Via: SIP/2.0/TLS 10.10.197.25:5061;branch=z9hG4bK7A5E0
From: <sips:10.10.197.25>;tag=968119B8-1F62
To: <sips:1002@10.10.199.250>;tag=74282742
Date: Thu, 28 Jun 2007 20:44:14 GMT
Call-ID: 2A9B32A0-24EF11DC-81B8E83B-9D0579C6@10.10.197.25
Max-Forwards: 70
CSeq: 101 ACK
Allow-Events: telephone-event
Content-Length: 0
```

CISCO CONFIDENTIAL

9. Info

9.1 SIP Video Call Using INFO Method

Title: SIP Video Call Using INFO Method

Description:

The INFO method is used by video capable SIP endpoints to signal different types of commands. The two commands supported by the SIP trunk device are Picture Fast Update and Picture Freeze.

Picture Fast Update is triggered by an endpoint to request a full I-frame to rebuild the frame buffer. Picture Fast Update is generally triggered at the beginning of a video session or when packet loss is severe.

Picture Freeze is used to do exactly what it sounds like. If an endpoint whishes to stop updating a picture it sends this command to indicate the current buffer should be maintained.

Configuration:

Node = Unified CM1, IP = 10.10.199.250
Node = Unified CM2, IP = 10.10.199.251

Phone = A, Line = 1005, IP = 10.10.199.71, Model = SCCP Video Endpoint
Phone = B, Line = 2005, IP = 10.10.199.72, Model = SCCP Video Endpoint

SIP Trunk between Unified CM1 & Unified CM2 has route pattern 2.XXXX

Scenario:

Phone A DN 1005 calls Phone B DN 2005 over the SIP Trunk by dialing 22005
Phone B DN 2005 Answers
Phone A DN 1005 goes onHook
End of Scenario

CISCO CONFIDENTIAL

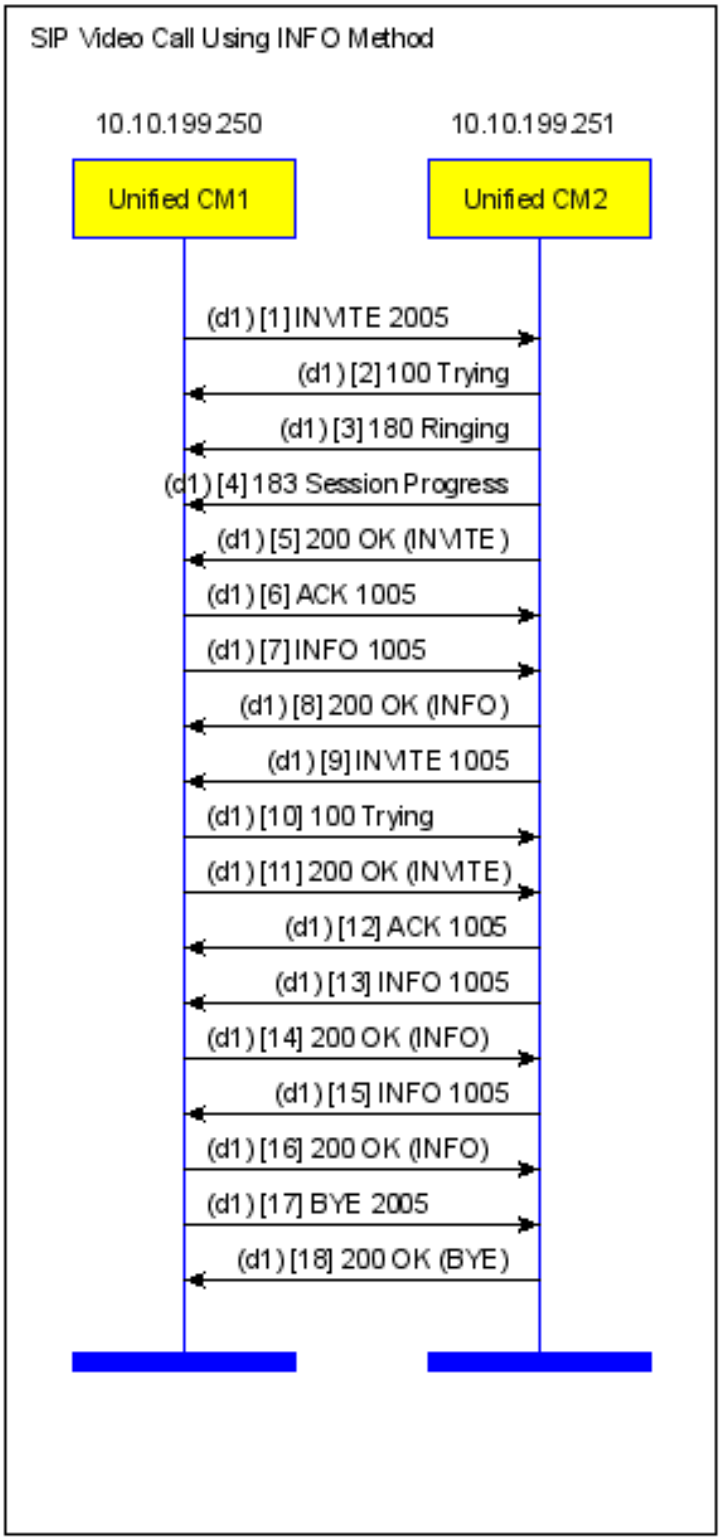

CISCO CONFIDENTIAL

```
[diagram]   Call-ID:[prev][next]
[1] INVITE sip:2005@10.10.199.251:5060 SIP/2.0
Date: Tue, 29 Jul 2008 17:43:57 GMT
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:1005@10.10.199.250>;tag=95ef4362-75f9-4faf-ae01-3fcd294149a0-20794164
Allow-Events: presence
P-Asserted-Identity: <sip:1005@10.10.199.250>
Supported: timer,resource-priority,replaces
Min-SE:  120
Remote-Party-ID: <sip:1005@10.10.199.250>;party=calling;screen=yes;privacy=off
Content-Length: 0
User-Agent: Cisco-CUCM7.1
To: <sip:2005@10.10.199.251>
Contact: <sip:1005@10.10.199.250:5060;transport=tcp>;video;audio
Expires: 180
Call-ID: ea123200-88f156dd-c-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK54adf9e1b
CSeq: 101 INVITE
Session-Expires:  120
Max-Forwards: 70

[diagram]   Call-ID:[prev][next]
[2] SIP/2.0 100 Trying
Date: Tue, 29 Jul 2008 17:45:47 GMT
From: <sip:1005@10.10.199.250>;tag=95ef4362-75f9-4faf-ae01-3fcd294149a0-20794164
Allow-Events: presence
Content-Length: 0
To: <sip:2005@10.10.199.251>
Call-ID: ea123200-88f156dd-c-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK54adf9e1b
CSeq: 101 INVITE

[diagram]   Call-ID:[prev][next]
[3] SIP/2.0 180 Ringing
Date: Tue, 29 Jul 2008 17:45:47 GMT
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:1005@10.10.199.250>;tag=95ef4362-75f9-4faf-ae01-3fcd294149a0-20794164
Allow-Events: presence
P-Asserted-Identity: <sip:2005@10.10.199.251>
Remote-Party-ID: <sip:2005@10.10.199.251>;party=called;screen=yes;privacy=off
Content-Length: 0
To: <sip:2005@10.10.199.251>;tag=e7a2b54c-403c-42f2-986a-ef3df579135a-20479656
Contact: <sip:1005@10.10.199.251:5060;transport=tcp>
Call-ID: ea123200-88f156dd-c-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK54adf9e1b
CSeq: 101 INVITE

[diagram]   Call-ID:[prev][next]
[4] SIP/2.0 183 Session Progress
Date: Tue, 29 Jul 2008 17:45:47 GMT
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:1005@10.10.199.250>;tag=95ef4362-75f9-4faf-ae01-3fcd294149a0-20794164
Allow-Events: presence
P-Asserted-Identity: <sip:2005@10.10.199.251>
Remote-Party-ID: <sip:2005@10.10.199.251>;party=called;screen=yes;privacy=off
Content-Length: 601
To: <sip:2005@10.10.199.251>;tag=e7a2b54c-403c-42f2-986a-ef3df579135a-20479656
Contact: <sip:1005@10.10.199.251:5060;transport=tcp>
Content-Type: application/sdp
Call-ID: ea123200-88f156dd-c-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK54adf9e1b
CSeq: 101 INVITE

v=0
o=CiscoSystemsCCM-SIP 2000 1 IN IP4 10.10.199.251
s=SIP Call
c=IN IP4 10.10.199.72
t=0 0
m=audio 4000 RTP/AVP 9 0 8 18
a=rtpmap:9 G722/8000
a=ptime:20
a=rtpmap:0 PCMU/8000
a=ptime:20
a=rtpmap:8 PCMA/8000
a=ptime:20
a=rtpmap:18 G729/8000
a=ptime:20
a=fmtp:0
a=sendonly
m=video 4002 RTP/AVP 97 96 34 31
```

CISCO CONFIDENTIAL

```
b=TIAS:384000
a=rtpmap:97 H264/90000
a=fmtp:97 profile-level-id=42000D
a=rtpmap:96 H263-1998/90000
a=fmtp:96 QCIF=1;CIF=1;MAXBR=3840;CUSTOM=352,240,1
a=rtpmap:34 H263/90000
a=fmtp:34 MAXBR=3840
a=rtpmap:31 H261/90000
a=fmtp:31 CIF=1;QCIF=1;MAXBR=3840;D=1
a=sendonly
```

[diagram] Call-ID:[prev][next]

[5] SIP/2.0 200 OK

```
Date: Tue, 29 Jul 2008 17:45:47 GMT
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:1005@10.10.199.250>;tag=95ef4362-75f9-4faf-ae01-3fcd294149a0-20794164
Allow-Events: presence
P-Asserted-Identity: <sip:2005@10.10.199.251>
Supported: replaces
Remote-Party-ID: <sip:2005@10.10.199.251>;party=called;screen=yes;privacy=off
Content-Length: 601
Require:  timer
To: <sip:2005@10.10.199.251>;tag=e7a2b54c-403c-42f2-986a-ef3df579135a-20479656
Contact: <sip:1005@10.10.199.251:5060;transport=tcp>
Content-Type: application/sdp
Call-ID: ea123200-88f156dd-c-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK54adf9e1b
CSeq: 101 INVITE
Session-Expires:  120;refresher=uas

v=0
o=CiscoSystemsCCM-SIP 2000 1 IN IP4 10.10.199.251
s=SIP Call
c=IN IP4 10.10.199.72
t=0 0
m=audio 4000 RTP/AVP 9 0 8 18
a=rtpmap:9 G722/8000
a=ptime:20
a=rtpmap:0 PCMU/8000
a=ptime:20
a=rtpmap:8 PCMA/8000
a=ptime:20
a=rtpmap:18 G729/8000
a=ptime:20
a=fmtp:0
a=sendonly
m=video 4002 RTP/AVP 97 96 34 31
b=TIAS:384000
a=rtpmap:97 H264/90000
a=fmtp:97 profile-level-id=42000D
a=rtpmap:96 H263-1998/90000
a=fmtp:96 QCIF=1;CIF=1;MAXBR=3840;CUSTOM=352,240,1
a=rtpmap:34 H263/90000
a=fmtp:34 MAXBR=3840
a=rtpmap:31 H261/90000
a=fmtp:31 CIF=1;QCIF=1;MAXBR=3840;D=1
a=sendonly
```

[diagram] Call-ID:[prev][next]

[6] ACK sip:1005@10.10.199.251:5060;transport=tcp SIP/2.0

```
Date: Tue, 29 Jul 2008 17:43:57 GMT
From: <sip:1005@10.10.199.250>;tag=95ef4362-75f9-4faf-ae01-3fcd294149a0-20794164
Allow-Events: presence
Content-Length: 283
To: <sip:2005@10.10.199.251>;tag=e7a2b54c-403c-42f2-986a-ef3df579135a-20479656
Content-Type: application/sdp
Call-ID: ea123200-88f156dd-c-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK65b727ded
CSeq: 101 ACK
Max-Forwards: 70

v=0
o=CiscoSystemsCCM-SIP 2000 1 IN IP4 10.10.199.250
s=SIP Call
c=IN IP4 10.10.199.71
t=0 0
m=audio 20004 RTP/AVP 9
a=rtpmap:9 G722/8000
a=ptime:20
a=recvonly
```

CISCO CONFIDENTIAL

```
m=video 20006 RTP/AVP 97
b=TIAS:384000
a=rtpmap:97 H264/90000
a=fmtp:97 profile-level-id=42000D
a=recvonly
```

[diagram] Call-ID:[prev][next]

[7] INFO sip:1005@10.10.199.251:5060;transport=tcp SIP/2.0

```
Date: Tue, 29 Jul 2008 17:43:57 GMT
From: <sip:1005@10.10.199.250>;tag=95ef4362-75f9-4faf-ae01-3fcd294149a0-20794164
Remote-Party-ID: <sip:1005@10.10.199.250>;party=calling;screen=yes;privacy=off
Content-Length: 190
User-Agent: Cisco-CUCM7.1
To: <sip:2005@10.10.199.251>;tag=e7a2b54c-403c-42f2-986a-ef3df579135a-20479656
Contact: <sip:1005@10.10.199.250:5060;transport=tcp>
Content-Type: application/media_control+xml
Call-ID: ea123200-88f156dd-c-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK7ad194de
CSeq: 102 INFO
Max-Forwards: 70

<?xml version="1.0" encoding="UTF-8" standalone="no" ?>
<media_control>

  <vc_primitive>
    <to_encoder>
      <picture_fast_update/>
    </to_encoder>
  </vc_primitive>

</media_control>
```

[diagram] Call-ID:[prev][next]

[8] SIP/2.0 200 OK

```
Date: Tue, 29 Jul 2008 17:45:50 GMT
From: <sip:1005@10.10.199.250>;tag=95ef4362-75f9-4faf-ae01-3fcd294149a0-20794164
Content-Length: 0
To: <sip:2005@10.10.199.251>;tag=e7a2b54c-403c-42f2-986a-ef3df579135a-20479656
Contact: <sip:2005@10.10.199.251:5060;transport=tcp>
Call-ID: ea123200-88f156dd-c-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK7ad194de
CSeq: 102 INFO
```

[diagram] Call-ID:[prev][next]

[9] INVITE sip:1005@10.10.199.250:5060;transport=tcp SIP/2.0

```
Date: Tue, 29 Jul 2008 17:45:50 GMT
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:2005@10.10.199.251>;tag=e7a2b54c-403c-42f2-986a-ef3df579135a-20479656
Allow-Events: presence
P-Asserted-Identity: <sip:2005@10.10.199.251>
Supported: timer,resource-priority,replaces
Min-SE:  120
Cisco-Guid: 732093696-2297517899-723-4224127660
Remote-Party-ID: <sip:2005@10.10.199.251>;party=calling;screen=yes;privacy=off
Content-Length: 259
User-Agent: Cisco-CUCM7.1
To: <sip:1005@10.10.199.250>;tag=95ef4362-75f9-4faf-ae01-3fcd294149a0-20794164
Contact: <sip:2005@10.10.199.251:5060;transport=tcp>
Expires: 180
Content-Type: application/sdp
Call-ID: ea123200-88f156dd-c-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bK76764d24d4
CSeq: 101 INVITE
Session-Expires:  120;refresher=uac
Max-Forwards: 70

v=0
o=CiscoSystemsCCM-SIP 2000 2 IN IP4 10.10.199.251
s=SIP Call
c=IN IP4 10.10.199.72
t=0 0
m=audio 20004 RTP/AVP 9
a=rtpmap:9 G722/8000
a=ptime:20
m=video 20006 RTP/AVP 97
b=TIAS:384000
a=rtpmap:97 H264/90000
a=fmtp:97 profile-level-id=42000D
```

CISCO CONFIDENTIAL

```
[diagram]   Call-ID:[prev][next]
[10] SIP/2.0 100 Trying
Date: Tue, 29 Jul 2008 17:44:00 GMT
From: <sip:2005@10.10.199.251>;tag=e7a2b54c-403c-42f2-986a-ef3df579135a-20479656
Allow-Events: presence
Content-Length: 0
To: <sip:1005@10.10.199.250>;tag=95ef4362-75f9-4faf-ae01-3fcd294149a0-20794164
Call-ID: ea123200-88f156dd-c-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bK76764d24d4
CSeq: 101 INVITE

[diagram]   Call-ID:[prev][next]
[11] SIP/2.0 200 OK
Date: Tue, 29 Jul 2008 17:44:00 GMT
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:2005@10.10.199.251>;tag=e7a2b54c-403c-42f2-986a-ef3df579135a-20479656
Allow-Events: presence
P-Asserted-Identity: <sip:1005@10.10.199.250>
Supported: replaces
Remote-Party-ID: <sip:1005@10.10.199.250>;party=called;screen=yes;privacy=off
Content-Length: 259
Require:  timer
To: <sip:1005@10.10.199.250>;tag=95ef4362-75f9-4faf-ae01-3fcd294149a0-20794164
Contact: <sip:1005@10.10.199.250:5060;transport=tcp>
Content-Type: application/sdp
Call-ID: ea123200-88f156dd-c-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bK76764d24d4
CSeq: 101 INVITE
Session-Expires:  120;refresher=uac

v=0
o=CiscoSystemsCCM-SIP 2000 2 IN IP4 10.10.199.250
s=SIP Call
c=IN IP4 10.10.199.71
t=0 0
m=audio 20004 RTP/AVP 9
a=rtpmap:9 G722/8000
a=ptime:20
m=video 20006 RTP/AVP 97
b=TIAS:384000
a=rtpmap:97 H264/90000
a=fmtp:97 profile-level-id=42000D

[diagram]   Call-ID:[prev][next]
[12] ACK sip:1005@10.10.199.250:5060;transport=tcp SIP/2.0
Date: Tue, 29 Jul 2008 17:45:50 GMT
From: <sip:2005@10.10.199.251>;tag=e7a2b54c-403c-42f2-986a-ef3df579135a-20479656
Allow-Events: presence
Content-Length: 0
To: <sip:1005@10.10.199.250>;tag=95ef4362-75f9-4faf-ae01-3fcd294149a0-20794164
Call-ID: ea123200-88f156dd-c-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bK77592198b
CSeq: 101 ACK
Max-Forwards: 70

[diagram]   Call-ID:[prev][next]
[13] INFO sip:1005@10.10.199.250:5060;transport=tcp SIP/2.0
Date: Tue, 29 Jul 2008 17:45:50 GMT
From: <sip:2005@10.10.199.251>;tag=e7a2b54c-403c-42f2-986a-ef3df579135a-20479656
Content-Length: 190
User-Agent: Cisco-CUCM7.1
To: <sip:1005@10.10.199.250>;tag=95ef4362-75f9-4faf-ae01-3fcd294149a0-20794164
Contact: <sip:2005@10.10.199.251:5060;transport=tcp>
Content-Type: application/media_control+xml
Call-ID: ea123200-88f156dd-c-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bK7858a10599
CSeq: 102 INFO
Max-Forwards: 70

<?xml version="1.0" encoding="UTF-8" standalone="no" ?>
<media_control>

  <vc_primitive>
    <to_encoder>
      <picture_fast_update/>
    </to_encoder>
  </vc_primitive>

</media_control>
```

CISCO CONFIDENTIAL

[diagram] Call-ID:[prev][next]
[14] SIP/2.0 200 OK
```
Date: Tue, 29 Jul 2008 17:44:00 GMT
From: <sip:2005@10.10.199.251>;tag=e7a2b54c-403c-42f2-986a-ef3df579135a-20479656
Content-Length: 0
To: <sip:1005@10.10.199.250>;tag=95ef4362-75f9-4faf-ae01-3fcd294149a0-20794164
Contact: <sip:1005@10.10.199.250:5060;transport=tcp>
Call-ID: ea123200-88f156dd-c-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bK7858a10599
CSeq: 102 INFO
```

[diagram] Call-ID:[prev][next]
[15] INFO sip:1005@10.10.199.250:5060;transport=tcp SIP/2.0
```
Date: Tue, 29 Jul 2008 17:45:50 GMT
From: <sip:2005@10.10.199.251>;tag=e7a2b54c-403c-42f2-986a-ef3df579135a-20479656
Content-Length: 190
User-Agent: Cisco-CUCM7.1
To: <sip:1005@10.10.199.250>;tag=95ef4362-75f9-4faf-ae01-3fcd294149a0-20794164
Contact: <sip:2005@10.10.199.251:5060;transport=tcp>
Content-Type: application/media_control+xml
Call-ID: ea123200-88f156dd-c-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bK796d903a6b
CSeq: 103 INFO
Max-Forwards: 70

<?xml version="1.0" encoding="UTF-8" standalone="no" ?>
<media_control>

  <vc_primitive>
    <to_encoder>
      <picture_fast_update/>
    </to_encoder>
  </vc_primitive>

</media_control>
```

[diagram] Call-ID:[prev][next]
[16] SIP/2.0 200 OK
```
Date: Tue, 29 Jul 2008 17:44:00 GMT
From: <sip:2005@10.10.199.251>;tag=e7a2b54c-403c-42f2-986a-ef3df579135a-20479656
Content-Length: 0
To: <sip:1005@10.10.199.250>;tag=95ef4362-75f9-4faf-ae01-3fcd294149a0-20794164
Contact: <sip:1005@10.10.199.250:5060;transport=tcp>
Call-ID: ea123200-88f156dd-c-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bK796d903a6b
CSeq: 103 INFO
```

[diagram] Call-ID:[prev][next]
[17] BYE sip:2005@10.10.199.251:5060;transport=tcp SIP/2.0
```
Date: Tue, 29 Jul 2008 17:44:00 GMT
From: <sip:1005@10.10.199.250>;tag=95ef4362-75f9-4faf-ae01-3fcd294149a0-20794164
P-Asserted-Identity: <sip:1005@10.10.199.250>
Content-Length: 0
User-Agent: Cisco-CUCM7.1
To: <sip:2005@10.10.199.251>;tag=e7a2b54c-403c-42f2-986a-ef3df579135a-20479656
Call-ID: ea123200-88f156dd-c-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK8302c7061
CSeq: 103 BYE
Max-Forwards: 70
```

[diagram] Call-ID:[prev][next]
[18] SIP/2.0 200 OK
```
Date: Tue, 29 Jul 2008 17:46:24 GMT
From: <sip:1005@10.10.199.250>;tag=95ef4362-75f9-4faf-ae01-3fcd294149a0-20794164
Content-Length: 0
To: <sip:2005@10.10.199.251>;tag=e7a2b54c-403c-42f2-986a-ef3df579135a-20479656
Call-ID: ea123200-88f156dd-c-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK8302c7061
CSeq: 103 BYE
```

10. MWI

10.1 MWI Status via Unsolicited NOTIFY

Title: MWI Status via Unsolicited NOTIFY

Description:

RFC3842 describes a standard way of delivering voicemail status using the SIP SUBSCRIBE/NOTIFY framework. However, many SIP devices already deliver voicemail information using the format described in RFC3842 but using unsolicited NOTIFY.

The following demonstrates how two Unified Cisco CM can accept unsolicited NOTIFY to deliver Message Waiting Indication (MWI) status. The example below shows how a SIP based voice-mail server could send a "Lamp On" status for the CM hosted device(s) assigned to directory number 1001

Configuration:

Node = Voice Mail Server, IP = 10.10.200.179
Node = Unified CM1, IP = 10.10.199.250

For Call Manager Unified CM1, the SIP Trunk Security Profile is configured to have "Accept Unsolicited Notification" checked.

Scenario:

Remote Voice Mail Server sends Unsolicited NOTIFY message to Unified CM1 to indicate Messages-Waiting for phone 1001.

CISCO CONFIDENTIAL

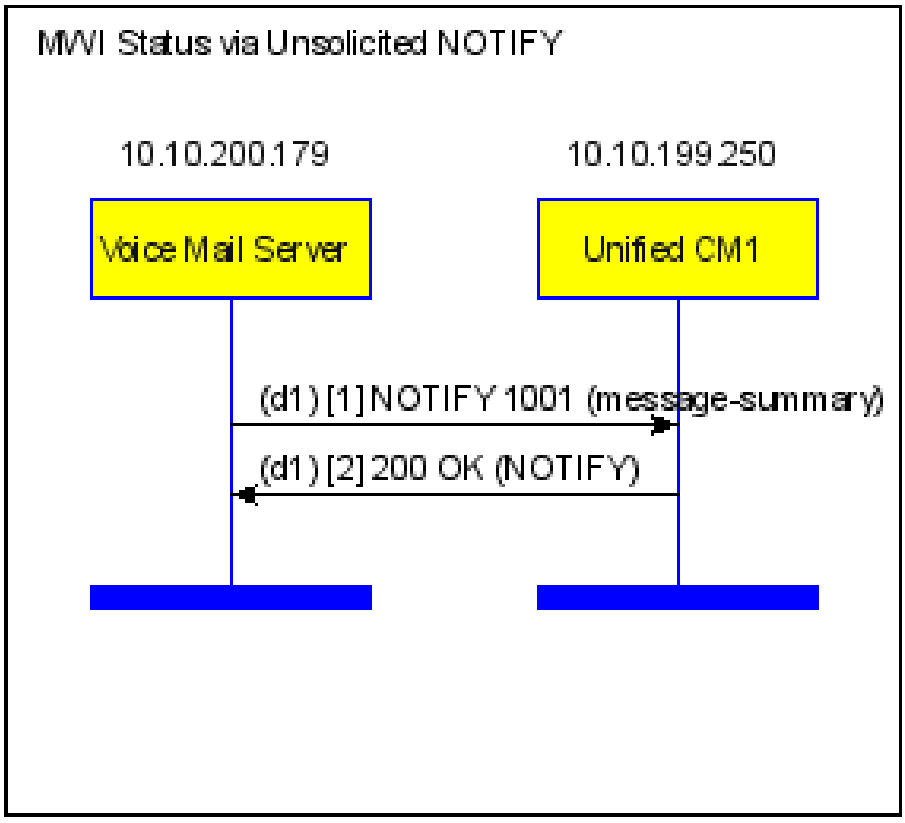

CISCO CONFIDENTIAL

```
[diagram]   Call-ID:[prev][next]
[1] NOTIFY sip:1001@10.10.199.250:5060 SIP/2.0
Via: SIP/2.0/TCP 10.10.200.179:5060
From: <sip:5678@10.10.200.179:5060>;tag=1
To: <sip:1001@10.10.199.250:5060>
Call-ID: 1-20175@10.10.200.179
CSeq: 1 NOTIFY
Event: message-summary
Allow: INVITE,ACK,BYE,CANCEL,OPTIONS,REGISTER,INFO,PRACK,SUBSCRIBE,NOTIFY,REFER,UPDATE
Expires: 180
Contact: sip:5678@10.10.200.179:5060
Max-Forwards: 70
Content-Type: text/plain
Content-Length: 23

Messages-Waiting: yes

[diagram]   Call-ID:[prev][next]
[2] SIP/2.0 200 OK
Date: Mon, 08 Jun 2009 19:22:02 GMT
From: <sip:5678@10.10.200.179:5060>;tag=1
Content-Length: 0
To: <sip:1001@10.10.199.250:5060>;tag=1086136707
Call-ID: 1-20175@10.10.200.179
Via: SIP/2.0/TCP 10.10.200.179:5060
CSeq: 1 NOTIFY
```

CISCO CONFIDENTIAL

11. Prack

11.1 Outbound Early Media Call with PRACK

Title: Outbound Early Media Call with PRACK

Description:

This flow shows a basic early media call from a SCCP phone to a SIP phone off a Call Manager via a SIP Trunk with rel1xx enabled. Outgoing INVITE has SDP.

Configuration:

Node = Unified CM1, IP = 10.10.199.250
Node = Unified CM2, IP = 10.10.199.251

Phone = A, Line = 1001, IP = 10.10.199.130, Model = SCCP
Phone = B, Line = 2001, IP = 10.10.199.171, Model = SIP TNP

SIP Trunk between Unified CM1 & Unified CM2 has
a) route pattern 2.XXXX
b) Media Termination Point Required checked.

Call Manager Service Parameter SIP_Rel1XX_Enabled set to True on both Call Manager's.

Scenario:

Phone A DN 1001 calls Phone B DN 2001 over the SIP Trunk by dialing 22001
Phone B DN 2001 Answers
Phone A DN 1001 goes onHook
End of Scenario

CISCO CONFIDENTIAL

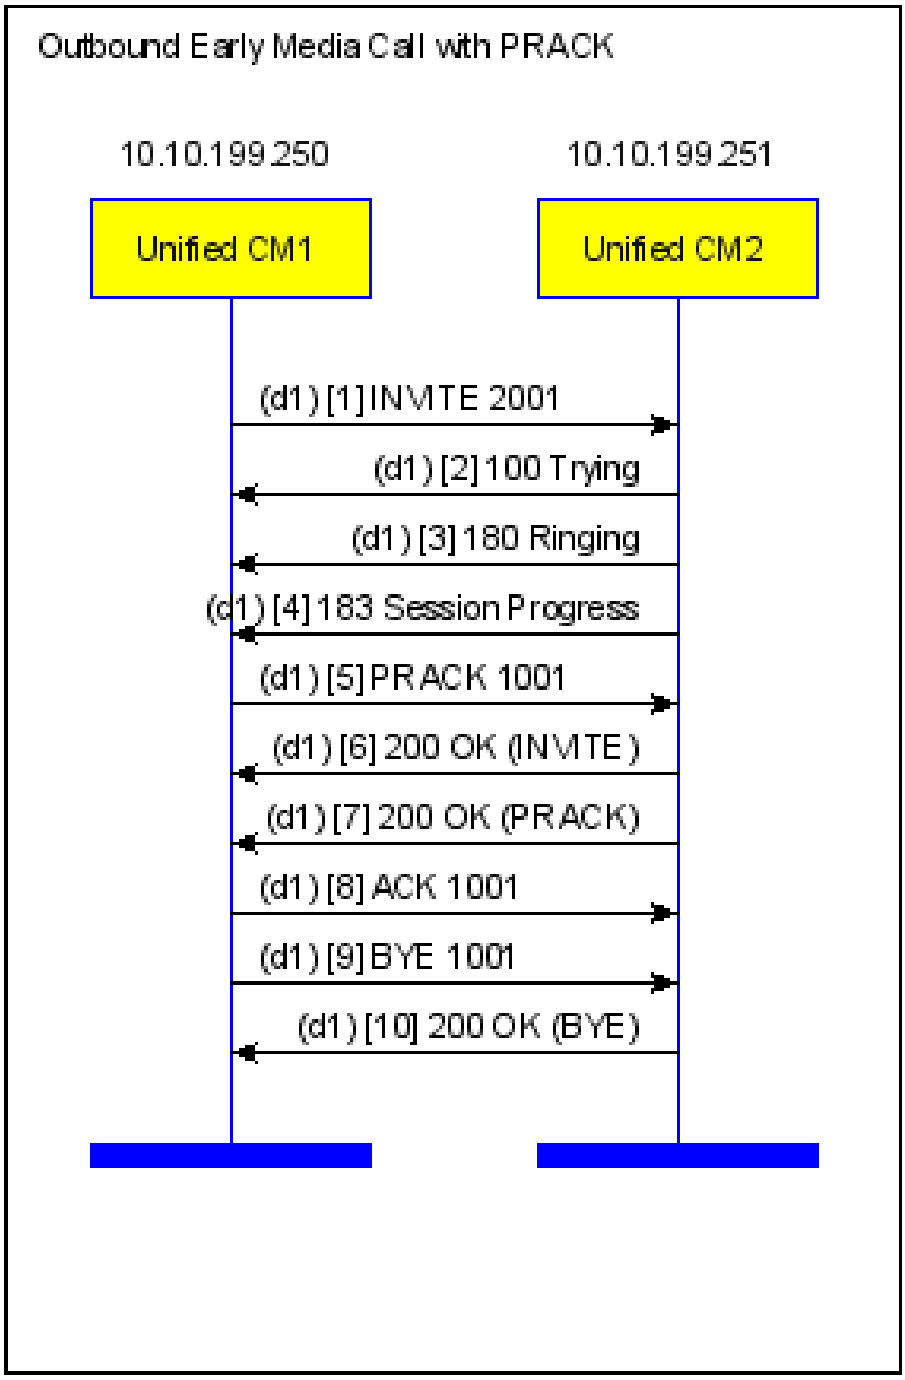

CISCO CONFIDENTIAL

```
[diagram]   Call-ID:[prev][next]
[1] INVITE sip:2001@10.10.199.251:5060 SIP/2.0
Date: Tue, 29 Jul 2008 01:37:03 GMT
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:1001@10.10.199.250>;tag=95ef4362-75f9-4faf-ae01-3fcd294149a0-20479273
Allow-Events: presence
P-Asserted-Identity: <sip:1001@10.10.199.250>
Supported: 100rel,timer,resource-priority,replaces
Min-SE:  1800
Remote-Party-ID: <sip:1001@10.10.199.250>;party=calling;screen=yes;privacy=off
Content-Length: 216
User-Agent: Cisco-CUCM7.1
To: <sip:2001@10.10.199.251>
Contact: <sip:1001@10.10.199.250:5060;transport=tcp>
Expires: 180
Content-Type: application/sdp
Call-ID: d7084f00-88e1743f-d0-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK40e918d80
CSeq: 101 INVITE
Session-Expires:  1800
Max-Forwards: 70

v=0
o=CiscoSystemsCCM-SIP 2000 1 IN IP4 10.10.199.250
s=SIP Call
c=IN IP4 10.10.199.250
t=0 0
m=audio 24592 RTP/AVP 0 101
a=rtpmap:0 PCMU/8000
a=ptime:20
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15

[diagram]   Call-ID:[prev][next]
[2] SIP/2.0 100 Trying
Date: Tue, 29 Jul 2008 01:38:52 GMT
From: <sip:1001@10.10.199.250>;tag=95ef4362-75f9-4faf-ae01-3fcd294149a0-20479273
Allow-Events: presence
Content-Length: 0
To: <sip:2001@10.10.199.251>
Call-ID: d7084f00-88e1743f-d0-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK40e918d80
CSeq: 101 INVITE

[diagram]   Call-ID:[prev][next]
[3] SIP/2.0 180 Ringing
Date: Tue, 29 Jul 2008 01:38:52 GMT
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:1001@10.10.199.250>;tag=95ef4362-75f9-4faf-ae01-3fcd294149a0-20479273
Allow-Events: presence
P-Asserted-Identity: <sip:2001@10.10.199.251>
Remote-Party-ID: <sip:2001@10.10.199.251>;party=called;screen=yes;privacy=off
Content-Length: 0
To: <sip:2001@10.10.199.251>;tag=e7a2b54c-403c-42f2-986a-ef3df579135a-20479621
Contact: <sip:1001@10.10.199.251:5060;transport=tcp>
Call-ID: d7084f00-88e1743f-d0-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK40e918d80
CSeq: 101 INVITE

[diagram]   Call-ID:[prev][next]
[4] SIP/2.0 183 Session Progress
Date: Tue, 29 Jul 2008 01:38:52 GMT
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:1001@10.10.199.250>;tag=95ef4362-75f9-4faf-ae01-3fcd294149a0-20479273
Allow-Events: presence
P-Asserted-Identity: <sip:2001@10.10.199.251>
Remote-Party-ID: <sip:2001@10.10.199.251>;party=called;screen=yes;privacy=off
Content-Length: 216
Require: 100rel
To: <sip:2001@10.10.199.251>;tag=e7a2b54c-403c-42f2-986a-ef3df579135a-20479621
RSeq: 1904966032
Contact: <sip:1001@10.10.199.251:5060;transport=tcp>
Content-Type: application/sdp
Call-ID: d7084f00-88e1743f-d0-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK40e918d80
CSeq: 101 INVITE

v=0
o=CiscoSystemsCCM-SIP 2000 1 IN IP4 10.10.199.251
s=SIP Call
```

CISCO CONFIDENTIAL

```
c=IN IP4 10.10.199.171
t=0 0
m=audio 25646 RTP/AVP 0 101
a=rtpmap:0 PCMU/8000
a=ptime:20
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
```

[diagram] Call-ID:[prev][next]

[5] PRACK sip:1001@10.10.199.251:5060;transport=tcp SIP/2.0

```
Date: Tue, 29 Jul 2008 01:37:03 GMT
From: <sip:1001@10.10.199.250>;tag=95ef4362-75f9-4faf-ae01-3fcd294149a0-20479273
RAck: 1904966032 101 INVITE
Allow-Events: presence
Content-Length: 0
To: <sip:2001@10.10.199.251>;tag=e7a2b54c-403c-42f2-986a-ef3df579135a-20479621
Call-ID: d7084f00-88e1743f-d0-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK4150a64576
CSeq: 102 PRACK
Max-Forwards: 70
```

[diagram] Call-ID:[prev][next]

[6] SIP/2.0 200 OK

```
Date: Tue, 29 Jul 2008 01:38:52 GMT
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:1001@10.10.199.250>;tag=95ef4362-75f9-4faf-ae01-3fcd294149a0-20479273
Allow-Events: presence
P-Asserted-Identity: <sip:2001@10.10.199.251>
Supported: replaces
Remote-Party-ID: <sip:2001@10.10.199.251>;party=called;screen=yes;privacy=off
Content-Length: 216
Require:  timer
To: <sip:2001@10.10.199.251>;tag=e7a2b54c-403c-42f2-986a-ef3df579135a-20479621
Contact: <sip:1001@10.10.199.251:5060;transport=tcp>
Content-Type: application/sdp
Call-ID: d7084f00-88e1743f-d0-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK40e918d80
CSeq: 101 INVITE
Session-Expires:  1800;refresher=uas

v=0
o=CiscoSystemsCCM-SIP 2000 1 IN IP4 10.10.199.251
s=SIP Call
c=IN IP4 10.10.199.171
t=0 0
m=audio 25646 RTP/AVP 0 101
a=rtpmap:0 PCMU/8000
a=ptime:20
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
```

[diagram] Call-ID:[prev][next]

[7] SIP/2.0 200 OK

```
Date: Tue, 29 Jul 2008 01:38:53 GMT
From: <sip:1001@10.10.199.250>;tag=95ef4362-75f9-4faf-ae01-3fcd294149a0-20479273
Content-Length: 0
To: <sip:2001@10.10.199.251>;tag=e7a2b54c-403c-42f2-986a-ef3df579135a-20479621
Call-ID: d7084f00-88e1743f-d0-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK4150a64576
CSeq: 102 PRACK
```

[diagram] Call-ID:[prev][next]

[8] ACK sip:1001@10.10.199.251:5060;transport=tcp SIP/2.0

```
Date: Tue, 29 Jul 2008 01:37:03 GMT
From: <sip:1001@10.10.199.250>;tag=95ef4362-75f9-4faf-ae01-3fcd294149a0-20479273
Allow-Events: presence
Content-Length: 0
To: <sip:2001@10.10.199.251>;tag=e7a2b54c-403c-42f2-986a-ef3df579135a-20479621
Call-ID: d7084f00-88e1743f-d0-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK425f85a7f6
CSeq: 101 ACK
Max-Forwards: 70
```

[diagram] Call-ID:[prev][next]

[9] BYE sip:1001@10.10.199.251:5060;transport=tcp SIP/2.0

```
Date: Tue, 29 Jul 2008 01:37:03 GMT
From: <sip:1001@10.10.199.250>;tag=95ef4362-75f9-4faf-ae01-3fcd294149a0-20479273
P-Asserted-Identity: <sip:1001@10.10.199.250>
Content-Length: 0
User-Agent: Cisco-CUCM7.1
```

CISCO CONFIDENTIAL

```
To: <sip:2001@10.10.199.251>;tag=e7a2b54c-403c-42f2-986a-ef3df579135a-20479621
Call-ID: d7084f00-88e1743f-d0-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK43b50e011
CSeq: 103 BYE
Max-Forwards: 70

[diagram]   Call-ID:[prev][next]
[10] SIP/2.0 200 OK
Date: Tue, 29 Jul 2008 01:39:02 GMT
From: <sip:1001@10.10.199.250>;tag=95ef4362-75f9-4faf-ae01-3fcd294149a0-20479273
Content-Length: 0
To: <sip:2001@10.10.199.251>;tag=e7a2b54c-403c-42f2-986a-ef3df579135a-20479621
Call-ID: d7084f00-88e1743f-d0-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK43b50e011
CSeq: 103 BYE
```

CISCO CONFIDENTIAL

11.2 Outbound Delayed Media Call with PRACK

Title: Outbound Delayed Media Call with PRACK

Description:

This flow shows a basic delayed media call from a SCCP phone to SIP phone off a Call Manager via a SIP Trunk with rel1xx enabled. Outgoing INVITE has no SDP.

Configuration:

Node = Unified CM1, IP = 10.10.199.250
Node = Unified CM2, IP = 10.10.199.251

Phone = A, Line = 1001, IP = 10.10.199.130, Model = SCCP
Phone = B, Line = 2001, IP = 10.10.199.171, Model = SIP TNP

SIP Trunk between Unified CM1 & Unified CM2 has
a) route pattern 2.XXXX

Call Manager Service Parameter SIP_Rel1XX_Enabled set to True on both Call Manager's.

Scenario:

Phone A DN 1001 calls Phone B DN 2001 over the SIP Trunk by dialing 22001
Phone B DN 2001 Answers
Phone A DN 1001 goes onHook

End of Scenario

CISCO CONFIDENTIAL

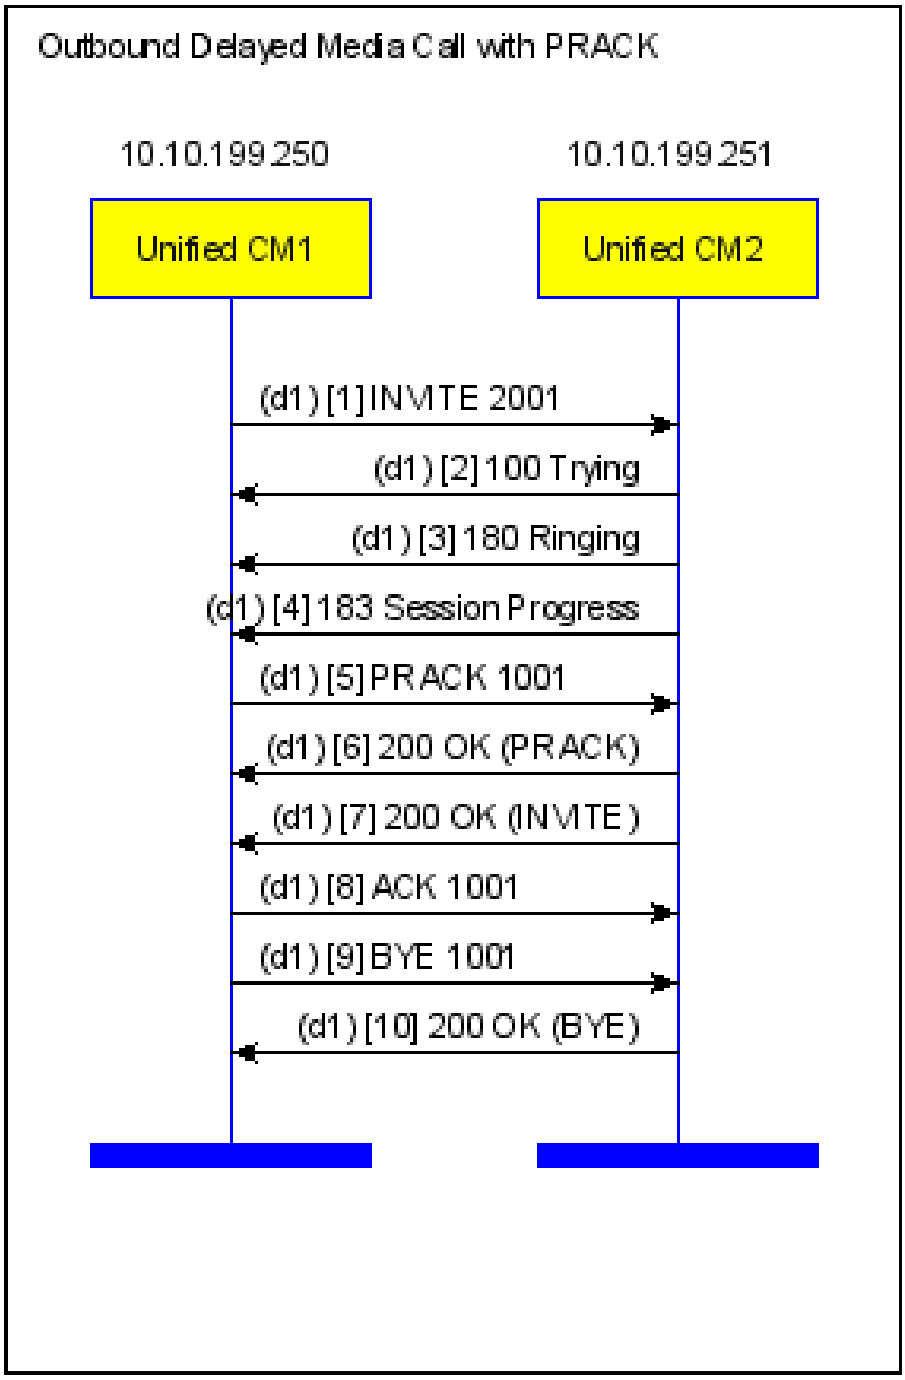

CISCO CONFIDENTIAL

[diagram] Call-ID:[prev][next]
[1] INVITE sip:2001@10.10.199.251:5060 SIP/2.0
```
Date: Tue, 29 Jul 2008 01:38:43 GMT
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:1001@10.10.199.250>;tag=95ef4362-75f9-4faf-ae01-3fcd294149a0-20479276
Allow-Events: presence
P-Asserted-Identity: <sip:1001@10.10.199.250>
Supported: 100rel,timer,resource-priority,replaces
Min-SE:  1800
Remote-Party-ID: <sip:1001@10.10.199.250>;party=calling;screen=yes;privacy=off
Content-Length: 0
User-Agent: Cisco-CUCM7.1
To: <sip:2001@10.10.199.251>
Contact: <sip:1001@10.10.199.250:5060;transport=tcp>
Expires: 180
Call-ID: 12a31900-88e174a3-d2-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK444a3bcd53
CSeq: 101 INVITE
Session-Expires:  1800
Max-Forwards: 70
```

[diagram] Call-ID:[prev][next]
[2] SIP/2.0 100 Trying
```
Date: Tue, 29 Jul 2008 01:40:32 GMT
From: <sip:1001@10.10.199.250>;tag=95ef4362-75f9-4faf-ae01-3fcd294149a0-20479276
Allow-Events: presence
Content-Length: 0
To: <sip:2001@10.10.199.251>
Call-ID: 12a31900-88e174a3-d2-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK444a3bcd53
CSeq: 101 INVITE
```

[diagram] Call-ID:[prev][next]
[3] SIP/2.0 180 Ringing
```
Date: Tue, 29 Jul 2008 01:40:32 GMT
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:1001@10.10.199.250>;tag=95ef4362-75f9-4faf-ae01-3fcd294149a0-20479276
Allow-Events: presence
P-Asserted-Identity: <sip:2001@10.10.199.251>
Remote-Party-ID: <sip:2001@10.10.199.251>;party=called;screen=yes;privacy=off
Content-Length: 0
To: <sip:2001@10.10.199.251>;tag=e7a2b54c-403c-42f2-986a-ef3df579135a-20479623
Contact: <sip:1001@10.10.199.251:5060;transport=tcp>
Call-ID: 12a31900-88e174a3-d2-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK444a3bcd53
CSeq: 101 INVITE
```

[diagram] Call-ID:[prev][next]
[4] SIP/2.0 183 Session Progress
```
Date: Tue, 29 Jul 2008 01:40:32 GMT
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:1001@10.10.199.250>;tag=95ef4362-75f9-4faf-ae01-3fcd294149a0-20479276
Allow-Events: presence
P-Asserted-Identity: <sip:2001@10.10.199.251>
Remote-Party-ID: <sip:2001@10.10.199.251>;party=called;screen=yes;privacy=off
Content-Length: 347
Require: 100rel
To: <sip:2001@10.10.199.251>;tag=e7a2b54c-403c-42f2-986a-ef3df579135a-20479623
RSeq: 2019937972
Contact: <sip:1001@10.10.199.251:5060;transport=tcp>
Content-Type: application/sdp
Call-ID: 12a31900-88e174a3-d2-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK444a3bcd53
CSeq: 101 INVITE

v=0
o=CiscoSystemsCCM-SIP 2000 1 IN IP4 10.10.199.251
s=SIP Call
c=IN IP4 10.10.199.171
t=0 0
m=audio 30418 RTP/AVP 9 0 8 18 101
a=rtpmap:9 G722/8000
a=ptime:20
a=rtpmap:0 PCMU/8000
a=ptime:20
a=rtpmap:8 PCMA/8000
a=ptime:20
a=rtpmap:18 G729/8000
a=ptime:20
a=fmtp:18 annexb=no
```

CISCO CONFIDENTIAL

```
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15

[diagram]   Call-ID:[prev][next]
[5] PRACK sip:1001@10.10.199.251:5060;transport=tcp SIP/2.0
Date: Tue, 29 Jul 2008 01:38:43 GMT
From: <sip:1001@10.10.199.250>;tag=95ef4362-75f9-4faf-ae01-3fcd294149a0-20479276
RAck: 2019937972 101 INVITE
Allow-Events: presence
Content-Length: 216
To: <sip:2001@10.10.199.251>;tag=e7a2b54c-403c-42f2-986a-ef3df579135a-20479623
Content-Type: application/sdp
Call-ID: 12a31900-88e174a3-d2-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK4538a8856f
CSeq: 102 PRACK
Max-Forwards: 70

v=0
o=CiscoSystemsCCM-SIP 2000 1 IN IP4 10.10.199.250
s=SIP Call
c=IN IP4 10.10.199.130
t=0 0
m=audio 17042 RTP/AVP 9 101
a=rtpmap:9 G722/8000
a=ptime:20
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15

[diagram]   Call-ID:[prev][next]
[6] SIP/2.0 200 OK
Date: Tue, 29 Jul 2008 01:40:34 GMT
From: <sip:1001@10.10.199.250>;tag=95ef4362-75f9-4faf-ae01-3fcd294149a0-20479276
Content-Length: 0
To: <sip:2001@10.10.199.251>;tag=e7a2b54c-403c-42f2-986a-ef3df579135a-20479623
Call-ID: 12a31900-88e174a3-d2-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK4538a8856f
CSeq: 102 PRACK

[diagram]   Call-ID:[prev][next]
[7] SIP/2.0 200 OK
Date: Tue, 29 Jul 2008 01:40:34 GMT
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:1001@10.10.199.250>;tag=95ef4362-75f9-4faf-ae01-3fcd294149a0-20479276
Allow-Events: presence
P-Asserted-Identity: <sip:2001@10.10.199.251>
Supported: replaces
Remote-Party-ID: <sip:2001@10.10.199.251>;party=called;screen=yes;privacy=off
Content-Length: 347
Require:  timer
To: <sip:2001@10.10.199.251>;tag=e7a2b54c-403c-42f2-986a-ef3df579135a-20479623
Contact: <sip:1001@10.10.199.251:5060;transport=tcp>
Content-Type: application/sdp
Call-ID: 12a31900-88e174a3-d2-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK444a3bcd53
CSeq: 101 INVITE
Session-Expires:  1800;refresher=uas

v=0
o=CiscoSystemsCCM-SIP 2000 1 IN IP4 10.10.199.251
s=SIP Call
c=IN IP4 10.10.199.171
t=0 0
m=audio 30418 RTP/AVP 9 0 8 18 101
a=rtpmap:9 G722/8000
a=ptime:20
a=rtpmap:0 PCMU/8000
a=ptime:20
a=rtpmap:8 PCMA/8000
a=ptime:20
a=rtpmap:18 G729/8000
a=ptime:20
a=fmtp:18 annexb=no
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15

[diagram]   Call-ID:[prev][next]
[8] ACK sip:1001@10.10.199.251:5060;transport=tcp SIP/2.0
Date: Tue, 29 Jul 2008 01:38:43 GMT
From: <sip:1001@10.10.199.250>;tag=95ef4362-75f9-4faf-ae01-3fcd294149a0-20479276
Allow-Events: presence
```

CISCO CONFIDENTIAL

```
Content-Length: 216
To: <sip:2001@10.10.199.251>;tag=e7a2b54c-403c-42f2-986a-ef3df579135a-20479623
Content-Type: application/sdp
Call-ID: 12a31900-88e174a3-d2-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK463413f067
CSeq: 101 ACK
Max-Forwards: 70

v=0
o=CiscoSystemsCCM-SIP 2000 1 IN IP4 10.10.199.250
s=SIP Call
c=IN IP4 10.10.199.130
t=0 0
m=audio 17042 RTP/AVP 9 101
a=rtpmap:9 G722/8000
a=ptime:20
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
```

[diagram] Call-ID:[prev][next]

[9] BYE sip:1001@10.10.199.251:5060;transport=tcp SIP/2.0

```
Date: Tue, 29 Jul 2008 01:38:43 GMT
From: <sip:1001@10.10.199.250>;tag=95ef4362-75f9-4faf-ae01-3fcd294149a0-20479276
P-Asserted-Identity: <sip:1001@10.10.199.250>
Content-Length: 0
User-Agent: Cisco-CUCM7.1
To: <sip:2001@10.10.199.251>;tag=e7a2b54c-403c-42f2-986a-ef3df579135a-20479623
Call-ID: 12a31900-88e174a3-d2-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK4726009922
CSeq: 103 BYE
Max-Forwards: 70
```

[diagram] Call-ID:[prev][next]

[10] SIP/2.0 200 OK

```
Date: Tue, 29 Jul 2008 01:40:41 GMT
From: <sip:1001@10.10.199.250>;tag=95ef4362-75f9-4faf-ae01-3fcd294149a0-20479276
Content-Length: 0
To: <sip:2001@10.10.199.251>;tag=e7a2b54c-403c-42f2-986a-ef3df579135a-20479623
Call-ID: 12a31900-88e174a3-d2-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK4726009922
CSeq: 103 BYE
```

CISCO CONFIDENTIAL

12. CallPreservation

12.1 Session Timers Negotiation & Refresh for the Sip Trunk Call on "Cisco Unified CM"

Title: Session Timers Negotiation & Refresh for the Sip Trunk Call on "Cisco Unified CM"

Description:
Cisco Unified IP Phone1---Cisco Unified CM1--siptrunk--Cisco Unified CM2---Cisoc Unified IP Phone2

Note:
There are 2 Service Params "SIP Min-SE Value" & "SIP Session Expires Timer" and initial session
timers negotiation for an Invite dialog is based on these.

For this scenario the following are configured values:-
"Cisco Unified CM1" (Min-SE 60, SE 90)
"Cisco Unified CM2" (Min-SE 120, SE 230)

For the Cisco Unified IP Phone1 to Cisco Unified IP Phone2 call as per above topology, the
initial outgoing INVITE from "Cisco Unified CM1" contains the Min-SE header with value 60 secs
and Session-Expires header with value 90 secs. The "Cisco Unified CM2" expects Min-SE value of
120 secs, so it sends 422 (SE Timer too small) indicating the required value in Min-SE header.

The "Cisco Unified CM1" sends an Invite with updated value in Session-Expires header. The
"Cisco Unified CM2" accepts it and sends 200 OK with Session-Expires header having negotiated
timeout and refresher="uas" is set because "Cisco Unified CM1" (i.e uac) didn't specify the
refresher and the uas has an option to choose itself as the refresher. With 200 OK and ACK
exchange an Invite dialog gets established.

The session timeout negotiated on the sip trunk is 120 secs, this sessin refresh happens every
120/2 = 60 secs.
There are 2 session refresh request/response exchanges depicted in the flow.

Configuration:

CISCO CONFIDENTIAL

Node = Unified CM1, IP = 10.10.199.250
Node = Unified CM2, IP = 10.10.199.251

Phone = A, Line = 1001, IP = 10.10.199.130, Model = SCCP
Phone = B, Line = 2002, IP = 10.10.199.179, Model = SCCP

SIP Trunk between Unified CM1 & Unified CM2 has route pattern 2.XXXX
Service Parameters Min-SE and SE values are changed for both Call Managers, as described above.

Scenario:
Phone A DN 1001 calls Phone B DN 2002 over the SIP Trunk by dialing 22002
Phone B DN 2002 Answers
Phone A and Phone B talk for 2 and half minutes
Phone A DN 1001 goes onHook
End of Scenario

CISCO CONFIDENTIAL

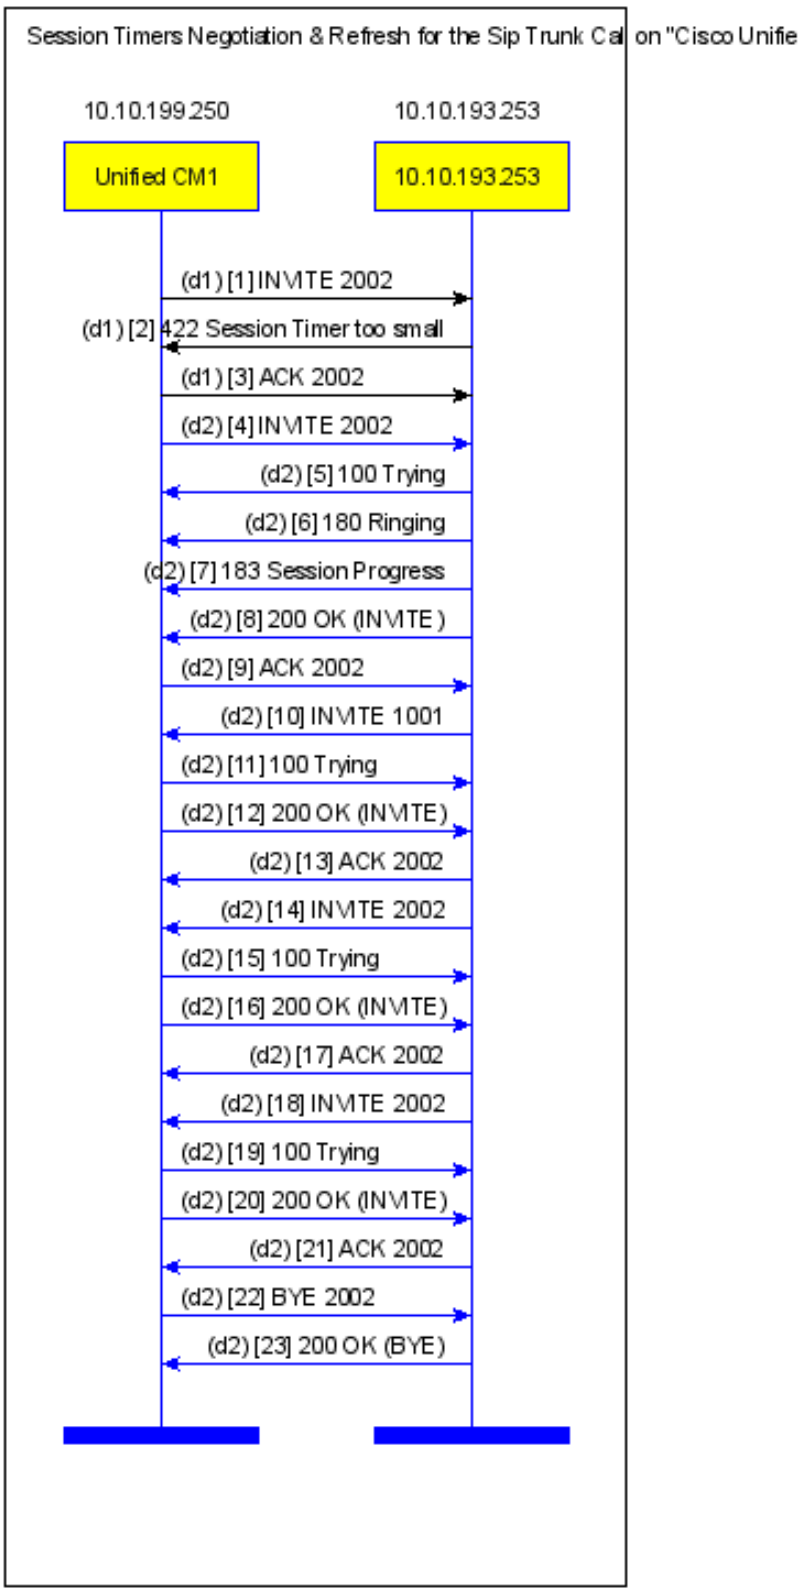

CISCO CONFIDENTIAL

```
[diagram]   Call-ID:[prev][next]
[1] INVITE sip:2002@10.10.193.253:5060 SIP/2.0
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK234ba8015
Remote-Party-ID: <sip:1001@10.10.199.250>;party=calling;screen=yes;privacy=off
From: <sip:1001@10.10.199.250>;tag=88fd35fa-b656-4fbc-bcf3-3fdd2ba559b3-22340970
To: <sip:2002@10.10.193.253>
Date: Wed, 11 Jul 2007 20:15:25 GMT
Call-ID: 7450f200-69513a5d-7-fac712ac@10.10.199.250
Supported: timer,replaces
Min-SE:  60
User-Agent: Cisco-CUCM7.1
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY, PUBLISH
CSeq: 101 INVITE
Contact: <sip:1001@10.10.199.250:5060;transport=tcp>
Expires: 180
Allow-Events: presence
Session-Expires:  90
Max-Forwards: 70
Content-Length: 0

[diagram]   Call-ID:[prev][next]
[2] SIP/2.0 422 Session Timer too small
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK234ba8015
From: <sip:1001@10.10.199.250>;tag=88fd35fa-b656-4fbc-bcf3-3fdd2ba559b3-22340970
To: <sip:2002@10.10.193.253>;tag=1563337971
Date: Wed, 11 Jul 2007 20:15:25 GMT
Call-ID: 7450f200-69513a5d-7-fac712ac@10.10.199.250
CSeq: 101 INVITE
Allow-Events: presence
Min-SE:  120
Content-Length: 0

[diagram]   Call-ID:[prev][next]
[3] ACK sip:2002@10.10.193.253:5060 SIP/2.0
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK234ba8015
From: <sip:1001@10.10.199.250>;tag=88fd35fa-b656-4fbc-bcf3-3fdd2ba559b3-22340970
To: <sip:2002@10.10.193.253>;tag=1563337971
Date: Wed, 11 Jul 2007 20:15:25 GMT
Call-ID: 7450f200-69513a5d-7-fac712ac@10.10.199.250
Max-Forwards: 70
CSeq: 101 ACK
Allow-Events: presence
Content-Length: 0

[diagram]   Call-ID:[prev][next]
[4] INVITE sip:2002@10.10.193.253:5060 SIP/2.0
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK3458922d2
Remote-Party-ID: <sip:1001@10.10.199.250>;party=calling;screen=yes;privacy=off
From: <sip:1001@10.10.199.250>;tag=88fd35fa-b656-4fbc-bcf3-3fdd2ba559b3-22340970
To: <sip:2002@10.10.193.253>
Date: Wed, 11 Jul 2007 20:15:25 GMT
Call-ID: 7450f200-69513a5d-8-fac712ac@10.10.199.250
Supported: timer,replaces
User-Agent: Cisco-CUCM7.1
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY, PUBLISH
CSeq: 101 INVITE
Contact: <sip:1001@10.10.199.250:5060;transport=tcp>
Expires: 180
Allow-Events: presence
Session-Expires:  120
Min-SE:  120
Max-Forwards: 70
Content-Length: 0

[diagram]   Call-ID:[prev][next]
[5] SIP/2.0 100 Trying
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK3458922d2
From: <sip:1001@10.10.199.250>;tag=88fd35fa-b656-4fbc-bcf3-3fdd2ba559b3-22340970
To: <sip:2002@10.10.193.253>
Date: Wed, 11 Jul 2007 20:15:25 GMT
Call-ID: 7450f200-69513a5d-8-fac712ac@10.10.199.250
CSeq: 101 INVITE
Allow-Events: presence
Content-Length: 0

[diagram]   Call-ID:[prev][next]
[6] SIP/2.0 180 Ringing
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK3458922d2
From: <sip:1001@10.10.199.250>;tag=88fd35fa-b656-4fbc-bcf3-3fdd2ba559b3-22340970
To: <sip:2002@10.10.193.253>;tag=c5bc4d0f-1965-4b87-bd74-7e24820e120a-19517710
```

CISCO CONFIDENTIAL

```
Date: Wed, 11 Jul 2007 20:15:25 GMT
Call-ID: 7450f200-69513a5d-8-fac712ac@10.10.199.250
CSeq: 101 INVITE
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY, PUBLISH
Allow-Events: presence
Remote-Party-ID: <sip:2002@10.10.193.253>;party=called;screen=yes;privacy=off
Contact: <sip:2002@10.10.193.253:5060;transport=tcp>
Content-Length: 0
```

[diagram] Call-ID:[prev][next]

[7] SIP/2.0 183 Session Progress

```
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK3458922d2
From: <sip:1001@10.10.199.250>;tag=88fd35fa-b656-4fbc-bcf3-3fdd2ba559b3-22340970
To: <sip:2002@10.10.193.253>;tag=c5bc4d0f-1965-4b87-bd74-7e24820e120a-19517710
Date: Wed, 11 Jul 2007 20:15:25 GMT
Call-ID: 7450f200-69513a5d-8-fac712ac@10.10.199.250
CSeq: 101 INVITE
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY, PUBLISH
Allow-Events: presence, kpml
Remote-Party-ID: <sip:2002@10.10.193.253>;party=called;screen=yes;privacy=off
Contact: <sip:2002@10.10.193.253:5060;transport=tcp>
Content-Type: application/sdp
Content-Length: 301

v=0
o=CiscoSystemsCCM-SIP 2000 1 IN IP4 10.10.193.253
s=SIP Call
c=IN IP4 10.10.199.238
t=0 0
m=audio 4000 RTP/AVP 0 8 18 101
a=rtpmap:0 PCMU/8000
a=ptime:20
a=rtpmap:8 PCMA/8000
a=ptime:20
a=rtpmap:18 G729/8000
a=ptime:20
a=sendonly
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
```

[diagram] Call-ID:[prev][next]

[8] SIP/2.0 200 OK

```
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK3458922d2
From: <sip:1001@10.10.199.250>;tag=88fd35fa-b656-4fbc-bcf3-3fdd2ba559b3-22340970
To: <sip:2002@10.10.193.253>;tag=c5bc4d0f-1965-4b87-bd74-7e24820e120a-19517710
Date: Wed, 11 Jul 2007 20:15:25 GMT
Call-ID: 7450f200-69513a5d-8-fac712ac@10.10.199.250
CSeq: 101 INVITE
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY, PUBLISH
Allow-Events: presence, kpml
Remote-Party-ID: <sip:2002@10.10.193.253>;party=called;screen=yes;privacy=off
Contact: <sip:2002@10.10.193.253:5060;transport=tcp>
Supported: replaces
Session-Expires:  120;refresher=uas
Require:  timer
Content-Type: application/sdp
Content-Length: 301

v=0
o=CiscoSystemsCCM-SIP 2000 1 IN IP4 10.10.193.253
s=SIP Call
c=IN IP4 10.10.199.238
t=0 0
m=audio 4000 RTP/AVP 0 8 18 101
a=rtpmap:0 PCMU/8000
a=ptime:20
a=rtpmap:8 PCMA/8000
a=ptime:20
a=rtpmap:18 G729/8000
a=ptime:20
a=sendonly
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
```

[diagram] Call-ID:[prev][next]

[9] ACK sip:2002@10.10.193.253:5060;transport=tcp SIP/2.0

```
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK426181336
From: <sip:1001@10.10.199.250>;tag=88fd35fa-b656-4fbc-bcf3-3fdd2ba559b3-22340970
To: <sip:2002@10.10.193.253>;tag=c5bc4d0f-1965-4b87-bd74-7e24820e120a-19517710
Date: Wed, 11 Jul 2007 20:15:25 GMT
```

CISCO CONFIDENTIAL

```
Call-ID: 7450f200-69513a5d-8-fac712ac@10.10.199.250
Max-Forwards: 70
CSeq: 101 ACK
Allow-Events: presence
Content-Type: application/sdp
Content-Length: 228

v=0
o=CiscoSystemsCCM-SIP 2000 1 IN IP4 10.10.199.250
s=SIP Call
c=IN IP4 10.10.199.251
t=0 0
m=audio 24298 RTP/AVP 0 101
a=rtpmap:0 PCMU/8000
a=ptime:20
a=recvonly
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
```

[diagram] Call-ID:[prev][next]

[10] INVITE sip:1001@10.10.199.250:5060;transport=tcp SIP/2.0

```
Via: SIP/2.0/TCP 10.10.193.253:5060;branch=z9hG4bK15f121b3282
Remote-Party-ID: <sip:2002@10.10.193.253>;party=calling;screen=yes;privacy=off
From: <sip:2002@10.10.193.253>;tag=c5bc4d0f-1965-4b87-bd74-7e24820e120a-19517710
To: <sip:1001@10.10.199.250>;tag=88fd35fa-b656-4fbc-bcf3-3fdd2ba559b3-22340970
Date: Wed, 11 Jul 2007 20:15:27 GMT
Call-ID: 7450f200-69513a5d-8-fac712ac@10.10.199.250
Supported: 100rel,timer,replaces
Min-SE:  120
Cisco-Guid: 1951461888-1766931037-6178-4257288876
User-Agent: Cisco-CUCM7.1
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY, PUBLISH
CSeq: 101 INVITE
Max-Forwards: 70
Contact: <sip:2002@10.10.193.253:5060;transport=tcp>
Expires: 180
Allow-Events: presence, kpml
Session-Expires:  120;refresher=uac
Content-Type: application/sdp
Content-Length: 216

v=0
o=CiscoSystemsCCM-SIP 2000 2 IN IP4 10.10.193.253
s=SIP Call
c=IN IP4 10.10.199.238
t=0 0
m=audio 16410 RTP/AVP 0 101
a=rtpmap:0 PCMU/8000
a=ptime:20
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
```

[diagram] Call-ID:[prev][next]

[11] SIP/2.0 100 Trying

```
Via: SIP/2.0/TCP 10.10.193.253:5060;branch=z9hG4bK15f121b3282
From: <sip:2002@10.10.193.253>;tag=c5bc4d0f-1965-4b87-bd74-7e24820e120a-19517710
To: <sip:1001@10.10.199.250>;tag=88fd35fa-b656-4fbc-bcf3-3fdd2ba559b3-22340970
Date: Wed, 11 Jul 2007 20:15:27 GMT
Call-ID: 7450f200-69513a5d-8-fac712ac@10.10.199.250
CSeq: 101 INVITE
Allow-Events: presence
Content-Length: 0
```

[diagram] Call-ID:[prev][next]

[12] SIP/2.0 200 OK

```
Via: SIP/2.0/TCP 10.10.193.253:5060;branch=z9hG4bK15f121b3282
From: <sip:2002@10.10.193.253>;tag=c5bc4d0f-1965-4b87-bd74-7e24820e120a-19517710
To: <sip:1001@10.10.199.250>;tag=88fd35fa-b656-4fbc-bcf3-3fdd2ba559b3-22340970
Date: Wed, 11 Jul 2007 20:15:27 GMT
Call-ID: 7450f200-69513a5d-8-fac712ac@10.10.199.250
CSeq: 101 INVITE
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY, PUBLISH
Allow-Events: presence
Remote-Party-ID: <sip:1001@10.10.199.250>;party=called;screen=yes;privacy=off
Contact: <sip:2002@10.10.199.250:5060;transport=tcp>
Supported: replaces
Session-Expires:  120;refresher=uac
Require:  timer
Content-Type: application/sdp
Content-Length: 216
```

CISCO CONFIDENTIAL

```
v=0
o=CiscoSystemsCCM-SIP 2000 2 IN IP4 10.10.199.250
s=SIP Call
c=IN IP4 10.10.199.251
t=0 0
m=audio 24298 RTP/AVP 0 101
a=rtpmap:0 PCMU/8000
a=ptime:20
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
```

[diagram] Call-ID:[prev][next]

[13] ACK sip:2002@10.10.199.250:5060;transport=tcp SIP/2.0

```
Via: SIP/2.0/TCP 10.10.193.253:5060;branch=z9hG4bK16074d4eec1
From: <sip:2002@10.10.193.253>;tag=c5bc4d0f-1965-4b87-bd74-7e24820e120a-19517710
To: <sip:1001@10.10.199.250>;tag=88fd35fa-b656-4fbc-bcf3-3fdd2ba559b3-22340970
Date: Wed, 11 Jul 2007 20:15:27 GMT
Call-ID: 7450f200-69513a5d-8-fac712ac@10.10.199.250
Max-Forwards: 70
CSeq: 101 ACK
Allow-Events: presence, kpml
Content-Length: 0
```

[diagram] Call-ID:[prev][next]

[14] INVITE sip:2002@10.10.199.250:5060;transport=tcp SIP/2.0

```
Via: SIP/2.0/TCP 10.10.193.253:5060;branch=z9hG4bK1615f2acf1a
Remote-Party-ID: <sip:2002@10.10.193.253>;party=calling;screen=yes;privacy=off
From: <sip:2002@10.10.193.253>;tag=c5bc4d0f-1965-4b87-bd74-7e24820e120a-19517710
To: <sip:1001@10.10.199.250>;tag=88fd35fa-b656-4fbc-bcf3-3fdd2ba559b3-22340970
Date: Wed, 11 Jul 2007 20:16:27 GMT
Call-ID: 7450f200-69513a5d-8-fac712ac@10.10.199.250
Supported: 100rel,timer,replaces
Min-SE:  120
Cisco-Guid: 1951461888-1766931037-6178-4257288876
User-Agent: Cisco-CUCM7.1
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY, PUBLISH
CSeq: 102 INVITE
Max-Forwards: 70
Contact: <sip:2002@10.10.193.253:5060;transport=tcp>
Expires: 180
Allow-Events: presence, kpml
Session-Expires:  120;refresher=uac
Content-Type: application/sdp
Content-Length: 216

v=0
o=CiscoSystemsCCM-SIP 2000 2 IN IP4 10.10.193.253
s=SIP Call
c=IN IP4 10.10.199.238
t=0 0
m=audio 16410 RTP/AVP 0 101
a=rtpmap:0 PCMU/8000
a=ptime:20
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
```

[diagram] Call-ID:[prev][next]

[15] SIP/2.0 100 Trying

```
Via: SIP/2.0/TCP 10.10.193.253:5060;branch=z9hG4bK1615f2acf1a
From: <sip:2002@10.10.193.253>;tag=c5bc4d0f-1965-4b87-bd74-7e24820e120a-19517710
To: <sip:1001@10.10.199.250>;tag=88fd35fa-b656-4fbc-bcf3-3fdd2ba559b3-22340970
Date: Wed, 11 Jul 2007 20:16:27 GMT
Call-ID: 7450f200-69513a5d-8-fac712ac@10.10.199.250
CSeq: 102 INVITE
Allow-Events: presence
Content-Length: 0
```

[diagram] Call-ID:[prev][next]

[16] SIP/2.0 200 OK

```
Via: SIP/2.0/TCP 10.10.193.253:5060;branch=z9hG4bK1615f2acf1a
From: <sip:2002@10.10.193.253>;tag=c5bc4d0f-1965-4b87-bd74-7e24820e120a-19517710
To: <sip:1001@10.10.199.250>;tag=88fd35fa-b656-4fbc-bcf3-3fdd2ba559b3-22340970
Date: Wed, 11 Jul 2007 20:16:27 GMT
Call-ID: 7450f200-69513a5d-8-fac712ac@10.10.199.250
CSeq: 102 INVITE
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY, PUBLISH
Allow-Events: presence
Remote-Party-ID: <sip:1001@10.10.199.250>;party=called;screen=yes;privacy=off
Contact: <sip:2002@10.10.199.250:5060;transport=tcp>
```

CISCO CONFIDENTIAL

```
Supported: replaces
Session-Expires:  120;refresher=uac
Require:  timer
Content-Type: application/sdp
Content-Length: 216

v=0
o=CiscoSystemsCCM-SIP 2000 2 IN IP4 10.10.199.250
s=SIP Call
c=IN IP4 10.10.199.251
t=0 0
m=audio 24298 RTP/AVP 0 101
a=rtpmap:0 PCMU/8000
a=ptime:20
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
```

[diagram] Call-ID:[prev][next]

```
[17] ACK sip:2002@10.10.199.250:5060;transport=tcp SIP/2.0
Via: SIP/2.0/TCP 10.10.193.253:5060;branch=z9hG4bK1627ea2125f
From: <sip:2002@10.10.193.253>;tag=c5bc4d0f-1965-4b87-bd74-7e24820e120a-19517710
To: <sip:1001@10.10.199.250>;tag=88fd35fa-b656-4fbc-bcf3-3fdd2ba559b3-22340970
Date: Wed, 11 Jul 2007 20:16:27 GMT
Call-ID: 7450f200-69513a5d-8-fac712ac@10.10.199.250
Max-Forwards: 70
CSeq: 102 ACK
Allow-Events: presence, kpml
Content-Length: 0
```

[diagram] Call-ID:[prev][next]

```
[18] INVITE sip:2002@10.10.199.250:5060;transport=tcp SIP/2.0
Via: SIP/2.0/TCP 10.10.193.253:5060;branch=z9hG4bK163149e3e27
Remote-Party-ID: <sip:2002@10.10.193.253>;party=calling;screen=yes;privacy=off
From: <sip:2002@10.10.193.253>;tag=c5bc4d0f-1965-4b87-bd74-7e24820e120a-19517710
To: <sip:1001@10.10.199.250>;tag=88fd35fa-b656-4fbc-bcf3-3fdd2ba559b3-22340970
Date: Wed, 11 Jul 2007 20:17:27 GMT
Call-ID: 7450f200-69513a5d-8-fac712ac@10.10.199.250
Supported: 100rel,timer,replaces
Min-SE:  120
Cisco-Guid: 1951461888-1766931037-6178-4257288876
User-Agent: Cisco-CUCM7.1
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY, PUBLISH
CSeq: 103 INVITE
Max-Forwards: 70
Contact: <sip:2002@10.10.193.253:5060;transport=tcp>
Expires: 180
Allow-Events: presence, kpml
Session-Expires:  120;refresher=uac
Content-Type: application/sdp
Content-Length: 216

v=0
o=CiscoSystemsCCM-SIP 2000 2 IN IP4 10.10.193.253
s=SIP Call
c=IN IP4 10.10.199.238
t=0 0
m=audio 16410 RTP/AVP 0 101
a=rtpmap:0 PCMU/8000
a=ptime:20
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
```

[diagram] Call-ID:[prev][next]

```
[19] SIP/2.0 100 Trying
Via: SIP/2.0/TCP 10.10.193.253:5060;branch=z9hG4bK163149e3e27
From: <sip:2002@10.10.193.253>;tag=c5bc4d0f-1965-4b87-bd74-7e24820e120a-19517710
To: <sip:1001@10.10.199.250>;tag=88fd35fa-b656-4fbc-bcf3-3fdd2ba559b3-22340970
Date: Wed, 11 Jul 2007 20:17:27 GMT
Call-ID: 7450f200-69513a5d-8-fac712ac@10.10.199.250
CSeq: 103 INVITE
Allow-Events: presence
Content-Length: 0
```

[diagram] Call-ID:[prev][next]

```
[20] SIP/2.0 200 OK
Via: SIP/2.0/TCP 10.10.193.253:5060;branch=z9hG4bK163149e3e27
From: <sip:2002@10.10.193.253>;tag=c5bc4d0f-1965-4b87-bd74-7e24820e120a-19517710
To: <sip:1001@10.10.199.250>;tag=88fd35fa-b656-4fbc-bcf3-3fdd2ba559b3-22340970
Date: Wed, 11 Jul 2007 20:17:27 GMT
Call-ID: 7450f200-69513a5d-8-fac712ac@10.10.199.250
```

CISCO CONFIDENTIAL

```
CSeq: 103 INVITE
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY, PUBLISH
Allow-Events: presence
Remote-Party-ID: <sip:1001@10.10.199.250>;party=called;screen=yes;privacy=off
Contact: <sip:2002@10.10.199.250:5060;transport=tcp>
Supported: replaces
Session-Expires:  120;refresher=uac
Require:  timer
Content-Type: application/sdp
Content-Length: 216

v=0
o=CiscoSystemsCCM-SIP 2000 2 IN IP4 10.10.199.250
s=SIP Call
c=IN IP4 10.10.199.251
t=0 0
m=audio 24298 RTP/AVP 0 101
a=rtpmap:0 PCMU/8000
a=ptime:20
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
```

[diagram] Call-ID:[prev][next]

[21] ACK sip:2002@10.10.199.250:5060;transport=tcp SIP/2.0

```
Via: SIP/2.0/TCP 10.10.193.253:5060;branch=z9hG4bK16464818614
From: <sip:2002@10.10.193.253>;tag=c5bc4d0f-1965-4b87-bd74-7e24820e120a-19517710
To: <sip:1001@10.10.199.250>;tag=88fd35fa-b656-4fbc-bcf3-3fdd2ba559b3-22340970
Date: Wed, 11 Jul 2007 20:17:27 GMT
Call-ID: 7450f200-69513a5d-8-fac712ac@10.10.199.250
Max-Forwards: 70
CSeq: 103 ACK
Allow-Events: presence, kpml
Content-Length: 0
```

[diagram] Call-ID:[prev][next]

[22] BYE sip:2002@10.10.193.253:5060;transport=tcp SIP/2.0

```
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK51f44fd2b
From: <sip:1001@10.10.199.250>;tag=88fd35fa-b656-4fbc-bcf3-3fdd2ba559b3-22340970
To: <sip:2002@10.10.193.253>;tag=c5bc4d0f-1965-4b87-bd74-7e24820e120a-19517710
Date: Wed, 11 Jul 2007 20:17:27 GMT
Call-ID: 7450f200-69513a5d-8-fac712ac@10.10.199.250
User-Agent: Cisco-CUCM7.1
Max-Forwards: 70
CSeq: 102 BYE
Content-Length: 0
```

[diagram] Call-ID:[prev][next]

[23] SIP/2.0 200 OK

```
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK51f44fd2b
From: <sip:1001@10.10.199.250>;tag=88fd35fa-b656-4fbc-bcf3-3fdd2ba559b3-22340970
To: <sip:2002@10.10.193.253>;tag=c5bc4d0f-1965-4b87-bd74-7e24820e120a-19517710
Date: Wed, 11 Jul 2007 20:18:04 GMT
Call-ID: 7450f200-69513a5d-8-fac712ac@10.10.199.250
CSeq: 102 BYE
Content-Length: 0
```

CISCO CONFIDENTIAL

12.2 Periodic Refresh after Session Timer Negotiation Failure

Title: Periodic Refresh after Session Timer Negotiation Failure

Description:

The scenario when Session Timers negotiation fails and periodic reInvite is attempted after configured interval.

Cisco Unified IP Phone--Cisco Unified CM----siptrunk---remoteUA

The session timers negotiation shall be considered to be failed for the following cases:

a) For Cisco Unified IP Phone to remoteUA call, the Cisco Unified CM sends INVITE with Supported:timer, Min-SE and Session-Expires headers, in response the remote UA sends 200 OK without Session-Expires header.

b) For remoteUA to Cisco Unified IP Phone call, the remote UA sends an initial INVITE without Supported:timer and Min-SE headers.

For the above cases when standard session timers negotiation fails, the Cisco Unified CM UA shall monitor the session using the periodic INVITE refresh procedure without the session timers headers.

The duration for the periodic refresh is configurable from the Cisco Unified CM's service parameter namely Session-Expires. The reInvite's shall be sent in the duration of configured Session-Expires value/2.

The following flow is depicting a) scenario.

Configuration:

Node = Unified CM, IP = 10.10.253.2

Node = RemoteUA, IP = 10.10.253.4

CISCO CONFIDENTIAL

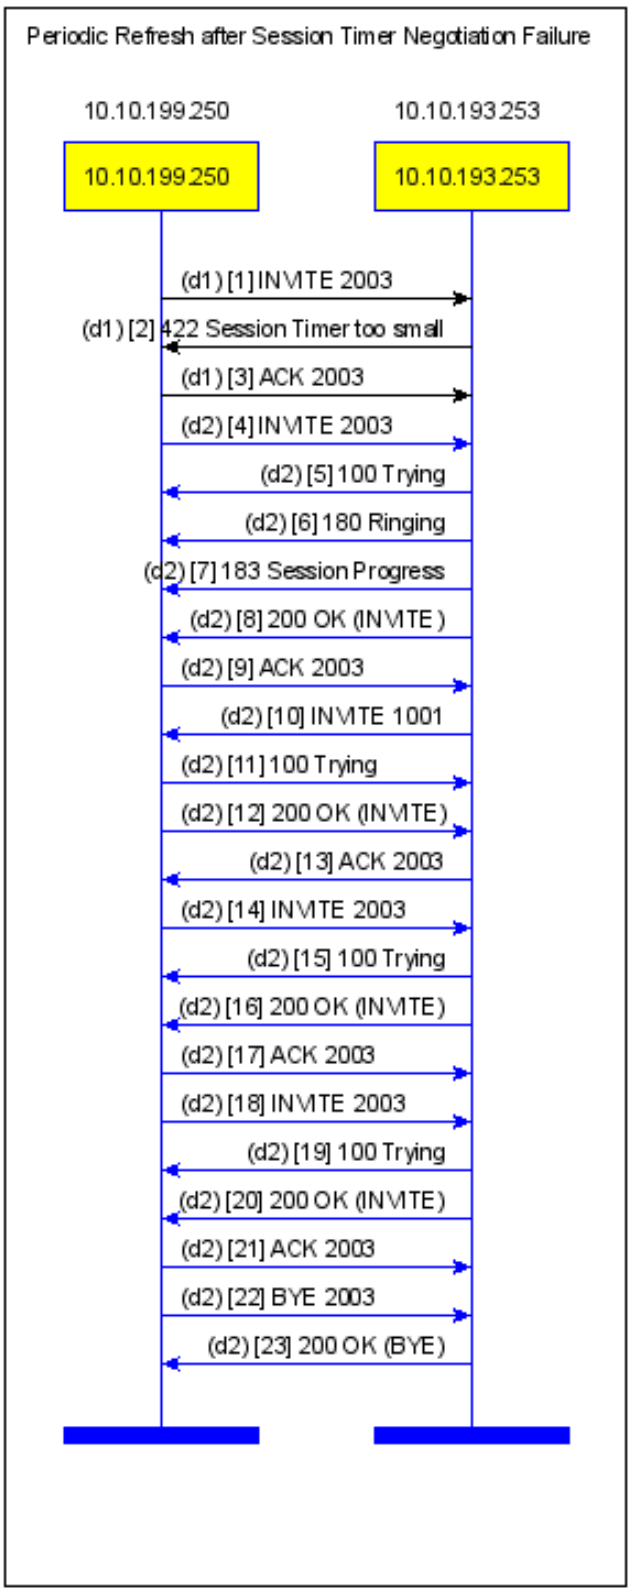

CISCO CONFIDENTIAL

```
[diagram]   Call-ID:[prev][next]
[1] INVITE sip:2003@10.10.193.253:5060 SIP/2.0
Via: SIP/2.0/UDP 10.10.199.250:5060;branch=z9hG4bK1d60f41884
Remote-Party-ID: <sip:1001@10.10.199.250>;party=calling;screen=yes;privacy=off
From: <sip:1001@10.10.199.250>;tag=88fd35fa-b656-4fbc-bcf3-3fdd2ba559b3-22644516
To: <sip:2003@10.10.193.253>
Date: Thu, 12 Jul 2007 17:52:32 GMT
Call-ID: a8d2b580-69616a60-1a-fac712ac@10.10.199.250
Supported: timer,replaces
Min-SE:  60
User-Agent: Cisco-CUCM7.1
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY, PUBLISH
CSeq: 101 INVITE
Contact: <sip:1001@10.10.199.250:5060>
Expires: 180
Allow-Events: presence
Session-Expires:  90
Max-Forwards: 70
Content-Length: 0

[diagram]   Call-ID:[prev][next]
[2] SIP/2.0 422 Session Timer too small
Via: SIP/2.0/UDP 10.10.199.250:5060;branch=z9hG4bK1d60f41884
From: <sip:1001@10.10.199.250>;tag=88fd35fa-b656-4fbc-bcf3-3fdd2ba559b3-22644516
To: <sip:2003@10.10.193.253>;tag=1442724430
Date: Thu, 12 Jul 2007 17:52:32 GMT
Call-ID: a8d2b580-69616a60-1a-fac712ac@10.10.199.250
CSeq: 101 INVITE
Allow-Events: presence
Min-SE:  120
Content-Length: 0

[diagram]   Call-ID:[prev][next]
[3] ACK sip:2003@10.10.193.253:5060 SIP/2.0
Via: SIP/2.0/UDP 10.10.199.250:5060;branch=z9hG4bK1d60f41884
From: <sip:1001@10.10.199.250>;tag=88fd35fa-b656-4fbc-bcf3-3fdd2ba559b3-22644516
To: <sip:2003@10.10.193.253>;tag=1442724430
Date: Thu, 12 Jul 2007 17:52:32 GMT
Call-ID: a8d2b580-69616a60-1a-fac712ac@10.10.199.250
Max-Forwards: 70
CSeq: 101 ACK
Allow-Events: presence
Content-Length: 0

[diagram]   Call-ID:[prev][next]
[4] INVITE sip:2003@10.10.193.253:5060 SIP/2.0
Via: SIP/2.0/UDP 10.10.199.250:5060;branch=z9hG4bK1e7bcb76f7
Remote-Party-ID: <sip:1001@10.10.199.250>;party=calling;screen=yes;privacy=off
From: <sip:1001@10.10.199.250>;tag=88fd35fa-b656-4fbc-bcf3-3fdd2ba559b3-22644516
To: <sip:2003@10.10.193.253>
Date: Thu, 12 Jul 2007 17:52:32 GMT
Call-ID: a8d2b580-69616a60-1b-fac712ac@10.10.199.250
Supported: timer,replaces
User-Agent: Cisco-CUCM7.1
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY, PUBLISH
CSeq: 101 INVITE
Contact: <sip:1001@10.10.199.250:5060>
Expires: 180
Allow-Events: presence
Session-Expires:  120
Min-SE:  120
Max-Forwards: 70
Content-Length: 0

[diagram]   Call-ID:[prev][next]
[5] SIP/2.0 100 Trying
Via: SIP/2.0/UDP 10.10.199.250:5060;branch=z9hG4bK1e7bcb76f7
From: <sip:1001@10.10.199.250>;tag=88fd35fa-b656-4fbc-bcf3-3fdd2ba559b3-22644516
To: <sip:2003@10.10.193.253>
Date: Thu, 12 Jul 2007 17:52:32 GMT
Call-ID: a8d2b580-69616a60-1b-fac712ac@10.10.199.250
CSeq: 101 INVITE
Allow-Events: presence
Content-Length: 0

[diagram]   Call-ID:[prev][next]
[6] SIP/2.0 180 Ringing
Via: SIP/2.0/UDP 10.10.199.250:5060;branch=z9hG4bK1e7bcb76f7
From: <sip:1001@10.10.199.250>;tag=88fd35fa-b656-4fbc-bcf3-3fdd2ba559b3-22644516
To: <sip:2003@10.10.193.253>;tag=c5bc4d0f-1965-4b87-bd74-7e24820e120a-22650267
```

CISCO CONFIDENTIAL

```
Date: Thu, 12 Jul 2007 17:52:32 GMT
Call-ID: a8d2b580-69616a60-1b-fac712ac@10.10.199.250
CSeq: 101 INVITE
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY, PUBLISH
Allow-Events: presence
Remote-Party-ID: <sip:2003@10.10.193.253>;party=called;screen=yes;privacy=off
Contact: <sip:2003@10.10.193.253:5060>
Content-Length: 0
```

[diagram] Call-ID:[prev][next]

[7] SIP/2.0 183 Session Progress

```
Via: SIP/2.0/UDP 10.10.199.250:5060;branch=z9hG4bK1e7bcb76f7
From: <sip:1001@10.10.199.250>;tag=88fd35fa-b656-4fbc-bcf3-3fdd2ba559b3-22644516
To: <sip:2003@10.10.193.253>;tag=c5bc4d0f-1965-4b87-bd74-7e24820e120a-22650267
Date: Thu, 12 Jul 2007 17:52:32 GMT
Call-ID: a8d2b580-69616a60-1b-fac712ac@10.10.199.250
CSeq: 101 INVITE
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY, PUBLISH
Allow-Events: presence, kpml
Remote-Party-ID: <sip:2003@10.10.193.253>;party=called;screen=yes;privacy=off
Contact: <sip:2003@10.10.193.253:5060>
Content-Type: application/sdp
Content-Length: 301

v=0
o=CiscoSystemsCCM-SIP 2000 1 IN IP4 10.10.193.253
s=SIP Call
c=IN IP4 10.10.199.238
t=0 0
m=audio 4000 RTP/AVP 0 8 18 101
a=rtpmap:0 PCMU/8000
a=ptime:20
a=rtpmap:8 PCMA/8000
a=ptime:20
a=rtpmap:18 G729/8000
a=ptime:20
a=sendonly
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
```

[diagram] Call-ID:[prev][next]

[8] SIP/2.0 200 OK

```
Via: SIP/2.0/UDP 10.10.199.250:5060;branch=z9hG4bK1e7bcb76f7
From: <sip:1001@10.10.199.250>;tag=88fd35fa-b656-4fbc-bcf3-3fdd2ba559b3-22644516
To: <sip:2003@10.10.193.253>;tag=c5bc4d0f-1965-4b87-bd74-7e24820e120a-22650267
Date: Thu, 12 Jul 2007 17:52:32 GMT
Call-ID: a8d2b580-69616a60-1b-fac712ac@10.10.199.250
CSeq: 101 INVITE
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY, PUBLISH
Allow-Events: presence, kpml
Remote-Party-ID: <sip:2003@10.10.193.253>;party=called;screen=yes;privacy=off
Contact: <sip:2003@10.10.193.253:5060>
Supported: replaces
Content-Type: application/sdp
Content-Length: 301

v=0
o=CiscoSystemsCCM-SIP 2000 1 IN IP4 10.10.193.253
s=SIP Call
c=IN IP4 10.10.199.238
t=0 0
m=audio 4000 RTP/AVP 0 8 18 101
a=rtpmap:0 PCMU/8000
a=ptime:20
a=rtpmap:8 PCMA/8000
a=ptime:20
a=rtpmap:18 G729/8000
a=ptime:20
a=sendonly
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
```

[diagram] Call-ID:[prev][next]

[9] ACK sip:2003@10.10.193.253:5060 SIP/2.0

```
Via: SIP/2.0/UDP 10.10.199.250:5060;branch=z9hG4bK1f1fc31af4
From: <sip:1001@10.10.199.250>;tag=88fd35fa-b656-4fbc-bcf3-3fdd2ba559b3-22644516
To: <sip:2003@10.10.193.253>;tag=c5bc4d0f-1965-4b87-bd74-7e24820e120a-22650267
Date: Thu, 12 Jul 2007 17:52:32 GMT
Call-ID: a8d2b580-69616a60-1b-fac712ac@10.10.199.250
Max-Forwards: 70
```

CISCO CONFIDENTIAL

```
CSeq: 101 ACK
Allow-Events: presence
Content-Type: application/sdp
Content-Length: 228

v=0
o=CiscoSystemsCCM-SIP 2000 1 IN IP4 10.10.199.250
s=SIP Call
c=IN IP4 10.10.199.251
t=0 0
m=audio 24936 RTP/AVP 0 101
a=rtpmap:0 PCMU/8000
a=ptime:20
a=recvonly
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
```

[diagram] Call-ID:[prev][next]

```
[10] INVITE sip:1001@10.10.199.250:5060 SIP/2.0
Via: SIP/2.0/UDP 10.10.193.253:5060;branch=z9hG4bK71f776d04
Remote-Party-ID: <sip:2003@10.10.193.253>;party=calling;screen=yes;privacy=off
From: <sip:2003@10.10.193.253>;tag=c5bc4d0f-1965-4b87-bd74-7e24820e120a-22650267
To: <sip:1001@10.10.199.250>;tag=88fd35fa-b656-4fbc-bcf3-3fdd2ba559b3-22644516
Date: Thu, 12 Jul 2007 17:52:33 GMT
Call-ID: a8d2b580-69616a60-1b-fac712ac@10.10.199.250
Supported: 100rel,timer,replaces
Min-SE:  120
Cisco-Guid: 2832381312-1767991904-14-4257288876
User-Agent: Cisco-CUCM7.1
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY, PUBLISH
CSeq: 101 INVITE
Max-Forwards: 70
Contact: <sip:2003@10.10.193.253:5060>
Expires: 180
Allow-Events: presence, kpml
Content-Type: application/sdp
Content-Length: 216

v=0
o=CiscoSystemsCCM-SIP 2000 2 IN IP4 10.10.193.253
s=SIP Call
c=IN IP4 10.10.199.238
t=0 0
m=audio 17122 RTP/AVP 0 101
a=rtpmap:0 PCMU/8000
a=ptime:20
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
```

[diagram] Call-ID:[prev][next]

```
[11] SIP/2.0 100 Trying
Via: SIP/2.0/UDP 10.10.193.253:5060;branch=z9hG4bK71f776d04
From: <sip:2003@10.10.193.253>;tag=c5bc4d0f-1965-4b87-bd74-7e24820e120a-22650267
To: <sip:1001@10.10.199.250>;tag=88fd35fa-b656-4fbc-bcf3-3fdd2ba559b3-22644516
Date: Thu, 12 Jul 2007 17:52:33 GMT
Call-ID: a8d2b580-69616a60-1b-fac712ac@10.10.199.250
CSeq: 101 INVITE
Allow-Events: presence
Content-Length: 0
```

[diagram] Call-ID:[prev][next]

```
[12] SIP/2.0 200 OK
Via: SIP/2.0/UDP 10.10.193.253:5060;branch=z9hG4bK71f776d04
From: <sip:2003@10.10.193.253>;tag=c5bc4d0f-1965-4b87-bd74-7e24820e120a-22650267
To: <sip:1001@10.10.199.250>;tag=88fd35fa-b656-4fbc-bcf3-3fdd2ba559b3-22644516
Date: Thu, 12 Jul 2007 17:52:33 GMT
Call-ID: a8d2b580-69616a60-1b-fac712ac@10.10.199.250
CSeq: 101 INVITE
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY, PUBLISH
Allow-Events: presence
Remote-Party-ID: <sip:1001@10.10.199.250>;party=called;screen=yes;privacy=off
Contact: <sip:2003@10.10.199.250:5060>
Supported: replaces
Content-Type: application/sdp
Content-Length: 216

v=0
o=CiscoSystemsCCM-SIP 2000 2 IN IP4 10.10.199.250
s=SIP Call
c=IN IP4 10.10.199.251
```

CISCO CONFIDENTIAL

```
t=0 0
m=audio 24936 RTP/AVP 0 101
a=rtpmap:0 PCMU/8000
a=ptime:20
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
```

[diagram] Call-ID:[prev][next]

[13] ACK sip:2003@10.10.199.250:5060 SIP/2.0

```
Via: SIP/2.0/UDP 10.10.193.253:5060;branch=z9hG4bK88454492
From: <sip:2003@10.10.193.253>;tag=c5bc4d0f-1965-4b87-bd74-7e24820e120a-22650267
To: <sip:1001@10.10.199.250>;tag=88fd35fa-b656-4fbc-bcf3-3fdd2ba559b3-22644516
Date: Thu, 12 Jul 2007 17:52:33 GMT
Call-ID: a8d2b580-69616a60-1b-fac712ac@10.10.199.250
Max-Forwards: 70
CSeq: 101 ACK
Allow-Events: presence, kpml
Content-Length: 0
```

[diagram] Call-ID:[prev][next]

[14] INVITE sip:2003@10.10.193.253:5060 SIP/2.0

```
Via: SIP/2.0/UDP 10.10.199.250:5060;branch=z9hG4bK2049973286
Remote-Party-ID: <sip:1001@10.10.199.250>;party=calling;screen=yes;privacy=off
From: <sip:1001@10.10.199.250>;tag=88fd35fa-b656-4fbc-bcf3-3fdd2ba559b3-22644516
To: <sip:2003@10.10.193.253>;tag=c5bc4d0f-1965-4b87-bd74-7e24820e120a-22650267
Date: Thu, 12 Jul 2007 17:53:18 GMT
Call-ID: a8d2b580-69616a60-1b-fac712ac@10.10.199.250
Supported: timer,replaces
Min-SE:  60
User-Agent: Cisco-CUCM7.1
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY, PUBLISH
CSeq: 102 INVITE
Max-Forwards: 70
Contact: <sip:2003@10.10.199.250:5060>
Expires: 180
Allow-Events: presence
Content-Type: application/sdp
Content-Length: 216

v=0
o=CiscoSystemsCCM-SIP 2000 2 IN IP4 10.10.199.250
s=SIP Call
c=IN IP4 10.10.199.251
t=0 0
m=audio 24936 RTP/AVP 0 101
a=rtpmap:0 PCMU/8000
a=ptime:20
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
```

[diagram] Call-ID:[prev][next]

[15] SIP/2.0 100 Trying

```
Via: SIP/2.0/UDP 10.10.199.250:5060;branch=z9hG4bK2049973286
From: <sip:1001@10.10.199.250>;tag=88fd35fa-b656-4fbc-bcf3-3fdd2ba559b3-22644516
To: <sip:2003@10.10.193.253>;tag=c5bc4d0f-1965-4b87-bd74-7e24820e120a-22650267
Date: Thu, 12 Jul 2007 17:53:18 GMT
Call-ID: a8d2b580-69616a60-1b-fac712ac@10.10.199.250
CSeq: 102 INVITE
Allow-Events: presence, kpml
Content-Length: 0
```

[diagram] Call-ID:[prev][next]

[16] SIP/2.0 200 OK

```
Via: SIP/2.0/UDP 10.10.199.250:5060;branch=z9hG4bK2049973286
From: <sip:1001@10.10.199.250>;tag=88fd35fa-b656-4fbc-bcf3-3fdd2ba559b3-22644516
To: <sip:2003@10.10.193.253>;tag=c5bc4d0f-1965-4b87-bd74-7e24820e120a-22650267
Date: Thu, 12 Jul 2007 17:53:18 GMT
Call-ID: a8d2b580-69616a60-1b-fac712ac@10.10.199.250
CSeq: 102 INVITE
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY, PUBLISH
Allow-Events: presence, kpml
Remote-Party-ID: <sip:2003@10.10.193.253>;party=called;screen=yes;privacy=off
Contact: <sip:2003@10.10.193.253:5060>
Supported: replaces
Content-Type: application/sdp
Content-Length: 216

v=0
o=CiscoSystemsCCM-SIP 2000 2 IN IP4 10.10.193.253
s=SIP Call
```

CISCO CONFIDENTIAL

```
c=IN IP4 10.10.199.238
t=0 0
m=audio 17122 RTP/AVP 0 101
a=rtpmap:0 PCMU/8000
a=ptime:20
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15

[diagram]   Call-ID:[prev][next]
[17] ACK sip:2003@10.10.193.253:5060 SIP/2.0
Via: SIP/2.0/UDP 10.10.199.250:5060;branch=z9hG4bK2158343c6f
From: <sip:1001@10.10.199.250>;tag=88fd35fa-b656-4fbc-bcf3-3fdd2ba559b3-22644516
To: <sip:2003@10.10.193.253>;tag=c5bc4d0f-1965-4b87-bd74-7e24820e120a-22650267
Date: Thu, 12 Jul 2007 17:53:18 GMT
Call-ID: a8d2b580-69616a60-1b-fac712ac@10.10.199.250
Max-Forwards: 70
CSeq: 102 ACK
Allow-Events: presence
Content-Length: 0

[diagram]   Call-ID:[prev][next]
[18] INVITE sip:2003@10.10.193.253:5060 SIP/2.0
Via: SIP/2.0/UDP 10.10.199.250:5060;branch=z9hG4bK22e4c2f42
Remote-Party-ID: <sip:1001@10.10.199.250>;party=calling;screen=yes;privacy=off
From: <sip:1001@10.10.199.250>;tag=88fd35fa-b656-4fbc-bcf3-3fdd2ba559b3-22644516
To: <sip:2003@10.10.193.253>;tag=c5bc4d0f-1965-4b87-bd74-7e24820e120a-22650267
Date: Thu, 12 Jul 2007 17:54:03 GMT
Call-ID: a8d2b580-69616a60-1b-fac712ac@10.10.199.250
Supported: timer,replaces
Min-SE:  60
User-Agent: Cisco-CUCM7.1
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY, PUBLISH
CSeq: 103 INVITE
Max-Forwards: 70
Contact: <sip:2003@10.10.199.250:5060>
Expires: 180
Allow-Events: presence
Content-Type: application/sdp
Content-Length: 216

v=0
o=CiscoSystemsCCM-SIP 2000 2 IN IP4 10.10.199.250
s=SIP Call
c=IN IP4 10.10.199.251
t=0 0
m=audio 24936 RTP/AVP 0 101
a=rtpmap:0 PCMU/8000
a=ptime:20
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15

[diagram]   Call-ID:[prev][next]
[19] SIP/2.0 100 Trying
Via: SIP/2.0/UDP 10.10.199.250:5060;branch=z9hG4bK22e4c2f42
From: <sip:1001@10.10.199.250>;tag=88fd35fa-b656-4fbc-bcf3-3fdd2ba559b3-22644516
To: <sip:2003@10.10.193.253>;tag=c5bc4d0f-1965-4b87-bd74-7e24820e120a-22650267
Date: Thu, 12 Jul 2007 17:54:03 GMT
Call-ID: a8d2b580-69616a60-1b-fac712ac@10.10.199.250
CSeq: 103 INVITE
Allow-Events: presence, kpml
Content-Length: 0

[diagram]   Call-ID:[prev][next]
[20] SIP/2.0 200 OK
Via: SIP/2.0/UDP 10.10.199.250:5060;branch=z9hG4bK22e4c2f42
From: <sip:1001@10.10.199.250>;tag=88fd35fa-b656-4fbc-bcf3-3fdd2ba559b3-22644516
To: <sip:2003@10.10.193.253>;tag=c5bc4d0f-1965-4b87-bd74-7e24820e120a-22650267
Date: Thu, 12 Jul 2007 17:54:03 GMT
Call-ID: a8d2b580-69616a60-1b-fac712ac@10.10.199.250
CSeq: 103 INVITE
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY, PUBLISH
Allow-Events: presence, kpml
Remote-Party-ID: <sip:2003@10.10.193.253>;party=called;screen=yes;privacy=off
Contact: <sip:2003@10.10.193.253:5060>
Supported: replaces
Content-Type: application/sdp
Content-Length: 216

v=0
o=CiscoSystemsCCM-SIP 2000 2 IN IP4 10.10.193.253
```

CISCO CONFIDENTIAL

```
s=SIP Call
c=IN IP4 10.10.199.238
t=0 0
m=audio 17122 RTP/AVP 0 101
a=rtpmap:0 PCMU/8000
a=ptime:20
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
```

[diagram] Call-ID:[prev][next]

```
[21] ACK sip:2003@10.10.193.253:5060 SIP/2.0
Via: SIP/2.0/UDP 10.10.199.250:5060;branch=z9hG4bK233989fca8
From: <sip:1001@10.10.199.250>;tag=88fd35fa-b656-4fbc-bcf3-3fdd2ba559b3-22644516
To: <sip:2003@10.10.193.253>;tag=c5bc4d0f-1965-4b87-bd74-7e24820e120a-22650267
Date: Thu, 12 Jul 2007 17:54:03 GMT
Call-ID: a8d2b580-69616a60-1b-fac712ac@10.10.199.250
Max-Forwards: 70
CSeq: 103 ACK
Allow-Events: presence
Content-Length: 0
```

[diagram] Call-ID:[prev][next]

```
[22] BYE sip:2003@10.10.193.253:5060 SIP/2.0
Via: SIP/2.0/UDP 10.10.199.250:5060;branch=z9hG4bK244a0d362e
From: <sip:1001@10.10.199.250>;tag=88fd35fa-b656-4fbc-bcf3-3fdd2ba559b3-22644516
To: <sip:2003@10.10.193.253>;tag=c5bc4d0f-1965-4b87-bd74-7e24820e120a-22650267
Date: Thu, 12 Jul 2007 17:54:03 GMT
Call-ID: a8d2b580-69616a60-1b-fac712ac@10.10.199.250
User-Agent: Cisco-CUCM7.1
Max-Forwards: 70
CSeq: 104 BYE
Content-Length: 0
```

[diagram] Call-ID:[prev][next]

```
[23] SIP/2.0 200 OK
Via: SIP/2.0/UDP 10.10.199.250:5060;branch=z9hG4bK244a0d362e
From: <sip:1001@10.10.199.250>;tag=88fd35fa-b656-4fbc-bcf3-3fdd2ba559b3-22644516
To: <sip:2003@10.10.193.253>;tag=c5bc4d0f-1965-4b87-bd74-7e24820e120a-22650267
Date: Thu, 12 Jul 2007 17:54:48 GMT
Call-ID: a8d2b580-69616a60-1b-fac712ac@10.10.199.250
CSeq: 104 BYE
Content-Length: 0
```

CISCO CONFIDENTIAL

12.3 Sip Trunk Call Preservation when "Cisco Unified CM" is the "Refresher"

Title: Sip Trunk Call Preservation when "Cisco Unified CM" is the "Refresher"

Description:

RemoteUA--siptrunk--Cisco Unified CM2---Cisoc Unified IP Phone

The scenario for Sip Trunk Call Preservation when "Cisco Unified CM" is the "Refresher" for the Session Timers and session refresh failure condition occurs.

The Cisco Unified CM's Sip Trunk tries to send the re-Invite for Session Refresh (retry times) and when no response is received back, it would be due to either RemoteUA being shutdown or network failure on some segment for the signaling path to RemoteUA. For best effort handling of this failure condition the Cisco Unified CM assumes later i.e it could be due to network failure on signaling path.

The signaling and media channel between calling & called party may not necessarily be established through the same network. So Cisco Unified CM makes an assumption that media path between RemoteUA and Cisco Unified IP Phone may stil be active, and it should'nt be interrupted until hangup from Cisco Unified IP Phone.

Thus SIP Trunk on Cisco Unified CM takes an action to preserve the call towards the call control side (i.e Cisco Unified IP Phone side).

This results in Cisco Unified IP Phone maintaining the media for an active call, and results in having the softkeys disabled so that feature requests may not be performed. Also "TEMP FAIL" is displayed on the Cisco Unified IP Phone.

Also the SIP Trunk sends a BYE on the sip dialog with remoteUA, so that any intermediate Call stateful Proxy servers can clear the state info for the clearing dialog. The 200 OK for BYE may not be received as network to remoteUA already got disconnected. Then sip trunk call instance clears itself as signaling connection was already disconnected.

CISCO CONFIDENTIAL

Configuration:

Node = RemoteUA, IP = 10.10.199.250

Node = Unified CM2, IP = 10.10.199.251

Phone = A, Line = 1001, IP = 10.10.199.130, Model = SCCP

Phone = B, Line = 2002, IP = 10.10.199.179, Model = SCCP

SIP Trunk between RemoteUA & Unified CM2 has route pattern 2.XXXX

Service Parameters Min-SE and SE values are changed to 120 value for both Call Managers.

Scenario:

Phone A DN 1001 calls Phone B DN 2002 over the SIP Trunk by dialing 22002

Phone B DN 2002 Answers

Phone A and Phone B talk for 2 and half minutes

Inbetween, RemoteUA fails to respond to Unified CM2's re-Invite for session-refresh

Phone A DN 1001 goes onHook

End of Scenario

CISCO CONFIDENTIAL

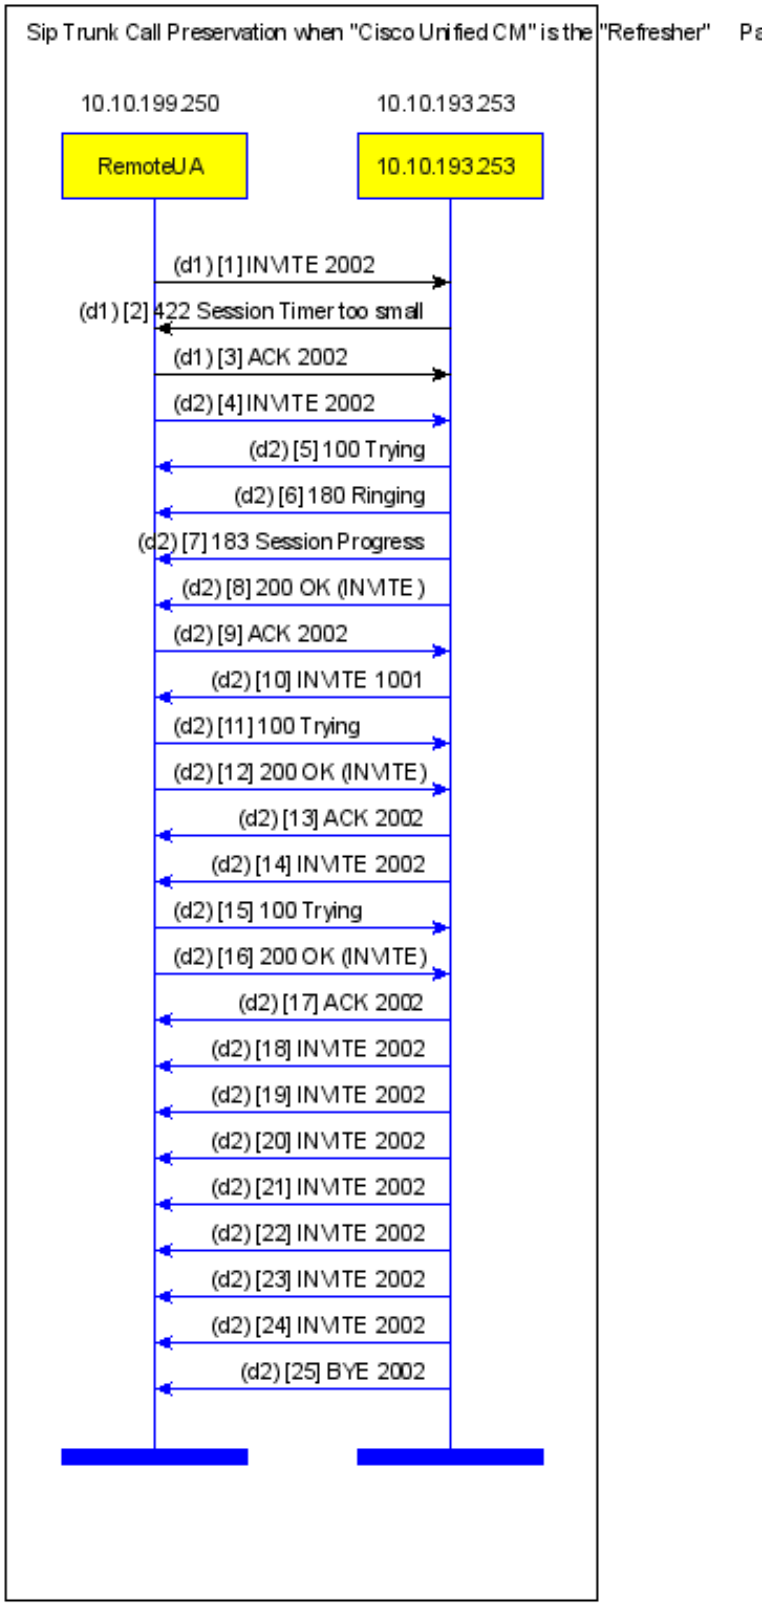

CISCO CONFIDENTIAL

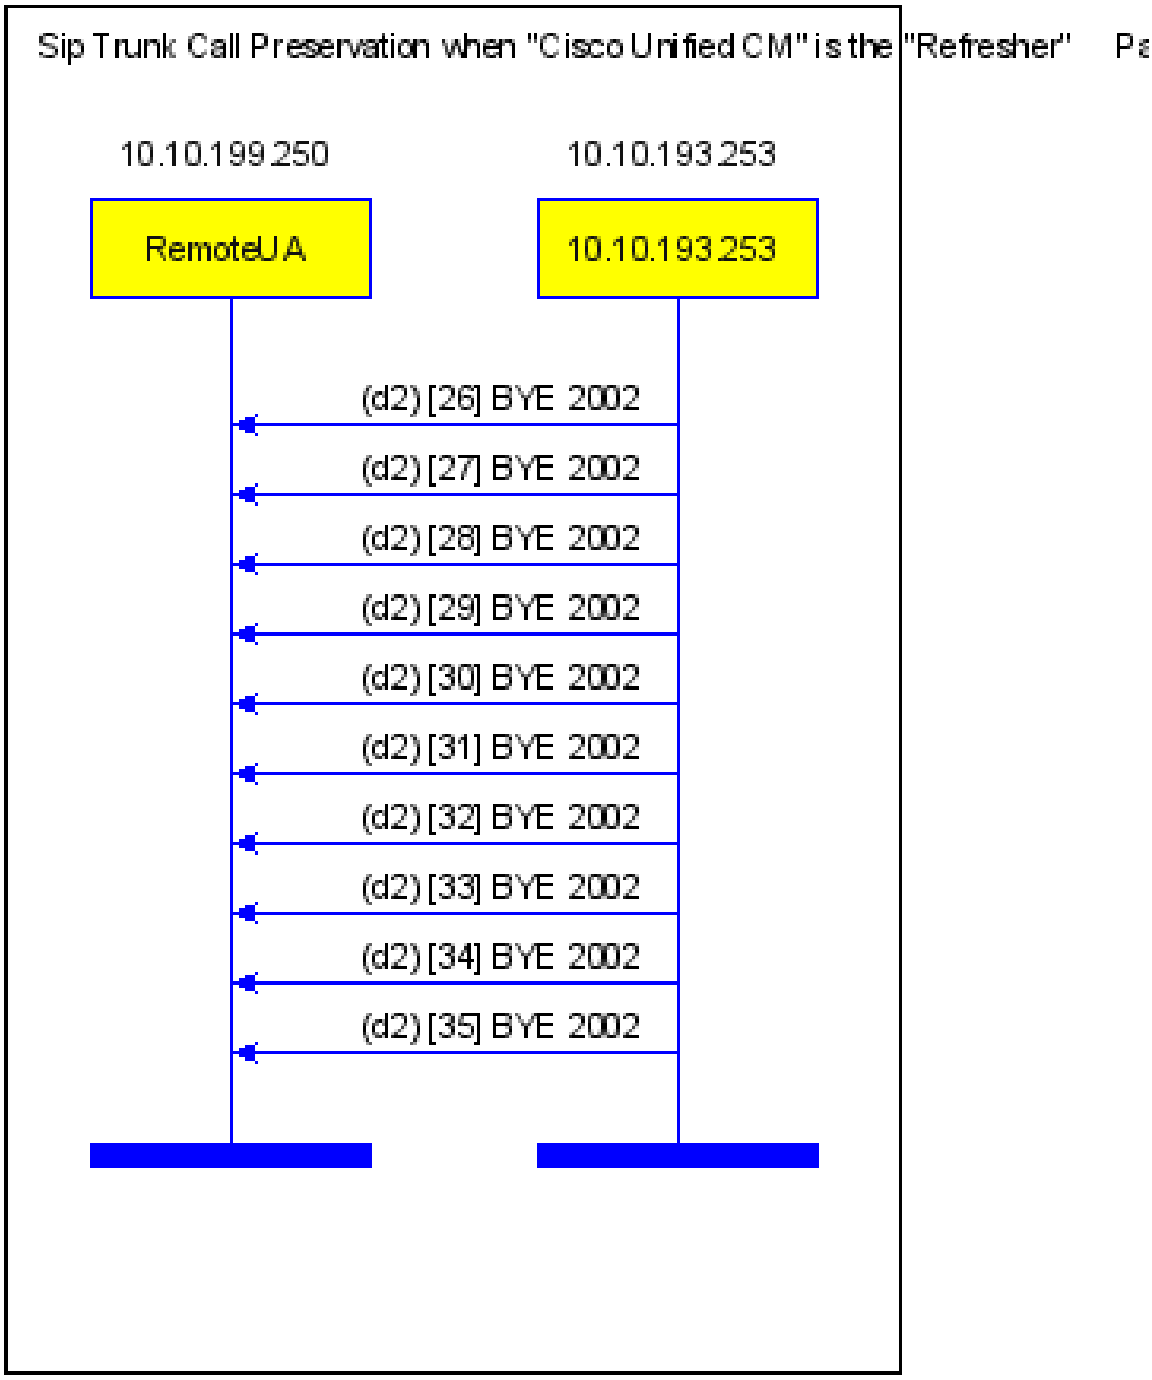

CISCO CONFIDENTIAL

[diagram] Call-ID:[prev][next]
[1] INVITE sip:2002@10.10.193.253:5060 SIP/2.0
Via: SIP/2.0/UDP 10.10.199.250:5060;branch=z9hG4bKe7e34f60a
Remote-Party-ID: <sip:1001@10.10.199.250>;party=calling;screen=yes;privacy=off
From: <sip:1001@10.10.199.250>;tag=88fd35fa-b656-4fbc-bcf3-3fdd2ba559b3-22360743
To: <sip:2002@10.10.193.253>
Date: Thu, 12 Jul 2007 16:41:22 GMT
Call-ID: b7b46a80-696159b2-25d-fac712ac@10.10.199.250
Supported: timer,replaces
Min-SE: 60
User-Agent: Cisco-CUCM7.1
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY, PUBLISH
CSeq: 101 INVITE
Contact: <sip:1001@10.10.199.250:5060>
Expires: 180
Allow-Events: presence
Session-Expires: 90
Max-Forwards: 70
Content-Length: 0

[diagram] Call-ID:[prev][next]
[2] SIP/2.0 422 Session Timer too small
Via: SIP/2.0/UDP 10.10.199.250:5060;branch=z9hG4bKe7e34f60a
From: <sip:1001@10.10.199.250>;tag=88fd35fa-b656-4fbc-bcf3-3fdd2ba559b3-22360743
To: <sip:2002@10.10.193.253>;tag=1984215675
Date: Thu, 12 Jul 2007 16:41:22 GMT
Call-ID: b7b46a80-696159b2-25d-fac712ac@10.10.199.250
CSeq: 101 INVITE
Allow-Events: presence
Min-SE: 120
Content-Length: 0

[diagram] Call-ID:[prev][next]
[3] ACK sip:2002@10.10.193.253:5060 SIP/2.0
Via: SIP/2.0/UDP 10.10.199.250:5060;branch=z9hG4bKe7e34f60a
From: <sip:1001@10.10.199.250>;tag=88fd35fa-b656-4fbc-bcf3-3fdd2ba559b3-22360743
To: <sip:2002@10.10.193.253>;tag=1984215675
Date: Thu, 12 Jul 2007 16:41:22 GMT
Call-ID: b7b46a80-696159b2-25d-fac712ac@10.10.199.250
Max-Forwards: 70
CSeq: 101 ACK
Allow-Events: presence
Content-Length: 0

[diagram] Call-ID:[prev][next]
[4] INVITE sip:2002@10.10.193.253:5060 SIP/2.0
Via: SIP/2.0/UDP 10.10.199.250:5060;branch=z9hG4bKf1ef587cf
Remote-Party-ID: <sip:1001@10.10.199.250>;party=calling;screen=yes;privacy=off
From: <sip:1001@10.10.199.250>;tag=88fd35fa-b656-4fbc-bcf3-3fdd2ba559b3-22360743
To: <sip:2002@10.10.193.253>
Date: Thu, 12 Jul 2007 16:41:22 GMT
Call-ID: b7b46a80-696159b2-25e-fac712ac@10.10.199.250
Supported: timer,replaces
User-Agent: Cisco-CUCM7.1
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY, PUBLISH
CSeq: 101 INVITE
Contact: <sip:1001@10.10.199.250:5060>
Expires: 180
Allow-Events: presence
Session-Expires: 120
Min-SE: 120
Max-Forwards: 70
Content-Length: 0

[diagram] Call-ID:[prev][next]
[5] SIP/2.0 100 Trying
Via: SIP/2.0/UDP 10.10.199.250:5060;branch=z9hG4bKf1ef587cf
From: <sip:1001@10.10.199.250>;tag=88fd35fa-b656-4fbc-bcf3-3fdd2ba559b3-22360743
To: <sip:2002@10.10.193.253>
Date: Thu, 12 Jul 2007 16:41:22 GMT
Call-ID: b7b46a80-696159b2-25e-fac712ac@10.10.199.250
CSeq: 101 INVITE
Allow-Events: presence
Content-Length: 0

[diagram] Call-ID:[prev][next]
[6] SIP/2.0 180 Ringing
Via: SIP/2.0/UDP 10.10.199.250:5060;branch=z9hG4bKf1ef587cf
From: <sip:1001@10.10.199.250>;tag=88fd35fa-b656-4fbc-bcf3-3fdd2ba559b3-22360743
To: <sip:2002@10.10.193.253>;tag=c5bc4d0f-1965-4b87-bd74-7e24820e120a-19517716

```
Date: Thu, 12 Jul 2007 16:41:22 GMT
Call-ID: b7b46a80-696159b2-25e-fac712ac@10.10.199.250
CSeq: 101 INVITE
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY, PUBLISH
Allow-Events: presence
Remote-Party-ID: <sip:2002@10.10.193.253>;party=called;screen=yes;privacy=off
Contact: <sip:2002@10.10.193.253:5060>
Content-Length: 0
```

[diagram] Call-ID:[prev][next]

[7] SIP/2.0 183 Session Progress

```
Via: SIP/2.0/UDP 10.10.199.250:5060;branch=z9hG4bKf1ef587cf
From: <sip:1001@10.10.199.250>;tag=88fd35fa-b656-4fbc-bcf3-3fdd2ba559b3-22360743
To: <sip:2002@10.10.193.253>;tag=c5bc4d0f-1965-4b87-bd74-7e24820e120a-19517716
Date: Thu, 12 Jul 2007 16:41:22 GMT
Call-ID: b7b46a80-696159b2-25e-fac712ac@10.10.199.250
CSeq: 101 INVITE
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY, PUBLISH
Allow-Events: presence, kpml
Remote-Party-ID: <sip:2002@10.10.193.253>;party=called;screen=yes;privacy=off
Contact: <sip:2002@10.10.193.253:5060>
Content-Type: application/sdp
Content-Length: 301

v=0
o=CiscoSystemsCCM-SIP 2000 1 IN IP4 10.10.193.253
s=SIP Call
c=IN IP4 10.10.199.238
t=0 0
m=audio 4000 RTP/AVP 0 8 18 101
a=rtpmap:0 PCMU/8000
a=ptime:20
a=rtpmap:8 PCMA/8000
a=ptime:20
a=rtpmap:18 G729/8000
a=ptime:20
a=sendonly
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
```

[diagram] Call-ID:[prev][next]

[8] SIP/2.0 200 OK

```
Via: SIP/2.0/UDP 10.10.199.250:5060;branch=z9hG4bKf1ef587cf
From: <sip:1001@10.10.199.250>;tag=88fd35fa-b656-4fbc-bcf3-3fdd2ba559b3-22360743
To: <sip:2002@10.10.193.253>;tag=c5bc4d0f-1965-4b87-bd74-7e24820e120a-19517716
Date: Thu, 12 Jul 2007 16:41:22 GMT
Call-ID: b7b46a80-696159b2-25e-fac712ac@10.10.199.250
CSeq: 101 INVITE
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY, PUBLISH
Allow-Events: presence, kpml
Remote-Party-ID: <sip:2002@10.10.193.253>;party=called;screen=yes;privacy=off
Contact: <sip:2002@10.10.193.253:5060>
Supported: replaces
Session-Expires:  120;refresher=uas
Require:  timer
Content-Type: application/sdp
Content-Length: 301

v=0
o=CiscoSystemsCCM-SIP 2000 1 IN IP4 10.10.193.253
s=SIP Call
c=IN IP4 10.10.199.238
t=0 0
m=audio 4000 RTP/AVP 0 8 18 101
a=rtpmap:0 PCMU/8000
a=ptime:20
a=rtpmap:8 PCMA/8000
a=ptime:20
a=rtpmap:18 G729/8000
a=ptime:20
a=sendonly
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
```

[diagram] Call-ID:[prev][next]

[9] ACK sip:2002@10.10.193.253:5060 SIP/2.0

```
Via: SIP/2.0/UDP 10.10.199.250:5060;branch=z9hG4bK1054a18a4
From: <sip:1001@10.10.199.250>;tag=88fd35fa-b656-4fbc-bcf3-3fdd2ba559b3-22360743
To: <sip:2002@10.10.193.253>;tag=c5bc4d0f-1965-4b87-bd74-7e24820e120a-19517716
Date: Thu, 12 Jul 2007 16:41:22 GMT
```

CISCO CONFIDENTIAL

```
Call-ID: b7b46a80-696159b2-25e-fac712ac@10.10.199.250
Max-Forwards: 70
CSeq: 101 ACK
Allow-Events: presence
Content-Type: application/sdp
Content-Length: 228

v=0
o=CiscoSystemsCCM-SIP 2000 1 IN IP4 10.10.199.250
s=SIP Call
c=IN IP4 10.10.199.251
t=0 0
m=audio 24026 RTP/AVP 0 101
a=rtpmap:0 PCMU/8000
a=ptime:20
a=recvonly
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
```

[diagram] Call-ID:[prev][next]

[10] INVITE sip:1001@10.10.199.250:5060 SIP/2.0

```
Via: SIP/2.0/UDP 10.10.193.253:5060;branch=z9hG4bK1772f1dfc1a
Remote-Party-ID: <sip:2002@10.10.193.253>;party=calling;screen=yes;privacy=off
From: <sip:2002@10.10.193.253>;tag=c5bc4d0f-1965-4b87-bd74-7e24820e120a-19517716
To: <sip:1001@10.10.199.250>;tag=88fd35fa-b656-4fbc-bcf3-3fdd2ba559b3-22360743
Date: Thu, 12 Jul 2007 16:41:25 GMT
Call-ID: b7b46a80-696159b2-25e-fac712ac@10.10.199.250
Supported: 100rel,timer,replaces
Min-SE:  120
Cisco-Guid: 3082054272-1767987634-6823-4257288876
User-Agent: Cisco-CUCM7.1
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY, PUBLISH
CSeq: 101 INVITE
Max-Forwards: 70
Contact: <sip:2002@10.10.193.253:5060>
Expires: 180
Allow-Events: presence, kpml
Session-Expires:  120;refresher=uac
Content-Type: application/sdp
Content-Length: 216

v=0
o=CiscoSystemsCCM-SIP 2000 2 IN IP4 10.10.193.253
s=SIP Call
c=IN IP4 10.10.199.238
t=0 0
m=audio 32592 RTP/AVP 0 101
a=rtpmap:0 PCMU/8000
a=ptime:20
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
```

[diagram] Call-ID:[prev][next]

[11] SIP/2.0 100 Trying

```
Via: SIP/2.0/UDP 10.10.193.253:5060;branch=z9hG4bK1772f1dfc1a
From: <sip:2002@10.10.193.253>;tag=c5bc4d0f-1965-4b87-bd74-7e24820e120a-19517716
To: <sip:1001@10.10.199.250>;tag=88fd35fa-b656-4fbc-bcf3-3fdd2ba559b3-22360743
Date: Thu, 12 Jul 2007 16:41:25 GMT
Call-ID: b7b46a80-696159b2-25e-fac712ac@10.10.199.250
CSeq: 101 INVITE
Allow-Events: presence
Content-Length: 0
```

[diagram] Call-ID:[prev][next]

[12] SIP/2.0 200 OK

```
Via: SIP/2.0/UDP 10.10.193.253:5060;branch=z9hG4bK1772f1dfc1a
From: <sip:2002@10.10.193.253>;tag=c5bc4d0f-1965-4b87-bd74-7e24820e120a-19517716
To: <sip:1001@10.10.199.250>;tag=88fd35fa-b656-4fbc-bcf3-3fdd2ba559b3-22360743
Date: Thu, 12 Jul 2007 16:41:25 GMT
Call-ID: b7b46a80-696159b2-25e-fac712ac@10.10.199.250
CSeq: 101 INVITE
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY, PUBLISH
Allow-Events: presence
Remote-Party-ID: <sip:1001@10.10.199.250>;party=called;screen=yes;privacy=off
Contact: <sip:2002@10.10.199.250:5060>
Supported: replaces
Session-Expires:  120;refresher=uac
Require:  timer
Content-Type: application/sdp
Content-Length: 216
```

CISCO CONFIDENTIAL

```
v=0
o=CiscoSystemsCCM-SIP 2000 2 IN IP4 10.10.199.250
s=SIP Call
c=IN IP4 10.10.199.251
t=0 0
m=audio 24026 RTP/AVP 0 101
a=rtpmap:0 PCMU/8000
a=ptime:20
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
```

[diagram] Call-ID:[prev][next]

```
[13] ACK sip:2002@10.10.199.250:5060 SIP/2.0
Via: SIP/2.0/UDP 10.10.193.253:5060;branch=z9hG4bK1786e8f14c2
From: <sip:2002@10.10.193.253>;tag=c5bc4d0f-1965-4b87-bd74-7e24820e120a-19517716
To: <sip:1001@10.10.199.250>;tag=88fd35fa-b656-4fbc-bcf3-3fdd2ba559b3-22360743
Date: Thu, 12 Jul 2007 16:41:25 GMT
Call-ID: b7b46a80-696159b2-25e-fac712ac@10.10.199.250
Max-Forwards: 70
CSeq: 101 ACK
Allow-Events: presence, kpml
Content-Length: 0
```

[diagram] Call-ID:[prev][next]

```
[14] INVITE sip:2002@10.10.199.250:5060 SIP/2.0
Via: SIP/2.0/UDP 10.10.193.253:5060;branch=z9hG4bK17945b34ec3
Remote-Party-ID: <sip:2002@10.10.193.253>;party=calling;screen=yes;privacy=off
From: <sip:2002@10.10.193.253>;tag=c5bc4d0f-1965-4b87-bd74-7e24820e120a-19517716
To: <sip:1001@10.10.199.250>;tag=88fd35fa-b656-4fbc-bcf3-3fdd2ba559b3-22360743
Date: Thu, 12 Jul 2007 16:42:25 GMT
Call-ID: b7b46a80-696159b2-25e-fac712ac@10.10.199.250
Supported: 100rel,timer,replaces
Min-SE:  120
Cisco-Guid: 3082054272-1767987634-6823-4257288876
User-Agent: Cisco-CUCM7.1
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY, PUBLISH
CSeq: 102 INVITE
Max-Forwards: 70
Contact: <sip:2002@10.10.193.253:5060>
Expires: 180
Allow-Events: presence, kpml
Session-Expires:  120;refresher=uac
Content-Type: application/sdp
Content-Length: 216

v=0
o=CiscoSystemsCCM-SIP 2000 2 IN IP4 10.10.193.253
s=SIP Call
c=IN IP4 10.10.199.238
t=0 0
m=audio 32592 RTP/AVP 0 101
a=rtpmap:0 PCMU/8000
a=ptime:20
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
```

[diagram] Call-ID:[prev][next]

```
[15] SIP/2.0 100 Trying
Via: SIP/2.0/UDP 10.10.193.253:5060;branch=z9hG4bK17945b34ec3
From: <sip:2002@10.10.193.253>;tag=c5bc4d0f-1965-4b87-bd74-7e24820e120a-19517716
To: <sip:1001@10.10.199.250>;tag=88fd35fa-b656-4fbc-bcf3-3fdd2ba559b3-22360743
Date: Thu, 12 Jul 2007 16:42:25 GMT
Call-ID: b7b46a80-696159b2-25e-fac712ac@10.10.199.250
CSeq: 102 INVITE
Allow-Events: presence
Content-Length: 0
```

[diagram] Call-ID:[prev][next]

```
[16] SIP/2.0 200 OK
Via: SIP/2.0/UDP 10.10.193.253:5060;branch=z9hG4bK17945b34ec3
From: <sip:2002@10.10.193.253>;tag=c5bc4d0f-1965-4b87-bd74-7e24820e120a-19517716
To: <sip:1001@10.10.199.250>;tag=88fd35fa-b656-4fbc-bcf3-3fdd2ba559b3-22360743
Date: Thu, 12 Jul 2007 16:42:25 GMT
Call-ID: b7b46a80-696159b2-25e-fac712ac@10.10.199.250
CSeq: 102 INVITE
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY, PUBLISH
Allow-Events: presence
Remote-Party-ID: <sip:1001@10.10.199.250>;party=called;screen=yes;privacy=off
Contact: <sip:2002@10.10.199.250:5060>
```

CISCO CONFIDENTIAL

```
Supported: replaces
Session-Expires:  120;refresher=uac
Require:  timer
Content-Type: application/sdp
Content-Length: 216

v=0
o=CiscoSystemsCCM-SIP 2000 2 IN IP4 10.10.199.250
s=SIP Call
c=IN IP4 10.10.199.251
t=0 0
m=audio 24026 RTP/AVP 0 101
a=rtpmap:0 PCMU/8000
a=ptime:20
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
```

[diagram] Call-ID:[prev][next]

```
[17] ACK sip:2002@10.10.199.250:5060 SIP/2.0
Via: SIP/2.0/UDP 10.10.193.253:5060;branch=z9hG4bK17a1e3829b8
From: <sip:2002@10.10.193.253>;tag=c5bc4d0f-1965-4b87-bd74-7e24820e120a-19517716
To: <sip:1001@10.10.199.250>;tag=88fd35fa-b656-4fbc-bcf3-3fdd2ba559b3-22360743
Date: Thu, 12 Jul 2007 16:42:25 GMT
Call-ID: b7b46a80-696159b2-25e-fac712ac@10.10.199.250
Max-Forwards: 70
CSeq: 102 ACK
Allow-Events: presence, kpml
Content-Length: 0
```

[diagram] Call-ID:[prev][next]

```
[18] INVITE sip:2002@10.10.199.250:5060 SIP/2.0
Via: SIP/2.0/UDP 10.10.193.253:5060;branch=z9hG4bK17b610bad4c
Remote-Party-ID: <sip:2002@10.10.193.253>;party=calling;screen=yes;privacy=off
From: <sip:2002@10.10.193.253>;tag=c5bc4d0f-1965-4b87-bd74-7e24820e120a-19517716
To: <sip:1001@10.10.199.250>;tag=88fd35fa-b656-4fbc-bcf3-3fdd2ba559b3-22360743
Date: Thu, 12 Jul 2007 16:43:25 GMT
Call-ID: b7b46a80-696159b2-25e-fac712ac@10.10.199.250
Supported: 100rel,timer,replaces
Min-SE:  120
Cisco-Guid: 3082054272-1767987634-6823-4257288876
User-Agent: Cisco-CUCM7.1
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY, PUBLISH
CSeq: 103 INVITE
Max-Forwards: 70
Contact: <sip:2002@10.10.193.253:5060>
Expires: 180
Allow-Events: presence, kpml
Session-Expires:  120;refresher=uac
Content-Type: application/sdp
Content-Length: 216

v=0
o=CiscoSystemsCCM-SIP 2000 2 IN IP4 10.10.193.253
s=SIP Call
c=IN IP4 10.10.199.238
t=0 0
m=audio 32592 RTP/AVP 0 101
a=rtpmap:0 PCMU/8000
a=ptime:20
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
```

[diagram] Call-ID:[prev][next]

```
[19] INVITE sip:2002@10.10.199.250:5060 SIP/2.0
Via: SIP/2.0/UDP 10.10.193.253:5060;branch=z9hG4bK17b610bad4c
Remote-Party-ID: <sip:2002@10.10.193.253>;party=calling;screen=yes;privacy=off
From: <sip:2002@10.10.193.253>;tag=c5bc4d0f-1965-4b87-bd74-7e24820e120a-19517716
To: <sip:1001@10.10.199.250>;tag=88fd35fa-b656-4fbc-bcf3-3fdd2ba559b3-22360743
Date: Thu, 12 Jul 2007 16:43:25 GMT
Call-ID: b7b46a80-696159b2-25e-fac712ac@10.10.199.250
Supported: 100rel,timer,replaces
Min-SE:  120
Cisco-Guid: 3082054272-1767987634-6823-4257288876
User-Agent: Cisco-CUCM7.1
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY, PUBLISH
CSeq: 103 INVITE
Max-Forwards: 70
Contact: <sip:2002@10.10.193.253:5060>
Expires: 180
Allow-Events: presence, kpml
```

CISCO CONFIDENTIAL

```
Session-Expires:  120;refresher=uac
Content-Type: application/sdp
Content-Length: 216

v=0
o=CiscoSystemsCCM-SIP 2000 2 IN IP4 10.10.193.253
s=SIP Call
c=IN IP4 10.10.199.238
t=0 0
m=audio 32592 RTP/AVP 0 101
a=rtpmap:0 PCMU/8000
a=ptime:20
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
```

[diagram] Call-ID:[prev][next]

```
[20] INVITE sip:2002@10.10.199.250:5060 SIP/2.0
Via: SIP/2.0/UDP 10.10.193.253:5060;branch=z9hG4bK17b610bad4c
Remote-Party-ID: <sip:2002@10.10.193.253>;party=calling;screen=yes;privacy=off
From: <sip:2002@10.10.193.253>;tag=c5bc4d0f-1965-4b87-bd74-7e24820e120a-19517716
To: <sip:1001@10.10.199.250>;tag=88fd35fa-b656-4fbc-bcf3-3fdd2ba559b3-22360743
Date: Thu, 12 Jul 2007 16:43:26 GMT
Call-ID: b7b46a80-696159b2-25e-fac712ac@10.10.199.250
Supported: 100rel,timer,replaces
Min-SE:  120
Cisco-Guid: 3082054272-1767987634-6823-4257288876
User-Agent: Cisco-CUCM7.1
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY, PUBLISH
CSeq: 103 INVITE
Max-Forwards: 70
Contact: <sip:2002@10.10.193.253:5060>
Expires: 180
Allow-Events: presence, kpml
Session-Expires:  120;refresher=uac
Content-Type: application/sdp
Content-Length: 216

v=0
o=CiscoSystemsCCM-SIP 2000 2 IN IP4 10.10.193.253
s=SIP Call
c=IN IP4 10.10.199.238
t=0 0
m=audio 32592 RTP/AVP 0 101
a=rtpmap:0 PCMU/8000
a=ptime:20
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
```

[diagram] Call-ID:[prev][next]

```
[21] INVITE sip:2002@10.10.199.250:5060 SIP/2.0
Via: SIP/2.0/UDP 10.10.193.253:5060;branch=z9hG4bK17b610bad4c
Remote-Party-ID: <sip:2002@10.10.193.253>;party=calling;screen=yes;privacy=off
From: <sip:2002@10.10.193.253>;tag=c5bc4d0f-1965-4b87-bd74-7e24820e120a-19517716
To: <sip:1001@10.10.199.250>;tag=88fd35fa-b656-4fbc-bcf3-3fdd2ba559b3-22360743
Date: Thu, 12 Jul 2007 16:43:28 GMT
Call-ID: b7b46a80-696159b2-25e-fac712ac@10.10.199.250
Supported: 100rel,timer,replaces
Min-SE:  120
Cisco-Guid: 3082054272-1767987634-6823-4257288876
User-Agent: Cisco-CUCM7.1
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY, PUBLISH
CSeq: 103 INVITE
Max-Forwards: 70
Contact: <sip:2002@10.10.193.253:5060>
Expires: 180
Allow-Events: presence, kpml
Session-Expires:  120;refresher=uac
Content-Type: application/sdp
Content-Length: 216

v=0
o=CiscoSystemsCCM-SIP 2000 2 IN IP4 10.10.193.253
s=SIP Call
c=IN IP4 10.10.199.238
t=0 0
m=audio 32592 RTP/AVP 0 101
a=rtpmap:0 PCMU/8000
a=ptime:20
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
```

CISCO CONFIDENTIAL

[diagram] Call-ID:[prev][next]
[22] INVITE sip:2002@10.10.199.250:5060 SIP/2.0
Via: SIP/2.0/UDP 10.10.193.253:5060;branch=z9hG4bK17b610bad4c
Remote-Party-ID: <sip:2002@10.10.193.253>;party=calling;screen=yes;privacy=off
From: <sip:2002@10.10.193.253>;tag=c5bc4d0f-1965-4b87-bd74-7e24820e120a-19517716
To: <sip:1001@10.10.199.250>;tag=88fd35fa-b656-4fbc-bcf3-3fdd2ba559b3-22360743
Date: Thu, 12 Jul 2007 16:43:32 GMT
Call-ID: b7b46a80-696159b2-25e-fac712ac@10.10.199.250
Supported: 100rel,timer,replaces
Min-SE: 120
Cisco-Guid: 3082054272-1767987634-6823-4257288876
User-Agent: Cisco-CUCM7.1
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY, PUBLISH
CSeq: 103 INVITE
Max-Forwards: 70
Contact: <sip:2002@10.10.193.253:5060>
Expires: 180
Allow-Events: presence, kpml
Session-Expires: 120;refresher=uac
Content-Type: application/sdp
Content-Length: 216

v=0
o=CiscoSystemsCCM-SIP 2000 2 IN IP4 10.10.193.253
s=SIP Call
c=IN IP4 10.10.199.238
t=0 0
m=audio 32592 RTP/AVP 0 101
a=rtpmap:0 PCMU/8000
a=ptime:20
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15

[diagram] Call-ID:[prev][next]
[23] INVITE sip:2002@10.10.199.250:5060 SIP/2.0
Via: SIP/2.0/UDP 10.10.193.253:5060;branch=z9hG4bK17b610bad4c
Remote-Party-ID: <sip:2002@10.10.193.253>;party=calling;screen=yes;privacy=off
From: <sip:2002@10.10.193.253>;tag=c5bc4d0f-1965-4b87-bd74-7e24820e120a-19517716
To: <sip:1001@10.10.199.250>;tag=88fd35fa-b656-4fbc-bcf3-3fdd2ba559b3-22360743
Date: Thu, 12 Jul 2007 16:43:40 GMT
Call-ID: b7b46a80-696159b2-25e-fac712ac@10.10.199.250
Supported: 100rel,timer,replaces
Min-SE: 120
Cisco-Guid: 3082054272-1767987634-6823-4257288876
User-Agent: Cisco-CUCM7.1
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY, PUBLISH
CSeq: 103 INVITE
Max-Forwards: 70
Contact: <sip:2002@10.10.193.253:5060>
Expires: 180
Allow-Events: presence, kpml
Session-Expires: 120;refresher=uac
Content-Type: application/sdp
Content-Length: 216

v=0
o=CiscoSystemsCCM-SIP 2000 2 IN IP4 10.10.193.253
s=SIP Call
c=IN IP4 10.10.199.238
t=0 0
m=audio 32592 RTP/AVP 0 101
a=rtpmap:0 PCMU/8000
a=ptime:20
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15

[diagram] Call-ID:[prev][next]
[24] INVITE sip:2002@10.10.199.250:5060 SIP/2.0
Via: SIP/2.0/UDP 10.10.193.253:5060;branch=z9hG4bK17b610bad4c
Remote-Party-ID: <sip:2002@10.10.193.253>;party=calling;screen=yes;privacy=off
From: <sip:2002@10.10.193.253>;tag=c5bc4d0f-1965-4b87-bd74-7e24820e120a-19517716
To: <sip:1001@10.10.199.250>;tag=88fd35fa-b656-4fbc-bcf3-3fdd2ba559b3-22360743
Date: Thu, 12 Jul 2007 16:43:56 GMT
Call-ID: b7b46a80-696159b2-25e-fac712ac@10.10.199.250
Supported: 100rel,timer,replaces
Min-SE: 120
Cisco-Guid: 3082054272-1767987634-6823-4257288876
User-Agent: Cisco-CUCM7.1
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY, PUBLISH

CISCO CONFIDENTIAL

```
CSeq: 103 INVITE
Max-Forwards: 70
Contact: <sip:2002@10.10.193.253:5060>
Expires: 180
Allow-Events: presence, kpml
Session-Expires:  120;refresher=uac
Content-Type: application/sdp
Content-Length: 216

v=0
o=CiscoSystemsCCM-SIP 2000 2 IN IP4 10.10.193.253
s=SIP Call
c=IN IP4 10.10.199.238
t=0 0
m=audio 32592 RTP/AVP 0 101
a=rtpmap:0 PCMU/8000
a=ptime:20
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
```

[diagram] Call-ID:[prev][next]

```
[25] BYE sip:2002@10.10.199.250:5060 SIP/2.0
Via: SIP/2.0/UDP 10.10.193.253:5060;branch=z9hG4bK17c2d18d34d
From: <sip:2002@10.10.193.253>;tag=c5bc4d0f-1965-4b87-bd74-7e24820e120a-19517716
To: <sip:1001@10.10.199.250>;tag=88fd35fa-b656-4fbc-bcf3-3fdd2ba559b3-22360743
Date: Thu, 12 Jul 2007 16:43:56 GMT
Call-ID: b7b46a80-696159b2-25e-fac712ac@10.10.199.250
User-Agent: Cisco-CUCM7.1
Max-Forwards: 70
CSeq: 104 BYE
Reason: Q.850;cause=86
Content-Length: 0
```

[diagram] Call-ID:[prev][next]

```
[26] BYE sip:2002@10.10.199.250:5060 SIP/2.0
Via: SIP/2.0/UDP 10.10.193.253:5060;branch=z9hG4bK17c2d18d34d
From: <sip:2002@10.10.193.253>;tag=c5bc4d0f-1965-4b87-bd74-7e24820e120a-19517716
To: <sip:1001@10.10.199.250>;tag=88fd35fa-b656-4fbc-bcf3-3fdd2ba559b3-22360743
Date: Thu, 12 Jul 2007 16:43:56 GMT
Call-ID: b7b46a80-696159b2-25e-fac712ac@10.10.199.250
User-Agent: Cisco-CUCM7.1
Max-Forwards: 70
CSeq: 104 BYE
Reason: Q.850;cause=86
Content-Length: 0
```

[diagram] Call-ID:[prev][next]

```
[27] BYE sip:2002@10.10.199.250:5060 SIP/2.0
Via: SIP/2.0/UDP 10.10.193.253:5060;branch=z9hG4bK17c2d18d34d
From: <sip:2002@10.10.193.253>;tag=c5bc4d0f-1965-4b87-bd74-7e24820e120a-19517716
To: <sip:1001@10.10.199.250>;tag=88fd35fa-b656-4fbc-bcf3-3fdd2ba559b3-22360743
Date: Thu, 12 Jul 2007 16:43:56 GMT
Call-ID: b7b46a80-696159b2-25e-fac712ac@10.10.199.250
User-Agent: Cisco-CUCM7.1
Max-Forwards: 70
CSeq: 104 BYE
Reason: Q.850;cause=86
Content-Length: 0
```

[diagram] Call-ID:[prev][next]

```
[28] BYE sip:2002@10.10.199.250:5060 SIP/2.0
Via: SIP/2.0/UDP 10.10.193.253:5060;branch=z9hG4bK17c2d18d34d
From: <sip:2002@10.10.193.253>;tag=c5bc4d0f-1965-4b87-bd74-7e24820e120a-19517716
To: <sip:1001@10.10.199.250>;tag=88fd35fa-b656-4fbc-bcf3-3fdd2ba559b3-22360743
Date: Thu, 12 Jul 2007 16:43:56 GMT
Call-ID: b7b46a80-696159b2-25e-fac712ac@10.10.199.250
User-Agent: Cisco-CUCM7.1
Max-Forwards: 70
CSeq: 104 BYE
Reason: Q.850;cause=86
Content-Length: 0
```

[diagram] Call-ID:[prev][next]

```
[29] BYE sip:2002@10.10.199.250:5060 SIP/2.0
Via: SIP/2.0/UDP 10.10.193.253:5060;branch=z9hG4bK17c2d18d34d
From: <sip:2002@10.10.193.253>;tag=c5bc4d0f-1965-4b87-bd74-7e24820e120a-19517716
To: <sip:1001@10.10.199.250>;tag=88fd35fa-b656-4fbc-bcf3-3fdd2ba559b3-22360743
Date: Thu, 12 Jul 2007 16:43:56 GMT
Call-ID: b7b46a80-696159b2-25e-fac712ac@10.10.199.250
User-Agent: Cisco-CUCM7.1
```

CISCO CONFIDENTIAL

```
Max-Forwards: 70
CSeq: 104 BYE
Reason: Q.850;cause=86
Content-Length: 0
```

[diagram] Call-ID:[prev][next]

[30] BYE sip:2002@10.10.199.250:5060 SIP/2.0

```
Via: SIP/2.0/UDP 10.10.193.253:5060;branch=z9hG4bK17c2d18d34d
From: <sip:2002@10.10.193.253>;tag=c5bc4d0f-1965-4b87-bd74-7e24820e120a-19517716
To: <sip:1001@10.10.199.250>;tag=88fd35fa-b656-4fbc-bcf3-3fdd2ba559b3-22360743
Date: Thu, 12 Jul 2007 16:43:56 GMT
Call-ID: b7b46a80-696159b2-25e-fac712ac@10.10.199.250
User-Agent: Cisco-CUCM7.1
Max-Forwards: 70
CSeq: 104 BYE
Reason: Q.850;cause=86
Content-Length: 0
```

[diagram] Call-ID:[prev][next]

[31] BYE sip:2002@10.10.199.250:5060 SIP/2.0

```
Via: SIP/2.0/UDP 10.10.193.253:5060;branch=z9hG4bK17c2d18d34d
From: <sip:2002@10.10.193.253>;tag=c5bc4d0f-1965-4b87-bd74-7e24820e120a-19517716
To: <sip:1001@10.10.199.250>;tag=88fd35fa-b656-4fbc-bcf3-3fdd2ba559b3-22360743
Date: Thu, 12 Jul 2007 16:43:56 GMT
Call-ID: b7b46a80-696159b2-25e-fac712ac@10.10.199.250
User-Agent: Cisco-CUCM7.1
Max-Forwards: 70
CSeq: 104 BYE
Reason: Q.850;cause=86
Content-Length: 0
```

[diagram] Call-ID:[prev][next]

[32] BYE sip:2002@10.10.199.250:5060 SIP/2.0

```
Via: SIP/2.0/UDP 10.10.193.253:5060;branch=z9hG4bK17c2d18d34d
From: <sip:2002@10.10.193.253>;tag=c5bc4d0f-1965-4b87-bd74-7e24820e120a-19517716
To: <sip:1001@10.10.199.250>;tag=88fd35fa-b656-4fbc-bcf3-3fdd2ba559b3-22360743
Date: Thu, 12 Jul 2007 16:43:56 GMT
Call-ID: b7b46a80-696159b2-25e-fac712ac@10.10.199.250
User-Agent: Cisco-CUCM7.1
Max-Forwards: 70
CSeq: 104 BYE
Reason: Q.850;cause=86
Content-Length: 0
```

[diagram] Call-ID:[prev][next]

[33] BYE sip:2002@10.10.199.250:5060 SIP/2.0

```
Via: SIP/2.0/UDP 10.10.193.253:5060;branch=z9hG4bK17c2d18d34d
From: <sip:2002@10.10.193.253>;tag=c5bc4d0f-1965-4b87-bd74-7e24820e120a-19517716
To: <sip:1001@10.10.199.250>;tag=88fd35fa-b656-4fbc-bcf3-3fdd2ba559b3-22360743
Date: Thu, 12 Jul 2007 16:43:56 GMT
Call-ID: b7b46a80-696159b2-25e-fac712ac@10.10.199.250
User-Agent: Cisco-CUCM7.1
Max-Forwards: 70
CSeq: 104 BYE
Reason: Q.850;cause=86
Content-Length: 0
```

[diagram] Call-ID:[prev][next]

[34] BYE sip:2002@10.10.199.250:5060 SIP/2.0

```
Via: SIP/2.0/UDP 10.10.193.253:5060;branch=z9hG4bK17c2d18d34d
From: <sip:2002@10.10.193.253>;tag=c5bc4d0f-1965-4b87-bd74-7e24820e120a-19517716
To: <sip:1001@10.10.199.250>;tag=88fd35fa-b656-4fbc-bcf3-3fdd2ba559b3-22360743
Date: Thu, 12 Jul 2007 16:43:56 GMT
Call-ID: b7b46a80-696159b2-25e-fac712ac@10.10.199.250
User-Agent: Cisco-CUCM7.1
Max-Forwards: 70
CSeq: 104 BYE
Reason: Q.850;cause=86
Content-Length: 0
```

[diagram] Call-ID:[prev][next]

[35] BYE sip:2002@10.10.199.250:5060 SIP/2.0

```
Via: SIP/2.0/UDP 10.10.193.253:5060;branch=z9hG4bK17c2d18d34d
From: <sip:2002@10.10.193.253>;tag=c5bc4d0f-1965-4b87-bd74-7e24820e120a-19517716
To: <sip:1001@10.10.199.250>;tag=88fd35fa-b656-4fbc-bcf3-3fdd2ba559b3-22360743
Date: Thu, 12 Jul 2007 16:43:56 GMT
Call-ID: b7b46a80-696159b2-25e-fac712ac@10.10.199.250
User-Agent: Cisco-CUCM7.1
Max-Forwards: 70
CSeq: 104 BYE
```

CISCO CONFIDENTIAL

```
Reason: Q.850;cause=86
Content-Length: 0
```

CISCO CONFIDENTIAL

12.4 Sip Trunk Call Preservation when "Cisco Unified CM" is the "Non-Refresher"

Title: Sip Trunk Call Preservation when "Cisco Unified CM" is the "Non-Refresher"

Description:
Cisco Unified IP Phone---Cisco Unified CM--siptrunk---RemoteUA

The scenario for Sip Trunk Call Preservation when "Cisco Unified CM" is the "Non-Refresher" for the
Session Timers and session refresh failure condition occurs.

The Cisco Unified Cm's Sip Trunk detects that session refresh isn't received in the negotiated
duration, it would be due to either RemoteUA being shutdown or network failure on some segment for
the signaling path to RemoteUA. For best effort handling of this failure condition the Cisco
Unified CM assumes later i.e it could be due to network failure on signaling path.

The signaling and media channel between calling & called party may not necessarily be
established through the same network. So Cisco Unified CM makes an assumption that media path
between RemoteUA and Cisco Unified IP Phone may still be active, and it shouldn't be interrupted.

Thus SIP Trunk on Cisco Unified CM takes an action to preserve the call towards the call control
side (i.e Cisco Unified IP Phone side). This results in Cisco Unified IP Phone maintaining the
media for an active call, and results in having the softkeys disabled so that feature requests may
not be performed. Also "TEMP FAIL" is displayed on the Cisco Unified IP Phone.

Also the SIP Trunk sends a BYE on the sip dialog with remoteUA, so that any intermediate Call
stateful Proxy servers can clear the state info for the clearing dialog. The 200 OK for BYE may not
be received as network to remoteUA already got disconnected. Then sip trunk call instance clears
itself as signaling connection was already disconnected.

Configuration:

CISCO CONFIDENTIAL

Node = Unified CM1, IP = 10.10.199.250
Node = RemoteUA, IP = 10.10.199.251

Phone = A, Line = 1001, IP = 10.10.199.130, Model = SCCP
Phone = B, Line = 2002, IP = 10.10.199.179, Model = SCCP

SIP Trunk between RemoteUA & Unified CM2 has route pattern 2.XXXX
Service Parameters Min-SE and SE values are changed to 120 value for both Call Managers.

Scenario:
Phone A DN 1001 calls Phone B DN 2002 over the SIP Trunk by dialing 22002
Phone B DN 2002 Answers
Phone A and Phone B talk for 2 and half minutes
Inbetween, RemoteUA fails to send re-Invite for session-refresh.
Phone A DN 1001 goes onHook
End of Scenario

CISCO CONFIDENTIAL

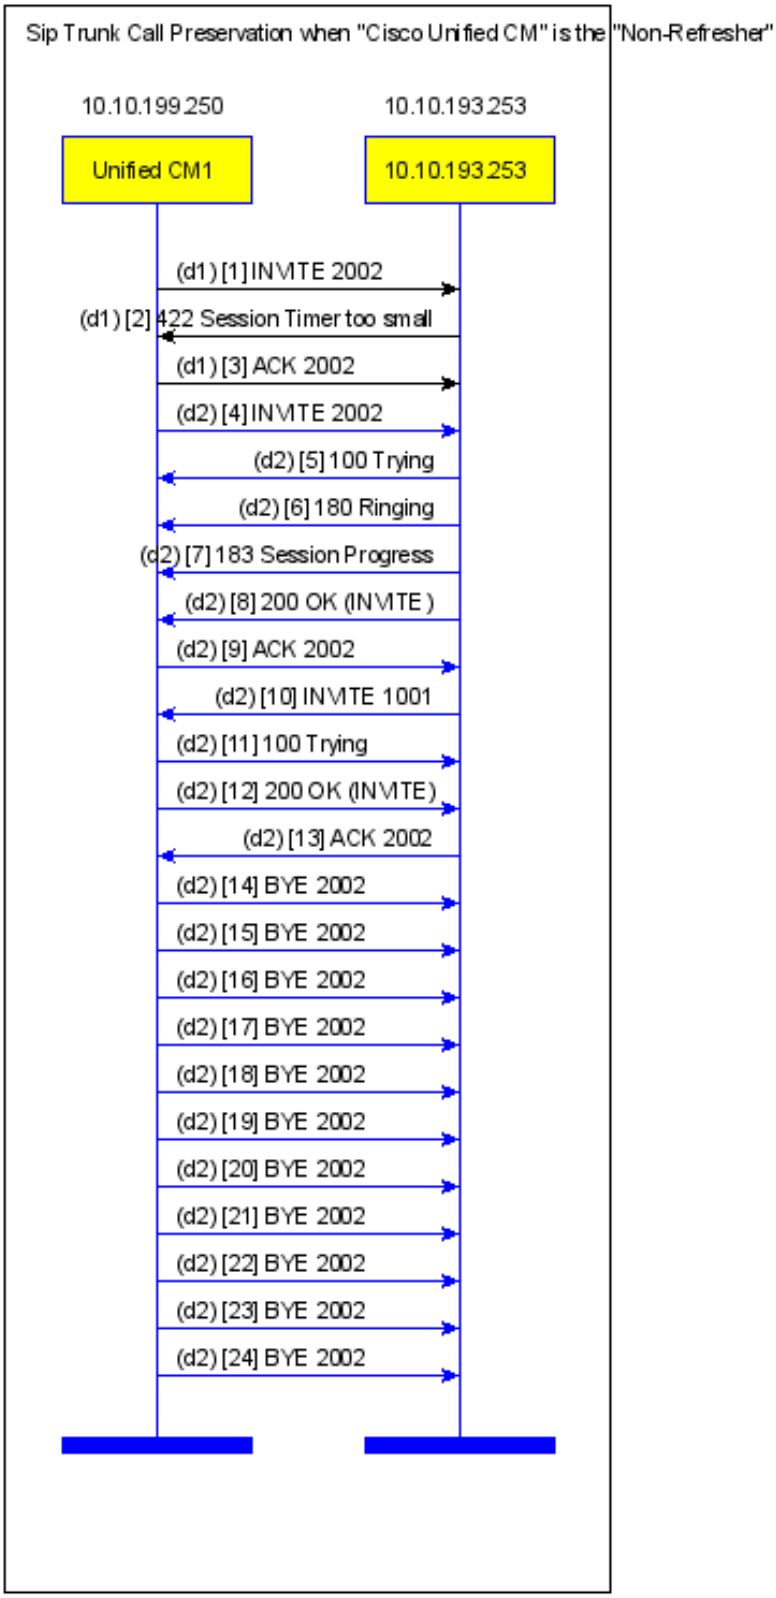

CISCO CONFIDENTIAL

[diagram] Call-ID:[prev][next]
[1] INVITE sip:2002@10.10.193.253:5060 SIP/2.0
Via: SIP/2.0/UDP 10.10.199.250:5060;branch=z9hG4bK4832c1fbb9
Remote-Party-ID: <sip:1001@10.10.199.250>;party=calling;screen=yes;privacy=off
From: <sip:1001@10.10.199.250>;tag=88fd35fa-b656-4fbc-bcf3-3fdd2ba559b3-22644541
To: <sip:2002@10.10.193.253>
Date: Thu, 12 Jul 2007 20:54:56 GMT
Call-ID: 23f49580-69619520-8e-fac712ac@10.10.199.250
Supported: timer,replaces
Min-SE: 60
User-Agent: Cisco-CUCM7.1
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY, PUBLISH
CSeq: 101 INVITE
Contact: <sip:1001@10.10.199.250:5060>
Expires: 180
Allow-Events: presence
Session-Expires: 90
Max-Forwards: 70
Content-Length: 0

[diagram] Call-ID:[prev][next]
[2] SIP/2.0 422 Session Timer too small
Via: SIP/2.0/UDP 10.10.199.250:5060;branch=z9hG4bK4832c1fbb9
From: <sip:1001@10.10.199.250>;tag=88fd35fa-b656-4fbc-bcf3-3fdd2ba559b3-22644541
To: <sip:2002@10.10.193.253>;tag=668956223
Date: Thu, 12 Jul 2007 20:54:56 GMT
Call-ID: 23f49580-69619520-8e-fac712ac@10.10.199.250
CSeq: 101 INVITE
Allow-Events: presence
Min-SE: 120
Content-Length: 0

[diagram] Call-ID:[prev][next]
[3] ACK sip:2002@10.10.193.253:5060 SIP/2.0
Via: SIP/2.0/UDP 10.10.199.250:5060;branch=z9hG4bK4832c1fbb9
From: <sip:1001@10.10.199.250>;tag=88fd35fa-b656-4fbc-bcf3-3fdd2ba559b3-22644541
To: <sip:2002@10.10.193.253>;tag=668956223
Date: Thu, 12 Jul 2007 20:54:56 GMT
Call-ID: 23f49580-69619520-8e-fac712ac@10.10.199.250
Max-Forwards: 70
CSeq: 101 ACK
Allow-Events: presence
Content-Length: 0

[diagram] Call-ID:[prev][next]
[4] INVITE sip:2002@10.10.193.253:5060 SIP/2.0
Via: SIP/2.0/UDP 10.10.199.250:5060;branch=z9hG4bK491223ce75
Remote-Party-ID: <sip:1001@10.10.199.250>;party=calling;screen=yes;privacy=off
From: <sip:1001@10.10.199.250>;tag=88fd35fa-b656-4fbc-bcf3-3fdd2ba559b3-22644541
To: <sip:2002@10.10.193.253>
Date: Thu, 12 Jul 2007 20:54:56 GMT
Call-ID: 23f49580-69619520-8f-fac712ac@10.10.199.250
Supported: timer,replaces
User-Agent: Cisco-CUCM7.1
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY, PUBLISH
CSeq: 101 INVITE
Contact: <sip:1001@10.10.199.250:5060>
Expires: 180
Allow-Events: presence
Session-Expires: 120
Min-SE: 120
Max-Forwards: 70
Content-Length: 0

[diagram] Call-ID:[prev][next]
[5] SIP/2.0 100 Trying
Via: SIP/2.0/UDP 10.10.199.250:5060;branch=z9hG4bK491223ce75
From: <sip:1001@10.10.199.250>;tag=88fd35fa-b656-4fbc-bcf3-3fdd2ba559b3-22644541
To: <sip:2002@10.10.193.253>
Date: Thu, 12 Jul 2007 20:54:56 GMT
Call-ID: 23f49580-69619520-8f-fac712ac@10.10.199.250
CSeq: 101 INVITE
Allow-Events: presence
Content-Length: 0

[diagram] Call-ID:[prev][next]
[6] SIP/2.0 180 Ringing
Via: SIP/2.0/UDP 10.10.199.250:5060;branch=z9hG4bK491223ce75
From: <sip:1001@10.10.199.250>;tag=88fd35fa-b656-4fbc-bcf3-3fdd2ba559b3-22644541
To: <sip:2002@10.10.193.253>;tag=c5bc4d0f-1965-4b87-bd74-7e24820e120a-22696985

CISCO CONFIDENTIAL

```
Date: Thu, 12 Jul 2007 20:54:56 GMT
Call-ID: 23f49580-69619520-8f-fac712ac@10.10.199.250
CSeq: 101 INVITE
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY, PUBLISH
Allow-Events: presence
Remote-Party-ID: <sip:2002@10.10.193.253>;party=called;screen=yes;privacy=off
Contact: <sip:2002@10.10.193.253:5060>
Content-Length: 0
```

[diagram] Call-ID:[prev][next]

[7] SIP/2.0 183 Session Progress

```
Via: SIP/2.0/UDP 10.10.199.250:5060;branch=z9hG4bK491223ce75
From: <sip:1001@10.10.199.250>;tag=88fd35fa-b656-4fbc-bcf3-3fdd2ba559b3-22644541
To: <sip:2002@10.10.193.253>;tag=c5bc4d0f-1965-4b87-bd74-7e24820e120a-22696985
Date: Thu, 12 Jul 2007 20:54:56 GMT
Call-ID: 23f49580-69619520-8f-fac712ac@10.10.199.250
CSeq: 101 INVITE
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY, PUBLISH
Allow-Events: presence, kpml
Remote-Party-ID: <sip:2002@10.10.193.253>;party=called;screen=yes;privacy=off
Contact: <sip:2002@10.10.193.253:5060>
Content-Type: application/sdp
Content-Length: 301

v=0
o=CiscoSystemsCCM-SIP 2000 1 IN IP4 10.10.193.253
s=SIP Call
c=IN IP4 10.10.199.238
t=0 0
m=audio 4000 RTP/AVP 0 8 18 101
a=rtpmap:0 PCMU/8000
a=ptime:20
a=rtpmap:8 PCMA/8000
a=ptime:20
a=rtpmap:18 G729/8000
a=ptime:20
a=sendonly
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
```

[diagram] Call-ID:[prev][next]

[8] SIP/2.0 200 OK

```
Via: SIP/2.0/UDP 10.10.199.250:5060;branch=z9hG4bK491223ce75
From: <sip:1001@10.10.199.250>;tag=88fd35fa-b656-4fbc-bcf3-3fdd2ba559b3-22644541
To: <sip:2002@10.10.193.253>;tag=c5bc4d0f-1965-4b87-bd74-7e24820e120a-22696985
Date: Thu, 12 Jul 2007 20:54:56 GMT
Call-ID: 23f49580-69619520-8f-fac712ac@10.10.199.250
CSeq: 101 INVITE
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY, PUBLISH
Allow-Events: presence, kpml
Remote-Party-ID: <sip:2002@10.10.193.253>;party=called;screen=yes;privacy=off
Contact: <sip:2002@10.10.193.253:5060>
Supported: replaces
Session-Expires:  120;refresher=uas
Require:  timer
Content-Type: application/sdp
Content-Length: 301

v=0
o=CiscoSystemsCCM-SIP 2000 1 IN IP4 10.10.193.253
s=SIP Call
c=IN IP4 10.10.199.238
t=0 0
m=audio 4000 RTP/AVP 0 8 18 101
a=rtpmap:0 PCMU/8000
a=ptime:20
a=rtpmap:8 PCMA/8000
a=ptime:20
a=rtpmap:18 G729/8000
a=ptime:20
a=sendonly
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
```

[diagram] Call-ID:[prev][next]

[9] ACK sip:2002@10.10.193.253:5060 SIP/2.0

```
Via: SIP/2.0/UDP 10.10.199.250:5060;branch=z9hG4bK4a3c91b60f
From: <sip:1001@10.10.199.250>;tag=88fd35fa-b656-4fbc-bcf3-3fdd2ba559b3-22644541
To: <sip:2002@10.10.193.253>;tag=c5bc4d0f-1965-4b87-bd74-7e24820e120a-22696985
Date: Thu, 12 Jul 2007 20:54:56 GMT
```

CISCO CONFIDENTIAL

```
Call-ID: 23f49580-69619520-8f-fac712ac@10.10.199.250
Max-Forwards: 70
CSeq: 101 ACK
Allow-Events: presence
Content-Type: application/sdp
Content-Length: 228

v=0
o=CiscoSystemsCCM-SIP 2000 1 IN IP4 10.10.199.250
s=SIP Call
c=IN IP4 10.10.199.251
t=0 0
m=audio 21706 RTP/AVP 0 101
a=rtpmap:0 PCMU/8000
a=ptime:20
a=recvonly
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
```

[diagram] Call-ID:[prev][next]

```
[10] INVITE sip:1001@10.10.199.250:5060 SIP/2.0
Via: SIP/2.0/UDP 10.10.193.253:5060;branch=z9hG4bK07eca88d5
Remote-Party-ID: <sip:2002@10.10.193.253>;party=calling;screen=yes;privacy=off
From: <sip:2002@10.10.193.253>;tag=c5bc4d0f-1965-4b87-bd74-7e24820e120a-22696985
To: <sip:1001@10.10.199.250>;tag=88fd35fa-b656-4fbc-bcf3-3fdd2ba559b3-22644541
Date: Thu, 12 Jul 2007 20:54:58 GMT
Call-ID: 23f49580-69619520-8f-fac712ac@10.10.199.250
Supported: 100rel,timer,replaces
Min-SE:  120
Cisco-Guid: 603231616-1768002848-2-4257288876
User-Agent: Cisco-CUCM7.1
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY, PUBLISH
CSeq: 101 INVITE
Max-Forwards: 70
Contact: <sip:2002@10.10.193.253:5060>
Expires: 180
Allow-Events: presence, kpml
Session-Expires:  120;refresher=uac
Content-Type: application/sdp
Content-Length: 216

v=0
o=CiscoSystemsCCM-SIP 2000 2 IN IP4 10.10.193.253
s=SIP Call
c=IN IP4 10.10.199.238
t=0 0
m=audio 30286 RTP/AVP 0 101
a=rtpmap:0 PCMU/8000
a=ptime:20
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
```

[diagram] Call-ID:[prev][next]

```
[11] SIP/2.0 100 Trying
Via: SIP/2.0/UDP 10.10.193.253:5060;branch=z9hG4bK07eca88d5
From: <sip:2002@10.10.193.253>;tag=c5bc4d0f-1965-4b87-bd74-7e24820e120a-22696985
To: <sip:1001@10.10.199.250>;tag=88fd35fa-b656-4fbc-bcf3-3fdd2ba559b3-22644541
Date: Thu, 12 Jul 2007 20:54:58 GMT
Call-ID: 23f49580-69619520-8f-fac712ac@10.10.199.250
CSeq: 101 INVITE
Allow-Events: presence
Content-Length: 0
```

[diagram] Call-ID:[prev][next]

```
[12] SIP/2.0 200 OK
Via: SIP/2.0/UDP 10.10.193.253:5060;branch=z9hG4bK07eca88d5
From: <sip:2002@10.10.193.253>;tag=c5bc4d0f-1965-4b87-bd74-7e24820e120a-22696985
To: <sip:1001@10.10.199.250>;tag=88fd35fa-b656-4fbc-bcf3-3fdd2ba559b3-22644541
Date: Thu, 12 Jul 2007 20:54:58 GMT
Call-ID: 23f49580-69619520-8f-fac712ac@10.10.199.250
CSeq: 101 INVITE
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY, PUBLISH
Allow-Events: presence
Remote-Party-ID: <sip:1001@10.10.199.250>;party=called;screen=yes;privacy=off
Contact: <sip:2002@10.10.199.250:5060>
Supported: replaces
Session-Expires:  120;refresher=uac
Require:  timer
Content-Type: application/sdp
Content-Length: 216
```

CISCO CONFIDENTIAL

```
v=0
o=CiscoSystemsCCM-SIP 2000 2 IN IP4 10.10.199.250
s=SIP Call
c=IN IP4 10.10.199.251
t=0 0
m=audio 21706 RTP/AVP 0 101
a=rtpmap:0 PCMU/8000
a=ptime:20
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
```

[diagram] Call-ID:[prev][next]

```
[13] ACK sip:2002@10.10.199.250:5060 SIP/2.0
Via: SIP/2.0/UDP 10.10.193.253:5060;branch=z9hG4bK1217f7021
From: <sip:2002@10.10.193.253>;tag=c5bc4d0f-1965-4b87-bd74-7e24820e120a-22696985
To: <sip:1001@10.10.199.250>;tag=88fd35fa-b656-4fbc-bcf3-3fdd2ba559b3-22644541
Date: Thu, 12 Jul 2007 20:54:58 GMT
Call-ID: 23f49580-69619520-8f-fac712ac@10.10.199.250
Max-Forwards: 70
CSeq: 101 ACK
Allow-Events: presence, kpml
Content-Length: 0
```

[diagram] Call-ID:[prev][next]

```
[14] BYE sip:2002@10.10.193.253:5060 SIP/2.0
Via: SIP/2.0/UDP 10.10.199.250:5060;branch=z9hG4bK4b56ee5d9a
From: <sip:1001@10.10.199.250>;tag=88fd35fa-b656-4fbc-bcf3-3fdd2ba559b3-22644541
To: <sip:2002@10.10.193.253>;tag=c5bc4d0f-1965-4b87-bd74-7e24820e120a-22696985
Date: Thu, 12 Jul 2007 20:54:58 GMT
Call-ID: 23f49580-69619520-8f-fac712ac@10.10.199.250
User-Agent: Cisco-CUCM7.1
Max-Forwards: 70
CSeq: 102 BYE
Reason: Q.850;cause=41
Content-Length: 0
```

[diagram] Call-ID:[prev][next]

```
[15] BYE sip:2002@10.10.193.253:5060 SIP/2.0
Via: SIP/2.0/UDP 10.10.199.250:5060;branch=z9hG4bK4b56ee5d9a
From: <sip:1001@10.10.199.250>;tag=88fd35fa-b656-4fbc-bcf3-3fdd2ba559b3-22644541
To: <sip:2002@10.10.193.253>;tag=c5bc4d0f-1965-4b87-bd74-7e24820e120a-22696985
Date: Thu, 12 Jul 2007 20:54:58 GMT
Call-ID: 23f49580-69619520-8f-fac712ac@10.10.199.250
User-Agent: Cisco-CUCM7.1
Max-Forwards: 70
CSeq: 102 BYE
Reason: Q.850;cause=41
Content-Length: 0
```

[diagram] Call-ID:[prev][next]

```
[16] BYE sip:2002@10.10.193.253:5060 SIP/2.0
Via: SIP/2.0/UDP 10.10.199.250:5060;branch=z9hG4bK4b56ee5d9a
From: <sip:1001@10.10.199.250>;tag=88fd35fa-b656-4fbc-bcf3-3fdd2ba559b3-22644541
To: <sip:2002@10.10.193.253>;tag=c5bc4d0f-1965-4b87-bd74-7e24820e120a-22696985
Date: Thu, 12 Jul 2007 20:54:58 GMT
Call-ID: 23f49580-69619520-8f-fac712ac@10.10.199.250
User-Agent: Cisco-CUCM7.1
Max-Forwards: 70
CSeq: 102 BYE
Reason: Q.850;cause=41
Content-Length: 0
```

[diagram] Call-ID:[prev][next]

```
[17] BYE sip:2002@10.10.193.253:5060 SIP/2.0
Via: SIP/2.0/UDP 10.10.199.250:5060;branch=z9hG4bK4b56ee5d9a
From: <sip:1001@10.10.199.250>;tag=88fd35fa-b656-4fbc-bcf3-3fdd2ba559b3-22644541
To: <sip:2002@10.10.193.253>;tag=c5bc4d0f-1965-4b87-bd74-7e24820e120a-22696985
Date: Thu, 12 Jul 2007 20:54:58 GMT
Call-ID: 23f49580-69619520-8f-fac712ac@10.10.199.250
User-Agent: Cisco-CUCM7.1
Max-Forwards: 70
CSeq: 102 BYE
Reason: Q.850;cause=41
Content-Length: 0
```

[diagram] Call-ID:[prev][next]

```
[18] BYE sip:2002@10.10.193.253:5060 SIP/2.0
Via: SIP/2.0/UDP 10.10.199.250:5060;branch=z9hG4bK4b56ee5d9a
From: <sip:1001@10.10.199.250>;tag=88fd35fa-b656-4fbc-bcf3-3fdd2ba559b3-22644541
```

CISCO CONFIDENTIAL

```
To: <sip:2002@10.10.193.253>;tag=c5bc4d0f-1965-4b87-bd74-7e24820e120a-22696985
Date: Thu, 12 Jul 2007 20:54:58 GMT
Call-ID: 23f49580-69619520-8f-fac712ac@10.10.199.250
User-Agent: Cisco-CUCM7.1
Max-Forwards: 70
CSeq: 102 BYE
Reason: Q.850;cause=41
Content-Length: 0
```

[diagram] Call-ID:[prev][next]

[19] BYE sip:2002@10.10.193.253:5060 SIP/2.0

```
Via: SIP/2.0/UDP 10.10.199.250:5060;branch=z9hG4bK4b56ee5d9a
From: <sip:1001@10.10.199.250>;tag=88fd35fa-b656-4fbc-bcf3-3fdd2ba559b3-22644541
To: <sip:2002@10.10.193.253>;tag=c5bc4d0f-1965-4b87-bd74-7e24820e120a-22696985
Date: Thu, 12 Jul 2007 20:54:58 GMT
Call-ID: 23f49580-69619520-8f-fac712ac@10.10.199.250
User-Agent: Cisco-CUCM7.1
Max-Forwards: 70
CSeq: 102 BYE
Reason: Q.850;cause=41
Content-Length: 0
```

[diagram] Call-ID:[prev][next]

[20] BYE sip:2002@10.10.193.253:5060 SIP/2.0

```
Via: SIP/2.0/UDP 10.10.199.250:5060;branch=z9hG4bK4b56ee5d9a
From: <sip:1001@10.10.199.250>;tag=88fd35fa-b656-4fbc-bcf3-3fdd2ba559b3-22644541
To: <sip:2002@10.10.193.253>;tag=c5bc4d0f-1965-4b87-bd74-7e24820e120a-22696985
Date: Thu, 12 Jul 2007 20:54:58 GMT
Call-ID: 23f49580-69619520-8f-fac712ac@10.10.199.250
User-Agent: Cisco-CUCM7.1
Max-Forwards: 70
CSeq: 102 BYE
Reason: Q.850;cause=41
Content-Length: 0
```

[diagram] Call-ID:[prev][next]

[21] BYE sip:2002@10.10.193.253:5060 SIP/2.0

```
Via: SIP/2.0/UDP 10.10.199.250:5060;branch=z9hG4bK4b56ee5d9a
From: <sip:1001@10.10.199.250>;tag=88fd35fa-b656-4fbc-bcf3-3fdd2ba559b3-22644541
To: <sip:2002@10.10.193.253>;tag=c5bc4d0f-1965-4b87-bd74-7e24820e120a-22696985
Date: Thu, 12 Jul 2007 20:54:58 GMT
Call-ID: 23f49580-69619520-8f-fac712ac@10.10.199.250
User-Agent: Cisco-CUCM7.1
Max-Forwards: 70
CSeq: 102 BYE
Reason: Q.850;cause=41
Content-Length: 0
```

[diagram] Call-ID:[prev][next]

[22] BYE sip:2002@10.10.193.253:5060 SIP/2.0

```
Via: SIP/2.0/UDP 10.10.199.250:5060;branch=z9hG4bK4b56ee5d9a
From: <sip:1001@10.10.199.250>;tag=88fd35fa-b656-4fbc-bcf3-3fdd2ba559b3-22644541
To: <sip:2002@10.10.193.253>;tag=c5bc4d0f-1965-4b87-bd74-7e24820e120a-22696985
Date: Thu, 12 Jul 2007 20:54:58 GMT
Call-ID: 23f49580-69619520-8f-fac712ac@10.10.199.250
User-Agent: Cisco-CUCM7.1
Max-Forwards: 70
CSeq: 102 BYE
Reason: Q.850;cause=41
Content-Length: 0
```

[diagram] Call-ID:[prev][next]

[23] BYE sip:2002@10.10.193.253:5060 SIP/2.0

```
Via: SIP/2.0/UDP 10.10.199.250:5060;branch=z9hG4bK4b56ee5d9a
From: <sip:1001@10.10.199.250>;tag=88fd35fa-b656-4fbc-bcf3-3fdd2ba559b3-22644541
To: <sip:2002@10.10.193.253>;tag=c5bc4d0f-1965-4b87-bd74-7e24820e120a-22696985
Date: Thu, 12 Jul 2007 20:54:58 GMT
Call-ID: 23f49580-69619520-8f-fac712ac@10.10.199.250
User-Agent: Cisco-CUCM7.1
Max-Forwards: 70
CSeq: 102 BYE
Reason: Q.850;cause=41
Content-Length: 0
```

[diagram] Call-ID:[prev][next]

[24] BYE sip:2002@10.10.193.253:5060 SIP/2.0

```
Via: SIP/2.0/UDP 10.10.199.250:5060;branch=z9hG4bK4b56ee5d9a
From: <sip:1001@10.10.199.250>;tag=88fd35fa-b656-4fbc-bcf3-3fdd2ba559b3-22644541
To: <sip:2002@10.10.193.253>;tag=c5bc4d0f-1965-4b87-bd74-7e24820e120a-22696985
Date: Thu, 12 Jul 2007 20:54:58 GMT
```

CISCO CONFIDENTIAL

```
Call-ID: 23f49580-69619520-8f-fac712ac@10.10.199.250
User-Agent: Cisco-CUCM7.1
Max-Forwards: 70
CSeq: 102 BYE
Reason: Q.850;cause=41
Content-Length: 0
```

CISCO CONFIDENTIAL

13. 3xx

13.1 Incoming 3xx Redirection

Title: Incoming 3xx Redirection

Description:

Cisco Unified CM SIP trunk processes the incoming 3xx response by sending out new INVITE specified in the contact headers of the 3xx response.

Cisco Unified IP SCCP phone 1001 dials SIP Proxy phone 3001.
SIP Proxy is in redirect mode, and therefore sends a 302 to the Cisco Unified CM.
Cisco Unified CM processes the 3xx response and sends an INVITE to the contact address in the 3xx.

Configuration:

Node = Unified CM1, IP = 10.10.199.250
Node = SIP Proxy, IP = 10.10.199.32

Phone = A, Line = 1001, IP = 10.10.199.130, Model = SCCP
Phone = B, Line = 3001, IP = 10.10.199.42, Model = SIP TNP

SIP Trunk on Unified CM1 pointing to the SIP Proxy with route pattern 4.XXXX

Scenario:

Phone A DN 1001 calls Phone B DN 3001 over the SIP Trunk by dialing 43001
Phone B DN 3001 is ringing
Phone B DN 3001 Answers
Phone A DN 1001 and Phone B DN 3001 have two-way speech
Phone A DN 1001 goes onHook
Phone B DN 3001 goes onHook

End of Scenario

CISCO CONFIDENTIAL

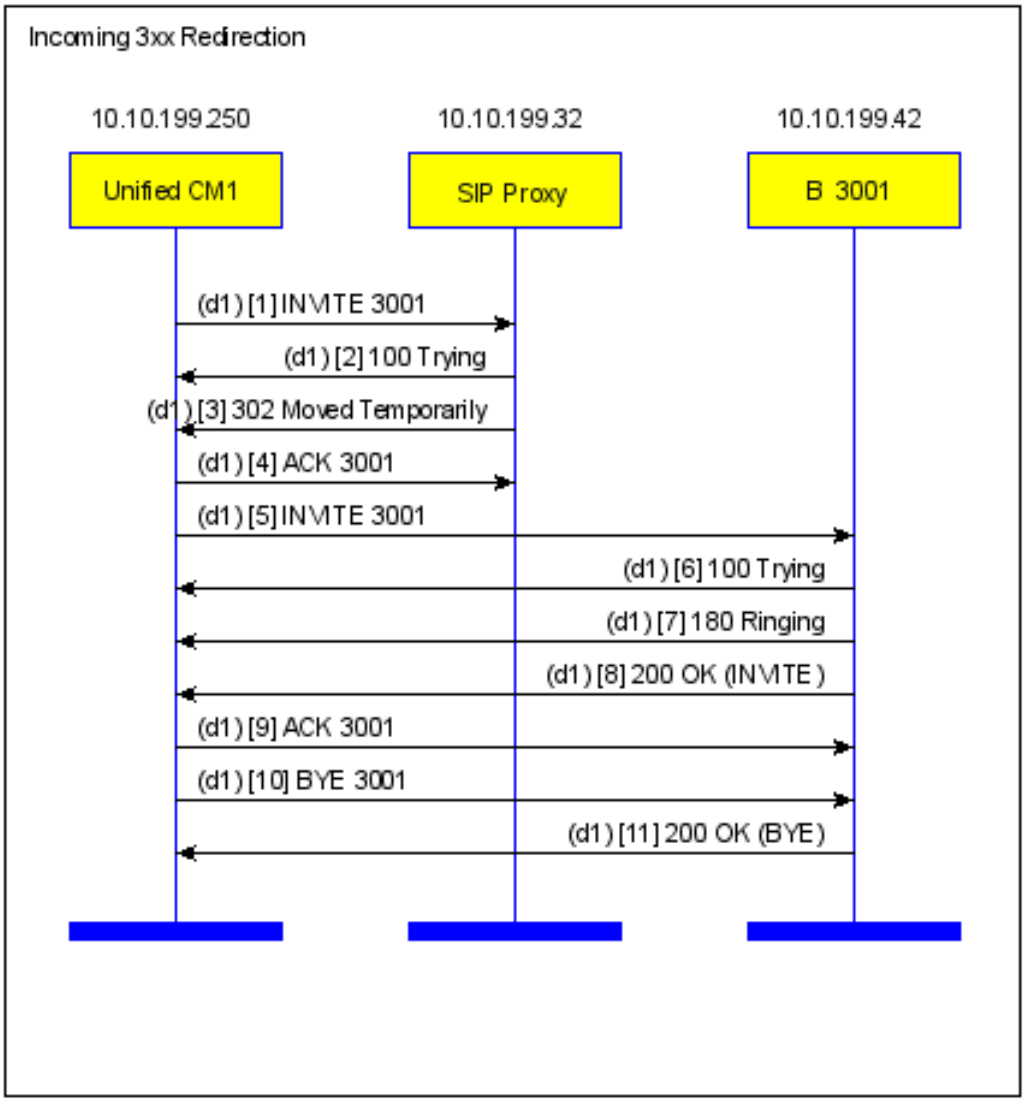

CISCO CONFIDENTIAL

[diagram] Call-ID:[prev][next]
[1] INVITE sip:3001@10.10.199.32:5060 SIP/2.0
Date: Tue, 29 Jul 2008 02:04:41 GMT
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:1001@10.10.199.250>;tag=95ef4362-75f9-4faf-ae01-3fcd294149a0-20571118
Allow-Events: presence
P-Asserted-Identity: <sip:1001@10.10.199.250>
Supported: timer,resource-priority,replaces
Min-SE: 120
Remote-Party-ID: <sip:1001@10.10.199.250>;party=calling;screen=yes;privacy=off
Content-Length: 0
User-Agent: Cisco-CUCM7.1
To: <sip:3001@10.10.199.32>
Contact: <sip:1001@10.10.199.250:5060;transport=tcp>
Expires: 180
Call-ID: b3470800-88e17ab9-6-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK17c0acda8
CSeq: 101 INVITE
Session-Expires: 120
Max-Forwards: 70

[diagram] Call-ID:[prev][next]
[2] SIP/2.0 100 Trying
Via: SIP/2.0/TCP 10.10.199.250:5060;received=10.10.199.250;branch=z9hG4bK17c0acda8
Call-ID: b3470800-88e17ab9-6-fac712ac@10.10.199.250
From: <sip:1001@10.10.199.250>;tag=95ef4362-75f9-4faf-ae01-3fcd294149a0-20571118
To: <sip:3001@10.10.199.32>
CSeq: 101 INVITE
Content-Length: 0

[diagram] Call-ID:[prev][next]
[3] SIP/2.0 302 Moved Temporarily
Via: SIP/2.0/TCP 10.10.199.250:5060;received=10.10.199.250;branch=z9hG4bK17c0acda8
Call-ID: b3470800-88e17ab9-6-fac712ac@10.10.199.250
From: <sip:1001@10.10.199.250>;tag=95ef4362-75f9-4faf-ae01-3fcd294149a0-20571118
To: <sip:3001@10.10.199.32>;tag=513dea65-224cc635
CSeq: 101 INVITE
Contact: <sip:3001@10.10.199.42:5060>
Content-Length: 0

[diagram] Call-ID:[prev][next]
[4] ACK sip:3001@10.10.199.32:5060 SIP/2.0
Date: Tue, 29 Jul 2008 02:04:41 GMT
From: <sip:1001@10.10.199.250>;tag=95ef4362-75f9-4faf-ae01-3fcd294149a0-20571118
Allow-Events: presence
Content-Length: 0
To: <sip:3001@10.10.199.32>;tag=513dea65-224cc635
Call-ID: b3470800-88e17ab9-6-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK17c0acda8
CSeq: 101 ACK
Max-Forwards: 70

[diagram] Call-ID:[prev][next]
[5] INVITE sip:3001@10.10.199.42:5060 SIP/2.0
Date: Tue, 29 Jul 2008 02:04:41 GMT
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:1001@10.10.199.250>;tag=95ef4362-75f9-4faf-ae01-3fcd294149a0-20571118
Allow-Events: presence
P-Asserted-Identity: <sip:1001@10.10.199.250>
Supported: timer,resource-priority,replaces
Min-SE: 120
Remote-Party-ID: <sip:1001@10.10.199.250>;party=calling;screen=yes;privacy=off
Content-Length: 0
User-Agent: Cisco-CUCM7.1
To: <sip:3001@10.10.199.42>
Contact: <sip:1001@10.10.199.250:5060>
Expires: 180
Call-ID: b3470800-88e17ab9-6-fac712ac@10.10.199.250
Via: SIP/2.0/UDP 10.10.199.250:5060;branch=z9hG4bK239b2040f
CSeq: 102 INVITE
Session-Expires: 120
Max-Forwards: 70

[diagram] Call-ID:[prev][next]
[6] SIP/2.0 100 Trying
Via: SIP/2.0/UDP 10.10.199.250:5060;branch=z9hG4bK239b2040f
From: <sip:1001@10.10.199.250>;tag=95ef4362-75f9-4faf-ae01-3fcd294149a0-20571118
To: <sip:3001@10.10.199.42>
Call-ID: b3470800-88e17ab9-6-fac712ac@10.10.199.250
Date: Mon, 28 Jul 2008 23:06:20 GMT

CISCO CONFIDENTIAL

```
CSeq: 102 INVITE
Server: CSCO/7
Contact: <sip:3001@10.10.199.42:5060>
Content-Length: 0
```

[diagram] Call-ID:[prev][next]

[7] SIP/2.0 180 Ringing

```
Via: SIP/2.0/UDP 10.10.199.250:5060;branch=z9hG4bK239b2040f
From: <sip:1001@10.10.199.250>;tag=95ef4362-75f9-4faf-ae01-3fcd294149a0-20571118
To: <sip:3001@10.10.199.42>;tag=000f24aa92b9000937081eea-09b2e9e4
Call-ID: b3470800-88e17ab9-6-fac712ac@10.10.199.250
Date: Mon, 28 Jul 2008 23:06:20 GMT
CSeq: 102 INVITE
Server: CSCO/7
Contact: <sip:3001@10.10.199.42:5060>
Content-Length: 0
```

[diagram] Call-ID:[prev][next]

[8] SIP/2.0 200 OK

```
Via: SIP/2.0/UDP 10.10.199.250:5060;branch=z9hG4bK239b2040f
From: <sip:1001@10.10.199.250>;tag=95ef4362-75f9-4faf-ae01-3fcd294149a0-20571118
To: <sip:3001@10.10.199.42>;tag=000f24aa92b9000937081eea-09b2e9e4
Call-ID: b3470800-88e17ab9-6-fac712ac@10.10.199.250
Date: Mon, 28 Jul 2008 23:06:21 GMT
CSeq: 102 INVITE
Server: CSCO/7
Contact: <sip:3001@10.10.199.42:5060>
Content-Type: application/sdp
Content-Length: 249

v=0
o=Cisco-SIPUA 21056 13601 IN IP4 10.10.199.42
s=SIP Call
c=IN IP4 10.10.199.42
t=0 0
m=audio 23362 RTP/AVP 0 8 18 101
a=rtpmap:0 PCMU/8000
a=rtpmap:8 PCMA/8000
a=rtpmap:18 G729/8000
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
```

[diagram] Call-ID:[prev][next]

[9] ACK sip:3001@10.10.199.42:5060 SIP/2.0

```
Date: Tue, 29 Jul 2008 02:04:41 GMT
From: <sip:1001@10.10.199.250>;tag=95ef4362-75f9-4faf-ae01-3fcd294149a0-20571118
Allow-Events: presence
Content-Length: 216
To: <sip:3001@10.10.199.42>;tag=000f24aa92b9000937081eea-09b2e9e4
Content-Type: application/sdp
Call-ID: b3470800-88e17ab9-6-fac712ac@10.10.199.250
Via: SIP/2.0/UDP 10.10.199.250:5060;branch=z9hG4bK35e13a9ab
CSeq: 102 ACK
Max-Forwards: 70

v=0
o=CiscoSystemsCCM-SIP 2000 1 IN IP4 10.10.199.250
s=SIP Call
c=IN IP4 10.10.199.130
t=0 0
m=audio 25382 RTP/AVP 0 101
a=rtpmap:0 PCMU/8000
a=ptime:20
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
```

[diagram] Call-ID:[prev][next]

[10] BYE sip:3001@10.10.199.42:5060 SIP/2.0

```
Date: Tue, 29 Jul 2008 02:04:41 GMT
From: <sip:1001@10.10.199.250>;tag=95ef4362-75f9-4faf-ae01-3fcd294149a0-20571118
P-Asserted-Identity: <sip:1001@10.10.199.250>
Content-Length: 0
User-Agent: Cisco-CUCM7.1
To: <sip:3001@10.10.199.42>;tag=000f24aa92b9000937081eea-09b2e9e4
Call-ID: b3470800-88e17ab9-6-fac712ac@10.10.199.250
Via: SIP/2.0/UDP 10.10.199.250:5060;branch=z9hG4bK41652fbbf
CSeq: 103 BYE
Max-Forwards: 70
```

CISCO CONFIDENTIAL

```
[diagram]   Call-ID:[prev][next]
[11] SIP/2.0 200 OK
Via: SIP/2.0/UDP 10.10.199.250:5060;branch=z9hG4bK41652fbbf
From: <sip:1001@10.10.199.250>;tag=95ef4362-75f9-4faf-ae01-3fcd294149a0-20571118
To: <sip:3001@10.10.199.42>;tag=000f24aa92b9000937081eea-09b2e9e4
Call-ID: b3470800-88e17ab9-6-fac712ac@10.10.199.250
Date: Mon, 28 Jul 2008 23:06:28 GMT
CSeq: 103 BYE
Server: CSCO/7
Content-Length: 0
```

CISCO CONFIDENTIAL

14. Authentication-Authorization

14.1 Unified CM gets Authenticated as UAC

Title: Unified CM gets Authenticated as UAC

Description:

When Cisco Unified CM is challenged as a UAC, it looks up the user credentials from the given realm and send the new request with Authorization header.

Configuration:

Node = Unified CM1, IP = 10.10.199.250

Node = Unified CM2, IP = 10.10.199.251

Phone = A, Line = 1001, IP = 10.10.199.130, Model = SCCP

Phone = B, Line = 2002, IP = 10.10.199.179, Model = SCCP

SIP Trunk between Unified CM1 & Unified CM2 has route pattern 2.XXXX

Scenario:

Phone A DN 1001 calls Phone B DN 2002 over the SIP Trunk by dialing 22002

Phone B returns 401 Unauthorized response.

Unified CM1 on which PhoneA is present, looks up user credentials and sends out new INVITE with Authorization header.

All the subsequent requests from the Unified CM for this dialog will have Authorization header already.

End of Scenario

CISCO CONFIDENTIAL

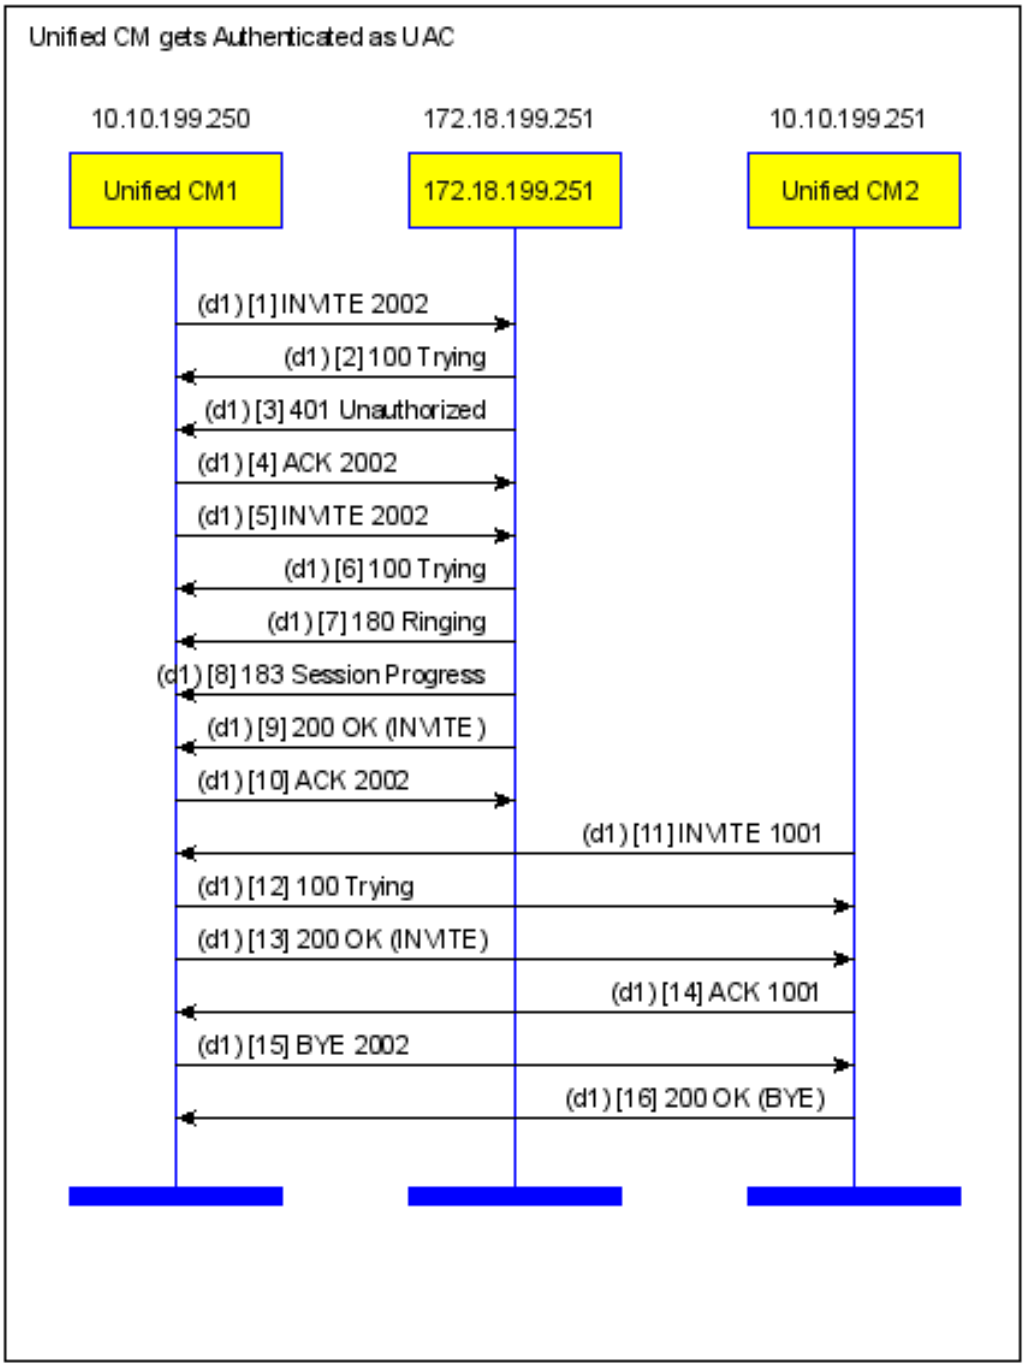

CISCO CONFIDENTIAL

[diagram] Call-ID:[prev][next]
[1] INVITE sip:2002@siptrunk17.cisco.com:5060 SIP/2.0
Date: Thu, 04 Jun 2009 18:38:06 GMT
Call-Info: <sip:10.10.199.250:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763516
Allow-Events: presence, kpml
P-Asserted-Identity: <sip:1001@10.10.199.250>
Supported: timer,resource-priority,replaces
Supported: Geolocation
Min-SE: 1800
Remote-Party-ID: <sip:1001@10.10.199.250>;party=calling;screen=yes;privacy=off
Content-Length: 0
User-Agent: Cisco-CUCM7.1
To: <sip:2002@siptrunk17.cisco.com>
Contact: <sip:1001@10.10.199.250:5060;transport=tcp>
Expires: 180
Call-ID: d6aec080-a281148e-1b-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK626c6d66f1
CSeq: 101 INVITE
Session-Expires: 1800
Max-Forwards: 70

[diagram] Call-ID:[prev][next]
[2] SIP/2.0 100 Trying
Date: Thu, 04 Jun 2009 18:39:07 GMT
From: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763516
Allow-Events: presence
Content-Length: 0
To: <sip:2002@siptrunk17.cisco.com>
Call-ID: d6aec080-a281148e-1b-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK626c6d66f1
CSeq: 101 INVITE

[diagram] Call-ID:[prev][next]
[3] SIP/2.0 401 Unauthorized
Date: Thu, 04 Jun 2009 18:39:07 GMT
From: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763516
Allow-Events: presence
WWW-Authenticate: Digest realm="StandAloneCluster", nonce="9r6RMo00XlsSln+S26o1VP3R3LMbIJLI", algorithm=MD5
Content-Length: 0
To: <sip:2002@siptrunk17.cisco.com>;tag=1668797903
Call-ID: d6aec080-a281148e-1b-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK626c6d66f1
CSeq: 101 INVITE

[diagram] Call-ID:[prev][next]
[4] ACK sip:2002@siptrunk17.cisco.com:5060 SIP/2.0
Date: Thu, 04 Jun 2009 18:38:06 GMT
From: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763516
Allow-Events: presence, kpml
Content-Length: 0
To: <sip:2002@siptrunk17.cisco.com>;tag=1668797903
Call-ID: d6aec080-a281148e-1b-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK626c6d66f1
CSeq: 101 ACK
Max-Forwards: 70

[diagram] Call-ID:[prev][next]
[5] INVITE sip:2002@siptrunk17.cisco.com:5060 SIP/2.0
Date: Thu, 04 Jun 2009 18:38:06 GMT
Authorization: Digest
username="siptrunk",realm="StandAloneCluster",uri="sip:2002@siptrunk17.cisco.com:5060",response="bc25600669b
fb96bfa83041ba3a3b916",nonce="9r6RMo00XlsSln+S26o1VP3R3LMbIJLI",algorithm=MD5
Call-Info: <sip:10.10.199.250:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763516
Allow-Events: presence, kpml
P-Asserted-Identity: <sip:1001@10.10.199.250>
Supported: timer,resource-priority,replaces
Supported: Geolocation
Min-SE: 1800
Remote-Party-ID: <sip:1001@10.10.199.250>;party=calling;screen=yes;privacy=off
Content-Length: 0
User-Agent: Cisco-CUCM7.1
To: <sip:2002@siptrunk17.cisco.com>
Contact: <sip:1001@10.10.199.250:5060;transport=tcp>
Expires: 180
Call-ID: d6aec080-a281148e-1b-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK634f63d456

CISCO CONFIDENTIAL

```
CSeq: 102 INVITE
Session-Expires:  1800
Max-Forwards: 70
```

[diagram] Call-ID:[prev][next]

[6] SIP/2.0 100 Trying

```
Date: Thu, 04 Jun 2009 18:39:07 GMT
From: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763516
Allow-Events: presence
Content-Length: 0
To: <sip:2002@siptrunk17.cisco.com>
Call-ID: d6aec080-a281148e-1b-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK634f63d456
CSeq: 102 INVITE
```

[diagram] Call-ID:[prev][next]

[7] SIP/2.0 180 Ringing

```
Date: Thu, 04 Jun 2009 18:39:07 GMT
Call-Info: <sip:10.10.199.251:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763516
Allow-Events: presence
P-Asserted-Identity: <sip:2002@10.10.199.251>
Supported: Geolocation
Remote-Party-ID: <sip:2002@10.10.199.251>;party=called;screen=yes;privacy=off
Content-Length: 0
To: <sip:2002@siptrunk17.cisco.com>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763432
Contact: <sip:2002@10.10.199.251:5060;transport=tcp>
Call-ID: d6aec080-a281148e-1b-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK634f63d456
CSeq: 102 INVITE
```

[diagram] Call-ID:[prev][next]

[8] SIP/2.0 183 Session Progress

```
Date: Thu, 04 Jun 2009 18:39:07 GMT
Call-Info: <sip:10.10.199.251:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763516
Allow-Events: presence, kpml
P-Asserted-Identity: <sip:2002@10.10.199.251>
Supported: Geolocation
Remote-Party-ID: <sip:2002@10.10.199.251>;party=called;screen=yes;privacy=off
Content-Length: 337
To: <sip:2002@siptrunk17.cisco.com>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763432
Contact: <sip:2002@10.10.199.251:5060;transport=tcp>
Content-Type: application/sdp
Call-ID: d6aec080-a281148e-1b-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK634f63d456
CSeq: 102 INVITE

v=0
o=CiscoSystemsCCM-SIP 2000 1 IN IP4 10.10.199.251
s=SIP Call
c=IN IP4 10.10.199.179
t=0 0
m=audio 4000 RTP/AVP 9 0 8 18 101
a=rtpmap:9 G722/8000
a=ptime:20
a=rtpmap:0 PCMU/8000
a=ptime:20
a=rtpmap:8 PCMA/8000
a=ptime:20
a=rtpmap:18 G729/8000
a=ptime:20
a=sendonly
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
```

[diagram] Call-ID:[prev][next]

[9] SIP/2.0 200 OK

```
Date: Thu, 04 Jun 2009 18:39:07 GMT
Call-Info: <sip:10.10.199.251:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763516
Allow-Events: presence, kpml
P-Asserted-Identity: <sip:2002@10.10.199.251>
Supported: replaces
Supported: Geolocation
Remote-Party-ID: <sip:2002@10.10.199.251>;party=called;screen=yes;privacy=off
Content-Length: 337
```

CISCO CONFIDENTIAL

```
Require:  timer
To: <sip:2002@siptrunk17.cisco.com>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763432
Contact: <sip:2002@10.10.199.251:5060;transport=tcp>
Content-Type: application/sdp
Call-ID: d6aec080-a281148e-1b-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK634f63d456
CSeq: 102 INVITE
Session-Expires:  1800;refresher=uas

v=0
o=CiscoSystemsCCM-SIP 2000 1 IN IP4 10.10.199.251
s=SIP Call
c=IN IP4 10.10.199.179
t=0 0
m=audio 4000 RTP/AVP 9 0 8 18 101
a=rtpmap:9 G722/8000
a=ptime:20
a=rtpmap:0 PCMU/8000
a=ptime:20
a=rtpmap:8 PCMA/8000
a=ptime:20
a=rtpmap:18 G729/8000
a=ptime:20
a=sendonly
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
```

[diagram] Call-ID:[prev][next]

[10] ACK sip:2002@10.10.199.251:5060;transport=tcp SIP/2.0

```
Date: Thu, 04 Jun 2009 18:38:06 GMT
Authorization: Digest
username="siptrunk",realm="StandAloneCluster",uri="sip:2002@siptrunk17.cisco.com:5060",response="bc25600669b
fb96bfa83041ba3a3b916",nonce="9r6RMo00XlsSln+S26o1VP3R3LMbIJLI",algorithm=MD5
From: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763516
Allow-Events: presence, kpml
Content-Length: 228
To: <sip:2002@siptrunk17.cisco.com>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763432
Content-Type: application/sdp
Call-ID: d6aec080-a281148e-1b-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK6469c401af
CSeq: 102 ACK
Max-Forwards: 70

v=0
o=CiscoSystemsCCM-SIP 2000 1 IN IP4 10.10.199.250
s=SIP Call
c=IN IP4 10.10.199.130
t=0 0
m=audio 22210 RTP/AVP 9 101
a=rtpmap:9 G722/8000
a=ptime:20
a=recvonly
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
```

[diagram] Call-ID:[prev][next]

[11] INVITE sip:1001@10.10.199.250:5060;transport=tcp SIP/2.0

```
Date: Thu, 04 Jun 2009 18:39:10 GMT
Call-Info: <sip:10.10.199.251:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:2002@siptrunk17.cisco.com>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763432
Allow-Events: presence, kpml
P-Asserted-Identity: <sip:2002@10.10.199.251>
Supported: timer,resource-priority,replaces
Min-SE:  1800
Remote-Party-ID: <sip:2002@10.10.199.251>;party=calling;screen=yes;privacy=off
Content-Length: 216
User-Agent: Cisco-CUCM7.1
To: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763516
Contact: <sip:2002@10.10.199.251:5060;transport=tcp>
Expires: 180
Content-Type: application/sdp
Call-ID: d6aec080-a281148e-1b-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bK6670973b2c
CSeq: 101 INVITE
Session-Expires:  1800;refresher=uac
Max-Forwards: 70

v=0
o=CiscoSystemsCCM-SIP 2000 2 IN IP4 10.10.199.251
```

CISCO CONFIDENTIAL

```
s=SIP Call
c=IN IP4 10.10.199.179
t=0 0
m=audio 21138 RTP/AVP 9 101
a=rtpmap:9 G722/8000
a=ptime:20
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
```

[diagram] Call-ID:[prev][next]

[12] SIP/2.0 100 Trying

```
Date: Thu, 04 Jun 2009 18:38:08 GMT
From: <sip:2002@siptrunk17.cisco.com>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763432
Allow-Events: presence, kpml
Content-Length: 0
To: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763516
Call-ID: d6aec080-a281148e-1b-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bK6670973b2c
CSeq: 101 INVITE
```

[diagram] Call-ID:[prev][next]

[13] SIP/2.0 200 OK

```
Date: Thu, 04 Jun 2009 18:38:08 GMT
Call-Info: <sip:10.10.199.250:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:2002@siptrunk17.cisco.com>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763432
Allow-Events: presence, kpml
P-Asserted-Identity: <sip:1001@10.10.199.250>
Supported: replaces
Supported: Geolocation
Remote-Party-ID: <sip:1001@10.10.199.250>;party=called;screen=yes;privacy=off
Content-Length: 216
Require:  timer
To: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763516
Contact: <sip:1001@10.10.199.250:5060;transport=tcp>
Content-Type: application/sdp
Call-ID: d6aec080-a281148e-1b-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bK6670973b2c
CSeq: 101 INVITE
Session-Expires:  1800;refresher=uac

v=0
o=CiscoSystemsCCM-SIP 2000 2 IN IP4 10.10.199.250
s=SIP Call
c=IN IP4 10.10.199.130
t=0 0
m=audio 22210 RTP/AVP 9 101
a=rtpmap:9 G722/8000
a=ptime:20
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
```

[diagram] Call-ID:[prev][next]

[14] ACK sip:1001@10.10.199.250:5060;transport=tcp SIP/2.0

```
Date: Thu, 04 Jun 2009 18:39:10 GMT
From: <sip:2002@siptrunk17.cisco.com>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763432
Allow-Events: presence, kpml
Content-Length: 0
To: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763516
Call-ID: d6aec080-a281148e-1b-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bK67229e95af
CSeq: 101 ACK
Max-Forwards: 70
```

[diagram] Call-ID:[prev][next]

[15] BYE sip:2002@10.10.199.251:5060;transport=tcp SIP/2.0

```
Date: Thu, 04 Jun 2009 18:38:08 GMT
Authorization: Digest
username="siptrunk",realm="StandAloneCluster",uri="sip:2002@10.10.199.251:5060;transport=tcp",response="a286
a8d5333eb56832140860c9bfccd5",nonce="9r6RMo00XlsSln+S26o1VP3R3LMbIJLI",algorithm=MD5
From: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763516
P-Asserted-Identity: <sip:1001@10.10.199.250>
Content-Length: 0
User-Agent: Cisco-CUCM7.1
To: <sip:2002@siptrunk17.cisco.com>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763432
Call-ID: d6aec080-a281148e-1b-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK65c253b7c
CSeq: 103 BYE
Max-Forwards: 70
```

CISCO CONFIDENTIAL

```
[diagram]   Call-ID:[prev][next]
[16] SIP/2.0 200 OK
Date: Thu, 04 Jun 2009 18:39:20 GMT
From: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763516
Content-Length: 0
To: <sip:2002@siptrunk17.cisco.com>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763432
Call-ID: d6aec080-a281148e-1b-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK65c253b7c
CSeq: 103 BYE
```

CISCO CONFIDENTIAL

14.2 Unified CM Authenticates Incoming Request

Title: Unified CM Authenticates Incoming Request

Description:

When a SIP trunk receives an incoming request, if authentication is enabled for this trunk, Cisco Unified CM will check the credential of the incoming request.

Unified CM will return 401 if authentication fails or the request doesn't have the Authorization header. If authorization is enabled for this trunk and authentication passes, Unified CM will also check the priviledges against the username. Unified CM will return 403 if authorization fails.

Configuration:

Node = Unified CM1, IP = 10.10.199.250

Node = Unified CM2, IP = 10.10.199.251

Phone = A, Line = 1001, IP = 10.10.199.130, Model = SCCP

Phone = B, Line = 2002, IP = 10.10.199.179, Model = SCCP

SIP Trunk between Unified CM2 & Unified CM1 has route pattern 1.XXXX

Scenario:

Phone B DN 2002 calls Phone A DN 1001 over the SIP Trunk by dialing 11001

Phone A's CCM Unified CM1 sends back 401 Unauthorized response since the INVITE doesn't have the Authorization header.

Unified CM2 on which PhoneB is present, looks up user credentials and sends out new INVITE with Authorization header.

Unified CM1 checks the Authorization header with its configured user credentials, Authentication passes, call moves on.

End of Scenario

CISCO CONFIDENTIAL

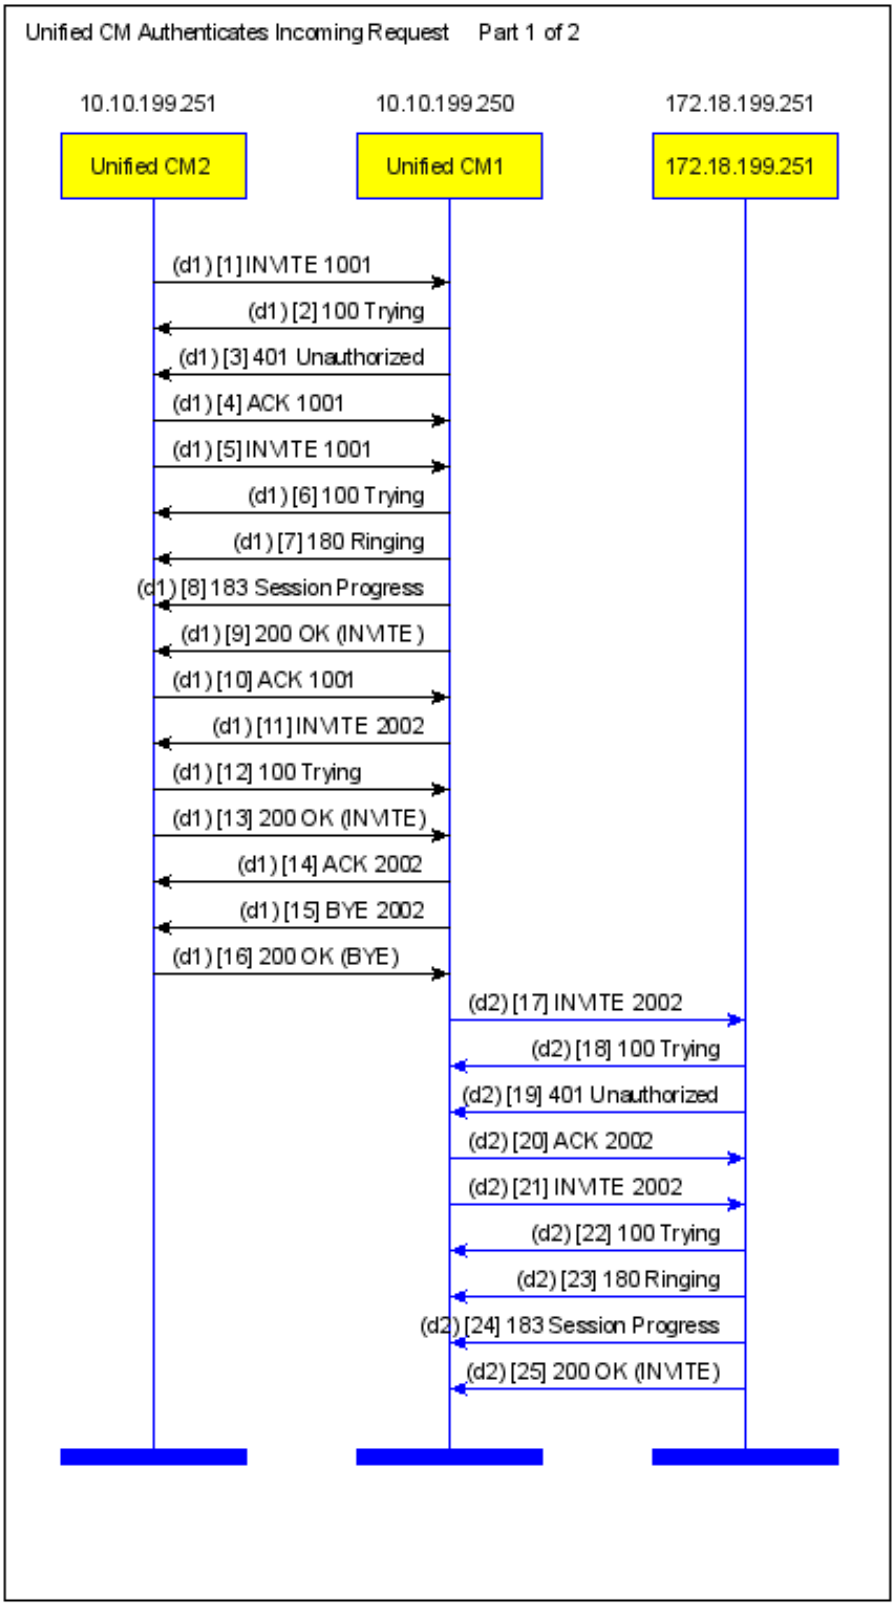

CISCO CONFIDENTIAL

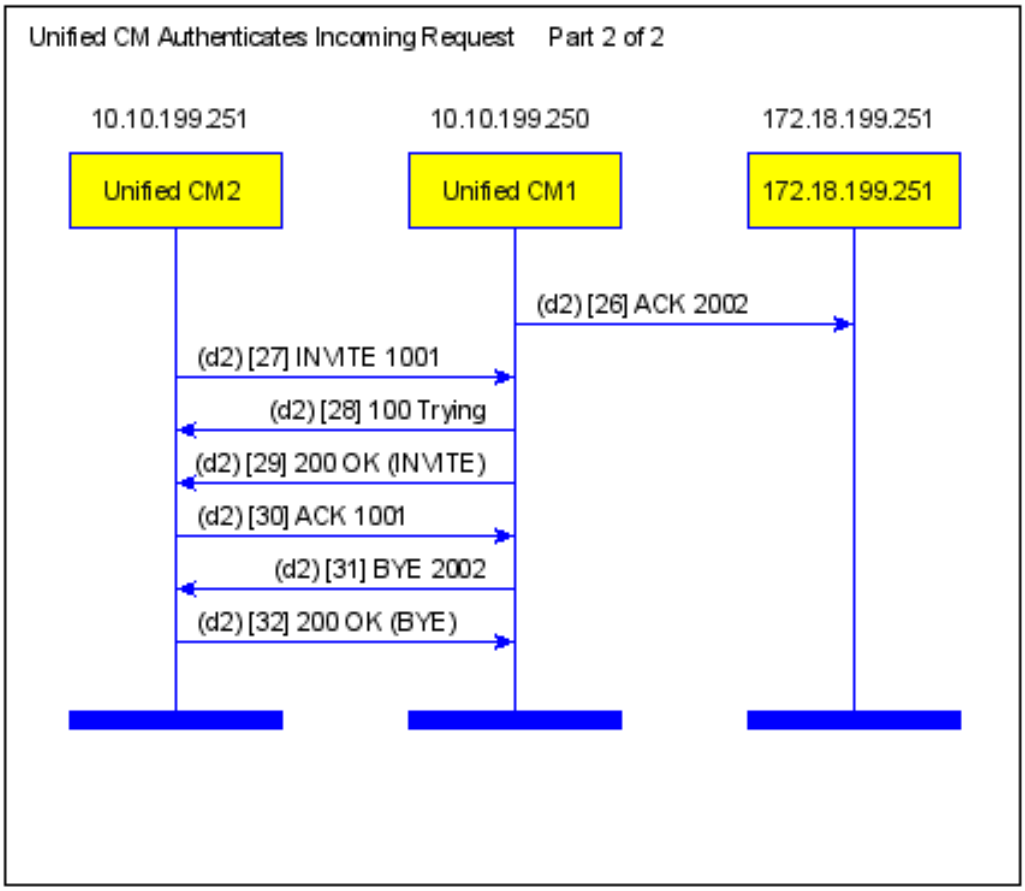

CISCO CONFIDENTIAL

[diagram] Call-ID:[prev][next]
[1] INVITE sip:1001@10.10.199.250:5060 SIP/2.0
Date: Thu, 04 Jun 2009 18:44:57 GMT
Call-Info: <sip:10.10.199.251:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763435
Allow-Events: presence, kpml
P-Asserted-Identity: <sip:2002@10.10.199.251>
Supported: timer,resource-priority,replaces
Supported: Geolocation
Min-SE: 1800
Remote-Party-ID: <sip:2002@10.10.199.251>;party=calling;screen=yes;privacy=off
Content-Length: 0
User-Agent: Cisco-CUCM7.1
To: <sip:1001@10.10.199.250>
Contact: <sip:2002@10.10.199.251:5060;transport=tcp>
Expires: 180
Call-ID: cba86000-a2811629-11-fbc712ac@10.10.199.251
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bK6868684a46
CSeq: 101 INVITE
Session-Expires: 1800
Max-Forwards: 70

[diagram] Call-ID:[prev][next]
[2] SIP/2.0 100 Trying
Date: Thu, 04 Jun 2009 18:43:55 GMT
From: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763435
Allow-Events: presence
Content-Length: 0
To: <sip:1001@10.10.199.250>
Call-ID: cba86000-a2811629-11-fbc712ac@10.10.199.251
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bK6868684a46
CSeq: 101 INVITE

[diagram] Call-ID:[prev][next]
[3] SIP/2.0 401 Unauthorized
Date: Thu, 04 Jun 2009 18:43:55 GMT
From: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763435
Allow-Events: presence
WWW-Authenticate: Digest realm="StandAloneCluster", nonce="prHI/kkYbSqGepz1ZA57SFCE0nr8s9R2", algorithm=MD5
Content-Length: 0
To: <sip:1001@10.10.199.250>;tag=1981007298
Call-ID: cba86000-a2811629-11-fbc712ac@10.10.199.251
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bK6868684a46
CSeq: 101 INVITE

[diagram] Call-ID:[prev][next]
[4] ACK sip:1001@10.10.199.250:5060 SIP/2.0
Date: Thu, 04 Jun 2009 18:44:57 GMT
From: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763435
Allow-Events: presence, kpml
Content-Length: 0
To: <sip:1001@10.10.199.250>;tag=1981007298
Call-ID: cba86000-a2811629-11-fbc712ac@10.10.199.251
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bK6868684a46
CSeq: 101 ACK
Max-Forwards: 70

[diagram] Call-ID:[prev][next]
[5] INVITE sip:1001@10.10.199.250:5060 SIP/2.0
Date: Thu, 04 Jun 2009 18:44:57 GMT
Authorization: Digest
username="siptrunk",realm="StandAloneCluster",uri="sip:1001@10.10.199.250:5060",response="c0e7798d882f3703ae
b7fae90dcc88c9",nonce="prHI/kkYbSqGepz1ZA57SFCE0nr8s9R2",algorithm=MD5
Call-Info: <sip:10.10.199.251:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763435
Allow-Events: presence, kpml
P-Asserted-Identity: <sip:2002@10.10.199.251>
Supported: timer,resource-priority,replaces
Supported: Geolocation
Min-SE: 1800
Remote-Party-ID: <sip:2002@10.10.199.251>;party=calling;screen=yes;privacy=off
Content-Length: 0
User-Agent: Cisco-CUCM7.1
To: <sip:1001@10.10.199.250>
Contact: <sip:2002@10.10.199.251:5060;transport=tcp>
Expires: 180
Call-ID: cba86000-a2811629-11-fbc712ac@10.10.199.251
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bK696069e00d

CISCO CONFIDENTIAL

```
CSeq: 102 INVITE
Session-Expires:  1800
Max-Forwards: 70
```

[diagram] Call-ID:[prev][next]

[6] SIP/2.0 100 Trying

```
Date: Thu, 04 Jun 2009 18:43:55 GMT
From: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763435
Allow-Events: presence
Content-Length: 0
To: <sip:1001@10.10.199.250>
Call-ID: cba86000-a2811629-11-fbc712ac@10.10.199.251
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bK696069e00d
CSeq: 102 INVITE
```

[diagram] Call-ID:[prev][next]

[7] SIP/2.0 180 Ringing

```
Date: Thu, 04 Jun 2009 18:43:55 GMT
Call-Info: <sip:10.10.199.250:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763435
Allow-Events: presence
P-Asserted-Identity: <sip:1001@10.10.199.250>
Supported: Geolocation
Remote-Party-ID: <sip:1001@10.10.199.250>;party=called;screen=yes;privacy=off
Content-Length: 0
To: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763517
Contact: <sip:1001@10.10.199.250:5060;transport=tcp>
Call-ID: cba86000-a2811629-11-fbc712ac@10.10.199.251
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bK696069e00d
CSeq: 102 INVITE
```

[diagram] Call-ID:[prev][next]

[8] SIP/2.0 183 Session Progress

```
Date: Thu, 04 Jun 2009 18:43:55 GMT
Call-Info: <sip:10.10.199.250:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763435
Allow-Events: presence, kpml
P-Asserted-Identity: <sip:1001@10.10.199.250>
Supported: Geolocation
Remote-Party-ID: <sip:1001@10.10.199.250>;party=called;screen=yes;privacy=off
Content-Length: 337
To: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763517
Contact: <sip:1001@10.10.199.250:5060;transport=tcp>
Content-Type: application/sdp
Call-ID: cba86000-a2811629-11-fbc712ac@10.10.199.251
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bK696069e00d
CSeq: 102 INVITE

v=0
o=CiscoSystemsCCM-SIP 2000 1 IN IP4 10.10.199.250
s=SIP Call
c=IN IP4 10.10.199.130
t=0 0
m=audio 4000 RTP/AVP 9 0 8 18 101
a=rtpmap:9 G722/8000
a=ptime:20
a=rtpmap:0 PCMU/8000
a=ptime:20
a=rtpmap:8 PCMA/8000
a=ptime:20
a=rtpmap:18 G729/8000
a=ptime:20
a=sendonly
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
```

[diagram] Call-ID:[prev][next]

[9] SIP/2.0 200 OK

```
Date: Thu, 04 Jun 2009 18:43:55 GMT
Call-Info: <sip:10.10.199.250:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763435
Allow-Events: presence, kpml
P-Asserted-Identity: <sip:1001@10.10.199.250>
Supported: replaces
Supported: Geolocation
Remote-Party-ID: <sip:1001@10.10.199.250>;party=called;screen=yes;privacy=off
Content-Length: 337
```

CISCO CONFIDENTIAL

```
Require:  timer
To: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763517
Contact: <sip:1001@10.10.199.250:5060;transport=tcp>
Content-Type: application/sdp
Call-ID: cba86000-a2811629-11-fbc712ac@10.10.199.251
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bK696069e00d
CSeq: 102 INVITE
Session-Expires:  1800;refresher=uas

v=0
o=CiscoSystemsCCM-SIP 2000 1 IN IP4 10.10.199.250
s=SIP Call
c=IN IP4 10.10.199.130
t=0 0
m=audio 4000 RTP/AVP 9 0 8 18 101
a=rtpmap:9 G722/8000
a=ptime:20
a=rtpmap:0 PCMU/8000
a=ptime:20
a=rtpmap:8 PCMA/8000
a=ptime:20
a=rtpmap:18 G729/8000
a=ptime:20
a=sendonly
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
```

[diagram] Call-ID:[prev][next]

[10] ACK sip:1001@10.10.199.250:5060;transport=tcp SIP/2.0

```
Date: Thu, 04 Jun 2009 18:44:57 GMT
Authorization: Digest
username="siptrunk",realm="StandAloneCluster",uri="sip:1001@10.10.199.250:5060",response="c0e7798d882f3703ae
b7fae90dcc88c9",nonce="prHI/kkYbSqGepz1ZA57SFCE0nr8s9R2",algorithm=MD5
From: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763435
Allow-Events: presence, kpml
Content-Length: 228
To: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763517
Content-Type: application/sdp
Call-ID: cba86000-a2811629-11-fbc712ac@10.10.199.251
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bK6a4383c13
CSeq: 102 ACK
Max-Forwards: 70

v=0
o=CiscoSystemsCCM-SIP 2000 1 IN IP4 10.10.199.251
s=SIP Call
c=IN IP4 10.10.199.179
t=0 0
m=audio 23358 RTP/AVP 9 101
a=rtpmap:9 G722/8000
a=ptime:20
a=recvonly
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
```

[diagram] Call-ID:[prev][next]

[11] INVITE sip:2002@10.10.199.251:5060;transport=tcp SIP/2.0

```
Date: Thu, 04 Jun 2009 18:43:58 GMT
Call-Info: <sip:10.10.199.250:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763517
Allow-Events: presence, kpml
P-Asserted-Identity: <sip:1001@10.10.199.250>
Supported: timer,resource-priority,replaces
Min-SE:  1800
Remote-Party-ID: <sip:1001@10.10.199.250>;party=calling;screen=yes;privacy=off
Content-Length: 216
User-Agent: Cisco-CUCM7.1
To: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763435
Contact: <sip:1001@10.10.199.250:5060;transport=tcp>
Expires: 180
Content-Type: application/sdp
Call-ID: cba86000-a2811629-11-fbc712ac@10.10.199.251
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK6666862291
CSeq: 101 INVITE
Session-Expires:  1800;refresher=uac
Max-Forwards: 70

v=0
o=CiscoSystemsCCM-SIP 2000 2 IN IP4 10.10.199.250
```

CISCO CONFIDENTIAL

```
s=SIP Call
c=IN IP4 10.10.199.130
t=0 0
m=audio 24448 RTP/AVP 9 101
a=rtpmap:9 G722/8000
a=ptime:20
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
```

[diagram] Call-ID:[prev][next]

[12] SIP/2.0 100 Trying

```
Date: Thu, 04 Jun 2009 18:45:00 GMT
From: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763517
Allow-Events: presence, kpml
Content-Length: 0
To: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763435
Call-ID: cba86000-a2811629-11-fbc712ac@10.10.199.251
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK6666862291
CSeq: 101 INVITE
```

[diagram] Call-ID:[prev][next]

[13] SIP/2.0 200 OK

```
Date: Thu, 04 Jun 2009 18:45:00 GMT
Call-Info: <sip:10.10.199.251:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763517
Allow-Events: presence, kpml
P-Asserted-Identity: <sip:2002@10.10.199.251>
Supported: replaces
Supported: Geolocation
Remote-Party-ID: <sip:2002@10.10.199.251>;party=called;screen=yes;privacy=off
Content-Length: 216
Require:  timer
To: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763435
Contact: <sip:2002@10.10.199.251:5060;transport=tcp>
Content-Type: application/sdp
Call-ID: cba86000-a2811629-11-fbc712ac@10.10.199.251
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK6666862291
CSeq: 101 INVITE
Session-Expires:  1800;refresher=uac

v=0
o=CiscoSystemsCCM-SIP 2000 2 IN IP4 10.10.199.251
s=SIP Call
c=IN IP4 10.10.199.179
t=0 0
m=audio 23358 RTP/AVP 9 101
a=rtpmap:9 G722/8000
a=ptime:20
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
```

[diagram] Call-ID:[prev][next]

[14] ACK sip:2002@10.10.199.251:5060;transport=tcp SIP/2.0

```
Date: Thu, 04 Jun 2009 18:43:58 GMT
From: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763517
Allow-Events: presence, kpml
Content-Length: 0
To: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763435
Call-ID: cba86000-a2811629-11-fbc712ac@10.10.199.251
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK671d09fb4b
CSeq: 101 ACK
Max-Forwards: 70
```

[diagram] Call-ID:[prev][next]

[15] BYE sip:2002@10.10.199.251:5060;transport=tcp SIP/2.0

```
Date: Thu, 04 Jun 2009 18:43:58 GMT
From: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763517
Content-Length: 0
User-Agent: Cisco-CUCM7.1
To: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763435
Call-ID: cba86000-a2811629-11-fbc712ac@10.10.199.251
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK6837cbee5
CSeq: 102 BYE
Max-Forwards: 70
```

[diagram] Call-ID:[prev][next]

[16] SIP/2.0 200 OK

```
Date: Thu, 04 Jun 2009 18:45:07 GMT
From: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763517
```

CISCO CONFIDENTIAL

```
Content-Length: 0
To: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763435
Call-ID: cba86000-a2811629-11-fbc712ac@10.10.199.251
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK6837cbee5
CSeq: 102 BYE
```

[diagram] Call-ID:[prev][next]

[17] INVITE sip:2002@siptrunk17.cisco.com:5060 SIP/2.0

```
Date: Thu, 04 Jun 2009 18:38:06 GMT
Call-Info: <sip:10.10.199.250:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763516
Allow-Events: presence, kpml
P-Asserted-Identity: <sip:1001@10.10.199.250>
Supported: timer,resource-priority,replaces
Supported: Geolocation
Min-SE:  1800
Remote-Party-ID: <sip:1001@10.10.199.250>;party=calling;screen=yes;privacy=off
Content-Length: 0
User-Agent: Cisco-CUCM7.1
To: <sip:2002@siptrunk17.cisco.com>
Contact: <sip:1001@10.10.199.250:5060;transport=tcp>
Expires: 180
Call-ID: d6aec080-a281148e-1b-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK626c6d66f1
CSeq: 101 INVITE
Session-Expires:  1800
Max-Forwards: 70
```

[diagram] Call-ID:[prev][next]

[18] SIP/2.0 100 Trying

```
Date: Thu, 04 Jun 2009 18:39:07 GMT
From: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763516
Allow-Events: presence
Content-Length: 0
To: <sip:2002@siptrunk17.cisco.com>
Call-ID: d6aec080-a281148e-1b-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK626c6d66f1
CSeq: 101 INVITE
```

[diagram] Call-ID:[prev][next]

[19] SIP/2.0 401 Unauthorized

```
Date: Thu, 04 Jun 2009 18:39:07 GMT
From: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763516
Allow-Events: presence
WWW-Authenticate: Digest realm="StandAloneCluster", nonce="9r6RMo00XlsSln+S26o1VP3R3LMbIJLI", algorithm=MD5
Content-Length: 0
To: <sip:2002@siptrunk17.cisco.com>;tag=1668797903
Call-ID: d6aec080-a281148e-1b-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK626c6d66f1
CSeq: 101 INVITE
```

[diagram] Call-ID:[prev][next]

[20] ACK sip:2002@siptrunk17.cisco.com:5060 SIP/2.0

```
Date: Thu, 04 Jun 2009 18:38:06 GMT
From: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763516
Allow-Events: presence, kpml
Content-Length: 0
To: <sip:2002@siptrunk17.cisco.com>;tag=1668797903
Call-ID: d6aec080-a281148e-1b-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK626c6d66f1
CSeq: 101 ACK
Max-Forwards: 70
```

[diagram] Call-ID:[prev][next]

[21] INVITE sip:2002@siptrunk17.cisco.com:5060 SIP/2.0

```
Date: Thu, 04 Jun 2009 18:38:06 GMT
Authorization: Digest
username="siptrunk",realm="StandAloneCluster",uri="sip:2002@siptrunk17.cisco.com:5060",response="bc25600669b
fb96bfa83041ba3a3b916",nonce="9r6RMo00XlsSln+S26o1VP3R3LMbIJLI",algorithm=MD5
Call-Info: <sip:10.10.199.250:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763516
Allow-Events: presence, kpml
P-Asserted-Identity: <sip:1001@10.10.199.250>
Supported: timer,resource-priority,replaces
Supported: Geolocation
Min-SE:  1800
Remote-Party-ID: <sip:1001@10.10.199.250>;party=calling;screen=yes;privacy=off
Content-Length: 0
```

CISCO CONFIDENTIAL

```
User-Agent: Cisco-CUCM7.1
To: <sip:2002@siptrunk17.cisco.com>
Contact: <sip:1001@10.10.199.250:5060;transport=tcp>
Expires: 180
Call-ID: d6aec080-a281148e-1b-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK634f63d456
CSeq: 102 INVITE
Session-Expires:  1800
Max-Forwards: 70
```

[diagram] Call-ID:[prev][next]

[22] SIP/2.0 100 Trying

```
Date: Thu, 04 Jun 2009 18:39:07 GMT
From: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763516
Allow-Events: presence
Content-Length: 0
To: <sip:2002@siptrunk17.cisco.com>
Call-ID: d6aec080-a281148e-1b-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK634f63d456
CSeq: 102 INVITE
```

[diagram] Call-ID:[prev][next]

[23] SIP/2.0 180 Ringing

```
Date: Thu, 04 Jun 2009 18:39:07 GMT
Call-Info: <sip:10.10.199.251:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763516
Allow-Events: presence
P-Asserted-Identity: <sip:2002@10.10.199.251>
Supported: Geolocation
Remote-Party-ID: <sip:2002@10.10.199.251>;party=called;screen=yes;privacy=off
Content-Length: 0
To: <sip:2002@siptrunk17.cisco.com>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763432
Contact: <sip:2002@10.10.199.251:5060;transport=tcp>
Call-ID: d6aec080-a281148e-1b-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK634f63d456
CSeq: 102 INVITE
```

[diagram] Call-ID:[prev][next]

[24] SIP/2.0 183 Session Progress

```
Date: Thu, 04 Jun 2009 18:39:07 GMT
Call-Info: <sip:10.10.199.251:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763516
Allow-Events: presence, kpml
P-Asserted-Identity: <sip:2002@10.10.199.251>
Supported: Geolocation
Remote-Party-ID: <sip:2002@10.10.199.251>;party=called;screen=yes;privacy=off
Content-Length: 337
To: <sip:2002@siptrunk17.cisco.com>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763432
Contact: <sip:2002@10.10.199.251:5060;transport=tcp>
Content-Type: application/sdp
Call-ID: d6aec080-a281148e-1b-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK634f63d456
CSeq: 102 INVITE

v=0
o=CiscoSystemsCCM-SIP 2000 1 IN IP4 10.10.199.251
s=SIP Call
c=IN IP4 10.10.199.179
t=0 0
m=audio 4000 RTP/AVP 9 0 8 18 101
a=rtpmap:9 G722/8000
a=ptime:20
a=rtpmap:0 PCMU/8000
a=ptime:20
a=rtpmap:8 PCMA/8000
a=ptime:20
a=rtpmap:18 G729/8000
a=ptime:20
a=sendonly
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
```

[diagram] Call-ID:[prev][next]

[25] SIP/2.0 200 OK

```
Date: Thu, 04 Jun 2009 18:39:07 GMT
Call-Info: <sip:10.10.199.251:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763516
```

CISCO CONFIDENTIAL

```
Allow-Events: presence, kpml
P-Asserted-Identity: <sip:2002@10.10.199.251>
Supported: replaces
Supported: Geolocation
Remote-Party-ID: <sip:2002@10.10.199.251>;party=called;screen=yes;privacy=off
Content-Length: 337
Require:  timer
To: <sip:2002@siptrunk17.cisco.com>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763432
Contact: <sip:2002@10.10.199.251:5060;transport=tcp>
Content-Type: application/sdp
Call-ID: d6aec080-a281148e-1b-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK634f63d456
CSeq: 102 INVITE
Session-Expires:  1800;refresher=uas

v=0
o=CiscoSystemsCCM-SIP 2000 1 IN IP4 10.10.199.251
s=SIP Call
c=IN IP4 10.10.199.179
t=0 0
m=audio 4000 RTP/AVP 9 0 8 18 101
a=rtpmap:9 G722/8000
a=ptime:20
a=rtpmap:0 PCMU/8000
a=ptime:20
a=rtpmap:8 PCMA/8000
a=ptime:20
a=rtpmap:18 G729/8000
a=ptime:20
a=sendonly
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
```

[diagram] Call-ID:[prev][next]

[26] ACK sip:2002@10.10.199.251:5060;transport=tcp SIP/2.0

```
Date: Thu, 04 Jun 2009 18:38:06 GMT
Authorization: Digest
username="siptrunk",realm="StandAloneCluster",uri="sip:2002@siptrunk17.cisco.com:5060",response="bc25600669b
fb96bfa83041ba3a3b916",nonce="9r6RMo00XlsSln+S26o1VP3R3LMbIJLI",algorithm=MD5
From: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763516
Allow-Events: presence, kpml
Content-Length: 228
To: <sip:2002@siptrunk17.cisco.com>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763432
Content-Type: application/sdp
Call-ID: d6aec080-a281148e-1b-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK6469c401af
CSeq: 102 ACK
Max-Forwards: 70

v=0
o=CiscoSystemsCCM-SIP 2000 1 IN IP4 10.10.199.250
s=SIP Call
c=IN IP4 10.10.199.130
t=0 0
m=audio 22210 RTP/AVP 9 101
a=rtpmap:9 G722/8000
a=ptime:20
a=recvonly
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
```

[diagram] Call-ID:[prev][next]

[27] INVITE sip:1001@10.10.199.250:5060;transport=tcp SIP/2.0

```
Date: Thu, 04 Jun 2009 18:39:10 GMT
Call-Info: <sip:10.10.199.251:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:2002@siptrunk17.cisco.com>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763432
Allow-Events: presence, kpml
P-Asserted-Identity: <sip:2002@10.10.199.251>
Supported: timer,resource-priority,replaces
Min-SE:  1800
Remote-Party-ID: <sip:2002@10.10.199.251>;party=calling;screen=yes;privacy=off
Content-Length: 216
User-Agent: Cisco-CUCM7.1
To: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763516
Contact: <sip:2002@10.10.199.251:5060;transport=tcp>
Expires: 180
Content-Type: application/sdp
Call-ID: d6aec080-a281148e-1b-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bK6670973b2c
```

CISCO CONFIDENTIAL

```
CSeq: 101 INVITE
Session-Expires:  1800;refresher=uac
Max-Forwards: 70

v=0
o=CiscoSystemsCCM-SIP 2000 2 IN IP4 10.10.199.251
s=SIP Call
c=IN IP4 10.10.199.179
t=0 0
m=audio 21138 RTP/AVP 9 101
a=rtpmap:9 G722/8000
a=ptime:20
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
```

[diagram] Call-ID:[prev][next]

[28] SIP/2.0 100 Trying

```
Date: Thu, 04 Jun 2009 18:38:08 GMT
From: <sip:2002@siptrunk17.cisco.com>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763432
Allow-Events: presence, kpml
Content-Length: 0
To: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763516
Call-ID: d6aec080-a281148e-1b-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bK6670973b2c
CSeq: 101 INVITE
```

[diagram] Call-ID:[prev][next]

[29] SIP/2.0 200 OK

```
Date: Thu, 04 Jun 2009 18:38:08 GMT
Call-Info: <sip:10.10.199.250:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:2002@siptrunk17.cisco.com>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763432
Allow-Events: presence, kpml
P-Asserted-Identity: <sip:1001@10.10.199.250>
Supported: replaces
Supported: Geolocation
Remote-Party-ID: <sip:1001@10.10.199.250>;party=called;screen=yes;privacy=off
Content-Length: 216
Require:  timer
To: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763516
Contact: <sip:1001@10.10.199.250:5060;transport=tcp>
Content-Type: application/sdp
Call-ID: d6aec080-a281148e-1b-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bK6670973b2c
CSeq: 101 INVITE
Session-Expires:  1800;refresher=uac

v=0
o=CiscoSystemsCCM-SIP 2000 2 IN IP4 10.10.199.250
s=SIP Call
c=IN IP4 10.10.199.130
t=0 0
m=audio 22210 RTP/AVP 9 101
a=rtpmap:9 G722/8000
a=ptime:20
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
```

[diagram] Call-ID:[prev][next]

[30] ACK sip:1001@10.10.199.250:5060;transport=tcp SIP/2.0

```
Date: Thu, 04 Jun 2009 18:39:10 GMT
From: <sip:2002@siptrunk17.cisco.com>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763432
Allow-Events: presence, kpml
Content-Length: 0
To: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763516
Call-ID: d6aec080-a281148e-1b-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bK67229e95af
CSeq: 101 ACK
Max-Forwards: 70
```

[diagram] Call-ID:[prev][next]

[31] BYE sip:2002@10.10.199.251:5060;transport=tcp SIP/2.0

```
Date: Thu, 04 Jun 2009 18:38:08 GMT
Authorization: Digest
username="siptrunk",realm="StandAloneCluster",uri="sip:2002@10.10.199.251:5060;transport=tcp",response="a286
a8d5333eb56832140860c9bfccd5",nonce="9r6RMo00XlsSln+S26o1VP3R3LMbIJLI",algorithm=MD5
From: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763516
P-Asserted-Identity: <sip:1001@10.10.199.250>
Content-Length: 0
User-Agent: Cisco-CUCM7.1
```

CISCO CONFIDENTIAL

```
To: <sip:2002@siptrunk17.cisco.com>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763432
Call-ID: d6aec080-a281148e-1b-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK65c253b7c
CSeq: 103 BYE
Max-Forwards: 70

[diagram]   Call-ID:[prev][next]
[32] SIP/2.0 200 OK
Date: Thu, 04 Jun 2009 18:39:20 GMT
From: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763516
Content-Length: 0
To: <sip:2002@siptrunk17.cisco.com>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763432
Call-ID: d6aec080-a281148e-1b-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK65c253b7c
CSeq: 103 BYE
```

15. ACL

15.1 Access Control List, Deny Presence Subscription

Title: Access Control List, Deny Presence Subscription

Description:

When a SIP trunk is configured not to allow Subscription with presence, an incoming SUBSCRIBE with presence event to this trunk is rejected with 403 response.

Configuration:

Node = Remote UA, IP = 10.10.200.179
Node = Unified CM1, IP = 10.10.199.250

Unified CM1 has its SIP Trunk Security Profile configured to have "Accept Presence Subscription" unchecked.

Scenario:

Remote UA sends Presence Subscription message to Unified CM1
Unified CM1 rejects the message with 403

CISCO CONFIDENTIAL

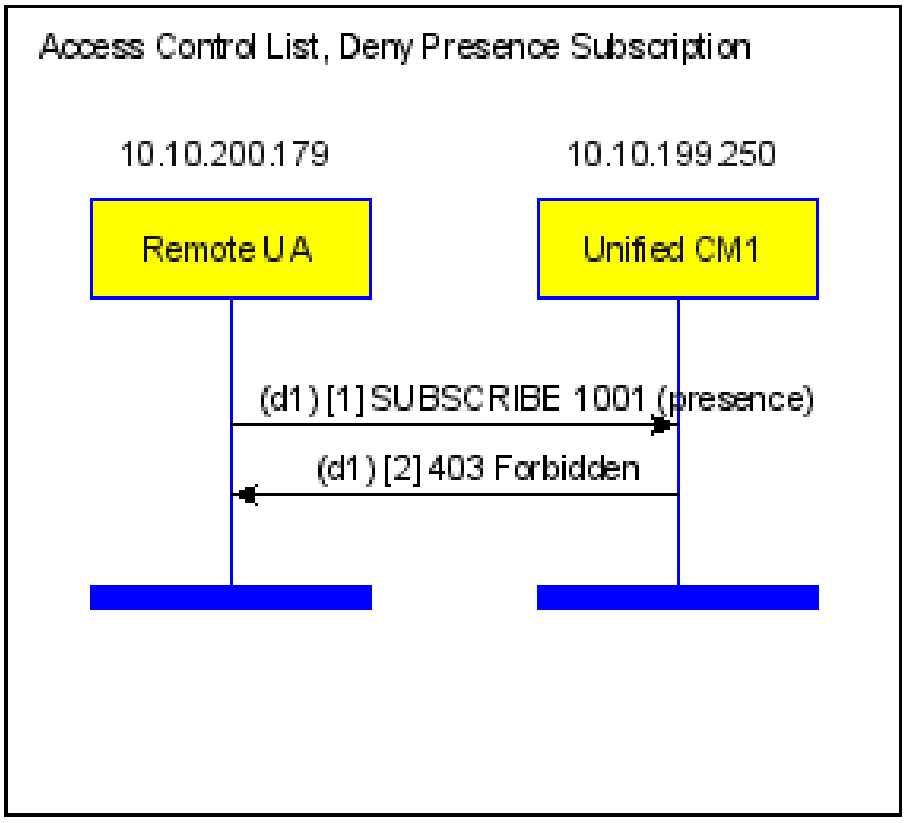

CISCO CONFIDENTIAL

```
[diagram]   Call-ID:[prev][next]
[1] SUBSCRIBE sip:1001@10.10.199.250:5060 SIP/2.0
Via: SIP/2.0/TCP 10.10.200.179:5060
From: <sip:5678@10.10.200.179:5060>;tag=1
To: <sip:1001@10.10.199.250:5060>
Call-ID: 1-1659@10.10.200.179
CSeq: 101 SUBSCRIBE
Event: presence
Accept: application/dialog-info+xml
Expires: 7200
Contact: sip:5678@10.10.200.179:5060
Max-Forwards: 70
Content-Length: 0

[diagram]   Call-ID:[prev][next]
[2] SIP/2.0 403 Forbidden
Date: Thu, 04 Jun 2009 15:31:38 GMT
From: <sip:5678@10.10.200.179:5060>;tag=1
Content-Length: 0
To: <sip:1001@10.10.199.250:5060>;tag=1807656856
Call-ID: 1-1659@10.10.200.179
Via: SIP/2.0/TCP 10.10.200.179:5060
CSeq: 101 SUBSCRIBE
```

CISCO CONFIDENTIAL

15.2 Access Control List, Deny Out of Dialog REFER

Title: Access Control List, Deny Out of Dialog REFER

Description:

When a SIP trunk is configured not to allow out-of-dialog REFER,
an incoming OOD REFER to this trunk is rejected with 403 response.

Configuration:

Node = Remote UA, IP = 10.10.200.179
Node = Unified CM1, IP = 10.10.199.250

Unified CM1 has its SIP Trunk Security Profile configured to have
"Accept Out-of-Dialog REFER" unchecked.

Scenario:

Remote UA sends Out-of-Dialog REFER message to Unified CM1
Unified CM1 rejects the message with 403

CISCO CONFIDENTIAL

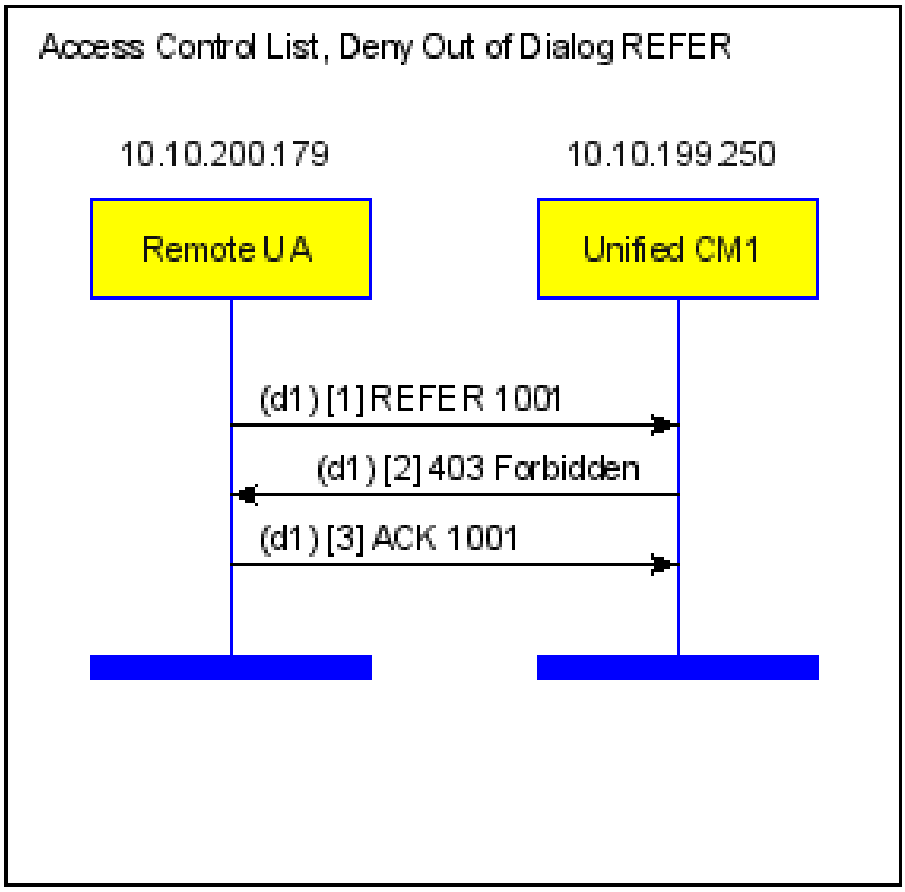

CISCO CONFIDENTIAL

```
[diagram]   Call-ID:[prev][next]
[1] REFER sip:1001@10.10.199.250:5060 SIP/2.0
Via: SIP/2.0/TCP 10.10.200.179:5060
From: sipp <sip:5678@10.10.200.179:5060>;tag=1
To: <sip:1001@10.10.199.250:5060>
Call-ID: 1-1506@10.10.200.179
Cseq: 103 REFER
Contact: <sip:5678@10.10.200.179:5060>
Refer-To: <sip:1009@10.10.199.250>
Referred-By: <sip:1234@whatever.com>;x-cisco-monitor-call
Max-Forwards: 70
Content-Length: 0

[diagram]   Call-ID:[prev][next]
[2] SIP/2.0 403 Forbidden
Date: Thu, 04 Jun 2009 15:26:47 GMT
From: sipp <sip:5678@10.10.200.179:5060>;tag=1
Content-Length: 0
To: <sip:1001@10.10.199.250:5060>;tag=535326704
Contact: <sip:1001@10.10.199.250:5060;transport=tcp>
Call-ID: 1-1506@10.10.200.179
Via: SIP/2.0/TCP 10.10.200.179:5060
CSeq: 103 REFER

[diagram]   Call-ID:[prev][next]
[3] ACK sip:1001@10.10.199.250:5060 SIP/2.0
Via: SIP/2.0/TCP 10.10.200.179:5060
From: sipp <sip:5678@10.10.200.179:5060>;tag=1
To: <sip:1001@10.10.199.250:5060>;tag=535326704
Call-ID: 1-1506@10.10.200.179
CSeq: 104 ACK
Contact: sip:5678@10.10.200.179:5060
Max-Forwards: 70
Content-Length: 0
```

CISCO CONFIDENTIAL

15.3 Access Control List, Deny Unsolicited NOTIFY

Title: Access Control List, Deny Unsolicited NOTIFY

Description:

When a SIP trunk is configured not to allow Unsolicited NOTIFY, an incoming Unsolicited NOTIFY(MWI, for example) to this trunk is rejected with 403 response.

Configuration:

Node = Remote UA, IP = 10.10.200.179
Node = Unified CM1, IP = 10.10.199.250

Unified CM1 has its SIP Trunk Security Profile configured to have "Accept Unsolicited Notification" unchecked.

Scenario:

Remote UA sends Unsolicited NOTIFY message to Unified CM1
Unified CM1 rejects the message with 403

CISCO CONFIDENTIAL

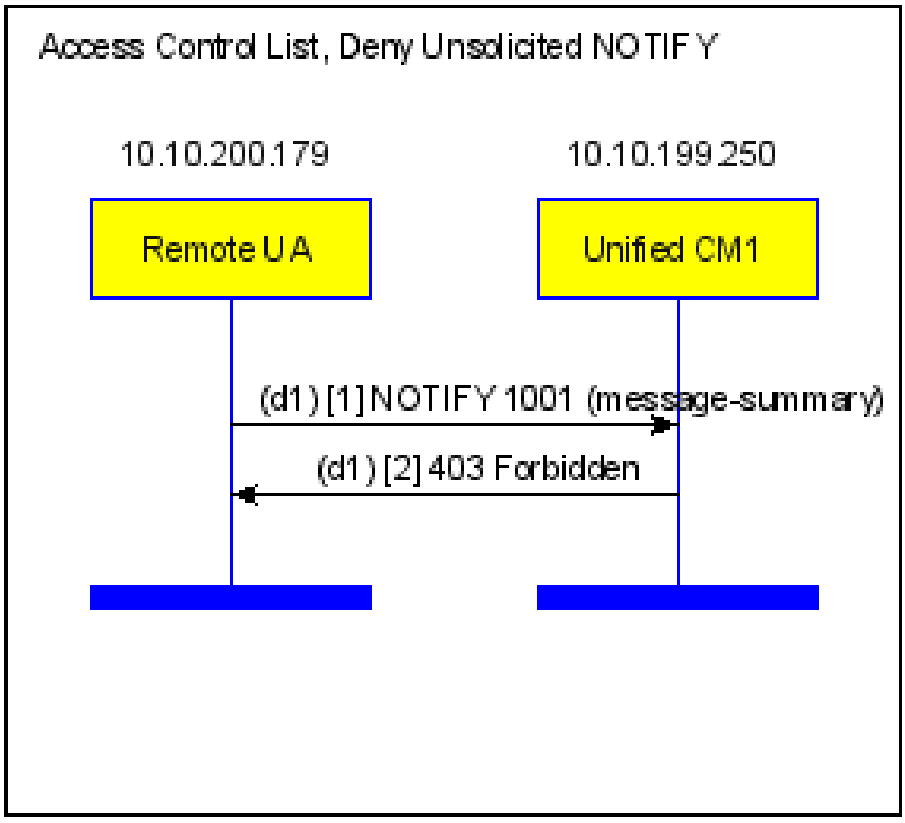

CISCO CONFIDENTIAL

```
[diagram]   Call-ID:[prev][next]
[1] NOTIFY sip:1001@10.10.199.250:5060 SIP/2.0
Via: SIP/2.0/TCP 10.10.200.179:5060
From: <sip:5678@10.10.200.179:5060>;tag=1
To: <sip:1001@10.10.199.250:5060>
Call-ID: 1-1928@10.10.200.179
CSeq: 1 NOTIFY
Event: message-summary
Allow: INVITE,ACK,BYE,CANCEL,OPTIONS,REGISTER,INFO,PRACK,SUBSCRIBE,NOTIFY,REFER,UPDATE
Expires: 180
Contact: sip:5678@10.10.200.179:5060
Max-Forwards: 70
Content-Type: text/plain
Content-Length: 23

Messages-Waiting: yes

[diagram]   Call-ID:[prev][next]
[2] SIP/2.0 403 Forbidden
Date: Thu, 04 Jun 2009 15:43:34 GMT
From: <sip:5678@10.10.200.179:5060>;tag=1
Content-Length: 0
To: <sip:1001@10.10.199.250:5060>;tag=464621608
Call-ID: 1-1928@10.10.200.179
Via: SIP/2.0/TCP 10.10.200.179:5060
CSeq: 1 NOTIFY
```

CISCO CONFIDENTIAL

15.4 Access Control List, Deny INVITE with Replaces Header

Title: Access Control List, Deny INVITE with Replaces Header

Description:

When a SIP trunk is configured not to allow Replaces header,
an incoming INVITE with Replaces header to this trunk is
rejected with 403 response.

Configuration:

Node = Remote UA, IP = 10.10.200.179
Node = Unified CM1, IP = 10.10.199.250

Unified CM1 has its SIP Trunk Security Profile configured to have
"Accept Replaces Header" unchecked.

Scenario:

Remote UA sends INVITE with Replaces header message to Unified CM1
Unified CM1 rejects the message with 403

CISCO CONFIDENTIAL

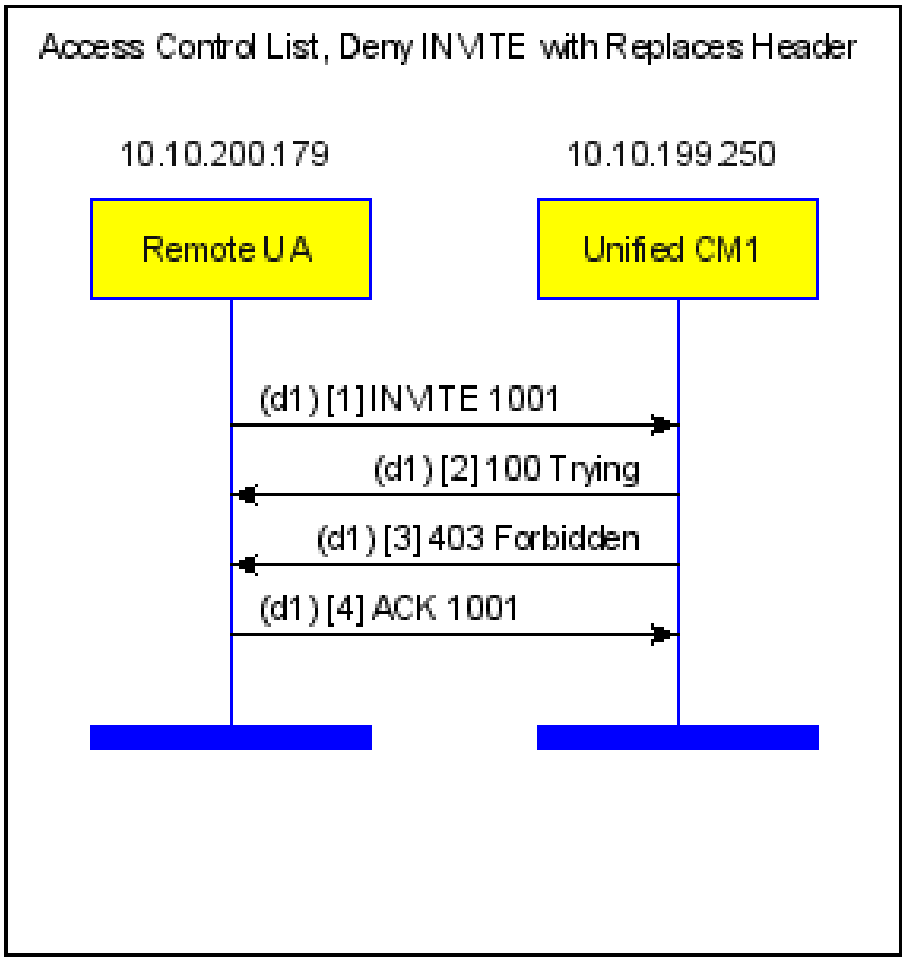

CISCO CONFIDENTIAL

```
[diagram]   Call-ID:[prev][next]
[1] INVITE sip:1001@10.10.199.250:5060 SIP/2.0
Via: SIP/2.0/TCP 10.10.200.179:5060
From: <sip:5678@10.10.200.179:5060>;tag=1
To: <sip:1001@10.10.199.250:5060>
Call-ID: 1-991@10.10.200.179
CSeq: 1 INVITE
Contact: sip:5678@10.10.200.179:5060
Max-Forwards: 70
Subject: Performance Test
Content-Type: application/sdp
Replaces: 42592@bobster.example.org;to-tag=7743;from-tag=6472
Content-Length: 318

v=0
o=CiscoSystemsCCM-SIP 2000 1000 IN IP4 10.10.193.222
s=SIP Call
c=IN IP4 10.10.193.222
t=0 0
m=audio 4000 RTP/AVP 2 0 8 18
a=rtpmap:2 G726-32/8000
a=ptime:120
a=rtpmap:0 PCMU/8000
a=ptime:40
a=rtpmap:8 PCMA/8000
a=ptime:40
a=rtpmap:18 G729/8000
a=ptime:60
a=fmtp:18 annexa=yes;annexb=no
a=sendonly

[diagram]   Call-ID:[prev][next]
[2] SIP/2.0 100 Trying
Date: Thu, 04 Jun 2009 15:14:44 GMT
From: <sip:5678@10.10.200.179:5060>;tag=1
Allow-Events: presence
Content-Length: 0
To: <sip:1001@10.10.199.250:5060>
Call-ID: 1-991@10.10.200.179
Via: SIP/2.0/TCP 10.10.200.179:5060
CSeq: 1 INVITE

[diagram]   Call-ID:[prev][next]
[3] SIP/2.0 403 Forbidden
Date: Thu, 04 Jun 2009 15:14:44 GMT
From: <sip:5678@10.10.200.179:5060>;tag=1
Allow-Events: presence
Content-Length: 0
To: <sip:1001@10.10.199.250:5060>;tag=1864289121
Call-ID: 1-991@10.10.200.179
Via: SIP/2.0/TCP 10.10.200.179:5060
CSeq: 1 INVITE

[diagram]   Call-ID:[prev][next]
[4] ACK sip:1001@10.10.199.250:5060 SIP/2.0
Via: SIP/2.0/TCP 10.10.200.179:5060
From: <sip:5678@10.10.200.179:5060>;tag=1
To: <sip:1001@10.10.199.250:5060>;tag=1864289121
Call-ID: 1-991@10.10.200.179
CSeq: 1 ACK
Contact: sip:5678@10.10.200.179:5060
Max-Forwards: 70
Subject: Performance Test
Content-Length: 0
```

CISCO CONFIDENTIAL

15.5 Access Control List, Deny REFER with Replaces Header

Title: Access Control List, Deny REFER with Replaces Header

Description:

When a SIP trunk is configured not to allow Replaces header, an incoming REFER with Replaces header to this trunk is rejected with 403 response.

Configuration:

Node = Remote UA, IP = 10.10.200.179
Node = Unified CM1, IP = 10.10.199.250

Unified CM1 has its SIP Trunk Security Profile configured to have "Accept Replaces Header" unchecked.

Scenario:

Remote UA sends REFER with Replaces header message to Unified CM1
Unified CM1 rejects the message with 403

CISCO CONFIDENTIAL

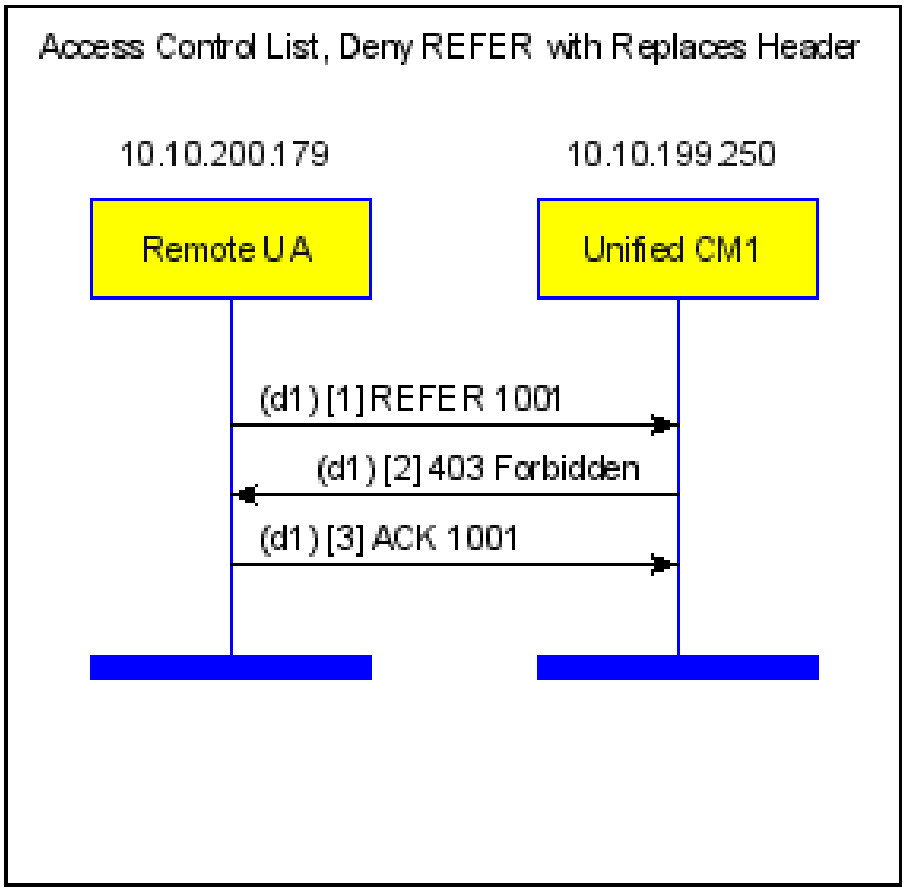

CISCO CONFIDENTIAL

```
[diagram]   Call-ID:[prev][next]
[1] REFER sip:1001@10.10.199.250:5060 SIP/2.0
Via: SIP/2.0/TCP 10.10.200.179:5060
From: sipp <sip:5678@10.10.200.179:5060>;tag=1
To: <sip:1001@10.10.199.250:5060>
Call-ID: 1-1698@10.10.200.179
Cseq: 103 REFER
Contact: <sip:5678@10.10.200.179:5060>
Refer-To: <sip:1009@10.10.199.250?Replaces=0.943331825637387%3Bto-tag%3D1_1146_CtkS000002%3Bfrom-
tag%3Drefer-1_AtoC>
Referred-By: <sip:1234@whatever.com>;x-cisco-monitor-call
Max-Forwards: 70
Content-Length: 0

[diagram]   Call-ID:[prev][next]
[2] SIP/2.0 403 Forbidden
Date: Thu, 04 Jun 2009 15:34:20 GMT
From: sipp <sip:5678@10.10.200.179:5060>;tag=1
Content-Length: 0
To: <sip:1001@10.10.199.250:5060>;tag=1612665088
Contact: <sip:1001@10.10.199.250:5060;transport=tcp>
Call-ID: 1-1698@10.10.200.179
Via: SIP/2.0/TCP 10.10.200.179:5060
CSeq: 103 REFER

[diagram]   Call-ID:[prev][next]
[3] ACK sip:1001@10.10.199.250:5060 SIP/2.0
Via: SIP/2.0/TCP 10.10.200.179:5060
From: sipp <sip:5678@10.10.200.179:5060>;tag=1
To: <sip:1001@10.10.199.250:5060>;tag=1612665088
Call-ID: 1-1698@10.10.200.179
CSeq: 104 ACK
Contact: sip:5678@10.10.200.179:5060
Max-Forwards: 70
Content-Length: 0
```

CISCO CONFIDENTIAL

16. RSVP

16.1 Outgoing RSVP Call through SIP Trunk

Title: Outgoing RSVP Call through SIP Trunk

Description:

The scenario for a RSVP outgoing call from a Cisco Unified IP Phone to a UserAgent reachable through Cisco Unified CM's SIP Trunk.

The Cisco Unified IP PHone and the SipTrunk devices are in different location and having RSVP

policy=Mandatory between them.

During call setup, a RSVP agent shall be allocated for each device in a different location, which would provide rsvp media path as following:

Cisco Unified IP Phone<--unresereved media->RSVPAgent1<--reserved media path--->RSVPAgent2<--unreserved media->remoteUA

The RSVPAgent1 is catering to the Cisco Unified IP Phone's location. The RSVPAgent2 is catering to the Cisco Unified CM's SIP Trunk's location.

The rsvp reservation is relevant only between the location of Cisco Unified IP Phone & outgoing SipTrunk device. The standard rfc3312 for negotiation of the resources through preconditions is 'not' supported through the SIP trunk. Thus the remote is not made aware of the reservation.

Configuration:

Node = Unified CM, IP = 10.10.199.250

Node = Unified CM, IP = 10.10.199.251

Phone = A, Line = 1001, IP = 10.10.199.130, Model = SCCP

Phone = B, Line = 2002, IP = 10.10.199.179, Model = SCCP

Scenario:

Phone A DN 1001 calls Phone B DN 2002 over the SIP Trunk by dialing 22002

Phone B DN 2002 Answers

Phone A DN 1001 goes onHook

CISCO CONFIDENTIAL

End of Scenario

CISCO CONFIDENTIAL

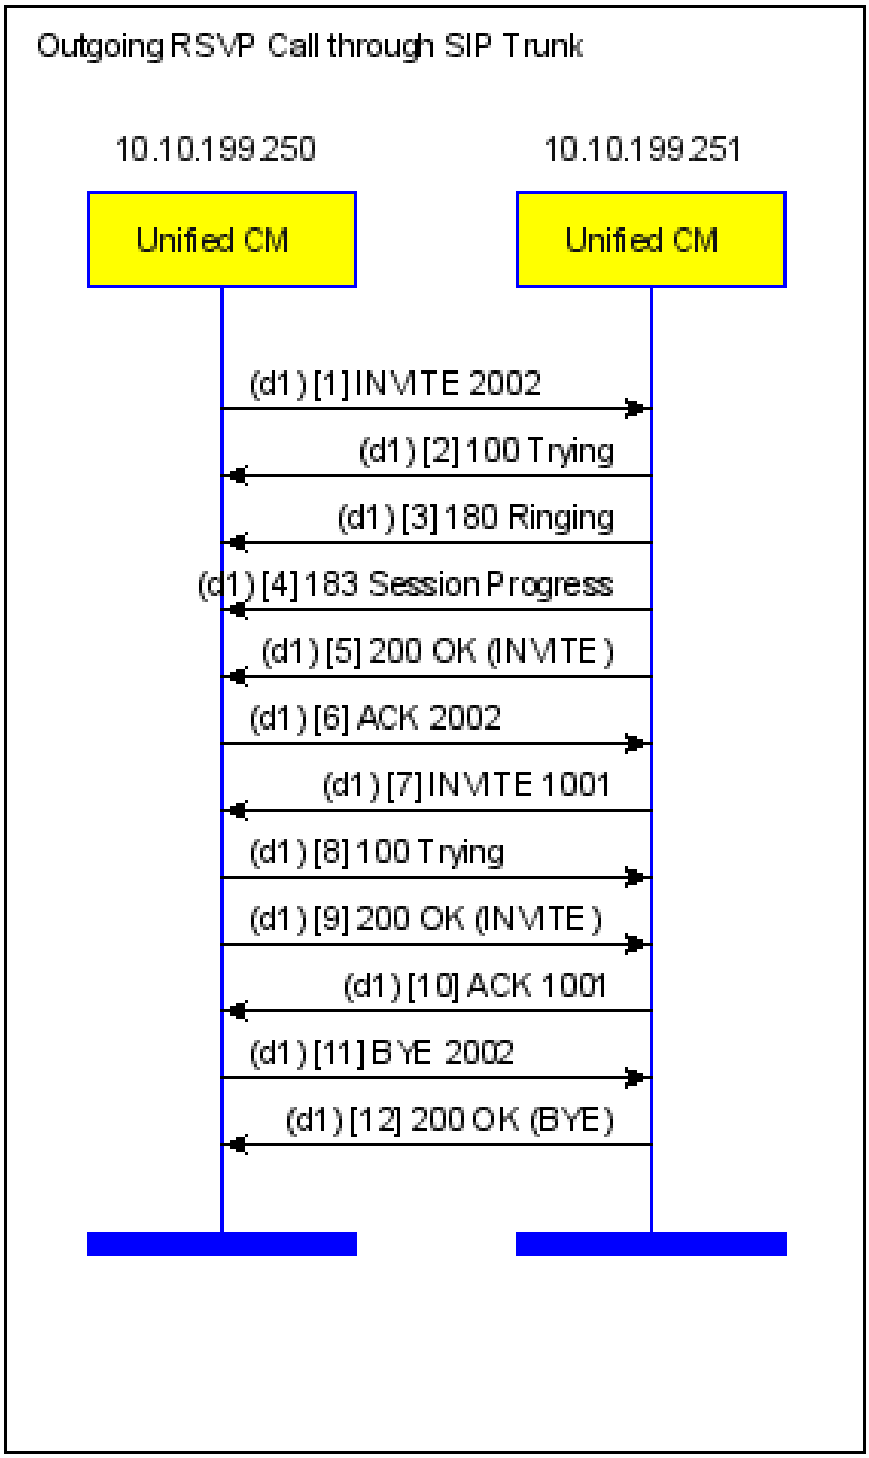

CISCO CONFIDENTIAL

[diagram] Call-ID:[prev][next]
[1] INVITE sip:2002@10.10.199.251:5060 SIP/2.0
```
Date: Wed, 10 Jun 2009 15:50:26 GMT
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-28674139
Allow-Events: presence
P-Asserted-Identity: <sip:1001@10.10.199.250>
Supported: timer,resource-priority,replaces
Supported: Geolocation
Min-SE:  1800
Remote-Party-ID: <sip:1001@10.10.199.250>;party=calling;screen=yes;privacy=off
Content-Length: 0
User-Agent: Cisco-CUCM7.1
To: <sip:2002@10.10.199.251>
Contact: <sip:1001@10.10.199.250:5060;transport=tcp>
Expires: 180
Call-ID: 68ef1280-a2f1d642-60-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK883bbf271
CSeq: 101 INVITE
Session-Expires:  1800
Max-Forwards: 70
```

[diagram] Call-ID:[prev][next]
[2] SIP/2.0 100 Trying
```
Date: Wed, 10 Jun 2009 15:51:43 GMT
From: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-28674139
Allow-Events: presence
Content-Length: 0
To: <sip:2002@10.10.199.251>
Call-ID: 68ef1280-a2f1d642-60-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK883bbf271
CSeq: 101 INVITE
```

[diagram] Call-ID:[prev][next]
[3] SIP/2.0 180 Ringing
```
Date: Wed, 10 Jun 2009 15:51:43 GMT
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-28674139
Allow-Events: presence
P-Asserted-Identity: <sip:2002@10.10.199.251>
Supported: Geolocation
Remote-Party-ID: <sip:2002@10.10.199.251>;party=called;screen=yes;privacy=off
Content-Length: 0
To: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-28674200
Contact: <sip:2002@10.10.199.251:5060;transport=tcp>
Call-ID: 68ef1280-a2f1d642-60-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK883bbf271
CSeq: 101 INVITE
```

[diagram] Call-ID:[prev][next]
[4] SIP/2.0 183 Session Progress
```
Date: Wed, 10 Jun 2009 15:51:43 GMT
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-28674139
Allow-Events: presence
P-Asserted-Identity: <sip:2002@10.10.199.251>
Supported: Geolocation
Remote-Party-ID: <sip:2002@10.10.199.251>;party=called;screen=yes;privacy=off
Content-Length: 250
To: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-28674200
Contact: <sip:2002@10.10.199.251:5060;transport=tcp>
Content-Type: application/sdp
Call-ID: 68ef1280-a2f1d642-60-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK883bbf271
CSeq: 101 INVITE

v=0
o=CiscoSystemsCCM-SIP 2000 1 IN IP4 10.10.199.251
s=SIP Call
c=IN IP4 10.10.199.163
t=0 0
m=audio 4000 RTP/AVP 18 101
a=rtpmap:18 G729/8000
a=ptime:20
a=fmtp:18 annexb=no
a=sendonly
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
```

CISCO CONFIDENTIAL

```
[diagram]   Call-ID:[prev][next]
[5] SIP/2.0 200 OK
Date: Wed, 10 Jun 2009 15:51:43 GMT
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-28674139
Allow-Events: presence
P-Asserted-Identity: <sip:2002@10.10.199.251>
Supported: replaces
Supported: Geolocation
Remote-Party-ID: <sip:2002@10.10.199.251>;party=called;screen=yes;privacy=off
Content-Length: 250
Require:  timer
To: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-28674200
Contact: <sip:2002@10.10.199.251:5060;transport=tcp>
Content-Type: application/sdp
Call-ID: 68ef1280-a2f1d642-60-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK883bbf271
CSeq: 101 INVITE
Session-Expires:  1800;refresher=uas

v=0
o=CiscoSystemsCCM-SIP 2000 1 IN IP4 10.10.199.251
s=SIP Call
c=IN IP4 10.10.199.163
t=0 0
m=audio 4000 RTP/AVP 18 101
a=rtpmap:18 G729/8000
a=ptime:20
a=fmtp:18 annexb=no
a=sendonly
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15

[diagram]   Call-ID:[prev][next]
[6] ACK sip:2002@10.10.199.251:5060;transport=tcp SIP/2.0
Date: Wed, 10 Jun 2009 15:50:26 GMT
From: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-28674139
Allow-Events: presence
Content-Length: 251
To: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-28674200
Content-Type: application/sdp
Call-ID: 68ef1280-a2f1d642-60-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK8951deeec2
CSeq: 101 ACK
Max-Forwards: 70

v=0
o=CiscoSystemsCCM-SIP 2000 1 IN IP4 10.10.199.250
s=SIP Call
c=IN IP4 10.10.199.163
t=0 0
m=audio 19348 RTP/AVP 18 101
a=rtpmap:18 G729/8000
a=ptime:20
a=fmtp:18 annexb=no
a=recvonly
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15

[diagram]   Call-ID:[prev][next]
[7] INVITE sip:1001@10.10.199.250:5060;transport=tcp SIP/2.0
Date: Wed, 10 Jun 2009 15:51:45 GMT
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-28674200
Allow-Events: presence
P-Asserted-Identity: <sip:2002@10.10.199.251>
Supported: timer,resource-priority,replaces
Min-SE:  1800
Remote-Party-ID: <sip:2002@10.10.199.251>;party=calling;screen=yes;privacy=off
Content-Length: 239
User-Agent: Cisco-CUCM7.1
To: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-28674139
Contact: <sip:2002@10.10.199.251:5060;transport=tcp>
Expires: 180
Content-Type: application/sdp
Call-ID: 68ef1280-a2f1d642-60-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bK19f1f5286
CSeq: 101 INVITE
Session-Expires:  1800;refresher=uac
Max-Forwards: 70
```

CISCO CONFIDENTIAL

```
v=0
o=CiscoSystemsCCM-SIP 2000 2 IN IP4 10.10.199.251
s=SIP Call
c=IN IP4 10.10.199.163
t=0 0
m=audio 17308 RTP/AVP 18 101
a=rtpmap:18 G729/8000
a=ptime:20
a=fmtp:18 annexb=no
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
```

[diagram] Call-ID:[prev][next]

[8] SIP/2.0 100 Trying

```
Date: Wed, 10 Jun 2009 15:50:28 GMT
From: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-28674200
Allow-Events: presence
Content-Length: 0
To: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-28674139
Call-ID: 68ef1280-a2f1d642-60-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bK19f1f5286
CSeq: 101 INVITE
```

[diagram] Call-ID:[prev][next]

[9] SIP/2.0 200 OK

```
Date: Wed, 10 Jun 2009 15:50:28 GMT
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-28674200
Allow-Events: presence
P-Asserted-Identity: <sip:1001@10.10.199.250>
Supported: replaces
Supported: Geolocation
Remote-Party-ID: <sip:1001@10.10.199.250>;party=called;screen=yes;privacy=off
Content-Length: 239
Require:  timer
To: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-28674139
Contact: <sip:1001@10.10.199.250:5060;transport=tcp>
Content-Type: application/sdp
Call-ID: 68ef1280-a2f1d642-60-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bK19f1f5286
CSeq: 101 INVITE
Session-Expires:  1800;refresher=uac

v=0
o=CiscoSystemsCCM-SIP 2000 2 IN IP4 10.10.199.250
s=SIP Call
c=IN IP4 10.10.199.163
t=0 0
m=audio 19348 RTP/AVP 18 101
a=rtpmap:18 G729/8000
a=ptime:20
a=fmtp:18 annexb=no
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
```

[diagram] Call-ID:[prev][next]

[10] ACK sip:1001@10.10.199.250:5060;transport=tcp SIP/2.0

```
Date: Wed, 10 Jun 2009 15:51:45 GMT
From: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-28674200
Allow-Events: presence
Content-Length: 0
To: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-28674139
Call-ID: 68ef1280-a2f1d642-60-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bK1a44460480
CSeq: 101 ACK
Max-Forwards: 70
```

[diagram] Call-ID:[prev][next]

[11] BYE sip:2002@10.10.199.251:5060;transport=tcp SIP/2.0

```
Date: Wed, 10 Jun 2009 15:50:28 GMT
From: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-28674139
P-Asserted-Identity: <sip:1001@10.10.199.250>
Content-Length: 0
User-Agent: Cisco-CUCM7.1
To: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-28674200
Call-ID: 68ef1280-a2f1d642-60-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK8a375a0f56
CSeq: 102 BYE
Max-Forwards: 70
```

CISCO CONFIDENTIAL

```
[diagram]   Call-ID:[prev][next]
[12] SIP/2.0 200 OK
Date: Wed, 10 Jun 2009 15:51:51 GMT
From: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-28674139
Content-Length: 0
To: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-28674200
Call-ID: 68ef1280-a2f1d642-60-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK8a375a0f56
CSeq: 102 BYE
```

CISCO CONFIDENTIAL

17. Publish

17.1 Basic PUBLISH Operations

Title: Basic PUBLISH Operations

Description:

Cisco Unified CM SIP trunk supports line appearance based presence information publication by using SIP PUBLISH method. This flow shows the basic PUBLISH operations for a given line appearance.

- Directory number 1001 on IP PhoneA is associated with Presence Server's user alice.
- When PhoneA registers with CM, SIP trunk sends out creates the publication with no etags.
- After the refresh timer expires, SIP trunk refreshes the publication with empty presence body.
- When PhoneA goes offhook/onhook, SIP trunk modifies the publication with new presence bodies.
- After PhoneA unregisters from CM, SIP trunk deletes the publication with 0 Expires header

Configuration:

Node = Cisco Unified CM, IP = 10.10.199.250

Node = Presence Server, IP = 10.10.199.215

Phone = A, Line = 1001, IP = 10.10.199.130, Model = SCCP

Scenario:

Phone A resets

Phone A offHook

Phone A onHook

Phone A resets

End of Scenario

CISCO CONFIDENTIAL

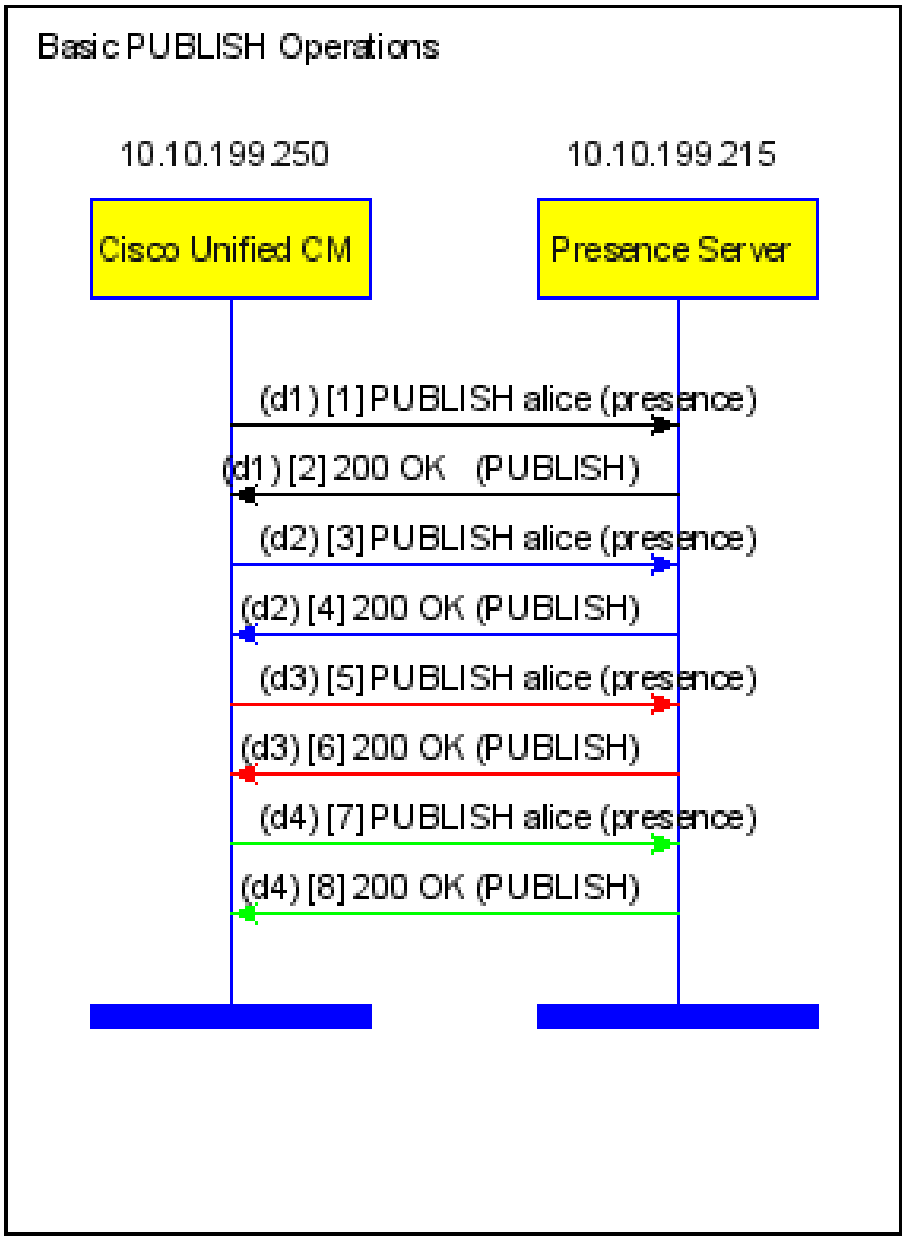

CISCO CONFIDENTIAL

```
[diagram]   Call-ID:[prev][next]
[1] PUBLISH sip:alice@10.10.199.215:5060 SIP/2.0
Date: Tue, 09 Jun 2009 18:29:23 GMT
From: <sip:alice@10.10.199.250>;tag=1753874294
Event: presence
Content-Length: 838
User-Agent: Cisco-CUCM7.1
To: <sip:alice@10.10.199.215>
Expires: 3600
Content-Type: application/pidf+xml
Call-ID: 73040900-a2e1aa03-e-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK1c2396e4b9
CSeq: 101 PUBLISH
Max-Forwards: 70

<?xml version="1.0" encoding="UTF-8" standalone="no" ?>
<presence xmlns="urn:ietf:params:xml:ns:pidf" entity="alice@10.10.199.250"
xmlns:r="urn:ietf:params:xml:ns:pidf:status:rpid" xmlns:ce="urn:cisco:params:xml:ns:pidf:rpid"
xmlns:dm="urn:ietf:params:xml:ns:pidf:data-model" xmlns:so="urn:cisco:params:xml:ns:pidf:source"
xmlns:sc="urn:ietf:params:xml:ns:pidf:servcaps">
  <tuple id="77ae8b01-67fb-7a3e-8bf8-3fb9a77ef111-8b998dbf-1c07-f2e4-4858-b44a38e4b5e3">
    <status>
    <basic>open</basic>
    </status>
    <sc:servcaps>
      <sc:audio>true</sc:audio>
    </sc:servcaps>
    <contact priority="0.8">sip:1001@10.10.199.250:5060;dpkid=8b998dbf-1c07-f2e4-4858-
b44a38e4b5e3;npkid=77ae8b01-67fb-7a3e-8bf8-3fb9a77ef111</contact>
    <model>Cisco 7970</model>
    <timestamp>2009-06-09T18:29:23Z</timestamp>
  </tuple>
</presence>

[diagram]   Call-ID:[prev][next]
[2] SIP/2.0 200 OK
Via: SIP/2.0/TCP 10.10.199.250:5060;received=10.10.199.250;branch=z9hG4bK1c2396e4b9
CSeq: 101 PUBLISH
Call-ID: 73040900-a2e1aa03-e-fac712ac@10.10.199.250
From: <sip:alice@10.10.199.250>;tag=1753874294
To: <sip:alice@10.10.199.215>;tag=9cfc8ce4
Content-Length: 0
SIP-ETag: 7e2e4afc-ea4b-43f0-a14c-4372912e
Expires: 3600
Contact: <sip:10.10.199.215:5070;transport=tcp>

[diagram]   Call-ID:[prev][next]
[3] PUBLISH sip:alice@10.10.199.215:5070 SIP/2.0
Date: Tue, 09 Jun 2009 18:29:57 GMT
From: <sip:alice@10.10.199.250>;tag=1924125015
Event: presence
Content-Length: 883
User-Agent: Cisco-CUCM7.1
To: <sip:alice@10.10.199.215>
Expires: 3600
Content-Type: application/pidf+xml
Call-ID: 87480600-a2e1aa25-f-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK1d21a2eda6
CSeq: 101 PUBLISH
Max-Forwards: 70
SIP-If-Match: 7e2e4afc-ea4b-43f0-a14c-4372912e

<?xml version="1.0" encoding="UTF-8" standalone="no" ?>
<presence xmlns="urn:ietf:params:xml:ns:pidf" entity="alice@10.10.199.250"
xmlns:r="urn:ietf:params:xml:ns:pidf:status:rpid" xmlns:ce="urn:cisco:params:xml:ns:pidf:rpid"
xmlns:dm="urn:ietf:params:xml:ns:pidf:data-model" xmlns:so="urn:cisco:params:xml:ns:pidf:source"
xmlns:sc="urn:ietf:params:xml:ns:pidf:servcaps">
  <tuple id="77ae8b01-67fb-7a3e-8bf8-3fb9a77ef111-8b998dbf-1c07-f2e4-4858-b44a38e4b5e3">
    <status>
    <basic>closed</basic>
    </status>
    <r:activities><r:busy/></r:activities>
    <sc:servcaps>
      <sc:audio>true</sc:audio>
    </sc:servcaps>
    <contact priority="0.8">sip:1001@10.10.199.250:5060;dpkid=8b998dbf-1c07-f2e4-4858-
b44a38e4b5e3;npkid=77ae8b01-67fb-7a3e-8bf8-3fb9a77ef111</contact>
    <model>Cisco 7970</model>
    <timestamp>2009-06-09T18:29:57Z</timestamp>
  </tuple>
```

CISCO CONFIDENTIAL

```
</presence>

[diagram]   Call-ID:[prev][next]
[4] SIP/2.0 200 OK
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK1d21a2eda6
CSeq: 101 PUBLISH
Call-ID: 87480600-a2e1aa25-f-fac712ac@10.10.199.250
From: <sip:alice@10.10.199.250>;tag=1924125015
To: <sip:alice@10.10.199.215>;tag=8207684e
Content-Length: 0
SIP-ETag: 5d63e34e-32b0-41e1-86f9-0bad18b6
Expires: 3600
Contact: <sip:10.10.199.215:5070;transport=tcp>

[diagram]   Call-ID:[prev][next]
[5] PUBLISH sip:alice@10.10.199.215:5070 SIP/2.0
Date: Tue, 09 Jun 2009 18:30:00 GMT
From: <sip:alice@10.10.199.250>;tag=677230072
Event: presence
Content-Length: 838
User-Agent: Cisco-CUCM7.1
To: <sip:alice@10.10.199.215>
Expires: 3600
Content-Type: application/pidf+xml
Call-ID: 8911c980-a2e1aa28-10-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK1e441c518a
CSeq: 101 PUBLISH
Max-Forwards: 70
SIP-If-Match: 5d63e34e-32b0-41e1-86f9-0bad18b6

<?xml version="1.0" encoding="UTF-8" standalone="no" ?>
<presence xmlns="urn:ietf:params:xml:ns:pidf" entity="alice@10.10.199.250"
xmlns:r="urn:ietf:params:xml:ns:pidf:status:rpid" xmlns:ce="urn:cisco:params:xml:ns:pidf:rpid"
xmlns:dm="urn:ietf:params:xml:ns:pidf:data-model" xmlns:so="urn:cisco:params:xml:ns:pidf:source"
xmlns:sc="urn:ietf:params:xml:ns:pidf:servcaps">
  <tuple id="77ae8b01-67fb-7a3e-8bf8-3fb9a77ef111-8b998dbf-1c07-f2e4-4858-b44a38e4b5e3">
    <status>
    <basic>open</basic>
    </status>
    <sc:servcaps>
      <sc:audio>true</sc:audio>
    </sc:servcaps>
    <contact priority="0.8">sip:1001@10.10.199.250:5060;dpkid=8b998dbf-1c07-f2e4-4858-
b44a38e4b5e3;npkid=77ae8b01-67fb-7a3e-8bf8-3fb9a77ef111</contact>
    <model>Cisco 7970</model>
    <timestamp>2009-06-09T18:30:00Z</timestamp>
  </tuple>
</presence>

[diagram]   Call-ID:[prev][next]
[6] SIP/2.0 200 OK
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK1e441c518a
CSeq: 101 PUBLISH
Call-ID: 8911c980-a2e1aa28-10-fac712ac@10.10.199.250
From: <sip:alice@10.10.199.250>;tag=677230072
To: <sip:alice@10.10.199.215>;tag=dc5804b4
Content-Length: 0
SIP-ETag: 79495ecf-9b6b-4244-8496-e3ee0d30
Expires: 3600
Contact: <sip:10.10.199.215:5070;transport=tcp>

[diagram]   Call-ID:[prev][next]
[7] PUBLISH sip:alice@10.10.199.215:5070 SIP/2.0
Date: Tue, 09 Jun 2009 18:30:18 GMT
From: <sip:alice@10.10.199.250>;tag=1885302667
Event: presence
Content-Length: 0
User-Agent: Cisco-CUCM7.1
To: <sip:alice@10.10.199.215>
Expires: 0
Call-ID: 93cc5e80-a2e1aa3a-11-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK1f7354a29
CSeq: 101 PUBLISH
Max-Forwards: 70
SIP-If-Match: 79495ecf-9b6b-4244-8496-e3ee0d30

[diagram]   Call-ID:[prev][next]
[8] SIP/2.0 200 OK
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK1f7354a29
CSeq: 101 PUBLISH
```

CISCO CONFIDENTIAL

```
Call-ID: 93cc5e80-a2e1aa3a-11-fac712ac@10.10.199.250
From: <sip:alice@10.10.199.250>;tag=1885302667
To: <sip:alice@10.10.199.215>;tag=a7b931a9
Content-Length: 0
Contact: <sip:10.10.199.215:5070;transport=tcp>
```

CISCO CONFIDENTIAL

17.2 PUBLISH with Shared Line, A Holds and B Resumes

Title: PUBLISH with Shared Line, A Holds and B Resumes

Description:

Since presence publication is line appearance based, the same directory number on difference phones are treated separately.

- Directory number 4001 on IP PhoneA is associated with Presence Server's user alice.
- Directory number 4001 on IP PhoneB is associated with Presence Server's user bob.
- Alice made a phone call, since IP PhoneA owns the call, 4001 on PhoneA is published as busy.
- Alice hold the call. No new PUBLISH message since PhoneA still owns the call.
- Bob resumes the call from PhoneB, so PhoneB takes over the call ownership from PhoneA. 4001 on PhoneA is published as idle, and 4001 on PhoneB is published at busy.
- Bob hangs up the phone. 4001 on PhoneB is published as idle.

Configuration:

Node = Cisco Unified CM, IP = 10.10.199.250
Node = Cisco Unified CM, IP = 10.10.199.251
Node = Presence Server, IP = 10.10.199.215

Phone = A, Line = 4001, IP = 10.10.199.130, Model = SCCP
Phone = B, Line = 4001, IP = 10.10.199.66, Model = SCCP
Phone = C, Line = 2002, IP = 10.10.199.179, Model = SCCP

Sip trunk between CCM1 and CCM2 has route pattern 2.XXXX

Scenario:

Phone A DN 4001 calls Phone C DN 2002 by dialing digits 22002
Phone C rings
Phone C answers. Phone B DN 4001 shows busy sign (red button on line)
Phone A presses hold softkey
Phone B presses resume softkey on DN 4001 call.
Phone A gets disconnected, since Phone B resumed the call.
Now Phone B and Phone C talk.

CISCO CONFIDENTIAL

Phone B goes onHook

Phone C goes onHook

End of Scenario

CISCO CONFIDENTIAL

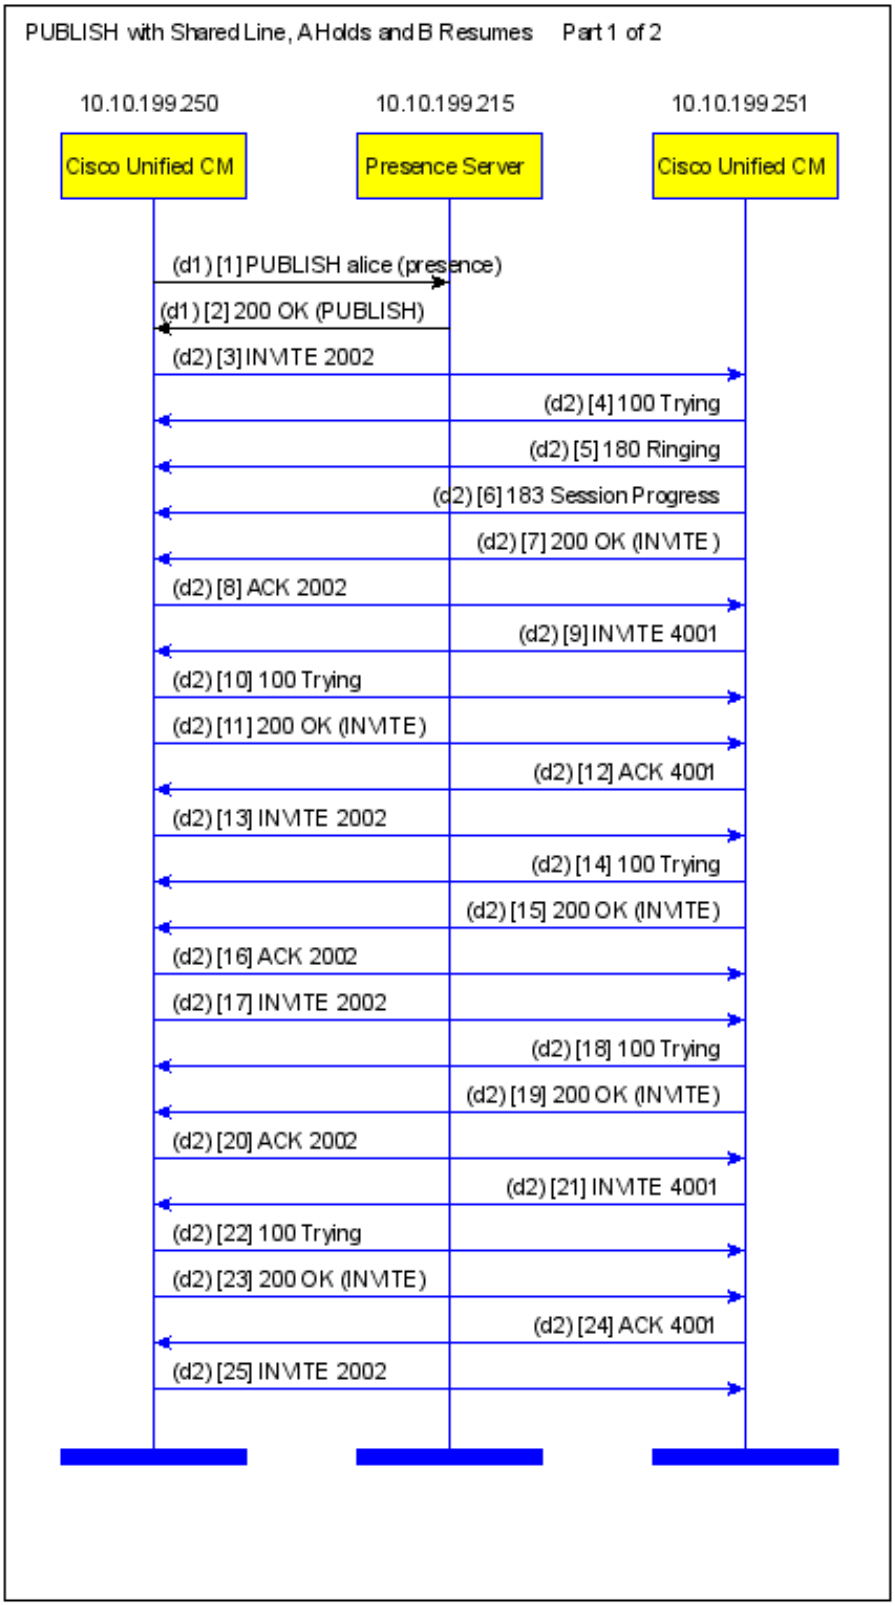

CISCO CONFIDENTIAL

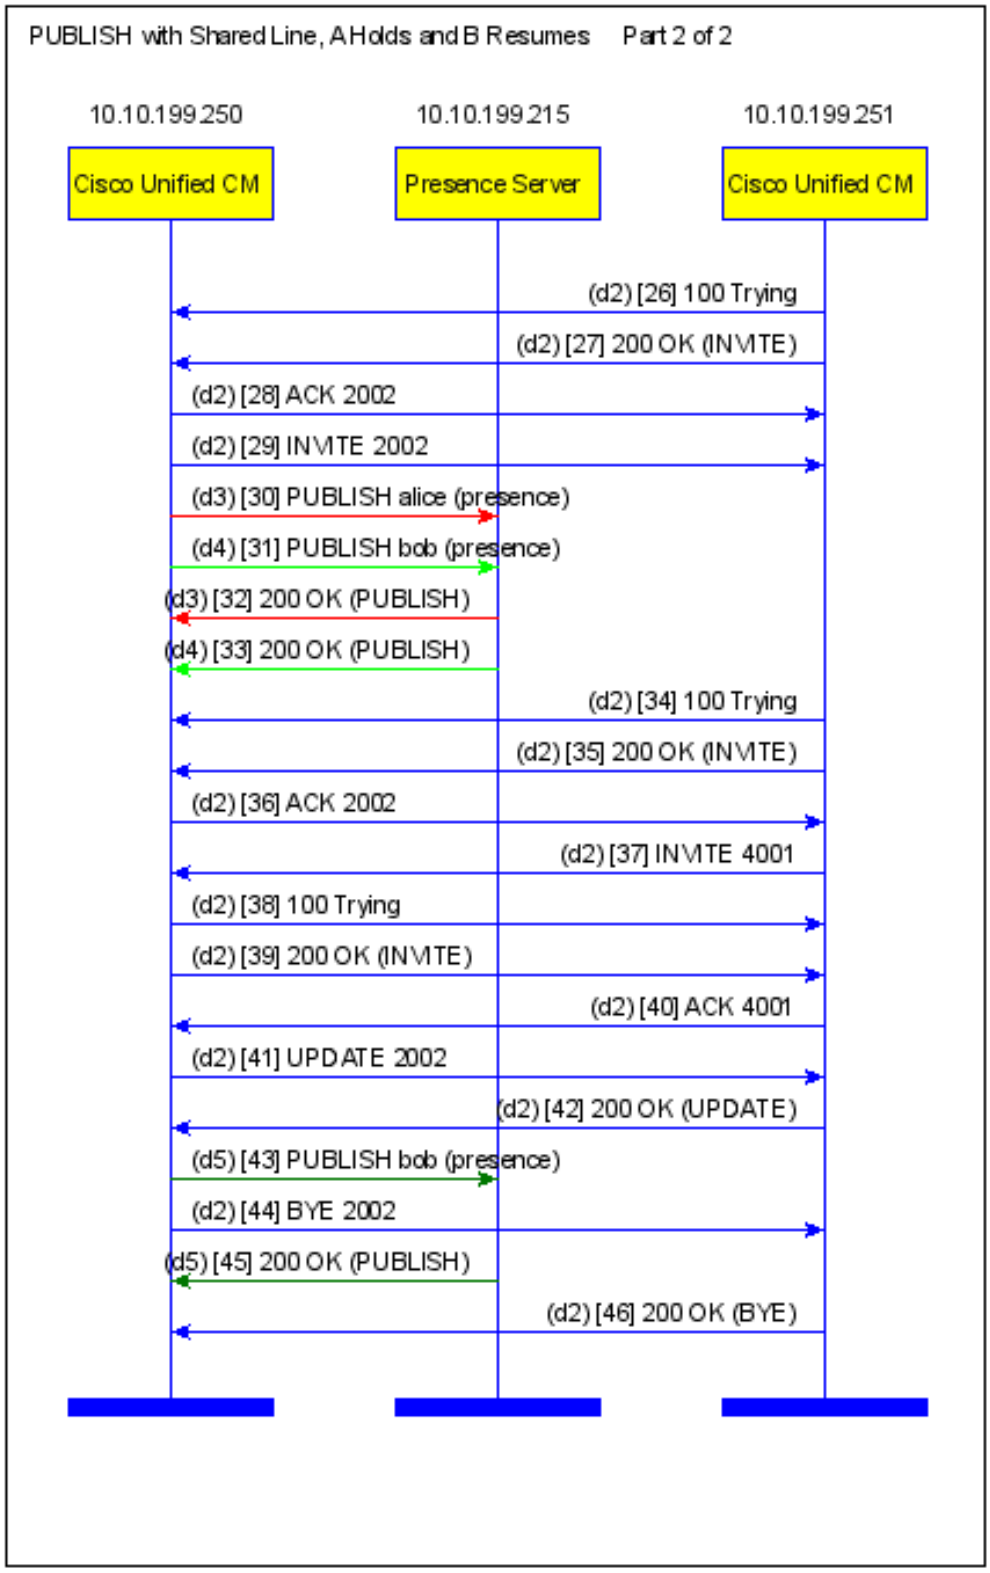

CISCO CONFIDENTIAL

```
[diagram]   Call-ID:[prev][next]
[1] PUBLISH sip:alice@10.10.199.215:5070 SIP/2.0
Date: Tue, 09 Jun 2009 19:55:01 GMT
From: <sip:alice@10.10.199.250>;tag=652985161
Event: presence
Content-Length: 883
User-Agent: Cisco-CUCM7.1
To: <sip:alice@10.10.199.215>
Expires: 3600
Content-Type: application/pidf+xml
Call-ID: 69809e00-a2e1be15-2f-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK3f79ac41
CSeq: 101 PUBLISH
Max-Forwards: 70
SIP-If-Match: e2bf8c69-b3ae-43a5-9905-b64837ad

<?xml version="1.0" encoding="UTF-8" standalone="no" ?>
<presence xmlns="urn:ietf:params:xml:ns:pidf" entity="alice@10.10.199.250"
xmlns:r="urn:ietf:params:xml:ns:pidf:status:rpid" xmlns:ce="urn:cisco:params:xml:ns:pidf:rpid"
xmlns:dm="urn:ietf:params:xml:ns:pidf:data-model" xmlns:so="urn:cisco:params:xml:ns:pidf:source"
xmlns:sc="urn:ietf:params:xml:ns:pidf:servcaps">
  <tuple id="0a02af61-9166-5a4a-f251-25d3e9351bf6-8b998dbf-1c07-f2e4-4858-b44a38e4b5e3">
    <status>
    <basic>closed</basic>
    </status>
    <r:activities><r:busy/></r:activities>
    <sc:servcaps>
      <sc:audio>true</sc:audio>
    </sc:servcaps>
    <contact priority="0.8">sip:4001@10.10.199.250:5060;dpkid=8b998dbf-1c07-f2e4-4858-
b44a38e4b5e3;npkid=0a02af61-9166-5a4a-f251-25d3e9351bf6</contact>
    <model>Cisco 7970</model>
    <timestamp>2009-06-09T19:55:01Z</timestamp>
  </tuple>
</presence>

[diagram]   Call-ID:[prev][next]
[2] SIP/2.0 200 OK
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK3f79ac41
CSeq: 101 PUBLISH
Call-ID: 69809e00-a2e1be15-2f-fac712ac@10.10.199.250
From: <sip:alice@10.10.199.250>;tag=652985161
To: <sip:alice@10.10.199.215>;tag=d7214c58
Content-Length: 0
SIP-ETag: 45e61b3c-01e3-49b7-b41a-dae67cb2
Expires: 3600
Contact: <sip:10.10.199.215:5070;transport=tcp>

[diagram]   Call-ID:[prev][next]
[3] INVITE sip:2002@10.10.199.251:5060 SIP/2.0
Date: Tue, 09 Jun 2009 19:55:04 GMT
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:4001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-28674129
Allow-Events: presence
P-Asserted-Identity: <sip:4001@10.10.199.250>
Supported: timer,resource-priority,replaces
Supported: Geolocation
Min-SE:  1800
Remote-Party-ID: <sip:4001@10.10.199.250>;party=calling;screen=yes;privacy=off
Content-Length: 0
User-Agent: Cisco-CUCM7.1
To: <sip:2002@10.10.199.251>
Contact: <sip:4001@10.10.199.250:5060;transport=tcp>
Expires: 180
Call-ID: 6b4a6180-a2e1be18-30-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK402c20e5c7
CSeq: 101 INVITE
Session-Expires:  1800
Max-Forwards: 70

[diagram]   Call-ID:[prev][next]
[4] SIP/2.0 100 Trying
Date: Tue, 09 Jun 2009 19:56:19 GMT
From: <sip:4001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-28674129
Allow-Events: presence
Content-Length: 0
To: <sip:2002@10.10.199.251>
Call-ID: 6b4a6180-a2e1be18-30-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK402c20e5c7
CSeq: 101 INVITE
```

CISCO CONFIDENTIAL

[diagram] Call-ID:[prev][next]
[5] SIP/2.0 180 Ringing

```
Date: Tue, 09 Jun 2009 19:56:19 GMT
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:4001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-28674129
Allow-Events: presence
P-Asserted-Identity: <sip:2002@10.10.199.251>
Supported: Geolocation
Remote-Party-ID: <sip:2002@10.10.199.251>;party=called;screen=yes;privacy=off
Content-Length: 0
To: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-28674192
Contact: <sip:2002@10.10.199.251:5060;transport=tcp>
Call-ID: 6b4a6180-a2e1be18-30-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK402c20e5c7
CSeq: 101 INVITE
```

[diagram] Call-ID:[prev][next]
[6] SIP/2.0 183 Session Progress

```
Date: Tue, 09 Jun 2009 19:56:19 GMT
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:4001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-28674129
Allow-Events: presence
P-Asserted-Identity: <sip:2002@10.10.199.251>
Supported: Geolocation
Remote-Party-ID: <sip:2002@10.10.199.251>;party=called;screen=yes;privacy=off
Content-Length: 337
To: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-28674192
Contact: <sip:2002@10.10.199.251:5060;transport=tcp>
Content-Type: application/sdp
Call-ID: 6b4a6180-a2e1be18-30-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK402c20e5c7
CSeq: 101 INVITE

v=0
o=CiscoSystemsCCM-SIP 2000 1 IN IP4 10.10.199.251
s=SIP Call
c=IN IP4 10.10.199.179
t=0 0
m=audio 4000 RTP/AVP 9 0 8 18 101
a=rtpmap:9 G722/8000
a=ptime:20
a=rtpmap:0 PCMU/8000
a=ptime:20
a=rtpmap:8 PCMA/8000
a=ptime:20
a=rtpmap:18 G729/8000
a=ptime:20
a=sendonly
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
```

[diagram] Call-ID:[prev][next]
[7] SIP/2.0 200 OK

```
Date: Tue, 09 Jun 2009 19:56:19 GMT
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:4001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-28674129
Allow-Events: presence
P-Asserted-Identity: <sip:2002@10.10.199.251>
Supported: replaces
Supported: Geolocation
Remote-Party-ID: <sip:2002@10.10.199.251>;party=called;screen=yes;privacy=off
Content-Length: 337
Require:  timer
To: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-28674192
Contact: <sip:2002@10.10.199.251:5060;transport=tcp>
Content-Type: application/sdp
Call-ID: 6b4a6180-a2e1be18-30-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK402c20e5c7
CSeq: 101 INVITE
Session-Expires:  1800;refresher=uas

v=0
o=CiscoSystemsCCM-SIP 2000 1 IN IP4 10.10.199.251
s=SIP Call
c=IN IP4 10.10.199.179
t=0 0
m=audio 4000 RTP/AVP 9 0 8 18 101
a=rtpmap:9 G722/8000
a=ptime:20
```

CISCO CONFIDENTIAL

```
a=rtpmap:0 PCMU/8000
a=ptime:20
a=rtpmap:8 PCMA/8000
a=ptime:20
a=rtpmap:18 G729/8000
a=ptime:20
a=sendonly
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15

[diagram]   Call-ID:[prev][next]
[8] ACK sip:2002@10.10.199.251:5060;transport=tcp SIP/2.0
Date: Tue, 09 Jun 2009 19:55:04 GMT
From: <sip:4001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-28674129
Allow-Events: presence
Content-Length: 228
To: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-28674192
Content-Type: application/sdp
Call-ID: 6b4a6180-a2e1be18-30-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK4147fa0ce5
CSeq: 101 ACK
Max-Forwards: 70

v=0
o=CiscoSystemsCCM-SIP 2000 1 IN IP4 10.10.199.250
s=SIP Call
c=IN IP4 10.10.199.130
t=0 0
m=audio 22686 RTP/AVP 9 101
a=rtpmap:9 G722/8000
a=ptime:20
a=recvonly
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15

[diagram]   Call-ID:[prev][next]
[9] INVITE sip:4001@10.10.199.250:5060;transport=tcp SIP/2.0
Date: Tue, 09 Jun 2009 19:56:21 GMT
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-28674192
Allow-Events: presence
P-Asserted-Identity: <sip:2002@10.10.199.251>
Supported: timer,resource-priority,replaces
Min-SE:  1800
Remote-Party-ID: <sip:2002@10.10.199.251>;party=calling;screen=yes;privacy=off
Content-Length: 216
User-Agent: Cisco-CUCM7.1
To: <sip:4001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-28674129
Contact: <sip:2002@10.10.199.251:5060;transport=tcp>
Expires: 180
Content-Type: application/sdp
Call-ID: 6b4a6180-a2e1be18-30-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bKd5bd137f8
CSeq: 101 INVITE
Session-Expires:  1800;refresher=uac
Max-Forwards: 70

v=0
o=CiscoSystemsCCM-SIP 2000 2 IN IP4 10.10.199.251
s=SIP Call
c=IN IP4 10.10.199.179
t=0 0
m=audio 30162 RTP/AVP 9 101
a=rtpmap:9 G722/8000
a=ptime:20
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15

[diagram]   Call-ID:[prev][next]
[10] SIP/2.0 100 Trying
Date: Tue, 09 Jun 2009 19:55:06 GMT
From: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-28674192
Allow-Events: presence
Content-Length: 0
To: <sip:4001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-28674129
Call-ID: 6b4a6180-a2e1be18-30-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bKd5bd137f8
CSeq: 101 INVITE
```

CISCO CONFIDENTIAL

```
[diagram]   Call-ID:[prev][next]
[11] SIP/2.0 200 OK
Date: Tue, 09 Jun 2009 19:55:06 GMT
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-28674192
Allow-Events: presence
P-Asserted-Identity: <sip:4001@10.10.199.250>
Supported: replaces
Supported: Geolocation
Remote-Party-ID: <sip:4001@10.10.199.250>;party=called;screen=yes;privacy=off
Content-Length: 216
Require:  timer
To: <sip:4001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-28674129
Contact: <sip:4001@10.10.199.250:5060;transport=tcp>
Content-Type: application/sdp
Call-ID: 6b4a6180-a2e1be18-30-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bKd5bd137f8
CSeq: 101 INVITE
Session-Expires:  1800;refresher=uac

v=0
o=CiscoSystemsCCM-SIP 2000 2 IN IP4 10.10.199.250
s=SIP Call
c=IN IP4 10.10.199.130
t=0 0
m=audio 22686 RTP/AVP 9 101
a=rtpmap:9 G722/8000
a=ptime:20
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15

[diagram]   Call-ID:[prev][next]
[12] ACK sip:4001@10.10.199.250:5060;transport=tcp SIP/2.0
Date: Tue, 09 Jun 2009 19:56:21 GMT
From: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-28674192
Allow-Events: presence
Content-Length: 0
To: <sip:4001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-28674129
Call-ID: 6b4a6180-a2e1be18-30-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bKe10818c6b
CSeq: 101 ACK
Max-Forwards: 70

[diagram]   Call-ID:[prev][next]
[13] INVITE sip:2002@10.10.199.251:5060;transport=tcp SIP/2.0
Date: Tue, 09 Jun 2009 19:55:10 GMT
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:4001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-28674129
Allow-Events: presence
P-Asserted-Identity: <sip:4001@10.10.199.250>
Supported: timer,resource-priority,replaces
Min-SE:  1800
Remote-Party-ID: <sip:4001@10.10.199.250>;party=calling;screen=yes;privacy=off
Content-Length: 221
User-Agent: Cisco-CUCM7.1
To: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-28674192
Contact: <sip:4001@10.10.199.250:5060;transport=tcp>
Expires: 180
Content-Type: application/sdp
Call-ID: 6b4a6180-a2e1be18-30-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK425f868a20
CSeq: 102 INVITE
Session-Expires:  1800;refresher=uas
Max-Forwards: 70

v=0
o=CiscoSystemsCCM-SIP 2000 3 IN IP4 10.10.199.250
s=SIP Call
c=IN IP4 0.0.0.0
t=0 0
m=audio 22686 RTP/AVP 9 101
a=rtpmap:9 G722/8000
a=ptime:20
a=inactive
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15

[diagram]   Call-ID:[prev][next]
[14] SIP/2.0 100 Trying
Date: Tue, 09 Jun 2009 19:56:25 GMT
```

CISCO CONFIDENTIAL

```
From: <sip:4001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-28674129
Allow-Events: presence
Content-Length: 0
To: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-28674192
Call-ID: 6b4a6180-a2e1be18-30-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK425f868a20
CSeq: 102 INVITE

[diagram]   Call-ID:[prev][next]
[15] SIP/2.0 200 OK
Date: Tue, 09 Jun 2009 19:56:25 GMT
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:4001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-28674129
Allow-Events: presence
P-Asserted-Identity: <sip:2002@10.10.199.251>
Supported: replaces
Supported: Geolocation
Remote-Party-ID: <sip:2002@10.10.199.251>;party=called;screen=yes;privacy=off
Content-Length: 228
Require:  timer
To: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-28674192
Contact: <sip:2002@10.10.199.251:5060;transport=tcp>
Content-Type: application/sdp
Call-ID: 6b4a6180-a2e1be18-30-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK425f868a20
CSeq: 102 INVITE
Session-Expires:  1800;refresher=uas

v=0
o=CiscoSystemsCCM-SIP 2000 3 IN IP4 10.10.199.251
s=SIP Call
c=IN IP4 10.10.199.179
t=0 0
m=audio 30162 RTP/AVP 9 101
a=rtpmap:9 G722/8000
a=ptime:20
a=inactive
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15

[diagram]   Call-ID:[prev][next]
[16] ACK sip:2002@10.10.199.251:5060;transport=tcp SIP/2.0
Date: Tue, 09 Jun 2009 19:55:10 GMT
From: <sip:4001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-28674129
Allow-Events: presence
Content-Length: 0
To: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-28674192
Call-ID: 6b4a6180-a2e1be18-30-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK4376f152f0
CSeq: 102 ACK
Max-Forwards: 70

[diagram]   Call-ID:[prev][next]
[17] INVITE sip:2002@10.10.199.251:5060;transport=tcp SIP/2.0
Date: Tue, 09 Jun 2009 19:55:10 GMT
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:4001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-28674129
Allow-Events: presence
P-Asserted-Identity: <sip:4001@10.10.199.250>
Supported: timer,resource-priority,replaces
Min-SE:  1800
Remote-Party-ID: <sip:4001@10.10.199.250>;party=calling;screen=yes;privacy=off
Content-Length: 0
User-Agent: Cisco-CUCM7.1
To: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-28674192
Contact: <sip:4001@10.10.199.250:5060;transport=tcp>
Expires: 180
Call-ID: 6b4a6180-a2e1be18-30-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK443bdfcb37
CSeq: 103 INVITE
Session-Expires:  1800;refresher=uas
Max-Forwards: 70

[diagram]   Call-ID:[prev][next]
[18] SIP/2.0 100 Trying
Date: Tue, 09 Jun 2009 19:56:25 GMT
From: <sip:4001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-28674129
Allow-Events: presence
Content-Length: 0
To: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-28674192
```

CISCO CONFIDENTIAL

```
Call-ID: 6b4a6180-a2e1be18-30-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK443bdfcb37
CSeq: 103 INVITE
```

[diagram] Call-ID:[prev][next]

[19] SIP/2.0 200 OK

```
Date: Tue, 09 Jun 2009 19:56:25 GMT
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:4001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-28674129
Allow-Events: presence
P-Asserted-Identity: <sip:2002@10.10.199.251>
Supported: replaces
Remote-Party-ID: <sip:2002@10.10.199.251>;party=called;screen=yes;privacy=off
Content-Length: 337
Require:  timer
To: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-28674192
Contact: <sip:2002@10.10.199.251:5060;transport=tcp>
Content-Type: application/sdp
Call-ID: 6b4a6180-a2e1be18-30-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK443bdfcb37
CSeq: 103 INVITE
Session-Expires:  1800;refresher=uas

v=0
o=CiscoSystemsCCM-SIP 2000 4 IN IP4 10.10.199.251
s=SIP Call
c=IN IP4 10.10.199.179
t=0 0
m=audio 4000 RTP/AVP 9 0 8 18 101
a=rtpmap:9 G722/8000
a=ptime:20
a=rtpmap:0 PCMU/8000
a=ptime:20
a=rtpmap:8 PCMA/8000
a=ptime:20
a=rtpmap:18 G729/8000
a=ptime:20
a=sendonly
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
```

[diagram] Call-ID:[prev][next]

[20] ACK sip:2002@10.10.199.251:5060;transport=tcp SIP/2.0

```
Date: Tue, 09 Jun 2009 19:55:10 GMT
From: <sip:4001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-28674129
Allow-Events: presence
Content-Length: 171
To: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-28674192
Content-Type: application/sdp
Call-ID: 6b4a6180-a2e1be18-30-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK454e8707e1
CSeq: 103 ACK
Max-Forwards: 70

v=0
o=CiscoSystemsCCM-SIP 2000 4 IN IP4 10.10.199.250
s=SIP Call
c=IN IP4 10.10.199.250
t=0 0
m=audio 4000 RTP/AVP 0
a=rtpmap:0 PCMU/8000
a=ptime:20
a=inactive
```

[diagram] Call-ID:[prev][next]

[21] INVITE sip:4001@10.10.199.250:5060;transport=tcp SIP/2.0

```
Date: Tue, 09 Jun 2009 19:56:25 GMT
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-28674192
Allow-Events: presence
P-Asserted-Identity: <sip:2002@10.10.199.251>
Supported: timer,resource-priority,replaces
Min-SE:  1800
Remote-Party-ID: <sip:2002@10.10.199.251>;party=calling;screen=yes;privacy=off
Content-Length: 160
User-Agent: Cisco-CUCM7.1
To: <sip:4001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-28674129
Contact: <sip:2002@10.10.199.251:5060;transport=tcp>
Expires: 180
Content-Type: application/sdp
```

CISCO CONFIDENTIAL

```
Call-ID: 6b4a6180-a2e1be18-30-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bKf76c028a4
CSeq: 102 INVITE
Session-Expires:  1800;refresher=uac
Max-Forwards: 70

v=0
o=CiscoSystemsCCM-SIP 2000 5 IN IP4 10.10.199.251
s=SIP Call
c=IN IP4 10.10.199.179
t=0 0
m=audio 30572 RTP/AVP 0
a=rtpmap:0 PCMU/8000
a=ptime:20
```

[diagram] Call-ID:[prev][next]

[22] SIP/2.0 100 Trying

```
Date: Tue, 09 Jun 2009 19:55:10 GMT
From: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-28674192
Allow-Events: presence
Content-Length: 0
To: <sip:4001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-28674129
Call-ID: 6b4a6180-a2e1be18-30-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bKf76c028a4
CSeq: 102 INVITE
```

[diagram] Call-ID:[prev][next]

[23] SIP/2.0 200 OK

```
Date: Tue, 09 Jun 2009 19:55:10 GMT
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-28674192
Allow-Events: presence
P-Asserted-Identity: <sip:4001@10.10.199.250>
Supported: replaces
Supported: Geolocation
Remote-Party-ID: <sip:4001@10.10.199.250>;party=called;screen=yes;privacy=off
Content-Length: 171
Require:  timer
To: <sip:4001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-28674129
Contact: <sip:4001@10.10.199.250:5060;transport=tcp>
Content-Type: application/sdp
Call-ID: 6b4a6180-a2e1be18-30-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bKf76c028a4
CSeq: 102 INVITE
Session-Expires:  1800;refresher=uac

v=0
o=CiscoSystemsCCM-SIP 2000 5 IN IP4 10.10.199.250
s=SIP Call
c=IN IP4 10.10.199.250
t=0 0
m=audio 4000 RTP/AVP 0
a=rtpmap:0 PCMU/8000
a=ptime:20
a=sendonly
```

[diagram] Call-ID:[prev][next]

[24] ACK sip:4001@10.10.199.250:5060;transport=tcp SIP/2.0

```
Date: Tue, 09 Jun 2009 19:56:25 GMT
From: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-28674192
Allow-Events: presence
Content-Length: 0
To: <sip:4001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-28674129
Call-ID: 6b4a6180-a2e1be18-30-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bK107592338e
CSeq: 102 ACK
Max-Forwards: 70
```

[diagram] Call-ID:[prev][next]

[25] INVITE sip:2002@10.10.199.251:5060;transport=tcp SIP/2.0

```
Date: Tue, 09 Jun 2009 19:55:14 GMT
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:4001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-28674129
Allow-Events: presence
P-Asserted-Identity: <sip:4001@10.10.199.250>
Supported: timer,resource-priority,replaces
Min-SE:  1800
Remote-Party-ID: <sip:4001@10.10.199.250>;party=calling;screen=yes;privacy=off
Content-Length: 164
User-Agent: Cisco-CUCM7.1
```

CISCO CONFIDENTIAL

```
To: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-28674192
Contact: <sip:4001@10.10.199.250:5060;transport=tcp>
Expires: 180
Content-Type: application/sdp
Call-ID: 6b4a6180-a2e1be18-30-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK462443d355
CSeq: 104 INVITE
Session-Expires:  1800;refresher=uas
Max-Forwards: 70

v=0
o=CiscoSystemsCCM-SIP 2000 6 IN IP4 10.10.199.250
s=SIP Call
c=IN IP4 0.0.0.0
t=0 0
m=audio 4000 RTP/AVP 0
a=rtpmap:0 PCMU/8000
a=ptime:20
a=inactive
```

[diagram] Call-ID:[prev][next]

[26] SIP/2.0 100 Trying

```
Date: Tue, 09 Jun 2009 19:56:29 GMT
From: <sip:4001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-28674129
Allow-Events: presence
Content-Length: 0
To: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-28674192
Call-ID: 6b4a6180-a2e1be18-30-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK462443d355
CSeq: 104 INVITE
```

[diagram] Call-ID:[prev][next]

[27] SIP/2.0 200 OK

```
Date: Tue, 09 Jun 2009 19:56:29 GMT
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:4001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-28674129
Allow-Events: presence
P-Asserted-Identity: <sip:2002@10.10.199.251>
Supported: replaces
Supported: Geolocation
Remote-Party-ID: <sip:2002@10.10.199.251>;party=called;screen=yes;privacy=off
Content-Length: 172
Require:  timer
To: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-28674192
Contact: <sip:2002@10.10.199.251:5060;transport=tcp>
Content-Type: application/sdp
Call-ID: 6b4a6180-a2e1be18-30-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK462443d355
CSeq: 104 INVITE
Session-Expires:  1800;refresher=uas

v=0
o=CiscoSystemsCCM-SIP 2000 6 IN IP4 10.10.199.251
s=SIP Call
c=IN IP4 10.10.199.179
t=0 0
m=audio 30572 RTP/AVP 0
a=rtpmap:0 PCMU/8000
a=ptime:20
a=inactive
```

[diagram] Call-ID:[prev][next]

[28] ACK sip:2002@10.10.199.251:5060;transport=tcp SIP/2.0

```
Date: Tue, 09 Jun 2009 19:55:14 GMT
From: <sip:4001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-28674129
Allow-Events: presence
Content-Length: 0
To: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-28674192
Call-ID: 6b4a6180-a2e1be18-30-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK476d45150d
CSeq: 104 ACK
Max-Forwards: 70
```

[diagram] Call-ID:[prev][next]

[29] INVITE sip:2002@10.10.199.251:5060;transport=tcp SIP/2.0

```
Date: Tue, 09 Jun 2009 19:55:14 GMT
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:4001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-28674129
Allow-Events: presence
P-Asserted-Identity: <sip:4001@10.10.199.250>
```

CISCO CONFIDENTIAL

```
Supported: timer,resource-priority,replaces
Min-SE:  1800
Remote-Party-ID: <sip:4001@10.10.199.250>;party=calling;screen=yes;privacy=off
Content-Length: 0
User-Agent: Cisco-CUCM7.1
To: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-28674192
Contact: <sip:4001@10.10.199.250:5060;transport=tcp>
Expires: 180
Call-ID: 6b4a6180-a2e1be18-30-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK4849b050c6
CSeq: 105 INVITE
Session-Expires:  1800;refresher=uas
Max-Forwards: 70

[diagram]   Call-ID:[prev][next]
[30] PUBLISH sip:alice@10.10.199.215:5070 SIP/2.0
Date: Tue, 09 Jun 2009 19:55:14 GMT
From: <sip:alice@10.10.199.250>;tag=585809125
Event: presence
Content-Length: 838
User-Agent: Cisco-CUCM7.1
To: <sip:alice@10.10.199.215>
Expires: 3600
Content-Type: application/pidf+xml
Call-ID: 71404280-a2e1be22-31-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK49705eb5e
CSeq: 101 PUBLISH
Max-Forwards: 70
SIP-If-Match: 45e61b3c-01e3-49b7-b41a-dae67cb2

<?xml version="1.0" encoding="UTF-8" standalone="no" ?>
<presence xmlns="urn:ietf:params:xml:ns:pidf" entity="alice@10.10.199.250"
xmlns:r="urn:ietf:params:xml:ns:pidf:status:rpid" xmlns:ce="urn:cisco:params:xml:ns:pidf:rpid"
xmlns:dm="urn:ietf:params:xml:ns:pidf:data-model" xmlns:so="urn:cisco:params:xml:ns:pidf:source"
xmlns:sc="urn:ietf:params:xml:ns:pidf:servcaps">
  <tuple id="0a02af61-9166-5a4a-f251-25d3e9351bf6-8b998dbf-1c07-f2e4-4858-b44a38e4b5e3">
    <status>
    <basic>open</basic>
    </status>
    <sc:servcaps>
      <sc:audio>true</sc:audio>
    </sc:servcaps>
    <contact priority="0.8">sip:4001@10.10.199.250:5060;dpkid=8b998dbf-1c07-f2e4-4858-
b44a38e4b5e3;npkid=0a02af61-9166-5a4a-f251-25d3e9351bf6</contact>
    <model>Cisco 7970</model>
    <timestamp>2009-06-09T19:55:14Z</timestamp>
  </tuple>
</presence>

[diagram]   Call-ID:[prev][next]
[31] PUBLISH sip:bob@10.10.199.215:5070 SIP/2.0
Date: Tue, 09 Jun 2009 19:55:14 GMT
From: <sip:bob@10.10.199.250>;tag=963418156
Event: presence
Content-Length: 881
User-Agent: Cisco-CUCM7.1
To: <sip:bob@10.10.199.215>
Expires: 3600
Content-Type: application/pidf+xml
Call-ID: 71404280-a2e1be22-32-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK4aa9d24e1
CSeq: 101 PUBLISH
Max-Forwards: 70
SIP-If-Match: 72d6a471-cc07-4b1f-bbd4-93e64bd8

<?xml version="1.0" encoding="UTF-8" standalone="no" ?>
<presence xmlns="urn:ietf:params:xml:ns:pidf" entity="bob@10.10.199.250"
xmlns:r="urn:ietf:params:xml:ns:pidf:status:rpid" xmlns:ce="urn:cisco:params:xml:ns:pidf:rpid"
xmlns:dm="urn:ietf:params:xml:ns:pidf:data-model" xmlns:so="urn:cisco:params:xml:ns:pidf:source"
xmlns:sc="urn:ietf:params:xml:ns:pidf:servcaps">
  <tuple id="0a02af61-9166-5a4a-f251-25d3e9351bf6-96738445-678b-f015-7b3e-4aeba2c49019">
    <status>
    <basic>closed</basic>
    </status>
    <r:activities><r:busy/></r:activities>
    <sc:servcaps>
      <sc:audio>true</sc:audio>
    </sc:servcaps>
    <contact priority="0.8">sip:4001@10.10.199.250:5060;dpkid=96738445-678b-f015-7b3e-
4aeba2c49019;npkid=0a02af61-9166-5a4a-f251-25d3e9351bf6</contact>
```

CISCO CONFIDENTIAL

```
    <model>Cisco 7970</model>
    <timestamp>2009-06-09T19:55:14Z</timestamp>
  </tuple>
</presence>

[diagram]   Call-ID:[prev][next]
[32] SIP/2.0 200 OK
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK49705eb5e
CSeq: 101 PUBLISH
Call-ID: 71404280-a2e1be22-31-fac712ac@10.10.199.250
From: <sip:alice@10.10.199.250>;tag=585809125
To: <sip:alice@10.10.199.215>;tag=f643d971
Content-Length: 0
SIP-ETag: 683e90fa-c03b-471c-9dde-7f2d1ab0
Expires: 3600
Contact: <sip:10.10.199.215:5070;transport=tcp>

[diagram]   Call-ID:[prev][next]
[33] SIP/2.0 200 OK
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK4aa9d24e1
CSeq: 101 PUBLISH
Call-ID: 71404280-a2e1be22-32-fac712ac@10.10.199.250
From: <sip:bob@10.10.199.250>;tag=963418156
To: <sip:bob@10.10.199.215>;tag=cc80bc2a
Content-Length: 0
SIP-ETag: 0124aab4-23e5-46c0-a92d-1e8ead3d
Expires: 3600
Contact: <sip:10.10.199.215:5070;transport=tcp>

[diagram]   Call-ID:[prev][next]
[34] SIP/2.0 100 Trying
Date: Tue, 09 Jun 2009 19:56:29 GMT
From: <sip:4001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-28674129
Allow-Events: presence
Content-Length: 0
To: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-28674192
Call-ID: 6b4a6180-a2e1be18-30-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK4849b050c6
CSeq: 105 INVITE

[diagram]   Call-ID:[prev][next]
[35] SIP/2.0 200 OK
Date: Tue, 09 Jun 2009 19:56:29 GMT
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:4001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-28674129
Allow-Events: presence
P-Asserted-Identity: <sip:2002@10.10.199.251>
Supported: replaces
Remote-Party-ID: <sip:2002@10.10.199.251>;party=called;screen=yes;privacy=off
Content-Length: 337
Require:  timer
To: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-28674192
Contact: <sip:2002@10.10.199.251:5060;transport=tcp>
Content-Type: application/sdp
Call-ID: 6b4a6180-a2e1be18-30-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK4849b050c6
CSeq: 105 INVITE
Session-Expires:  1800;refresher=uas

v=0
o=CiscoSystemsCCM-SIP 2000 7 IN IP4 10.10.199.251
s=SIP Call
c=IN IP4 10.10.199.179
t=0 0
m=audio 4000 RTP/AVP 9 0 8 18 101
a=rtpmap:9 G722/8000
a=ptime:20
a=rtpmap:0 PCMU/8000
a=ptime:20
a=rtpmap:8 PCMA/8000
a=ptime:20
a=rtpmap:18 G729/8000
a=ptime:20
a=sendonly
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15

[diagram]   Call-ID:[prev][next]
[36] ACK sip:2002@10.10.199.251:5060;transport=tcp SIP/2.0
Date: Tue, 09 Jun 2009 19:55:14 GMT
```

CISCO CONFIDENTIAL

```
From: <sip:4001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-28674129
Allow-Events: presence
Content-Length: 227
To: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-28674192
Content-Type: application/sdp
Call-ID: 6b4a6180-a2e1be18-30-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK4b642fe083
CSeq: 105 ACK
Max-Forwards: 70

v=0
o=CiscoSystemsCCM-SIP 2000 7 IN IP4 10.10.199.250
s=SIP Call
c=IN IP4 10.10.199.66
t=0 0
m=audio 29060 RTP/AVP 9 101
a=rtpmap:9 G722/8000
a=ptime:20
a=recvonly
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15

[diagram]   Call-ID:[prev][next]
[37] INVITE sip:4001@10.10.199.250:5060;transport=tcp SIP/2.0
Date: Tue, 09 Jun 2009 19:56:29 GMT
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-28674192
Allow-Events: presence
P-Asserted-Identity: <sip:2002@10.10.199.251>
Supported: timer,resource-priority,replaces
Min-SE:  1800
Remote-Party-ID: <sip:2002@10.10.199.251>;party=calling;screen=yes;privacy=off
Content-Length: 216
User-Agent: Cisco-CUCM7.1
To: <sip:4001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-28674129
Contact: <sip:2002@10.10.199.251:5060;transport=tcp>
Expires: 180
Content-Type: application/sdp
Call-ID: 6b4a6180-a2e1be18-30-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bK117abe98cd
CSeq: 103 INVITE
Session-Expires:  1800;refresher=uac
Max-Forwards: 70

v=0
o=CiscoSystemsCCM-SIP 2000 8 IN IP4 10.10.199.251
s=SIP Call
c=IN IP4 10.10.199.179
t=0 0
m=audio 30924 RTP/AVP 9 101
a=rtpmap:9 G722/8000
a=ptime:20
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15

[diagram]   Call-ID:[prev][next]
[38] SIP/2.0 100 Trying
Date: Tue, 09 Jun 2009 19:55:14 GMT
From: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-28674192
Allow-Events: presence
Content-Length: 0
To: <sip:4001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-28674129
Call-ID: 6b4a6180-a2e1be18-30-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bK117abe98cd
CSeq: 103 INVITE

[diagram]   Call-ID:[prev][next]
[39] SIP/2.0 200 OK
Date: Tue, 09 Jun 2009 19:55:14 GMT
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-28674192
Allow-Events: presence
P-Asserted-Identity: <sip:4001@10.10.199.250>
Supported: replaces
Supported: Geolocation
Remote-Party-ID: <sip:4001@10.10.199.250>;party=called;screen=yes;privacy=off
Content-Length: 215
Require:  timer
To: <sip:4001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-28674129
Contact: <sip:4001@10.10.199.250:5060;transport=tcp>
```

CISCO CONFIDENTIAL

```
Content-Type: application/sdp
Call-ID: 6b4a6180-a2e1be18-30-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bK117abe98cd
CSeq: 103 INVITE
Session-Expires:  1800;refresher=uac

v=0
o=CiscoSystemsCCM-SIP 2000 8 IN IP4 10.10.199.250
s=SIP Call
c=IN IP4 10.10.199.66
t=0 0
m=audio 29060 RTP/AVP 9 101
a=rtpmap:9 G722/8000
a=ptime:20
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
```

[diagram] Call-ID:[prev][next]

[40] ACK sip:4001@10.10.199.250:5060;transport=tcp SIP/2.0

```
Date: Tue, 09 Jun 2009 19:56:29 GMT
From: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-28674192
Allow-Events: presence
Content-Length: 0
To: <sip:4001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-28674129
Call-ID: 6b4a6180-a2e1be18-30-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bK1271d4dbb6
CSeq: 103 ACK
Max-Forwards: 70
```

[diagram] Call-ID:[prev][next]

[41] UPDATE sip:2002@10.10.199.251:5060;transport=tcp SIP/2.0

```
Date: Tue, 09 Jun 2009 19:55:14 GMT
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:4001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-28674129
Allow-Events: presence
P-Asserted-Identity: <sip:4001@10.10.199.250>
Supported: timer,resource-priority,replaces
Remote-Party-ID: <sip:4001@10.10.199.250>;party=calling;screen=yes;privacy=off
Content-Length: 0
User-Agent: Cisco-CUCM7.1
To: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-28674192
Contact: <sip:4001@10.10.199.250:5060;transport=tcp>
Call-ID: 6b4a6180-a2e1be18-30-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK4c64cfa51e
CSeq: 106 UPDATE
Max-Forwards: 70
```

[diagram] Call-ID:[prev][next]

[42] SIP/2.0 200 OK

```
Date: Tue, 09 Jun 2009 19:56:29 GMT
From: <sip:4001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-28674129
Allow-Events: presence
P-Asserted-Identity: <sip:2002@10.10.199.251>
Remote-Party-ID: <sip:2002@10.10.199.251>;party=called;screen=yes;privacy=off
Content-Length: 0
Require:  timer
To: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-28674192
Contact: <sip:2002@10.10.199.251:5060;transport=tcp>
Call-ID: 6b4a6180-a2e1be18-30-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK4c64cfa51e
CSeq: 106 UPDATE
Session-Expires:  1800;refresher=uas
```

[diagram] Call-ID:[prev][next]

[43] PUBLISH sip:bob@10.10.199.215:5070 SIP/2.0

```
Date: Tue, 09 Jun 2009 19:55:22 GMT
From: <sip:bob@10.10.199.250>;tag=656965031
Event: presence
Content-Length: 836
User-Agent: Cisco-CUCM7.1
To: <sip:bob@10.10.199.215>
Expires: 3600
Content-Type: application/pidf+xml
Call-ID: 7604f680-a2e1be2a-33-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK4d5104083c
CSeq: 101 PUBLISH
Max-Forwards: 70
SIP-If-Match: 0124aab4-23e5-46c0-a92d-1e8ead3d

<?xml version="1.0" encoding="UTF-8" standalone="no" ?>
```

CISCO CONFIDENTIAL

```
<presence xmlns="urn:ietf:params:xml:ns:pidf" entity="bob@10.10.199.250"
xmlns:r="urn:ietf:params:xml:ns:pidf:status:rpid" xmlns:ce="urn:cisco:params:xml:ns:pidf:rpid"
xmlns:dm="urn:ietf:params:xml:ns:pidf:data-model" xmlns:so="urn:cisco:params:xml:ns:pidf:source"
xmlns:sc="urn:ietf:params:xml:ns:pidf:servcaps">
  <tuple id="0a02af61-9166-5a4a-f251-25d3e9351bf6-96738445-678b-f015-7b3e-4aeba2c49019">
    <status>
    <basic>open</basic>
    </status>
    <sc:servcaps>
      <sc:audio>true</sc:audio>
    </sc:servcaps>
    <contact priority="0.8">sip:4001@10.10.199.250:5060;dpkid=96738445-678b-f015-7b3e-
4aeba2c49019;npkid=0a02af61-9166-5a4a-f251-25d3e9351bf6</contact>
    <model>Cisco 7970</model>
    <timestamp>2009-06-09T19:55:22Z</timestamp>
  </tuple>
</presence>
```

[diagram] Call-ID:[prev][next]

[44] BYE sip:2002@10.10.199.251:5060;transport=tcp SIP/2.0

```
Date: Tue, 09 Jun 2009 19:55:14 GMT
From: <sip:4001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-28674129
P-Asserted-Identity: <sip:4001@10.10.199.250>
Content-Length: 0
User-Agent: Cisco-CUCM7.1
To: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-28674192
Call-ID: 6b4a6180-a2e1be18-30-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK4e74b1979e
CSeq: 107 BYE
Max-Forwards: 70
```

[diagram] Call-ID:[prev][next]

[45] SIP/2.0 200 OK

```
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK4d5104083c
CSeq: 101 PUBLISH
Call-ID: 7604f680-a2e1be2a-33-fac712ac@10.10.199.250
From: <sip:bob@10.10.199.250>;tag=656965031
To: <sip:bob@10.10.199.215>;tag=a02c7e69
Content-Length: 0
SIP-ETag: 0433edea-a992-48d9-bf7b-49d5268e
Expires: 3600
Contact: <sip:10.10.199.215:5070;transport=tcp>
```

[diagram] Call-ID:[prev][next]

[46] SIP/2.0 200 OK

```
Date: Tue, 09 Jun 2009 19:56:36 GMT
From: <sip:4001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-28674129
Content-Length: 0
To: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-28674192
Call-ID: 6b4a6180-a2e1be18-30-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK4e74b1979e
CSeq: 107 BYE
```

CISCO CONFIDENTIAL

17.3 PUBLISH with Shared Line, A Holds and B Selects

Title: PUBLISH with Shared Line, A Holds and B Selects

Description:

Since presence publication is line appearance based, the same directory number on difference phones are treated separately.

- Directory number 4001 on IP PhoneA is associated with CUPS user alice.
- Directory number 4001 on IP PhoneB is associated with CUPS user bob.
- Alice made a phone call, since IP PhoneA owns the call, 4001 on PhoneA is published as busy.
- Alice hold the call. No new PUBLISH message since PhoneA still owns the call.
- Bob selects the call from PhoneB, so PhoneB takes over the call ownership from PhoneA. 4001 on PhoneA is published as idle, and 4001 on PhoneB is published at busy.
- Bob resumes the call. No new PUBLISH message since PhoneB still owns the call.
- Bob hangs up the phone. 4001 on PhoneB is published as idle.

Configuration:

Node = Cisco Unified CM, IP = 10.10.199.250
Node = Cisco Unified CM, IP = 10.10.199.251
Node = Presence Server, IP = 10.10.199.215

Phone = A, Line = 4001, IP = 10.10.199.130, Model = SCCP
Phone = B, Line = 4001, IP = 10.10.199.66, Model = SCCP
Phone = C, Line = 2002, IP = 10.10.199.179, Model = SCCP

Sip Trunk between CCM1 and CCM2 has route pattern 2.XXXX

Scenario:

Phone A DN 4001 calls Phone C DN 2002 by dialing digits 22002
Phone C rings
Phone C answers. Phone B DN 4001 shows busy sign (red button on line)
Phone A presses hold softkey

CISCO CONFIDENTIAL

Phone B selects the DN 4001 call

Phone B presses resume softkey on DN 4001 call

Phone A gets disconnected, since Phone B resumed the call

Now Phone B and Phone C talk

Phone B goes onHook

Phone C goes onHook

End of Scenario

CISCO CONFIDENTIAL

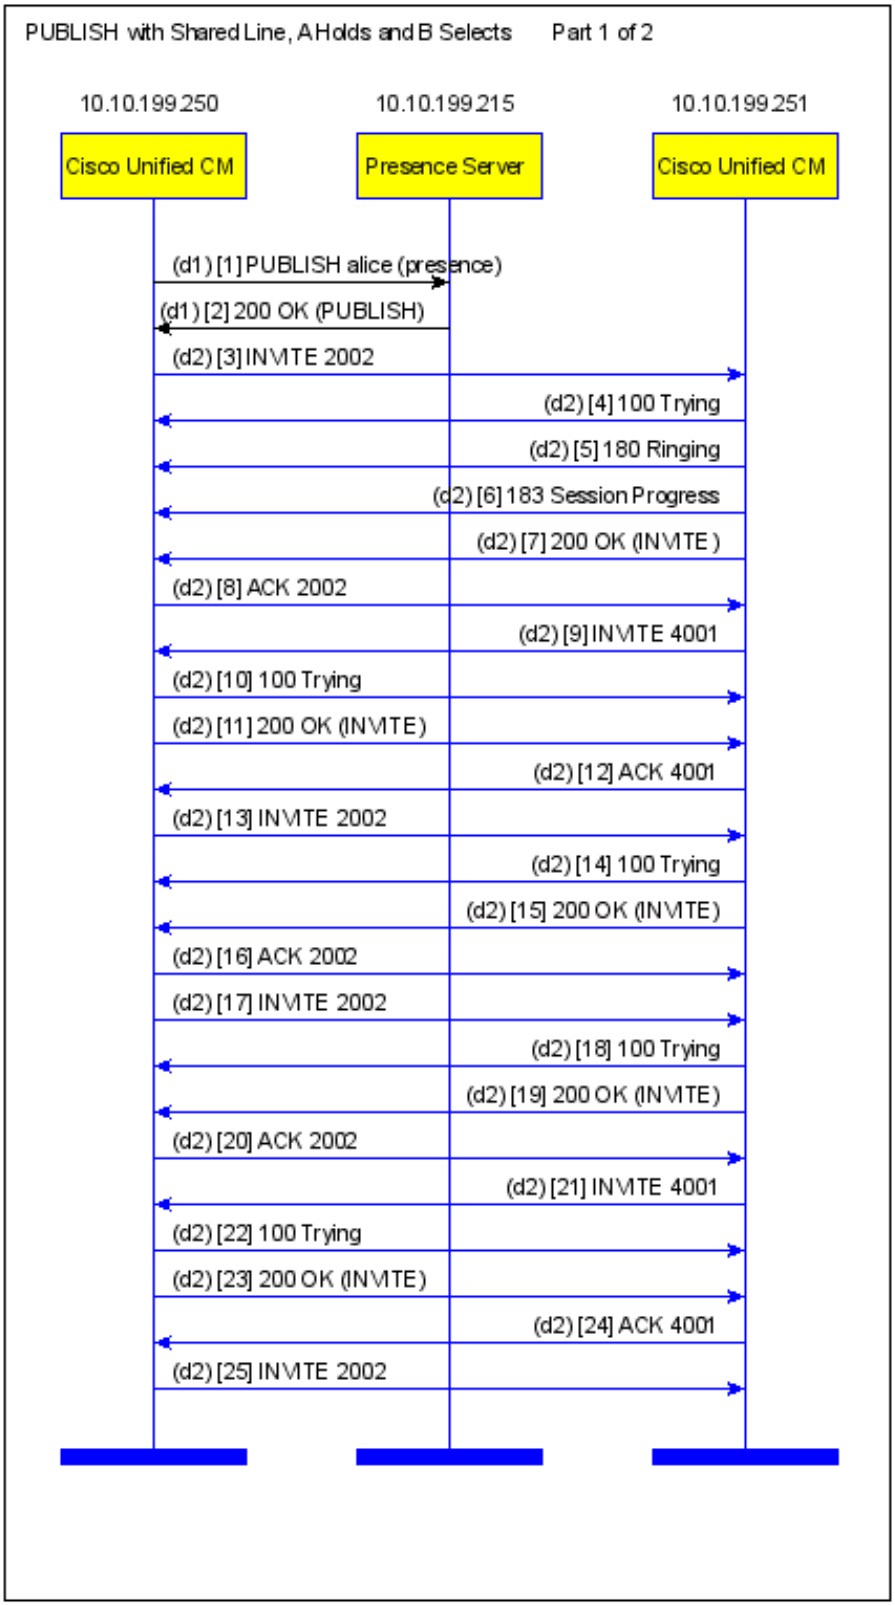

CISCO CONFIDENTIAL

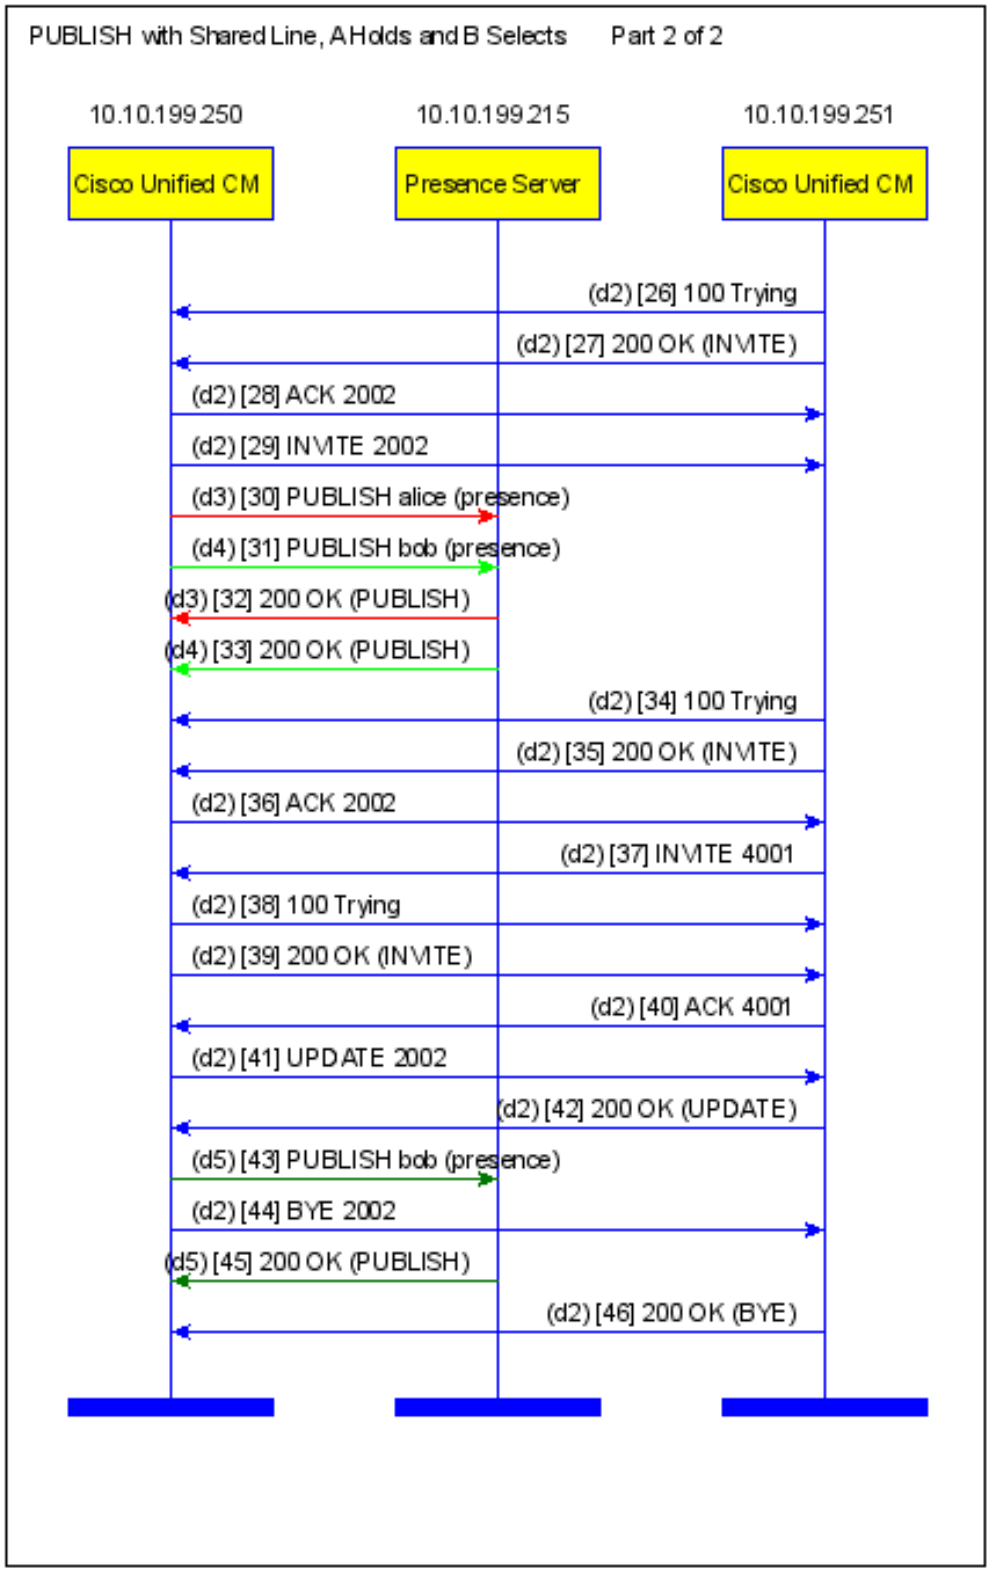

CISCO CONFIDENTIAL

```
[diagram]   Call-ID:[prev][next]
[1] PUBLISH sip:alice@10.10.199.215:5070 SIP/2.0
Date: Tue, 09 Jun 2009 20:01:57 GMT
From: <sip:alice@10.10.199.250>;tag=1729538319
Event: presence
Content-Length: 883
User-Agent: Cisco-CUCM7.1
To: <sip:alice@10.10.199.215>
Expires: 3600
Content-Type: application/pidf+xml
Call-ID: 61752e00-a2e1bfb5-34-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK4f7a1d3f09
CSeq: 101 PUBLISH
Max-Forwards: 70
SIP-If-Match: 683e90fa-c03b-471c-9dde-7f2d1ab0

<?xml version="1.0" encoding="UTF-8" standalone="no" ?>
<presence xmlns="urn:ietf:params:xml:ns:pidf" entity="alice@10.10.199.250"
xmlns:r="urn:ietf:params:xml:ns:pidf:status:rpid" xmlns:ce="urn:cisco:params:xml:ns:pidf:rpid"
xmlns:dm="urn:ietf:params:xml:ns:pidf:data-model" xmlns:so="urn:cisco:params:xml:ns:pidf:source"
xmlns:sc="urn:ietf:params:xml:ns:pidf:servcaps">
  <tuple id="0a02af61-9166-5a4a-f251-25d3e9351bf6-8b998dbf-1c07-f2e4-4858-b44a38e4b5e3">
    <status>
    <basic>closed</basic>
    </status>
    <r:activities><r:busy/></r:activities>
    <sc:servcaps>
      <sc:audio>true</sc:audio>
    </sc:servcaps>
    <contact priority="0.8">sip:4001@10.10.199.250:5060;dpkid=8b998dbf-1c07-f2e4-4858-
b44a38e4b5e3;npkid=0a02af61-9166-5a4a-f251-25d3e9351bf6</contact>
    <model>Cisco 7970</model>
    <timestamp>2009-06-09T20:01:57Z</timestamp>
  </tuple>
</presence>

[diagram]   Call-ID:[prev][next]
[2] SIP/2.0 200 OK
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK4f7a1d3f09
CSeq: 101 PUBLISH
Call-ID: 61752e00-a2e1bfb5-34-fac712ac@10.10.199.250
From: <sip:alice@10.10.199.250>;tag=1729538319
To: <sip:alice@10.10.199.215>;tag=9e5da7d8
Content-Length: 0
SIP-ETag: e3817ad2-32a9-49e4-98ef-26e53070
Expires: 3600
Contact: <sip:10.10.199.215:5070;transport=tcp>

[diagram]   Call-ID:[prev][next]
[3] INVITE sip:2002@10.10.199.251:5060 SIP/2.0
Date: Tue, 09 Jun 2009 20:02:00 GMT
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:4001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-28674132
Allow-Events: presence
P-Asserted-Identity: <sip:4001@10.10.199.250>
Supported: timer,resource-priority,replaces
Supported: Geolocation
Min-SE:  1800
Remote-Party-ID: <sip:4001@10.10.199.250>;party=calling;screen=yes;privacy=off
Content-Length: 0
User-Agent: Cisco-CUCM7.1
To: <sip:2002@10.10.199.251>
Contact: <sip:4001@10.10.199.250:5060;transport=tcp>
Expires: 180
Call-ID: 633ef180-a2e1bfb8-35-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK5036bbf386
CSeq: 101 INVITE
Session-Expires:  1800
Max-Forwards: 70

[diagram]   Call-ID:[prev][next]
[4] SIP/2.0 100 Trying
Date: Tue, 09 Jun 2009 20:03:15 GMT
From: <sip:4001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-28674132
Allow-Events: presence
Content-Length: 0
To: <sip:2002@10.10.199.251>
Call-ID: 633ef180-a2e1bfb8-35-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK5036bbf386
CSeq: 101 INVITE
```

CISCO CONFIDENTIAL

```
[diagram]   Call-ID:[prev][next]
[5] SIP/2.0 180 Ringing
Date: Tue, 09 Jun 2009 20:03:15 GMT
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:4001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-28674132
Allow-Events: presence
P-Asserted-Identity: <sip:2002@10.10.199.251>
Supported: Geolocation
Remote-Party-ID: <sip:2002@10.10.199.251>;party=called;screen=yes;privacy=off
Content-Length: 0
To: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-28674194
Contact: <sip:2002@10.10.199.251:5060;transport=tcp>
Call-ID: 633ef180-a2e1bfb8-35-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK5036bbf386
CSeq: 101 INVITE

[diagram]   Call-ID:[prev][next]
[6] SIP/2.0 183 Session Progress
Date: Tue, 09 Jun 2009 20:03:15 GMT
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:4001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-28674132
Allow-Events: presence
P-Asserted-Identity: <sip:2002@10.10.199.251>
Supported: Geolocation
Remote-Party-ID: <sip:2002@10.10.199.251>;party=called;screen=yes;privacy=off
Content-Length: 337
To: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-28674194
Contact: <sip:2002@10.10.199.251:5060;transport=tcp>
Content-Type: application/sdp
Call-ID: 633ef180-a2e1bfb8-35-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK5036bbf386
CSeq: 101 INVITE

v=0
o=CiscoSystemsCCM-SIP 2000 1 IN IP4 10.10.199.251
s=SIP Call
c=IN IP4 10.10.199.179
t=0 0
m=audio 4000 RTP/AVP 9 0 8 18 101
a=rtpmap:9 G722/8000
a=ptime:20
a=rtpmap:0 PCMU/8000
a=ptime:20
a=rtpmap:8 PCMA/8000
a=ptime:20
a=rtpmap:18 G729/8000
a=ptime:20
a=sendonly
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15

[diagram]   Call-ID:[prev][next]
[7] SIP/2.0 200 OK
Date: Tue, 09 Jun 2009 20:03:15 GMT
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:4001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-28674132
Allow-Events: presence
P-Asserted-Identity: <sip:2002@10.10.199.251>
Supported: replaces
Supported: Geolocation
Remote-Party-ID: <sip:2002@10.10.199.251>;party=called;screen=yes;privacy=off
Content-Length: 337
Require:  timer
To: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-28674194
Contact: <sip:2002@10.10.199.251:5060;transport=tcp>
Content-Type: application/sdp
Call-ID: 633ef180-a2e1bfb8-35-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK5036bbf386
CSeq: 101 INVITE
Session-Expires:  1800;refresher=uas

v=0
o=CiscoSystemsCCM-SIP 2000 1 IN IP4 10.10.199.251
s=SIP Call
c=IN IP4 10.10.199.179
t=0 0
m=audio 4000 RTP/AVP 9 0 8 18 101
a=rtpmap:9 G722/8000
a=ptime:20
```

CISCO CONFIDENTIAL

```
a=rtpmap:0 PCMU/8000
a=ptime:20
a=rtpmap:8 PCMA/8000
a=ptime:20
a=rtpmap:18 G729/8000
a=ptime:20
a=sendonly
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15

[diagram]   Call-ID:[prev][next]
[8] ACK sip:2002@10.10.199.251:5060;transport=tcp SIP/2.0
Date: Tue, 09 Jun 2009 20:02:00 GMT
From: <sip:4001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-28674132
Allow-Events: presence
Content-Length: 228
To: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-28674194
Content-Type: application/sdp
Call-ID: 633ef180-a2e1bfb8-35-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK51574453c0
CSeq: 101 ACK
Max-Forwards: 70

v=0
o=CiscoSystemsCCM-SIP 2000 1 IN IP4 10.10.199.250
s=SIP Call
c=IN IP4 10.10.199.130
t=0 0
m=audio 31454 RTP/AVP 9 101
a=rtpmap:9 G722/8000
a=ptime:20
a=recvonly
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15

[diagram]   Call-ID:[prev][next]
[9] INVITE sip:4001@10.10.199.250:5060;transport=tcp SIP/2.0
Date: Tue, 09 Jun 2009 20:03:17 GMT
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-28674194
Allow-Events: presence
P-Asserted-Identity: <sip:2002@10.10.199.251>
Supported: timer,resource-priority,replaces
Min-SE:  1800
Remote-Party-ID: <sip:2002@10.10.199.251>;party=calling;screen=yes;privacy=off
Content-Length: 216
User-Agent: Cisco-CUCM7.1
To: <sip:4001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-28674132
Contact: <sip:2002@10.10.199.251:5060;transport=tcp>
Expires: 180
Content-Type: application/sdp
Call-ID: 633ef180-a2e1bfb8-35-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bK1340bd51c4
CSeq: 101 INVITE
Session-Expires:  1800;refresher=uac
Max-Forwards: 70

v=0
o=CiscoSystemsCCM-SIP 2000 2 IN IP4 10.10.199.251
s=SIP Call
c=IN IP4 10.10.199.179
t=0 0
m=audio 22544 RTP/AVP 9 101
a=rtpmap:9 G722/8000
a=ptime:20
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15

[diagram]   Call-ID:[prev][next]
[10] SIP/2.0 100 Trying
Date: Tue, 09 Jun 2009 20:02:02 GMT
From: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-28674194
Allow-Events: presence
Content-Length: 0
To: <sip:4001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-28674132
Call-ID: 633ef180-a2e1bfb8-35-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bK1340bd51c4
CSeq: 101 INVITE
```

CISCO CONFIDENTIAL

```
[diagram]   Call-ID:[prev][next]
[11] SIP/2.0 200 OK
Date: Tue, 09 Jun 2009 20:02:02 GMT
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-28674194
Allow-Events: presence
P-Asserted-Identity: <sip:4001@10.10.199.250>
Supported: replaces
Supported: Geolocation
Remote-Party-ID: <sip:4001@10.10.199.250>;party=called;screen=yes;privacy=off
Content-Length: 216
Require:  timer
To: <sip:4001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-28674132
Contact: <sip:4001@10.10.199.250:5060;transport=tcp>
Content-Type: application/sdp
Call-ID: 633ef180-a2e1bfb8-35-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bK1340bd51c4
CSeq: 101 INVITE
Session-Expires:  1800;refresher=uac

v=0
o=CiscoSystemsCCM-SIP 2000 2 IN IP4 10.10.199.250
s=SIP Call
c=IN IP4 10.10.199.130
t=0 0
m=audio 31454 RTP/AVP 9 101
a=rtpmap:9 G722/8000
a=ptime:20
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15

[diagram]   Call-ID:[prev][next]
[12] ACK sip:4001@10.10.199.250:5060;transport=tcp SIP/2.0
Date: Tue, 09 Jun 2009 20:03:17 GMT
From: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-28674194
Allow-Events: presence
Content-Length: 0
To: <sip:4001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-28674132
Call-ID: 633ef180-a2e1bfb8-35-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bK147760cfad
CSeq: 101 ACK
Max-Forwards: 70

[diagram]   Call-ID:[prev][next]
[13] INVITE sip:2002@10.10.199.251:5060;transport=tcp SIP/2.0
Date: Tue, 09 Jun 2009 20:02:05 GMT
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:4001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-28674132
Allow-Events: presence
P-Asserted-Identity: <sip:4001@10.10.199.250>
Supported: timer,resource-priority,replaces
Min-SE:  1800
Remote-Party-ID: <sip:4001@10.10.199.250>;party=calling;screen=yes;privacy=off
Content-Length: 221
User-Agent: Cisco-CUCM7.1
To: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-28674194
Contact: <sip:4001@10.10.199.250:5060;transport=tcp>
Expires: 180
Content-Type: application/sdp
Call-ID: 633ef180-a2e1bfb8-35-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK5219bdf0b8
CSeq: 102 INVITE
Session-Expires:  1800;refresher=uas
Max-Forwards: 70

v=0
o=CiscoSystemsCCM-SIP 2000 3 IN IP4 10.10.199.250
s=SIP Call
c=IN IP4 0.0.0.0
t=0 0
m=audio 31454 RTP/AVP 9 101
a=rtpmap:9 G722/8000
a=ptime:20
a=inactive
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15

[diagram]   Call-ID:[prev][next]
[14] SIP/2.0 100 Trying
Date: Tue, 09 Jun 2009 20:03:20 GMT
```

CISCO CONFIDENTIAL

```
From: <sip:4001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-28674132
Allow-Events: presence
Content-Length: 0
To: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-28674194
Call-ID: 633ef180-a2e1bfb8-35-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK5219bdf0b8
CSeq: 102 INVITE
```

[diagram] Call-ID:[prev][next]

[15] SIP/2.0 200 OK

```
Date: Tue, 09 Jun 2009 20:03:20 GMT
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:4001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-28674132
Allow-Events: presence
P-Asserted-Identity: <sip:2002@10.10.199.251>
Supported: replaces
Supported: Geolocation
Remote-Party-ID: <sip:2002@10.10.199.251>;party=called;screen=yes;privacy=off
Content-Length: 228
Require:  timer
To: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-28674194
Contact: <sip:2002@10.10.199.251:5060;transport=tcp>
Content-Type: application/sdp
Call-ID: 633ef180-a2e1bfb8-35-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK5219bdf0b8
CSeq: 102 INVITE
Session-Expires:  1800;refresher=uas

v=0
o=CiscoSystemsCCM-SIP 2000 3 IN IP4 10.10.199.251
s=SIP Call
c=IN IP4 10.10.199.179
t=0 0
m=audio 22544 RTP/AVP 9 101
a=rtpmap:9 G722/8000
a=ptime:20
a=inactive
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
```

[diagram] Call-ID:[prev][next]

[16] ACK sip:2002@10.10.199.251:5060;transport=tcp SIP/2.0

```
Date: Tue, 09 Jun 2009 20:02:05 GMT
From: <sip:4001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-28674132
Allow-Events: presence
Content-Length: 0
To: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-28674194
Call-ID: 633ef180-a2e1bfb8-35-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK53ebb91e0
CSeq: 102 ACK
Max-Forwards: 70
```

[diagram] Call-ID:[prev][next]

[17] INVITE sip:2002@10.10.199.251:5060;transport=tcp SIP/2.0

```
Date: Tue, 09 Jun 2009 20:02:05 GMT
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:4001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-28674132
Allow-Events: presence
P-Asserted-Identity: <sip:4001@10.10.199.250>
Supported: timer,resource-priority,replaces
Min-SE:  1800
Remote-Party-ID: <sip:4001@10.10.199.250>;party=calling;screen=yes;privacy=off
Content-Length: 0
User-Agent: Cisco-CUCM7.1
To: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-28674194
Contact: <sip:4001@10.10.199.250:5060;transport=tcp>
Expires: 180
Call-ID: 633ef180-a2e1bfb8-35-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK547c838a91
CSeq: 103 INVITE
Session-Expires:  1800;refresher=uas
Max-Forwards: 70
```

[diagram] Call-ID:[prev][next]

[18] SIP/2.0 100 Trying

```
Date: Tue, 09 Jun 2009 20:03:20 GMT
From: <sip:4001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-28674132
Allow-Events: presence
Content-Length: 0
To: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-28674194
```

CISCO CONFIDENTIAL

```
Call-ID: 633ef180-a2e1bfb8-35-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK547c838a91
CSeq: 103 INVITE

[diagram]   Call-ID:[prev][next]
[19] SIP/2.0 200 OK
Date: Tue, 09 Jun 2009 20:03:20 GMT
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:4001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-28674132
Allow-Events: presence
P-Asserted-Identity: <sip:2002@10.10.199.251>
Supported: replaces
Remote-Party-ID: <sip:2002@10.10.199.251>;party=called;screen=yes;privacy=off
Content-Length: 337
Require:  timer
To: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-28674194
Contact: <sip:2002@10.10.199.251:5060;transport=tcp>
Content-Type: application/sdp
Call-ID: 633ef180-a2e1bfb8-35-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK547c838a91
CSeq: 103 INVITE
Session-Expires:  1800;refresher=uas

v=0
o=CiscoSystemsCCM-SIP 2000 4 IN IP4 10.10.199.251
s=SIP Call
c=IN IP4 10.10.199.179
t=0 0
m=audio 4000 RTP/AVP 9 0 8 18 101
a=rtpmap:9 G722/8000
a=ptime:20
a=rtpmap:0 PCMU/8000
a=ptime:20
a=rtpmap:8 PCMA/8000
a=ptime:20
a=rtpmap:18 G729/8000
a=ptime:20
a=sendonly
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15

[diagram]   Call-ID:[prev][next]
[20] ACK sip:2002@10.10.199.251:5060;transport=tcp SIP/2.0
Date: Tue, 09 Jun 2009 20:02:05 GMT
From: <sip:4001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-28674132
Allow-Events: presence
Content-Length: 171
To: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-28674194
Content-Type: application/sdp
Call-ID: 633ef180-a2e1bfb8-35-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK5518adfd06
CSeq: 103 ACK
Max-Forwards: 70

v=0
o=CiscoSystemsCCM-SIP 2000 4 IN IP4 10.10.199.250
s=SIP Call
c=IN IP4 10.10.199.250
t=0 0
m=audio 4000 RTP/AVP 0
a=rtpmap:0 PCMU/8000
a=ptime:20
a=inactive

[diagram]   Call-ID:[prev][next]
[21] INVITE sip:4001@10.10.199.250:5060;transport=tcp SIP/2.0
Date: Tue, 09 Jun 2009 20:03:21 GMT
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-28674194
Allow-Events: presence
P-Asserted-Identity: <sip:2002@10.10.199.251>
Supported: timer,resource-priority,replaces
Min-SE:  1800
Remote-Party-ID: <sip:2002@10.10.199.251>;party=calling;screen=yes;privacy=off
Content-Length: 160
User-Agent: Cisco-CUCM7.1
To: <sip:4001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-28674132
Contact: <sip:2002@10.10.199.251:5060;transport=tcp>
Expires: 180
Content-Type: application/sdp
```

CISCO CONFIDENTIAL

```
Call-ID: 633ef180-a2e1bfb8-35-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bK1569cb1749
CSeq: 102 INVITE
Session-Expires:  1800;refresher=uac
Max-Forwards: 70

v=0
o=CiscoSystemsCCM-SIP 2000 5 IN IP4 10.10.199.251
s=SIP Call
c=IN IP4 10.10.199.179
t=0 0
m=audio 22930 RTP/AVP 0
a=rtpmap:0 PCMU/8000
a=ptime:20
```

[diagram] Call-ID:[prev][next]

[22] SIP/2.0 100 Trying

```
Date: Tue, 09 Jun 2009 20:02:06 GMT
From: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-28674194
Allow-Events: presence
Content-Length: 0
To: <sip:4001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-28674132
Call-ID: 633ef180-a2e1bfb8-35-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bK1569cb1749
CSeq: 102 INVITE
```

[diagram] Call-ID:[prev][next]

[23] SIP/2.0 200 OK

```
Date: Tue, 09 Jun 2009 20:02:06 GMT
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-28674194
Allow-Events: presence
P-Asserted-Identity: <sip:4001@10.10.199.250>
Supported: replaces
Supported: Geolocation
Remote-Party-ID: <sip:4001@10.10.199.250>;party=called;screen=yes;privacy=off
Content-Length: 171
Require:  timer
To: <sip:4001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-28674132
Contact: <sip:4001@10.10.199.250:5060;transport=tcp>
Content-Type: application/sdp
Call-ID: 633ef180-a2e1bfb8-35-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bK1569cb1749
CSeq: 102 INVITE
Session-Expires:  1800;refresher=uac

v=0
o=CiscoSystemsCCM-SIP 2000 5 IN IP4 10.10.199.250
s=SIP Call
c=IN IP4 10.10.199.250
t=0 0
m=audio 4000 RTP/AVP 0
a=rtpmap:0 PCMU/8000
a=ptime:20
a=sendonly
```

[diagram] Call-ID:[prev][next]

[24] ACK sip:4001@10.10.199.250:5060;transport=tcp SIP/2.0

```
Date: Tue, 09 Jun 2009 20:03:21 GMT
From: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-28674194
Allow-Events: presence
Content-Length: 0
To: <sip:4001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-28674132
Call-ID: 633ef180-a2e1bfb8-35-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bK166018eb92
CSeq: 102 ACK
Max-Forwards: 70
```

[diagram] Call-ID:[prev][next]

[25] INVITE sip:2002@10.10.199.251:5060;transport=tcp SIP/2.0

```
Date: Tue, 09 Jun 2009 20:02:08 GMT
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:4001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-28674132
Allow-Events: presence
P-Asserted-Identity: <sip:4001@10.10.199.250>
Supported: timer,resource-priority,replaces
Min-SE:  1800
Remote-Party-ID: <sip:4001@10.10.199.250>;party=calling;screen=yes;privacy=off
Content-Length: 164
User-Agent: Cisco-CUCM7.1
```

CISCO CONFIDENTIAL

```
To: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-28674194
Contact: <sip:4001@10.10.199.250:5060;transport=tcp>
Expires: 180
Content-Type: application/sdp
Call-ID: 633ef180-a2e1bfb8-35-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK564a9550ab
CSeq: 104 INVITE
Session-Expires:  1800;refresher=uas
Max-Forwards: 70

v=0
o=CiscoSystemsCCM-SIP 2000 6 IN IP4 10.10.199.250
s=SIP Call
c=IN IP4 0.0.0.0
t=0 0
m=audio 4000 RTP/AVP 0
a=rtpmap:0 PCMU/8000
a=ptime:20
a=inactive
```

[diagram] Call-ID:[prev][next]

[26] SIP/2.0 100 Trying

```
Date: Tue, 09 Jun 2009 20:03:23 GMT
From: <sip:4001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-28674132
Allow-Events: presence
Content-Length: 0
To: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-28674194
Call-ID: 633ef180-a2e1bfb8-35-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK564a9550ab
CSeq: 104 INVITE
```

[diagram] Call-ID:[prev][next]

[27] SIP/2.0 200 OK

```
Date: Tue, 09 Jun 2009 20:03:23 GMT
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:4001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-28674132
Allow-Events: presence
P-Asserted-Identity: <sip:2002@10.10.199.251>
Supported: replaces
Supported: Geolocation
Remote-Party-ID: <sip:2002@10.10.199.251>;party=called;screen=yes;privacy=off
Content-Length: 172
Require:  timer
To: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-28674194
Contact: <sip:2002@10.10.199.251:5060;transport=tcp>
Content-Type: application/sdp
Call-ID: 633ef180-a2e1bfb8-35-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK564a9550ab
CSeq: 104 INVITE
Session-Expires:  1800;refresher=uas

v=0
o=CiscoSystemsCCM-SIP 2000 6 IN IP4 10.10.199.251
s=SIP Call
c=IN IP4 10.10.199.179
t=0 0
m=audio 22930 RTP/AVP 0
a=rtpmap:0 PCMU/8000
a=ptime:20
a=inactive
```

[diagram] Call-ID:[prev][next]

[28] ACK sip:2002@10.10.199.251:5060;transport=tcp SIP/2.0

```
Date: Tue, 09 Jun 2009 20:02:08 GMT
From: <sip:4001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-28674132
Allow-Events: presence
Content-Length: 0
To: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-28674194
Call-ID: 633ef180-a2e1bfb8-35-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK5738a2d945
CSeq: 104 ACK
Max-Forwards: 70
```

[diagram] Call-ID:[prev][next]

[29] INVITE sip:2002@10.10.199.251:5060;transport=tcp SIP/2.0

```
Date: Tue, 09 Jun 2009 20:02:08 GMT
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:4001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-28674132
Allow-Events: presence
P-Asserted-Identity: <sip:4001@10.10.199.250>
```

CISCO CONFIDENTIAL

```
Supported: timer,resource-priority,replaces
Min-SE:  1800
Remote-Party-ID: <sip:4001@10.10.199.250>;party=calling;screen=yes;privacy=off
Content-Length: 0
User-Agent: Cisco-CUCM7.1
To: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-28674194
Contact: <sip:4001@10.10.199.250:5060;transport=tcp>
Expires: 180
Call-ID: 633ef180-a2e1bfb8-35-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK583cc5b2f
CSeq: 105 INVITE
Session-Expires:  1800;refresher=uas
Max-Forwards: 70

[diagram]   Call-ID:[prev][next]
[30] PUBLISH sip:alice@10.10.199.215:5070 SIP/2.0
Date: Tue, 09 Jun 2009 20:02:08 GMT
From: <sip:alice@10.10.199.250>;tag=413284381
Event: presence
Content-Length: 838
User-Agent: Cisco-CUCM7.1
To: <sip:alice@10.10.199.215>
Expires: 3600
Content-Type: application/pidf+xml
Call-ID: 6803a580-a2e1bfc0-36-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK591aa4db76
CSeq: 101 PUBLISH
Max-Forwards: 70
SIP-If-Match: e3817ad2-32a9-49e4-98ef-26e53070

<?xml version="1.0" encoding="UTF-8" standalone="no" ?>
<presence xmlns="urn:ietf:params:xml:ns:pidf" entity="alice@10.10.199.250"
xmlns:r="urn:ietf:params:xml:ns:pidf:status:rpid" xmlns:ce="urn:cisco:params:xml:ns:pidf:rpid"
xmlns:dm="urn:ietf:params:xml:ns:pidf:data-model" xmlns:so="urn:cisco:params:xml:ns:pidf:source"
xmlns:sc="urn:ietf:params:xml:ns:pidf:servcaps">
  <tuple id="0a02af61-9166-5a4a-f251-25d3e9351bf6-8b998dbf-1c07-f2e4-4858-b44a38e4b5e3">
    <status>
    <basic>open</basic>
    </status>
    <sc:servcaps>
      <sc:audio>true</sc:audio>
    </sc:servcaps>
    <contact priority="0.8">sip:4001@10.10.199.250:5060;dpkid=8b998dbf-1c07-f2e4-4858-
b44a38e4b5e3;npkid=0a02af61-9166-5a4a-f251-25d3e9351bf6</contact>
    <model>Cisco 7970</model>
    <timestamp>2009-06-09T20:02:08Z</timestamp>
  </tuple>
</presence>

[diagram]   Call-ID:[prev][next]
[31] PUBLISH sip:bob@10.10.199.215:5070 SIP/2.0
Date: Tue, 09 Jun 2009 20:02:08 GMT
From: <sip:bob@10.10.199.250>;tag=2146891961
Event: presence
Content-Length: 881
User-Agent: Cisco-CUCM7.1
To: <sip:bob@10.10.199.215>
Expires: 3600
Content-Type: application/pidf+xml
Call-ID: 6803a580-a2e1bfc0-37-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK5a50e77ab9
CSeq: 101 PUBLISH
Max-Forwards: 70
SIP-If-Match: 0433edea-a992-48d9-bf7b-49d5268e

<?xml version="1.0" encoding="UTF-8" standalone="no" ?>
<presence xmlns="urn:ietf:params:xml:ns:pidf" entity="bob@10.10.199.250"
xmlns:r="urn:ietf:params:xml:ns:pidf:status:rpid" xmlns:ce="urn:cisco:params:xml:ns:pidf:rpid"
xmlns:dm="urn:ietf:params:xml:ns:pidf:data-model" xmlns:so="urn:cisco:params:xml:ns:pidf:source"
xmlns:sc="urn:ietf:params:xml:ns:pidf:servcaps">
  <tuple id="0a02af61-9166-5a4a-f251-25d3e9351bf6-96738445-678b-f015-7b3e-4aeba2c49019">
    <status>
    <basic>closed</basic>
    </status>
    <r:activities><r:busy/></r:activities>
    <sc:servcaps>
      <sc:audio>true</sc:audio>
    </sc:servcaps>
    <contact priority="0.8">sip:4001@10.10.199.250:5060;dpkid=96738445-678b-f015-7b3e-
4aeba2c49019;npkid=0a02af61-9166-5a4a-f251-25d3e9351bf6</contact>
```

CISCO CONFIDENTIAL

```
    <model>Cisco 7970</model>
    <timestamp>2009-06-09T20:02:08Z</timestamp>
  </tuple>
</presence>

[diagram]   Call-ID:[prev][next]
[32] SIP/2.0 200 OK
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK591aa4db76
CSeq: 101 PUBLISH
Call-ID: 6803a580-a2e1bfc0-36-fac712ac@10.10.199.250
From: <sip:alice@10.10.199.250>;tag=413284381
To: <sip:alice@10.10.199.215>;tag=4bbbdc96
Content-Length: 0
SIP-ETag: a22d81f2-ba2a-4193-b6b0-962831af
Expires: 3600
Contact: <sip:10.10.199.215:5070;transport=tcp>

[diagram]   Call-ID:[prev][next]
[33] SIP/2.0 200 OK
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK5a50e77ab9
CSeq: 101 PUBLISH
Call-ID: 6803a580-a2e1bfc0-37-fac712ac@10.10.199.250
From: <sip:bob@10.10.199.250>;tag=2146891961
To: <sip:bob@10.10.199.215>;tag=aad2dbbc
Content-Length: 0
SIP-ETag: c96b6b71-1172-42c4-bb48-73b3d733
Expires: 3600
Contact: <sip:10.10.199.215:5070;transport=tcp>

[diagram]   Call-ID:[prev][next]
[34] SIP/2.0 100 Trying
Date: Tue, 09 Jun 2009 20:03:23 GMT
From: <sip:4001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-28674132
Allow-Events: presence
Content-Length: 0
To: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-28674194
Call-ID: 633ef180-a2e1bfb8-35-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK583cc5b2f
CSeq: 105 INVITE

[diagram]   Call-ID:[prev][next]
[35] SIP/2.0 200 OK
Date: Tue, 09 Jun 2009 20:03:23 GMT
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:4001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-28674132
Allow-Events: presence
P-Asserted-Identity: <sip:2002@10.10.199.251>
Supported: replaces
Remote-Party-ID: <sip:2002@10.10.199.251>;party=called;screen=yes;privacy=off
Content-Length: 337
Require:  timer
To: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-28674194
Contact: <sip:2002@10.10.199.251:5060;transport=tcp>
Content-Type: application/sdp
Call-ID: 633ef180-a2e1bfb8-35-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK583cc5b2f
CSeq: 105 INVITE
Session-Expires:  1800;refresher=uas

v=0
o=CiscoSystemsCCM-SIP 2000 7 IN IP4 10.10.199.251
s=SIP Call
c=IN IP4 10.10.199.179
t=0 0
m=audio 4000 RTP/AVP 9 0 8 18 101
a=rtpmap:9 G722/8000
a=ptime:20
a=rtpmap:0 PCMU/8000
a=ptime:20
a=rtpmap:8 PCMA/8000
a=ptime:20
a=rtpmap:18 G729/8000
a=ptime:20
a=sendonly
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15

[diagram]   Call-ID:[prev][next]
[36] ACK sip:2002@10.10.199.251:5060;transport=tcp SIP/2.0
Date: Tue, 09 Jun 2009 20:02:08 GMT
```

CISCO CONFIDENTIAL

```
From: <sip:4001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-28674132
Allow-Events: presence
Content-Length: 227
To: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-28674194
Content-Type: application/sdp
Call-ID: 633ef180-a2e1bfb8-35-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK5b22d0140
CSeq: 105 ACK
Max-Forwards: 70

v=0
o=CiscoSystemsCCM-SIP 2000 7 IN IP4 10.10.199.250
s=SIP Call
c=IN IP4 10.10.199.66
t=0 0
m=audio 21318 RTP/AVP 9 101
a=rtpmap:9 G722/8000
a=ptime:20
a=recvonly
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
```

[diagram] Call-ID:[prev][next]

[37] INVITE sip:4001@10.10.199.250:5060;transport=tcp SIP/2.0

```
Date: Tue, 09 Jun 2009 20:03:23 GMT
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-28674194
Allow-Events: presence
P-Asserted-Identity: <sip:2002@10.10.199.251>
Supported: timer,resource-priority,replaces
Min-SE:  1800
Remote-Party-ID: <sip:2002@10.10.199.251>;party=calling;screen=yes;privacy=off
Content-Length: 216
User-Agent: Cisco-CUCM7.1
To: <sip:4001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-28674132
Contact: <sip:2002@10.10.199.251:5060;transport=tcp>
Expires: 180
Content-Type: application/sdp
Call-ID: 633ef180-a2e1bfb8-35-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bK1714fd60ef
CSeq: 103 INVITE
Session-Expires:  1800;refresher=uac
Max-Forwards: 70

v=0
o=CiscoSystemsCCM-SIP 2000 8 IN IP4 10.10.199.251
s=SIP Call
c=IN IP4 10.10.199.179
t=0 0
m=audio 23182 RTP/AVP 9 101
a=rtpmap:9 G722/8000
a=ptime:20
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
```

[diagram] Call-ID:[prev][next]

[38] SIP/2.0 100 Trying

```
Date: Tue, 09 Jun 2009 20:02:08 GMT
From: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-28674194
Allow-Events: presence
Content-Length: 0
To: <sip:4001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-28674132
Call-ID: 633ef180-a2e1bfb8-35-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bK1714fd60ef
CSeq: 103 INVITE
```

[diagram] Call-ID:[prev][next]

[39] SIP/2.0 200 OK

```
Date: Tue, 09 Jun 2009 20:02:08 GMT
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-28674194
Allow-Events: presence
P-Asserted-Identity: <sip:4001@10.10.199.250>
Supported: replaces
Supported: Geolocation
Remote-Party-ID: <sip:4001@10.10.199.250>;party=called;screen=yes;privacy=off
Content-Length: 215
Require:  timer
To: <sip:4001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-28674132
Contact: <sip:4001@10.10.199.250:5060;transport=tcp>
```

CISCO CONFIDENTIAL

```
Content-Type: application/sdp
Call-ID: 633ef180-a2e1bfb8-35-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bK1714fd60ef
CSeq: 103 INVITE
Session-Expires:  1800;refresher=uac

v=0
o=CiscoSystemsCCM-SIP 2000 8 IN IP4 10.10.199.250
s=SIP Call
c=IN IP4 10.10.199.66
t=0 0
m=audio 21318 RTP/AVP 9 101
a=rtpmap:9 G722/8000
a=ptime:20
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
```

[diagram] Call-ID:[prev][next]

```
[40] ACK sip:4001@10.10.199.250:5060;transport=tcp SIP/2.0
Date: Tue, 09 Jun 2009 20:03:23 GMT
From: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-28674194
Allow-Events: presence
Content-Length: 0
To: <sip:4001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-28674132
Call-ID: 633ef180-a2e1bfb8-35-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bK1831784e22
CSeq: 103 ACK
Max-Forwards: 70
```

[diagram] Call-ID:[prev][next]

```
[41] UPDATE sip:2002@10.10.199.251:5060;transport=tcp SIP/2.0
Date: Tue, 09 Jun 2009 20:02:08 GMT
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:4001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-28674132
Allow-Events: presence
P-Asserted-Identity: <sip:4001@10.10.199.250>
Supported: timer,resource-priority,replaces
Remote-Party-ID: <sip:4001@10.10.199.250>;party=calling;screen=yes;privacy=off
Content-Length: 0
User-Agent: Cisco-CUCM7.1
To: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-28674194
Contact: <sip:4001@10.10.199.250:5060;transport=tcp>
Call-ID: 633ef180-a2e1bfb8-35-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK5c20745215
CSeq: 106 UPDATE
Max-Forwards: 70
```

[diagram] Call-ID:[prev][next]

```
[42] SIP/2.0 200 OK
Date: Tue, 09 Jun 2009 20:03:23 GMT
From: <sip:4001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-28674132
Allow-Events: presence
P-Asserted-Identity: <sip:2002@10.10.199.251>
Remote-Party-ID: <sip:2002@10.10.199.251>;party=called;screen=yes;privacy=off
Content-Length: 0
Require:  timer
To: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-28674194
Contact: <sip:2002@10.10.199.251:5060;transport=tcp>
Call-ID: 633ef180-a2e1bfb8-35-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK5c20745215
CSeq: 106 UPDATE
Session-Expires:  1800;refresher=uas
```

[diagram] Call-ID:[prev][next]

```
[43] PUBLISH sip:bob@10.10.199.215:5070 SIP/2.0
Date: Tue, 09 Jun 2009 20:02:15 GMT
From: <sip:bob@10.10.199.250>;tag=1721332874
Event: presence
Content-Length: 836
User-Agent: Cisco-CUCM7.1
To: <sip:bob@10.10.199.215>
Expires: 3600
Content-Type: application/pidf+xml
Call-ID: 6c2fc300-a2e1bfc7-38-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK5d4bb1d9a8
CSeq: 101 PUBLISH
Max-Forwards: 70
SIP-If-Match: c96b6b71-1172-42c4-bb48-73b3d733

<?xml version="1.0" encoding="UTF-8" standalone="no" ?>
```

CISCO CONFIDENTIAL

```
<presence xmlns="urn:ietf:params:xml:ns:pidf" entity="bob@10.10.199.250"
xmlns:r="urn:ietf:params:xml:ns:pidf:status:rpid" xmlns:ce="urn:cisco:params:xml:ns:pidf:rpid"
xmlns:dm="urn:ietf:params:xml:ns:pidf:data-model" xmlns:so="urn:cisco:params:xml:ns:pidf:source"
xmlns:sc="urn:ietf:params:xml:ns:pidf:servcaps">
  <tuple id="0a02af61-9166-5a4a-f251-25d3e9351bf6-96738445-678b-f015-7b3e-4aeba2c49019">
    <status>
    <basic>open</basic>
    </status>
    <sc:servcaps>
      <sc:audio>true</sc:audio>
    </sc:servcaps>
    <contact priority="0.8">sip:4001@10.10.199.250:5060;dpkid=96738445-678b-f015-7b3e-
4aeba2c49019;npkid=0a02af61-9166-5a4a-f251-25d3e9351bf6</contact>
    <model>Cisco 7970</model>
    <timestamp>2009-06-09T20:02:15Z</timestamp>
  </tuple>
</presence>

[diagram]   Call-ID:[prev][next]
[44] BYE sip:2002@10.10.199.251:5060;transport=tcp SIP/2.0
Date: Tue, 09 Jun 2009 20:02:08 GMT
From: <sip:4001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-28674132
P-Asserted-Identity: <sip:4001@10.10.199.250>
Content-Length: 0
User-Agent: Cisco-CUCM7.1
To: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-28674194
Call-ID: 633ef180-a2e1bfb8-35-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK5e4ad6139
CSeq: 107 BYE
Max-Forwards: 70

[diagram]   Call-ID:[prev][next]
[45] SIP/2.0 200 OK
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK5d4bb1d9a8
CSeq: 101 PUBLISH
Call-ID: 6c2fc300-a2e1bfc7-38-fac712ac@10.10.199.250
From: <sip:bob@10.10.199.250>;tag=1721332874
To: <sip:bob@10.10.199.215>;tag=336ffa6d
Content-Length: 0
SIP-ETag: 2d3f557e-4c46-481d-8f34-e58e3d6f
Expires: 3600
Contact: <sip:10.10.199.215:5070;transport=tcp>

[diagram]   Call-ID:[prev][next]
[46] SIP/2.0 200 OK
Date: Tue, 09 Jun 2009 20:03:30 GMT
From: <sip:4001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-28674132
Content-Length: 0
To: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-28674194
Call-ID: 633ef180-a2e1bfb8-35-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK5e4ad6139
CSeq: 107 BYE
```

CISCO CONFIDENTIAL

17.4 PUBLISH Support for Mobility

Title: PUBLISH Support for Mobility

Description:

This flow shows the PUBLISH support for mobility.

- Directory number 4001 is associated with a remote destination profile, which points to a mobile phone number 9199234040, connected to Unified CM through a SIP Gateway.
- The remote profile is associated with user carl.
- When 4001 is called, mobile number 9199234040 also rings.
- If the mobile phone answers the call, busy status is published. Since the remote destination is a mobile phone, the mobile number is in the PUBLISH message.
- After the call is terminated, idle status is published.

Configuration:

Node = Cisco Unified CM, IP = 10.10.199.250

Node = Presence Server, IP = 10.10.199.215

Node = SIP Gateway, IP = 10.10.199.93

CISCO CONFIDENTIAL

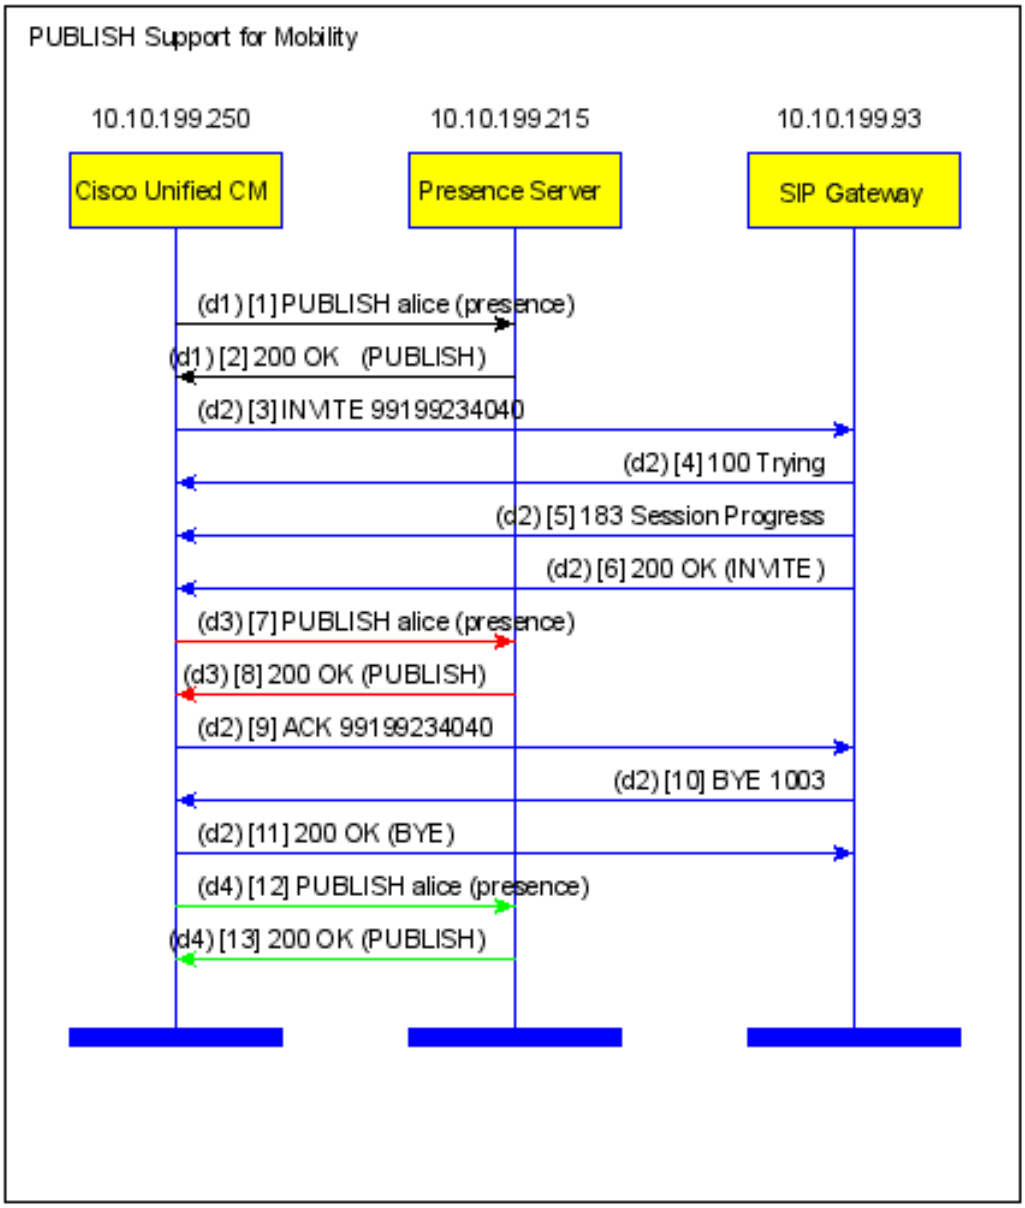

CISCO CONFIDENTIAL

```
[diagram]   Call-ID:[prev][next]
[1] PUBLISH sip:alice@10.10.199.215:5060 SIP/2.0
Date: Tue, 16 Jun 2009 17:44:25 GMT
From: <sip:alice@10.10.199.250>;tag=473185106
Event: presence
Content-Length: 838
User-Agent: Cisco-CUCM7.1
To: <sip:alice@10.10.199.215>
Expires: 3600
Content-Type: application/pidf+xml
Call-ID: 53c62800-a371d9f9-9-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bKa772bcbdb
CSeq: 101 PUBLISH
Max-Forwards: 70

<?xml version="1.0" encoding="UTF-8" standalone="no" ?>
<presence xmlns="urn:ietf:params:xml:ns:pidf" entity="alice@10.10.199.250"
xmlns:r="urn:ietf:params:xml:ns:pidf:status:rpid" xmlns:ce="urn:cisco:params:xml:ns:pidf:rpid"
xmlns:dm="urn:ietf:params:xml:ns:pidf:data-model" xmlns:so="urn:cisco:params:xml:ns:pidf:source"
xmlns:sc="urn:ietf:params:xml:ns:pidf:servcaps">
  <tuple id="0a02af61-9166-5a4a-f251-25d3e9351bf6-8b998dbf-1c07-f2e4-4858-b44a38e4b5e3">
    <status>
    <basic>open</basic>
    </status>
    <sc:servcaps>
      <sc:audio>true</sc:audio>
    </sc:servcaps>
    <contact priority="0.8">sip:4001@10.10.199.250:5060;dpkid=8b998dbf-1c07-f2e4-4858-
b44a38e4b5e3;npkid=0a02af61-9166-5a4a-f251-25d3e9351bf6</contact>
    <model>Cisco 7970</model>
    <timestamp>2009-06-16T17:44:25Z</timestamp>
  </tuple>
</presence>

[diagram]   Call-ID:[prev][next]
[2] SIP/2.0 200 OK
Via: SIP/2.0/TCP 10.10.199.250:5060;received=10.10.199.250;branch=z9hG4bKa772bcbdb
CSeq: 101 PUBLISH
Call-ID: 53c62800-a371d9f9-9-fac712ac@10.10.199.250
From: <sip:alice@10.10.199.250>;tag=473185106
To: <sip:alice@10.10.199.215>;tag=f66065a9
Content-Length: 0
SIP-ETag: 339dadb0-95b5-43f2-9010-ae928d37
Expires: 3600
Contact: <sip:10.10.199.215:5070;transport=tcp>

[diagram]   Call-ID:[prev][next]
[3] INVITE sip:99199234040@10.10.199.93:5060 SIP/2.0
Date: Tue, 16 Jun 2009 17:46:24 GMT
Call-Info: <sip:10.10.199.250:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:1003@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-31411421
Allow-Events: presence, kpml
P-Asserted-Identity: <sip:1003@10.10.199.250>
Supported: timer,resource-priority,replaces
Supported: Geolocation
Min-SE:  1800
Remote-Party-ID: <sip:1003@10.10.199.250>;party=calling;screen=yes;privacy=off
Content-Length: 0
User-Agent: Cisco-CUCM7.1
To: <sip:99199234040@10.10.199.93>
Contact: <sip:1003@10.10.199.250:5060;transport=tcp>
Expires: 180
Call-ID: 9ab41d80-a371da70-a-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bKb191abcf
CSeq: 101 INVITE
Session-Expires:  1800
Max-Forwards: 70

[diagram]   Call-ID:[prev][next]
[4] SIP/2.0 100 Trying
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bKb191abcf
From: <sip:1003@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-31411421
To: <sip:99199234040@10.10.199.93>;tag=475F05C8-AFE
Date: Tue, 16 Jun 2009 17:47:27 GMT
Call-ID: 9ab41d80-a371da70-a-fac712ac@10.10.199.250
Server: Cisco-SIPGateway/IOS-12.x
CSeq: 101 INVITE
Allow-Events: telephone-event
Content-Length: 0
```

CISCO CONFIDENTIAL

[diagram] Call-ID:[prev][next]

[5] SIP/2.0 183 Session Progress

```
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bKb191abcf
From: <sip:1003@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-31411421
To: <sip:99199234040@10.10.199.93>;tag=475F05C8-AFE
Date: Tue, 16 Jun 2009 17:47:27 GMT
Call-ID: 9ab41d80-a371da70-a-fac712ac@10.10.199.250
Server: Cisco-SIPGateway/IOS-12.x
CSeq: 101 INVITE
Allow: INVITE, OPTIONS, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY, INFO, REGISTER
Allow-Events: telephone-event
Contact: <sip:99199234040@10.10.199.93:5060;transport=tcp>
Content-Type: application/sdp
Content-Disposition: session;handling=required
Content-Length: 333

v=0
o=CiscoSystemsSIP-GW-UserAgent 7154 2643 IN IP4 10.10.199.93
s=SIP Call
c=IN IP4 10.10.199.93
t=0 0
m=audio 19364 RTP/AVP 0 8 18 101 19
c=IN IP4 10.10.199.93
a=rtpmap:0 PCMU/8000
a=rtpmap:8 PCMA/8000
a=rtpmap:18 G729/8000
a=fmtp:18 annexb=no
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-16
a=rtpmap:19 CN/8000
```

[diagram] Call-ID:[prev][next]

[6] SIP/2.0 200 OK

```
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bKb191abcf
From: <sip:1003@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-31411421
To: <sip:99199234040@10.10.199.93>;tag=475F05C8-AFE
Date: Tue, 16 Jun 2009 17:47:27 GMT
Call-ID: 9ab41d80-a371da70-a-fac712ac@10.10.199.250
Server: Cisco-SIPGateway/IOS-12.x
CSeq: 101 INVITE
Allow: INVITE, OPTIONS, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY, INFO, REGISTER
Allow-Events: telephone-event
Contact: <sip:99199234040@10.10.199.93:5060;transport=tcp>
Session-Expires:  1800;refresher=uac
Require: timer
Content-Type: application/sdp
Content-Disposition: session;handling=required
Content-Length: 333

v=0
o=CiscoSystemsSIP-GW-UserAgent 7154 2643 IN IP4 10.10.199.93
s=SIP Call
c=IN IP4 10.10.199.93
t=0 0
m=audio 19364 RTP/AVP 0 8 18 101 19
c=IN IP4 10.10.199.93
a=rtpmap:0 PCMU/8000
a=rtpmap:8 PCMA/8000
a=rtpmap:18 G729/8000
a=fmtp:18 annexb=no
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-16
a=rtpmap:19 CN/8000
```

[diagram] Call-ID:[prev][next]

[7] PUBLISH sip:alice@10.10.199.215:5070 SIP/2.0

```
Date: Tue, 16 Jun 2009 17:46:28 GMT
From: <sip:alice@10.10.199.250>;tag=219151673
Event: presence
Content-Length: 899
User-Agent: Cisco-CUCM7.1
To: <sip:alice@10.10.199.215>
Expires: 3600
Content-Type: application/pidf+xml
Call-ID: 9d167780-a371da74-b-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bKc6514a7f1
CSeq: 101 PUBLISH
Max-Forwards: 70
SIP-If-Match: ed569887-c838-410f-b2b7-e0f79b29
```

CISCO CONFIDENTIAL

```
<?xml version="1.0" encoding="UTF-8" standalone="no" ?>
<presence xmlns="urn:ietf:params:xml:ns:pidf" entity="alice@10.10.199.250"
xmlns:r="urn:ietf:params:xml:ns:pidf:status:rpid" xmlns:ce="urn:cisco:params:xml:ns:pidf:rpid"
xmlns:dm="urn:ietf:params:xml:ns:pidf:data-model" xmlns:so="urn:cisco:params:xml:ns:pidf:source"
xmlns:sc="urn:ietf:params:xml:ns:pidf:servcaps">
  <tuple id="0a02af61-9166-5a4a-f251-25d3e9351bf6-4cf407b2-c86c-6a45-dac8-412c1341c046">
    <status>
    <basic>closed</basic>
    </status>
    <r:activities><r:busy/></r:activities>
    <sc:servcaps>
      <sc:audio>true</sc:audio>
    </sc:servcaps>
    <contact priority="0.8">sip:4001@10.10.199.250:5060;dpkid=4cf407b2-c86c-6a45-dac8-
412c1341c046;npkid=0a02af61-9166-5a4a-f251-25d3e9351bf6;mobile=99199234040</contact>
    <model>unknown</model>
    <timestamp>2009-06-16T17:46:28Z</timestamp>
  </tuple>
</presence>
```

[diagram] Call-ID:[prev][next]

[8] SIP/2.0 200 OK

```
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bKc6514a7f1
CSeq: 101 PUBLISH
Call-ID: 9d167780-a371da74-b-fac712ac@10.10.199.250
From: <sip:alice@10.10.199.250>;tag=219151673
To: <sip:alice@10.10.199.215>;tag=88921565
Content-Length: 0
SIP-ETag: a0ff049a-90d1-4c43-959f-41d58f95
Expires: 3600
Contact: <sip:10.10.199.215:5070;transport=tcp>
```

[diagram] Call-ID:[prev][next]

[9] ACK sip:99199234040@10.10.199.93:5060;transport=tcp SIP/2.0

```
Date: Tue, 16 Jun 2009 17:46:24 GMT
From: <sip:1003@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-31411421
Allow-Events: presence, kpml
Content-Length: 215
To: <sip:99199234040@10.10.199.93>;tag=475F05C8-AFE
Content-Type: application/sdp
Call-ID: 9ab41d80-a371da70-a-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bKd7d59b8a4
CSeq: 101 ACK
Max-Forwards: 70

v=0
o=CiscoSystemsCCM-SIP 2000 1 IN IP4 10.10.199.250
s=SIP Call
c=IN IP4 10.10.199.66
t=0 0
m=audio 26396 RTP/AVP 0 101
a=rtpmap:0 PCMU/8000
a=ptime:20
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
```

[diagram] Call-ID:[prev][next]

[10] BYE sip:1003@10.10.199.250:5060;transport=tcp SIP/2.0

```
Via: SIP/2.0/TCP 10.10.199.93;branch=z9hG4bKC16F2
From: <sip:99199234040@10.10.199.93>;tag=475F05C8-AFE
To: <sip:1003@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-31411421
Date: Tue, 16 Jun 2009 17:47:32 GMT
Call-ID: 9ab41d80-a371da70-a-fac712ac@10.10.199.250
User-Agent: Cisco-SIPGateway/IOS-12.x
Max-Forwards: 70
Timestamp: 1245174460
CSeq: 101 BYE
Reason: Q.850;cause=16
Content-Length: 0
```

[diagram] Call-ID:[prev][next]

[11] SIP/2.0 200 OK

```
Date: Tue, 16 Jun 2009 17:46:37 GMT
From: <sip:99199234040@10.10.199.93>;tag=475F05C8-AFE
Content-Length: 0
To: <sip:1003@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-31411421
Call-ID: 9ab41d80-a371da70-a-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.93;branch=z9hG4bKC16F2
CSeq: 101 BYE
```

CISCO CONFIDENTIAL

```
[diagram]   Call-ID:[prev][next]
[12] PUBLISH sip:alice@10.10.199.215:5070 SIP/2.0
Date: Tue, 16 Jun 2009 17:46:47 GMT
From: <sip:alice@10.10.199.250>;tag=1720047523
Event: presence
Content-Length: 854
User-Agent: Cisco-CUCM7.1
To: <sip:alice@10.10.199.215>
Expires: 3600
Content-Type: application/pidf+xml
Call-ID: a869a300-a371da87-c-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bKe709f258c
CSeq: 101 PUBLISH
Max-Forwards: 70
SIP-If-Match: a0ff049a-90d1-4c43-959f-41d58f95

<?xml version="1.0" encoding="UTF-8" standalone="no" ?>
<presence xmlns="urn:ietf:params:xml:ns:pidf" entity="alice@10.10.199.250"
xmlns:r="urn:ietf:params:xml:ns:pidf:status:rpid" xmlns:ce="urn:cisco:params:xml:ns:pidf:rpid"
xmlns:dm="urn:ietf:params:xml:ns:pidf:data-model" xmlns:so="urn:cisco:params:xml:ns:pidf:source"
xmlns:sc="urn:ietf:params:xml:ns:pidf:servcaps">
  <tuple id="0a02af61-9166-5a4a-f251-25d3e9351bf6-4cf407b2-c86c-6a45-dac8-412c1341c046">
    <status>
    <basic>open</basic>
    </status>
    <sc:servcaps>
      <sc:audio>true</sc:audio>
    </sc:servcaps>
    <contact priority="0.8">sip:4001@10.10.199.250:5060;dpkid=4cf407b2-c86c-6a45-dac8-
412c1341c046;npkid=0a02af61-9166-5a4a-f251-25d3e9351bf6;mobile=99199234040</contact>
    <model>unknown</model>
    <timestamp>2009-06-16T17:46:47Z</timestamp>
  </tuple>
</presence>

[diagram]   Call-ID:[prev][next]
[13] SIP/2.0 200 OK
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bKe709f258c
CSeq: 101 PUBLISH
Call-ID: a869a300-a371da87-c-fac712ac@10.10.199.250
From: <sip:alice@10.10.199.250>;tag=1720047523
To: <sip:alice@10.10.199.215>;tag=e21401c9
Content-Length: 0
SIP-ETag: 847b2f49-b007-47bc-b90f-e37d1570
Expires: 3600
Contact: <sip:10.10.199.215:5070;transport=tcp>
```

CISCO CONFIDENTIAL

17.5 PUBlISH Support for DND

Title: PUBlISH Support for DND

Description:

This flow shows the PUBLISH support for DND. DND status is published independent of the line appearance's busy/idle status.

- Directory number 1001 is associated with an end user alice.
- Phone DND turned.
- When the phone becomes busy, DND status is published as well.
- When the phone becomes idle, DND status is published as well.

Configuration:

Node = Cisco Unified CM, IP = 10.10.199.250

Node = Presence Server, IP = 10.10.199.215

Phone = A, Line = 1001, IP = 10.10.199.130, Model = SCCP

Scenario:

Phone A offHook

Phone A onHook

End of Scenario

CISCO CONFIDENTIAL

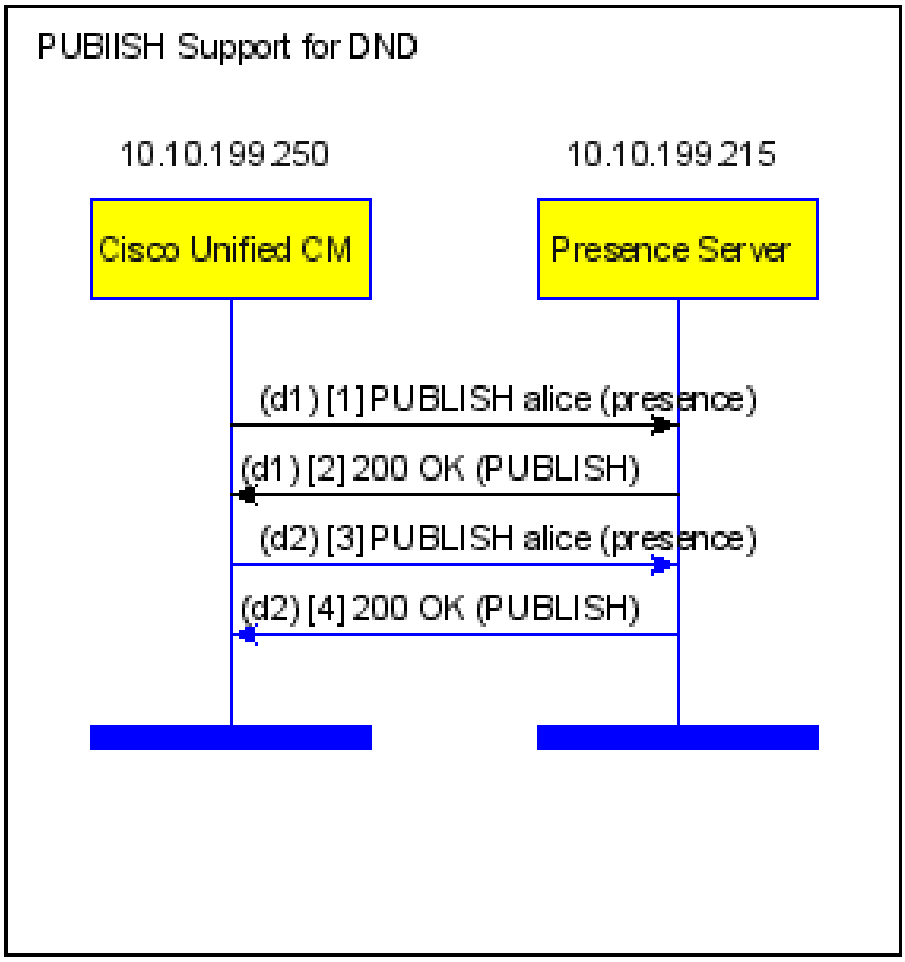

CISCO CONFIDENTIAL

```
[diagram]   Call-ID:[prev][next]
[1] PUBLISH sip:alice@10.10.199.215:5070 SIP/2.0
Date: Tue, 09 Jun 2009 19:13:15 GMT
From: <sip:alice@10.10.199.250>;tag=1248830532
Event: presence
Content-Length: 967
User-Agent: Cisco-CUCM7.1
To: <sip:alice@10.10.199.215>
Expires: 3600
Content-Type: application/pidf+xml
Call-ID: 93cf5d00-a2e1b44b-1e-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK2cf2adbd8
CSeq: 101 PUBLISH
Max-Forwards: 70
SIP-If-Match: 2b9b64b9-0903-43db-a72c-deed564f

<?xml version="1.0" encoding="UTF-8" standalone="no" ?>
<presence xmlns="urn:ietf:params:xml:ns:pidf" entity="alice@10.10.199.250"
xmlns:r="urn:ietf:params:xml:ns:pidf:status:rpid" xmlns:ce="urn:cisco:params:xml:ns:pidf:rpid"
xmlns:dm="urn:ietf:params:xml:ns:pidf:data-model" xmlns:so="urn:cisco:params:xml:ns:pidf:source"
xmlns:sc="urn:ietf:params:xml:ns:pidf:servcaps">
  <tuple id="77ae8b01-67fb-7a3e-8bf8-3fb9a77ef111-8b998dbf-1c07-f2e4-4858-b44a38e4b5e3">
    <status>
    <basic>closed</basic>
    </status>
    <r:activities><r:busy/></r:activities>
    <sc:servcaps>
      <sc:audio>true</sc:audio>
    </sc:servcaps>
    <contact priority="0.8">sip:1001@10.10.199.250:5060;dpkid=8b998dbf-1c07-f2e4-4858-
b44a38e4b5e3;npkid=77ae8b01-67fb-7a3e-8bf8-3fb9a77ef111</contact>
    <model>Cisco 7970</model>
    <timestamp>2009-06-09T19:13:15Z</timestamp>
  </tuple>
  <dm:person>
    <r:activities>
      <ce:dnd/>
    </r:activities>
  </dm:person>
</presence>

[diagram]   Call-ID:[prev][next]
[2] SIP/2.0 200 OK
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK2cf2adbd8
CSeq: 101 PUBLISH
Call-ID: 93cf5d00-a2e1b44b-1e-fac712ac@10.10.199.250
From: <sip:alice@10.10.199.250>;tag=1248830532
To: <sip:alice@10.10.199.215>;tag=f83a539e
Content-Length: 0
SIP-ETag: d1c9ff82-861c-491c-9735-dcfb47f7
Expires: 3600
Contact: <sip:10.10.199.215:5070;transport=tcp>

[diagram]   Call-ID:[prev][next]
[3] PUBLISH sip:alice@10.10.199.215:5070 SIP/2.0
Date: Tue, 09 Jun 2009 19:13:19 GMT
From: <sip:alice@10.10.199.250>;tag=1558792911
Event: presence
Content-Length: 922
User-Agent: Cisco-CUCM7.1
To: <sip:alice@10.10.199.215>
Expires: 3600
Content-Type: application/pidf+xml
Call-ID: 9631b700-a2e1b44f-1f-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK2d6c8faa9d
CSeq: 101 PUBLISH
Max-Forwards: 70
SIP-If-Match: d1c9ff82-861c-491c-9735-dcfb47f7

<?xml version="1.0" encoding="UTF-8" standalone="no" ?>
<presence xmlns="urn:ietf:params:xml:ns:pidf" entity="alice@10.10.199.250"
xmlns:r="urn:ietf:params:xml:ns:pidf:status:rpid" xmlns:ce="urn:cisco:params:xml:ns:pidf:rpid"
xmlns:dm="urn:ietf:params:xml:ns:pidf:data-model" xmlns:so="urn:cisco:params:xml:ns:pidf:source"
xmlns:sc="urn:ietf:params:xml:ns:pidf:servcaps">
  <tuple id="77ae8b01-67fb-7a3e-8bf8-3fb9a77ef111-8b998dbf-1c07-f2e4-4858-b44a38e4b5e3">
    <status>
    <basic>open</basic>
    </status>
    <sc:servcaps>
      <sc:audio>true</sc:audio>
```

CISCO CONFIDENTIAL

```
    </sc:servcaps>
    <contact priority="0.8">sip:1001@10.10.199.250:5060;dpkid=8b998dbf-1c07-f2e4-4858-
b44a38e4b5e3;npkid=77ae8b01-67fb-7a3e-8bf8-3fb9a77ef111</contact>
    <model>Cisco 7970</model>
    <timestamp>2009-06-09T19:13:19Z</timestamp>
  </tuple>
  <dm:person>
    <r:activities>
      <ce:dnd/>
    </r:activities>
  </dm:person>
</presence>

[diagram]   Call-ID:[prev][next]
[4] SIP/2.0 200 OK
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK2d6c8faa9d
CSeq: 101 PUBLISH
Call-ID: 9631b700-a2e1b44f-1f-fac712ac@10.10.199.250
From: <sip:alice@10.10.199.250>;tag=1558792911
To: <sip:alice@10.10.199.215>;tag=01e94eea
Content-Length: 0
SIP-ETag: 458ba51f-ca66-4e1b-9ff4-6b627b22
Expires: 3600
Contact: <sip:10.10.199.215:5070;transport=tcp>
```

CISCO CONFIDENTIAL

18. G.729

18.1 Establish G.729a with No MTP

Title: Establish G.729a with No MTP

Description:

This feature allows for calls with pre-allocated MTP to be initiated with low bandwidth codecs such as G729.

The CM1 is configured with MTP Required and the G.729a codec on SIP Trunk going to CM2. CM2 trunk doesn't have MTP Required checked.

External MTP is attaced to Unified CM1.

Configuration:

Node = Unified CM1, IP = 10.10.199.250
Node = Unified CM2, IP = 10.10.199.251
Node = External MTP, IP = 10.10.199.163

Phone = A, Line = 1001, IP = 10.10.199.130, Model = SCCP
Phone = B, Line = 2002, IP = 10.10.199.179, Model = SCCP

SIP Trunk between Unified CM1 & Unified CM2 has route pattern 2.XXXX

Scenario:

Phone A DN 1001 calls Phone B DN 2002 over the SIP Trunk by dialing 22002
Phone B DN 2002 Answers
Phone A DN 1001 goes onHook
End of Scenario

CISCO CONFIDENTIAL

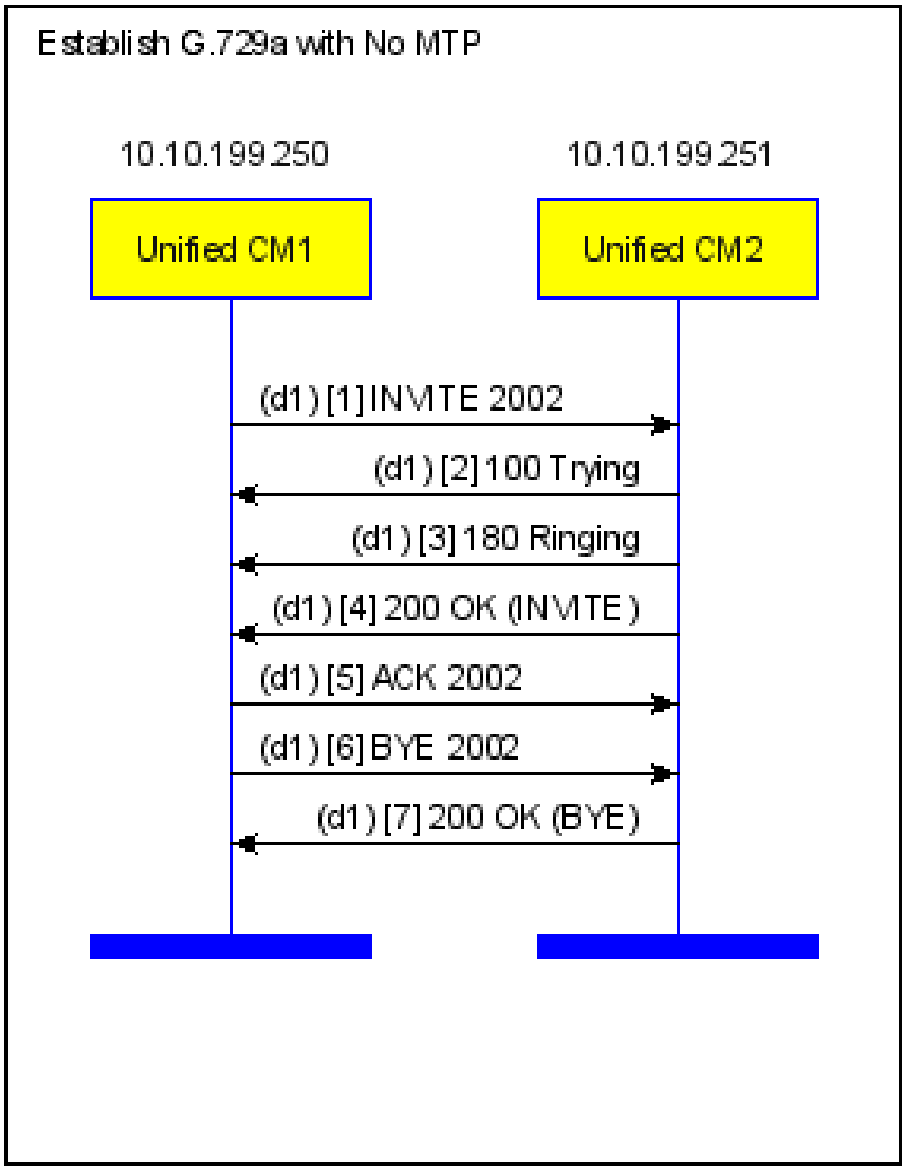

CISCO CONFIDENTIAL

[diagram] Call-ID:[prev][next]
[1] INVITE sip:2002@10.10.199.251:5060 SIP/2.0
Date: Tue, 09 Jun 2009 16:02:12 GMT
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-28674102
Allow-Events: presence
P-Asserted-Identity: <sip:1001@10.10.199.250>
Supported: timer,resource-priority,replaces
Supported: Geolocation
Min-SE: 1800
Remote-Party-ID: <sip:1001@10.10.199.250>;party=calling;screen=yes;privacy=off
Content-Length: 239
User-Agent: Cisco-CUCM7.1
To: <sip:2002@10.10.199.251>
Contact: <sip:1001@10.10.199.250:5060;transport=tcp>
Expires: 180
Content-Type: application/sdp
Call-ID: e3545f80-a2e18784-7-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bKb3f404d92
CSeq: 101 INVITE
Session-Expires: 1800
Max-Forwards: 70

v=0
o=CiscoSystemsCCM-SIP 2000 1 IN IP4 10.10.199.250
s=SIP Call
c=IN IP4 10.10.199.163
t=0 0
m=audio 18542 RTP/AVP 18 101
a=rtpmap:18 G729/8000
a=ptime:20
a=fmtp:18 annexb=no
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15

[diagram] Call-ID:[prev][next]
[2] SIP/2.0 100 Trying
Date: Tue, 09 Jun 2009 16:03:26 GMT
From: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-28674102
Allow-Events: presence
Content-Length: 0
To: <sip:2002@10.10.199.251>
Call-ID: e3545f80-a2e18784-7-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bKb3f404d92
CSeq: 101 INVITE

[diagram] Call-ID:[prev][next]
[3] SIP/2.0 180 Ringing
Date: Tue, 09 Jun 2009 16:03:26 GMT
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-28674102
Allow-Events: presence
P-Asserted-Identity: <sip:2002@10.10.199.251>
Supported: Geolocation
Remote-Party-ID: <sip:2002@10.10.199.251>;party=called;screen=yes;privacy=off
Content-Length: 0
To: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-28674177
Contact: <sip:2002@10.10.199.251:5060;transport=tcp>
Call-ID: e3545f80-a2e18784-7-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bKb3f404d92
CSeq: 101 INVITE

[diagram] Call-ID:[prev][next]
[4] SIP/2.0 200 OK
Date: Tue, 09 Jun 2009 16:03:26 GMT
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-28674102
Allow-Events: presence
P-Asserted-Identity: <sip:2002@10.10.199.251>
Supported: replaces
Supported: Geolocation
Remote-Party-ID: <sip:2002@10.10.199.251>;party=called;screen=yes;privacy=off
Content-Length: 239
Require: timer
To: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-28674177
Contact: <sip:2002@10.10.199.251:5060;transport=tcp>
Content-Type: application/sdp
Call-ID: e3545f80-a2e18784-7-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bKb3f404d92
CSeq: 101 INVITE

CISCO CONFIDENTIAL

```
Session-Expires:  1800;refresher=uas

v=0
o=CiscoSystemsCCM-SIP 2000 1 IN IP4 10.10.199.251
s=SIP Call
c=IN IP4 10.10.199.179
t=0 0
m=audio 25606 RTP/AVP 18 101
a=rtpmap:18 G729/8000
a=ptime:20
a=fmtp:18 annexb=no
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
```

[diagram] Call-ID:[prev][next]

[5] ACK sip:2002@10.10.199.251:5060;transport=tcp SIP/2.0

```
Date: Tue, 09 Jun 2009 16:02:12 GMT
From: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-28674102
Allow-Events: presence
Content-Length: 0
To: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-28674177
Call-ID: e3545f80-a2e18784-7-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bKcaad2f0b
CSeq: 101 ACK
Max-Forwards: 70
```

[diagram] Call-ID:[prev][next]

[6] BYE sip:2002@10.10.199.251:5060;transport=tcp SIP/2.0

```
Date: Tue, 09 Jun 2009 16:02:12 GMT
From: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-28674102
P-Asserted-Identity: <sip:1001@10.10.199.250>
Content-Length: 0
User-Agent: Cisco-CUCM7.1
To: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-28674177
Call-ID: e3545f80-a2e18784-7-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bKd5c572dd0
CSeq: 102 BYE
Max-Forwards: 70
```

[diagram] Call-ID:[prev][next]

[7] SIP/2.0 200 OK

```
Date: Tue, 09 Jun 2009 16:03:34 GMT
From: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-28674102
Content-Length: 0
To: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-28674177
Call-ID: e3545f80-a2e18784-7-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bKd5c572dd0
CSeq: 102 BYE
```

CISCO CONFIDENTIAL

18.2 Establish G.729 with MTP

Title: Establish G.729 with MTP

Description:

This feature allows for calls with pre-allocated MTP to be initiate with low bandwidth codecs such as G729.

The CM1 is configured with MTP required and the G.729a codec on SIP Trunk going to CM2. CM2 trunk has MTP Required with G.711ulaw codec on SIP Trunk going to CM1

External MTP is attached to CM1.
External MTP is attached to CM2.

Configuration:

Node = Unified CM1, IP = 10.10.199.250
Node = Unified CM2, IP = 10.10.199.251
Node = External MTP, IP = 10.10.199.163
Node = External MTP, IP = 10.10.199.164

Phone = A, Line = 1001, IP = 10.10.199.130, Model = SCCP
Phone = B, Line = 2002, IP = 10.10.199.179, Model = SCCP

SIP Trunk between Unified CM1 & Unified CM2 has route pattern 2.XXXX

Scenario:

Phone A DN 1001 calls Phone B DN 2002 over the SIP Trunk by dialing 22002
Phone B DN 2002 Answers
Phone A DN 1001 goes onHook

End of Scenario

CISCO CONFIDENTIAL

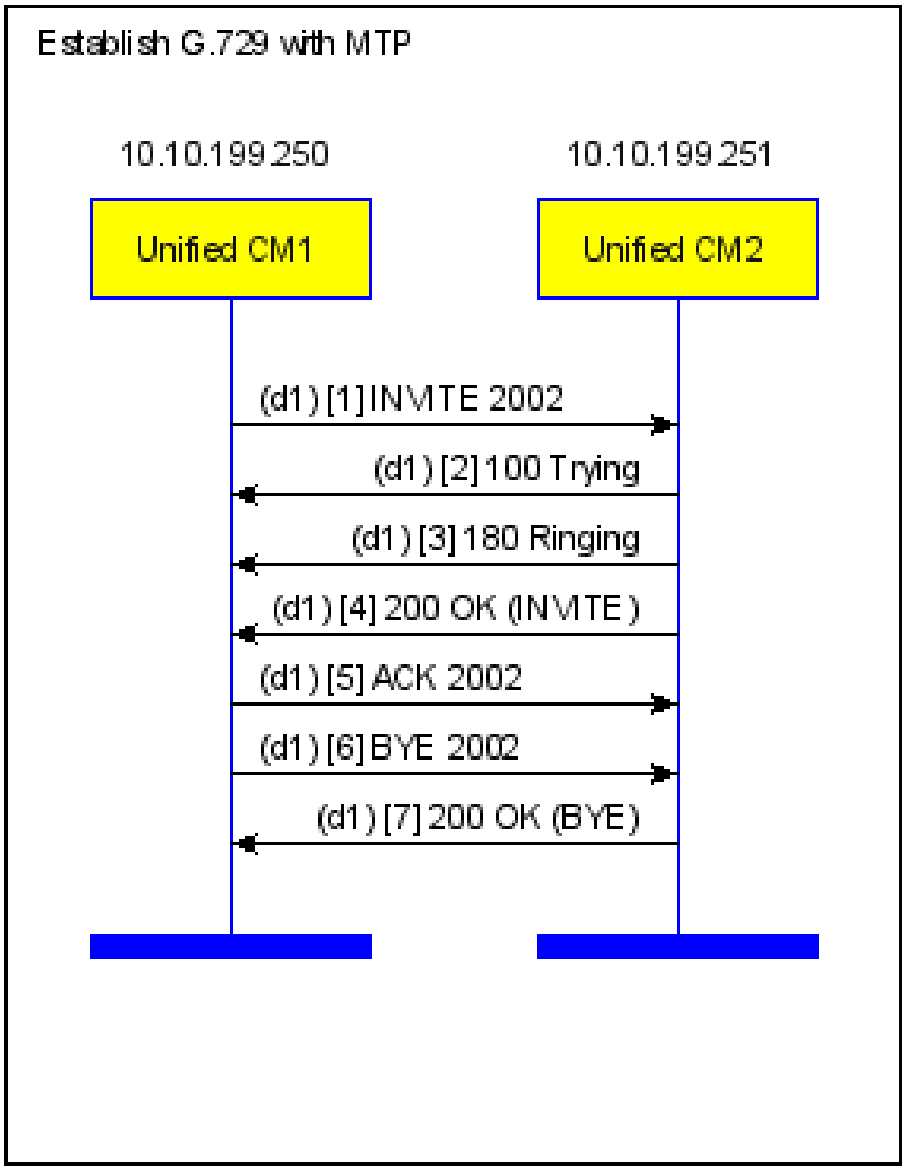

CISCO CONFIDENTIAL

[diagram] Call-ID:[prev][next]
[1] INVITE sip:2002@10.10.199.251:5060 SIP/2.0
Date: Tue, 09 Jun 2009 16:08:02 GMT
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-28674105
Allow-Events: presence
P-Asserted-Identity: <sip:1001@10.10.199.250>
Supported: timer,resource-priority,replaces
Supported: Geolocation
Min-SE: 1800
Remote-Party-ID: <sip:1001@10.10.199.250>;party=calling;screen=yes;privacy=off
Content-Length: 239
User-Agent: Cisco-CUCM7.1
To: <sip:2002@10.10.199.251>
Contact: <sip:1001@10.10.199.250:5060;transport=tcp>
Expires: 180
Content-Type: application/sdp
Call-ID: b3f22280-a2e188e2-8-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bKe145ee3fe
CSeq: 101 INVITE
Session-Expires: 1800
Max-Forwards: 70

v=0
o=CiscoSystemsCCM-SIP 2000 1 IN IP4 10.10.199.250
s=SIP Call
c=IN IP4 10.10.199.163
t=0 0
m=audio 18478 RTP/AVP 18 101
a=rtpmap:18 G729/8000
a=ptime:20
a=fmtp:18 annexb=no
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15

[diagram] Call-ID:[prev][next]
[2] SIP/2.0 100 Trying
Date: Tue, 09 Jun 2009 16:09:16 GMT
From: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-28674105
Allow-Events: presence
Content-Length: 0
To: <sip:2002@10.10.199.251>
Call-ID: b3f22280-a2e188e2-8-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bKe145ee3fe
CSeq: 101 INVITE

[diagram] Call-ID:[prev][next]
[3] SIP/2.0 180 Ringing
Date: Tue, 09 Jun 2009 16:09:16 GMT
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-28674105
Allow-Events: presence
P-Asserted-Identity: <sip:2002@10.10.199.251>
Supported: Geolocation
Remote-Party-ID: <sip:2002@10.10.199.251>;party=called;screen=yes;privacy=off
Content-Length: 0
To: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-28674179
Contact: <sip:2002@10.10.199.251:5060;transport=tcp>
Call-ID: b3f22280-a2e188e2-8-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bKe145ee3fe
CSeq: 101 INVITE

[diagram] Call-ID:[prev][next]
[4] SIP/2.0 200 OK
Date: Tue, 09 Jun 2009 16:09:16 GMT
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-28674105
Allow-Events: presence
P-Asserted-Identity: <sip:2002@10.10.199.251>
Supported: replaces
Supported: Geolocation
Remote-Party-ID: <sip:2002@10.10.199.251>;party=called;screen=yes;privacy=off
Content-Length: 239
Require: timer
To: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-28674179
Contact: <sip:2002@10.10.199.251:5060;transport=tcp>
Content-Type: application/sdp
Call-ID: b3f22280-a2e188e2-8-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bKe145ee3fe
CSeq: 101 INVITE

CISCO CONFIDENTIAL

```
Session-Expires:  1800;refresher=uas

v=0
o=CiscoSystemsCCM-SIP 2000 1 IN IP4 10.10.199.251
s=SIP Call
c=IN IP4 10.10.199.164
t=0 0
m=audio 18096 RTP/AVP 18 101
a=rtpmap:18 G729/8000
a=ptime:20
a=fmtp:18 annexb=no
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
```

[diagram] Call-ID:[prev][next]

[5] ACK sip:2002@10.10.199.251:5060;transport=tcp SIP/2.0

```
Date: Tue, 09 Jun 2009 16:08:02 GMT
From: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-28674105
Allow-Events: presence
Content-Length: 0
To: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-28674179
Call-ID: b3f22280-a2e188e2-8-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bKf6b6155e5
CSeq: 101 ACK
Max-Forwards: 70
```

[diagram] Call-ID:[prev][next]

[6] BYE sip:2002@10.10.199.251:5060;transport=tcp SIP/2.0

```
Date: Tue, 09 Jun 2009 16:08:02 GMT
From: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-28674105
P-Asserted-Identity: <sip:1001@10.10.199.250>
Content-Length: 0
User-Agent: Cisco-CUCM7.1
To: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-28674179
Call-ID: b3f22280-a2e188e2-8-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK1076584e96
CSeq: 102 BYE
Max-Forwards: 70
```

[diagram] Call-ID:[prev][next]

[7] SIP/2.0 200 OK

```
Date: Tue, 09 Jun 2009 16:09:23 GMT
From: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-28674105
Content-Length: 0
To: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-28674179
Call-ID: b3f22280-a2e188e2-8-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK1076584e96
CSeq: 102 BYE
```

CISCO CONFIDENTIAL

18.3 Delayed Media Call with No MTP

Title: Delayed Media Call with No MTP

Description:

This feature allows for calls with pre-allocated MTP to be initiate with low bandwidth codecs such as G729.

The CM1 is not configured with MTP required on SIP Trunk going to CM2.
CM2 has MTP Required with G.711ulaw codec on SIP Trunk going to CM1

External MTP1 is attached to CCM1.
External MTP2 is attached to CCM2.

Configuration:

Node = Unified CM1, IP = 10.10.199.250
Node = Unified CM2, IP = 10.10.199.251
Node = External MTP, IP = 10.10.199.163
Node = External MTP, IP = 10.10.199.164

Phone = A, Line = 1001, IP = 10.10.199.130, Model = SCCP
Phone = B, Line = 2002, IP = 10.10.199.179, Model = SCCP

SIP Trunk between Unified CM1 & Unified CM2 has route pattern 2.XXXX

Scenario:

Phone A DN 1001 calls Phone B DN 2002 over the SIP Trunk by dialing 22002
Phone B DN 2002 Answers
Phone A DN 1001 goes onHook

End of Scenario

CISCO CONFIDENTIAL

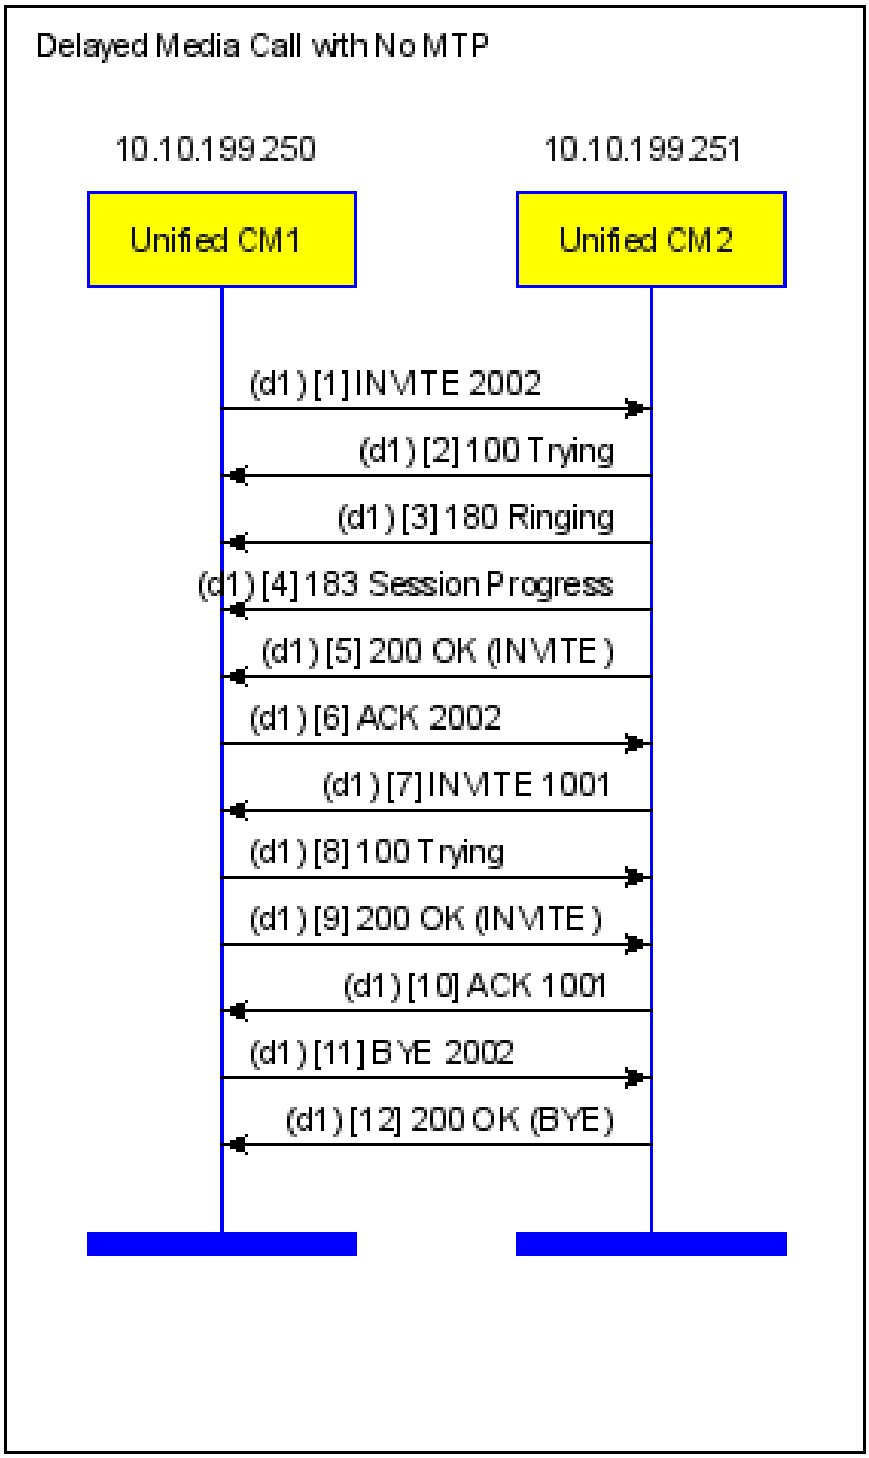

CISCO CONFIDENTIAL

[diagram] Call-ID:[prev][next]
[1] INVITE sip:2002@10.10.199.251:5060 SIP/2.0
```
Date: Tue, 09 Jun 2009 18:05:05 GMT
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-28674110
Allow-Events: presence
P-Asserted-Identity: <sip:1001@10.10.199.250>
Supported: timer,resource-priority,replaces
Supported: Geolocation
Min-SE:  1800
Remote-Party-ID: <sip:1001@10.10.199.250>;party=calling;screen=yes;privacy=off
Content-Length: 0
User-Agent: Cisco-CUCM7.1
To: <sip:2002@10.10.199.251>
Contact: <sip:1001@10.10.199.250:5060;transport=tcp>
Expires: 180
Call-ID: dfae400-a2e1a451-a-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK147461810b
CSeq: 101 INVITE
Session-Expires:  1800
Max-Forwards: 70
```

[diagram] Call-ID:[prev][next]
[2] SIP/2.0 100 Trying
```
Date: Tue, 09 Jun 2009 18:06:19 GMT
From: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-28674110
Allow-Events: presence
Content-Length: 0
To: <sip:2002@10.10.199.251>
Call-ID: dfae400-a2e1a451-a-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK147461810b
CSeq: 101 INVITE
```

[diagram] Call-ID:[prev][next]
[3] SIP/2.0 180 Ringing
```
Date: Tue, 09 Jun 2009 18:06:19 GMT
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-28674110
Allow-Events: presence
P-Asserted-Identity: <sip:2002@10.10.199.251>
Supported: Geolocation
Remote-Party-ID: <sip:2002@10.10.199.251>;party=called;screen=yes;privacy=off
Content-Length: 0
To: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-28674185
Contact: <sip:2002@10.10.199.251:5060;transport=tcp>
Call-ID: dfae400-a2e1a451-a-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK147461810b
CSeq: 101 INVITE
```

[diagram] Call-ID:[prev][next]
[4] SIP/2.0 183 Session Progress
```
Date: Tue, 09 Jun 2009 18:06:19 GMT
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-28674110
Allow-Events: presence
P-Asserted-Identity: <sip:2002@10.10.199.251>
Supported: Geolocation
Remote-Party-ID: <sip:2002@10.10.199.251>;party=called;screen=yes;privacy=off
Content-Length: 263
To: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-28674185
Contact: <sip:2002@10.10.199.251:5060;transport=tcp>
Content-Type: application/sdp
Call-ID: dfae400-a2e1a451-a-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK147461810b
CSeq: 101 INVITE

v=0
o=CiscoSystemsCCM-SIP 2000 1 IN IP4 10.10.199.251
s=SIP Call
c=IN IP4 10.10.199.251
t=0 0
m=audio 4000 RTP/AVP 0 8 101
a=rtpmap:0 PCMU/8000
a=ptime:20
a=rtpmap:8 PCMA/8000
a=ptime:20
a=sendonly
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
```

CISCO CONFIDENTIAL

```
[diagram]   Call-ID:[prev][next]
[5] SIP/2.0 200 OK
Date: Tue, 09 Jun 2009 18:06:19 GMT
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-28674110
Allow-Events: presence
P-Asserted-Identity: <sip:2002@10.10.199.251>
Supported: replaces
Supported: Geolocation
Remote-Party-ID: <sip:2002@10.10.199.251>;party=called;screen=yes;privacy=off
Content-Length: 263
Require:  timer
To: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-28674185
Contact: <sip:2002@10.10.199.251:5060;transport=tcp>
Content-Type: application/sdp
Call-ID: dfae400-a2e1a451-a-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK147461810b
CSeq: 101 INVITE
Session-Expires:  1800;refresher=uas

v=0
o=CiscoSystemsCCM-SIP 2000 1 IN IP4 10.10.199.251
s=SIP Call
c=IN IP4 10.10.199.251
t=0 0
m=audio 4000 RTP/AVP 0 8 101
a=rtpmap:0 PCMU/8000
a=ptime:20
a=rtpmap:8 PCMA/8000
a=ptime:20
a=sendonly
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15

[diagram]   Call-ID:[prev][next]
[6] ACK sip:2002@10.10.199.251:5060;transport=tcp SIP/2.0
Date: Tue, 09 Jun 2009 18:05:05 GMT
From: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-28674110
Allow-Events: presence
Content-Length: 228
To: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-28674185
Content-Type: application/sdp
Call-ID: dfae400-a2e1a451-a-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK1519d3eb90
CSeq: 101 ACK
Max-Forwards: 70

v=0
o=CiscoSystemsCCM-SIP 2000 1 IN IP4 10.10.199.250
s=SIP Call
c=IN IP4 10.10.199.130
t=0 0
m=audio 19478 RTP/AVP 0 101
a=rtpmap:0 PCMU/8000
a=ptime:20
a=recvonly
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15

[diagram]   Call-ID:[prev][next]
[7] INVITE sip:1001@10.10.199.250:5060;transport=tcp SIP/2.0
Date: Tue, 09 Jun 2009 18:06:21 GMT
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-28674185
Allow-Events: presence
P-Asserted-Identity: <sip:2002@10.10.199.251>
Supported: timer,resource-priority,replaces
Min-SE:  1800
Remote-Party-ID: <sip:2002@10.10.199.251>;party=calling;screen=yes;privacy=off
Content-Length: 216
User-Agent: Cisco-CUCM7.1
To: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-28674110
Contact: <sip:2002@10.10.199.251:5060;transport=tcp>
Expires: 180
Content-Type: application/sdp
Call-ID: dfae400-a2e1a451-a-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bK96135f1b9
CSeq: 101 INVITE
Session-Expires:  1800;refresher=uac
Max-Forwards: 70
```

CISCO CONFIDENTIAL

```
v=0
o=CiscoSystemsCCM-SIP 2000 2 IN IP4 10.10.199.251
s=SIP Call
c=IN IP4 10.10.199.251
t=0 0
m=audio 24602 RTP/AVP 0 101
a=rtpmap:0 PCMU/8000
a=ptime:20
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
```

[diagram] Call-ID:[prev][next]

[8] SIP/2.0 100 Trying

```
Date: Tue, 09 Jun 2009 18:05:07 GMT
From: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-28674185
Allow-Events: presence
Content-Length: 0
To: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-28674110
Call-ID: dfae400-a2e1a451-a-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bK96135f1b9
CSeq: 101 INVITE
```

[diagram] Call-ID:[prev][next]

[9] SIP/2.0 200 OK

```
Date: Tue, 09 Jun 2009 18:05:07 GMT
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-28674185
Allow-Events: presence
P-Asserted-Identity: <sip:1001@10.10.199.250>
Supported: replaces
Supported: Geolocation
Remote-Party-ID: <sip:1001@10.10.199.250>;party=called;screen=yes;privacy=off
Content-Length: 216
Require:  timer
To: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-28674110
Contact: <sip:1001@10.10.199.250:5060;transport=tcp>
Content-Type: application/sdp
Call-ID: dfae400-a2e1a451-a-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bK96135f1b9
CSeq: 101 INVITE
Session-Expires:  1800;refresher=uac

v=0
o=CiscoSystemsCCM-SIP 2000 2 IN IP4 10.10.199.250
s=SIP Call
c=IN IP4 10.10.199.130
t=0 0
m=audio 19478 RTP/AVP 0 101
a=rtpmap:0 PCMU/8000
a=ptime:20
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
```

[diagram] Call-ID:[prev][next]

[10] ACK sip:1001@10.10.199.250:5060;transport=tcp SIP/2.0

```
Date: Tue, 09 Jun 2009 18:06:21 GMT
From: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-28674185
Allow-Events: presence
Content-Length: 0
To: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-28674110
Call-ID: dfae400-a2e1a451-a-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bKa3a9d10b0
CSeq: 101 ACK
Max-Forwards: 70
```

[diagram] Call-ID:[prev][next]

[11] BYE sip:2002@10.10.199.251:5060;transport=tcp SIP/2.0

```
Date: Tue, 09 Jun 2009 18:05:07 GMT
From: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-28674110
P-Asserted-Identity: <sip:1001@10.10.199.250>
Content-Length: 0
User-Agent: Cisco-CUCM7.1
To: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-28674185
Call-ID: dfae400-a2e1a451-a-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK1636fde52a
CSeq: 102 BYE
Max-Forwards: 70
```

CISCO CONFIDENTIAL

```
[diagram]   Call-ID:[prev][next]
[12] SIP/2.0 200 OK
Date: Tue, 09 Jun 2009 18:06:26 GMT
From: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-28674110
Content-Length: 0
To: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-28674185
Call-ID: dfae400-a2e1a451-a-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK1636fde52a
CSeq: 102 BYE
```

CISCO CONFIDENTIAL

18.4 Delayed Media Call No Support

Title: Delayed Media Call No Support

Description:

This feature allows for calls with pre-allocated MTP to be initiate with low bandwidth codecs such as G729.

The CM1 is configured with MTP required and G.729a codec on SIP Trunk going to CM2.
No MTP device is configured that supports G.729a,
CM2 trunk has no MTP Required checked.

External MTP is attached to CCM1

Configuration:

Node = Unified CM1, IP = 10.10.199.250
Node = Unified CM2, IP = 10.10.199.251
Node = External MTP, IP = 10.10.199.163

Phone = A, Line = 1001, IP = 10.10.199.130, Model = SCCP
Phone = B, Line = 2002, IP = 10.10.199.179, Model = SCCP

SIP Trunk between Unified CM1 & Unified CM2 has route pattern 2.XXXX

Scenario:

Phone A DN 1001 calls Phone B DN 2002 over the SIP Trunk by dialing 22002
Phone B DN 2002 Answers
Phone A DN 1001 goes onHook
End of Scenario

CISCO CONFIDENTIAL

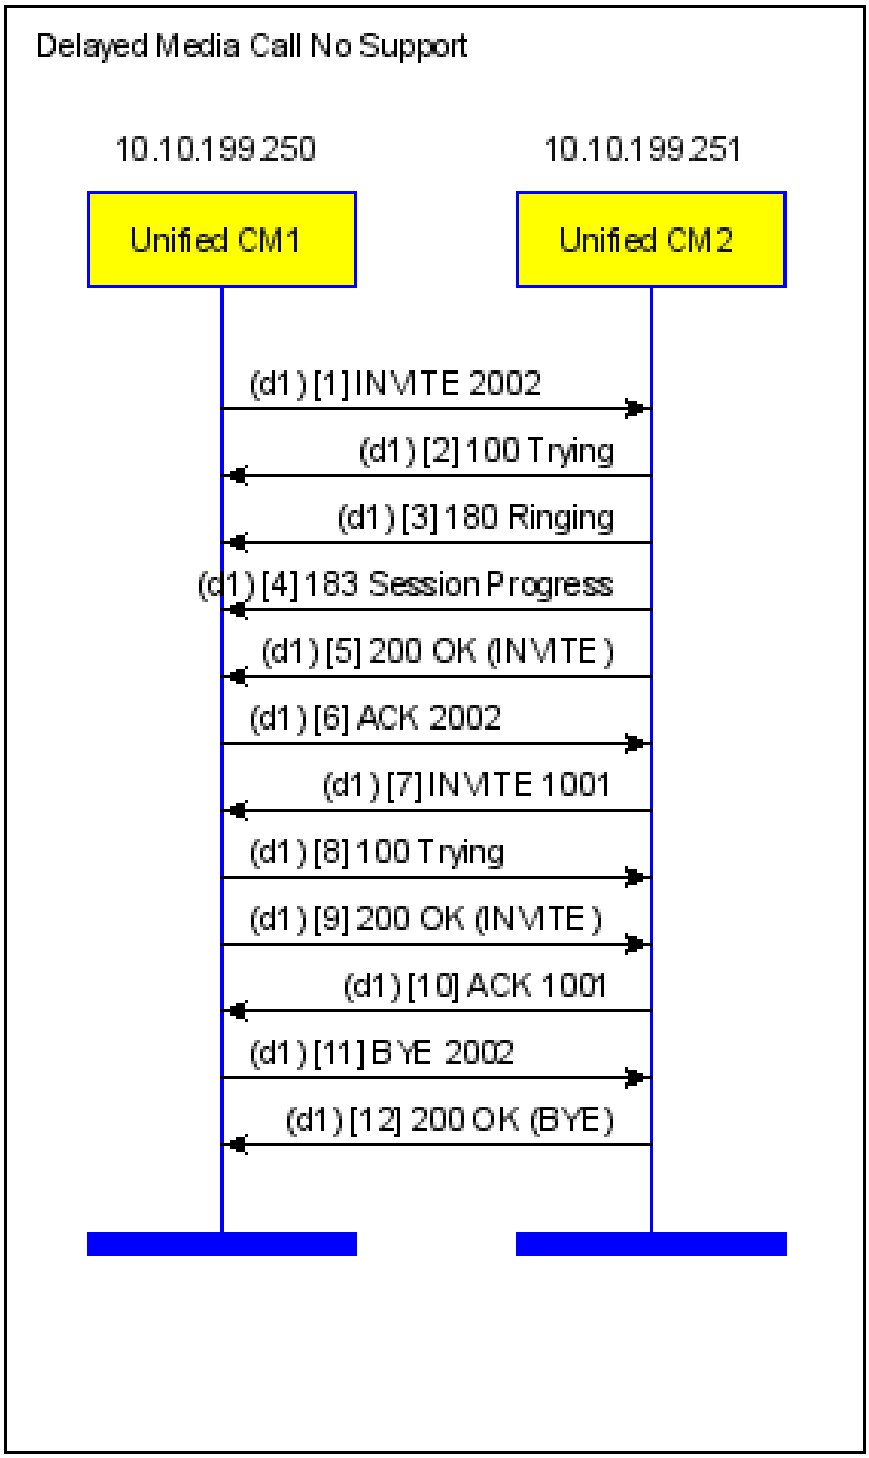

CISCO CONFIDENTIAL

[diagram] Call-ID:[prev][next]
[1] INVITE sip:2002@10.10.199.251:5060 SIP/2.0
```
Date: Tue, 09 Jun 2009 18:17:52 GMT
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-28674112
Allow-Events: presence
P-Asserted-Identity: <sip:1001@10.10.199.250>
Supported: timer,resource-priority,replaces
Supported: Geolocation
Min-SE:  1800
Remote-Party-ID: <sip:1001@10.10.199.250>;party=calling;screen=yes;privacy=off
Content-Length: 0
User-Agent: Cisco-CUCM7.1
To: <sip:2002@10.10.199.251>
Contact: <sip:1001@10.10.199.250:5060;transport=tcp>
Expires: 180
Call-ID: d725cd80-a2e1a750-b-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK172327f2d1
CSeq: 101 INVITE
Session-Expires:  1800
Max-Forwards: 70
```

[diagram] Call-ID:[prev][next]
[2] SIP/2.0 100 Trying
```
Date: Tue, 09 Jun 2009 18:19:07 GMT
From: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-28674112
Allow-Events: presence
Content-Length: 0
To: <sip:2002@10.10.199.251>
Call-ID: d725cd80-a2e1a750-b-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK172327f2d1
CSeq: 101 INVITE
```

[diagram] Call-ID:[prev][next]
[3] SIP/2.0 180 Ringing
```
Date: Tue, 09 Jun 2009 18:19:07 GMT
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-28674112
Allow-Events: presence
P-Asserted-Identity: <sip:2002@10.10.199.251>
Supported: Geolocation
Remote-Party-ID: <sip:2002@10.10.199.251>;party=called;screen=yes;privacy=off
Content-Length: 0
To: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-28674188
Contact: <sip:2002@10.10.199.251:5060;transport=tcp>
Call-ID: d725cd80-a2e1a750-b-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK172327f2d1
CSeq: 101 INVITE
```

[diagram] Call-ID:[prev][next]
[4] SIP/2.0 183 Session Progress
```
Date: Tue, 09 Jun 2009 18:19:07 GMT
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-28674112
Allow-Events: presence
P-Asserted-Identity: <sip:2002@10.10.199.251>
Supported: Geolocation
Remote-Party-ID: <sip:2002@10.10.199.251>;party=called;screen=yes;privacy=off
Content-Length: 337
To: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-28674188
Contact: <sip:2002@10.10.199.251:5060;transport=tcp>
Content-Type: application/sdp
Call-ID: d725cd80-a2e1a750-b-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK172327f2d1
CSeq: 101 INVITE

v=0
o=CiscoSystemsCCM-SIP 2000 1 IN IP4 10.10.199.251
s=SIP Call
c=IN IP4 10.10.199.179
t=0 0
m=audio 4000 RTP/AVP 9 0 8 18 101
a=rtpmap:9 G722/8000
a=ptime:20
a=rtpmap:0 PCMU/8000
a=ptime:20
a=rtpmap:8 PCMA/8000
a=ptime:20
a=rtpmap:18 G729/8000
a=ptime:20
```

CISCO CONFIDENTIAL

```
a=sendonly
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15

[diagram]   Call-ID:[prev][next]
[5] SIP/2.0 200 OK
Date: Tue, 09 Jun 2009 18:19:07 GMT
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-28674112
Allow-Events: presence
P-Asserted-Identity: <sip:2002@10.10.199.251>
Supported: replaces
Supported: Geolocation
Remote-Party-ID: <sip:2002@10.10.199.251>;party=called;screen=yes;privacy=off
Content-Length: 337
Require:  timer
To: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-28674188
Contact: <sip:2002@10.10.199.251:5060;transport=tcp>
Content-Type: application/sdp
Call-ID: d725cd80-a2e1a750-b-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK172327f2d1
CSeq: 101 INVITE
Session-Expires:  1800;refresher=uas

v=0
o=CiscoSystemsCCM-SIP 2000 1 IN IP4 10.10.199.251
s=SIP Call
c=IN IP4 10.10.199.179
t=0 0
m=audio 4000 RTP/AVP 9 0 8 18 101
a=rtpmap:9 G722/8000
a=ptime:20
a=rtpmap:0 PCMU/8000
a=ptime:20
a=rtpmap:8 PCMA/8000
a=ptime:20
a=rtpmap:18 G729/8000
a=ptime:20
a=sendonly
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15

[diagram]   Call-ID:[prev][next]
[6] ACK sip:2002@10.10.199.251:5060;transport=tcp SIP/2.0
Date: Tue, 09 Jun 2009 18:17:52 GMT
From: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-28674112
Allow-Events: presence
Content-Length: 228
To: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-28674188
Content-Type: application/sdp
Call-ID: d725cd80-a2e1a750-b-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK1868d07e7f
CSeq: 101 ACK
Max-Forwards: 70

v=0
o=CiscoSystemsCCM-SIP 2000 2 IN IP4 10.10.199.250
s=SIP Call
c=IN IP4 10.10.199.250
t=0 0
m=audio 24638 RTP/AVP 0 101
a=rtpmap:0 PCMU/8000
a=ptime:20
a=recvonly
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15

[diagram]   Call-ID:[prev][next]
[7] INVITE sip:1001@10.10.199.250:5060;transport=tcp SIP/2.0
Date: Tue, 09 Jun 2009 18:19:09 GMT
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-28674188
Allow-Events: presence
P-Asserted-Identity: <sip:2002@10.10.199.251>
Supported: timer,resource-priority,replaces
Min-SE:  1800
Remote-Party-ID: <sip:2002@10.10.199.251>;party=calling;screen=yes;privacy=off
Content-Length: 216
User-Agent: Cisco-CUCM7.1
To: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-28674112
```

CISCO CONFIDENTIAL

```
Contact: <sip:2002@10.10.199.251:5060;transport=tcp>
Expires: 180
Content-Type: application/sdp
Call-ID: d725cd80-a2e1a750-b-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bKb1ed0c5dc
CSeq: 101 INVITE
Session-Expires:  1800;refresher=uac
Max-Forwards: 70

v=0
o=CiscoSystemsCCM-SIP 2000 2 IN IP4 10.10.199.251
s=SIP Call
c=IN IP4 10.10.199.179
t=0 0
m=audio 20426 RTP/AVP 0 101
a=rtpmap:0 PCMU/8000
a=ptime:20
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
```

[diagram] Call-ID:[prev][next]

[8] SIP/2.0 100 Trying

```
Date: Tue, 09 Jun 2009 18:17:54 GMT
From: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-28674188
Allow-Events: presence
Content-Length: 0
To: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-28674112
Call-ID: d725cd80-a2e1a750-b-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bKb1ed0c5dc
CSeq: 101 INVITE
```

[diagram] Call-ID:[prev][next]

[9] SIP/2.0 200 OK

```
Date: Tue, 09 Jun 2009 18:17:54 GMT
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-28674188
Allow-Events: presence
P-Asserted-Identity: <sip:1001@10.10.199.250>
Supported: replaces
Supported: Geolocation
Remote-Party-ID: <sip:1001@10.10.199.250>;party=called;screen=yes;privacy=off
Content-Length: 216
Require:  timer
To: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-28674112
Contact: <sip:1001@10.10.199.250:5060;transport=tcp>
Content-Type: application/sdp
Call-ID: d725cd80-a2e1a750-b-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bKb1ed0c5dc
CSeq: 101 INVITE
Session-Expires:  1800;refresher=uac

v=0
o=CiscoSystemsCCM-SIP 2000 3 IN IP4 10.10.199.250
s=SIP Call
c=IN IP4 10.10.199.250
t=0 0
m=audio 24638 RTP/AVP 0 101
a=rtpmap:0 PCMU/8000
a=ptime:20
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
```

[diagram] Call-ID:[prev][next]

[10] ACK sip:1001@10.10.199.250:5060;transport=tcp SIP/2.0

```
Date: Tue, 09 Jun 2009 18:19:09 GMT
From: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-28674188
Allow-Events: presence
Content-Length: 0
To: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-28674112
Call-ID: d725cd80-a2e1a750-b-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bKc28e800a
CSeq: 101 ACK
Max-Forwards: 70
```

[diagram] Call-ID:[prev][next]

[11] BYE sip:2002@10.10.199.251:5060;transport=tcp SIP/2.0

```
Date: Tue, 09 Jun 2009 18:17:54 GMT
From: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-28674112
P-Asserted-Identity: <sip:1001@10.10.199.250>
Content-Length: 0
```

CISCO CONFIDENTIAL

```
User-Agent: Cisco-CUCM7.1
To: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-28674188
Call-ID: d725cd80-a2e1a750-b-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK193fa0a37
CSeq: 102 BYE
Max-Forwards: 70

[diagram]   Call-ID:[prev][next]
[12] SIP/2.0 200 OK
Date: Tue, 09 Jun 2009 18:19:15 GMT
From: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-28674112
Content-Length: 0
To: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-28674188
Call-ID: d725cd80-a2e1a750-b-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK193fa0a37
CSeq: 102 BYE
```

19. PAI

19.1 Basic Outgoing Call with default identity configurations on SIP Trunk

Title: Basic Outgoing Call with default identity configurations on SIP Trunk

Description:

Basic Unified CM to Unified CM SIP Trunk Call with default configurations, Asserted-Identity[v] & Remote-Party-Id[v]

The following basic call flow illustrates the SIP messaging for an outgoing SIP Trunk call from a Unified CM1 to a remote Unified CM2.

The Unified CM1 sends an INVITE over the SIP Trunk and Unified CM2 sends 100, 180 and 200 SIP Response
messages.

The INVITE request carries a Remote-Party-Id & Asserted-Identity headers. There is "no" Privacy header sent
as Display name & Number are not restricted.

The 180 & 200 response messages carry the Alerting & Connected Name in Remote-Party-Id & Asserted-Identity headers.

Configuration:

Node = Unified CM1, IP = 10.10.199.250
Node = Unified CM2, IP = 10.10.199.251

Phone = A, Line = 1001, IP = 10.10.199.130, Model = SCCP
Phone = B, Line = 2002, IP = 10.10.199.179, Model = SCCP

SIP Trunk from Unified CM1 & Unified CM2 has
a) route pattern 2.XXXX
b) Has destination port configured to be 5060
c) Remote-Party-Id [v] Asserted-Identity [v], SIP Privacy= Default, Asserted-Type=Default

Scenario:

Phone A DN 1001 calls Phone B DN 2002 over the SIP Trunk by dialing 22002
Phone B DN 2002 Answers

CISCO CONFIDENTIAL

Phone A goes onHook

End of Scenario

CISCO CONFIDENTIAL

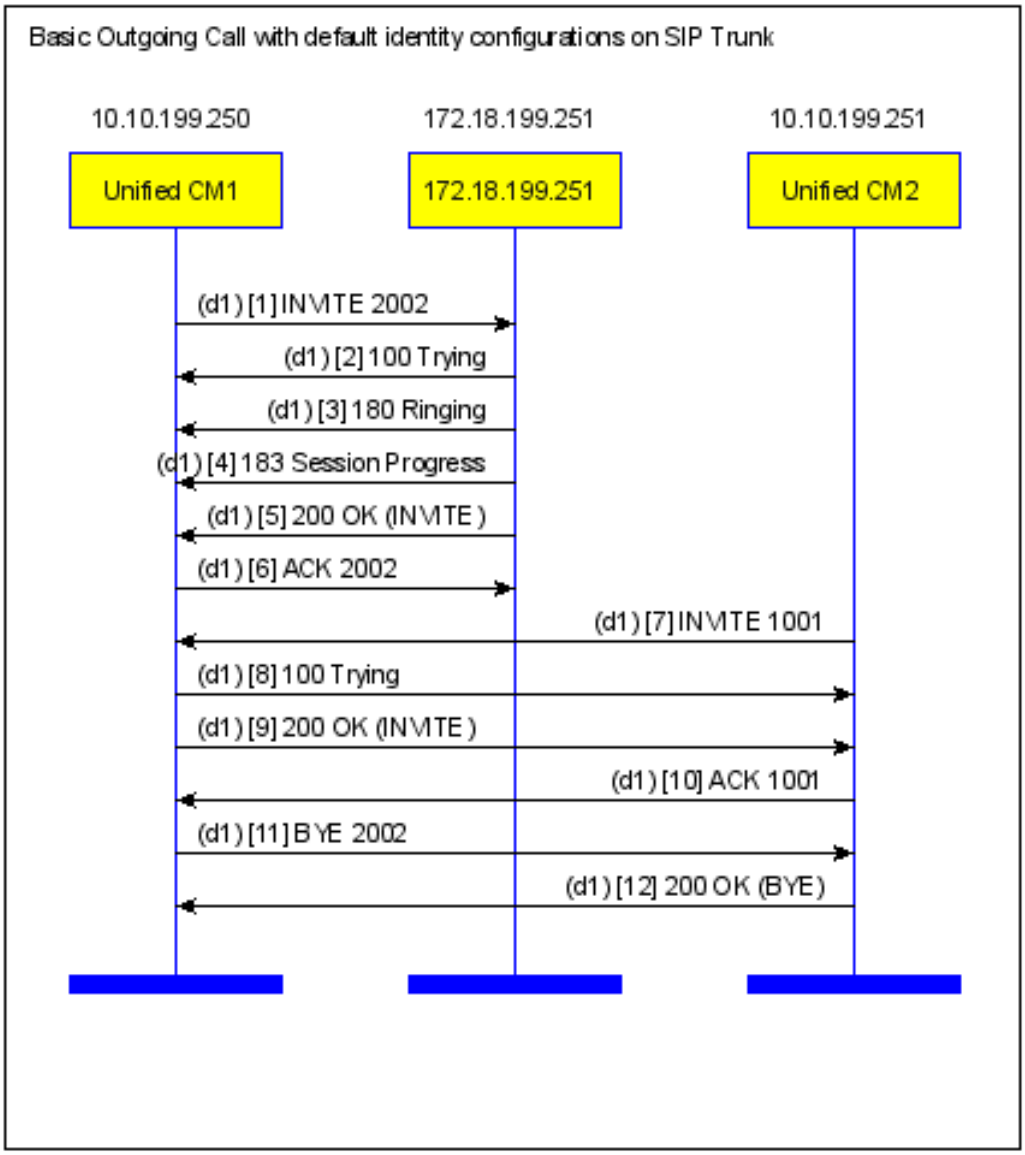

CISCO CONFIDENTIAL

[diagram] Call-ID:[prev][next]
[1] INVITE sip:2002@siptrunk17.cisco.com:5060 SIP/2.0
Date: Thu, 04 Jun 2009 20:17:15 GMT
Call-Info: <sip:10.10.199.250:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: "Alice, Connect" <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763522
Allow-Events: presence, kpml
P-Asserted-Identity: "Alice, Connect" <sip:1001@10.10.199.250>
Supported: timer,resource-priority,replaces
Supported: Geolocation
Min-SE: 1800
Remote-Party-ID: "Alice, Connect" <sip:1001@10.10.199.250>;party=calling;screen=yes;privacy=off
Content-Length: 0
User-Agent: Cisco-CUCM7.1
To: <sip:2002@siptrunk17.cisco.com>
Contact: <sip:1001@10.10.199.250:5060;transport=tcp>
Expires: 180
Call-ID: b0901d00-a2812bcb-25-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK744bbb208f
CSeq: 101 INVITE
Session-Expires: 1800
Max-Forwards: 70

[diagram] Call-ID:[prev][next]
[2] SIP/2.0 100 Trying
Date: Thu, 04 Jun 2009 20:18:17 GMT
From: "Alice, Connect" <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763522
Allow-Events: presence
Content-Length: 0
To: <sip:2002@siptrunk17.cisco.com>
Call-ID: b0901d00-a2812bcb-25-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK744bbb208f
CSeq: 101 INVITE

[diagram] Call-ID:[prev][next]
[3] SIP/2.0 180 Ringing
Date: Thu, 04 Jun 2009 20:18:17 GMT
Call-Info: <sip:10.10.199.251:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: "Alice, Connect" <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763522
Allow-Events: presence
P-Asserted-Identity: "Bob, Alert" <sip:2002@10.10.199.251>
Supported: Geolocation
Remote-Party-ID: "Bob, Alert" <sip:2002@10.10.199.251>;party=called;screen=yes;privacy=off
Content-Length: 0
To: <sip:2002@siptrunk17.cisco.com>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763438
Contact: <sip:2002@10.10.199.251:5060;transport=tcp>
Call-ID: b0901d00-a2812bcb-25-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK744bbb208f
CSeq: 101 INVITE

[diagram] Call-ID:[prev][next]
[4] SIP/2.0 183 Session Progress
Date: Thu, 04 Jun 2009 20:18:17 GMT
Call-Info: <sip:10.10.199.251:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: "Alice, Connect" <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763522
Allow-Events: presence, kpml
P-Asserted-Identity: "Bob, Alert" <sip:2002@10.10.199.251>
Supported: Geolocation
Remote-Party-ID: "Bob, Alert" <sip:2002@10.10.199.251>;party=called;screen=yes;privacy=off
Content-Length: 337
To: <sip:2002@siptrunk17.cisco.com>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763438
Contact: <sip:2002@10.10.199.251:5060;transport=tcp>
Content-Type: application/sdp
Call-ID: b0901d00-a2812bcb-25-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK744bbb208f
CSeq: 101 INVITE

v=0
o=CiscoSystemsCCM-SIP 2000 1 IN IP4 10.10.199.251
s=SIP Call
c=IN IP4 10.10.199.179
t=0 0
m=audio 4000 RTP/AVP 9 0 8 18 101
a=rtpmap:9 G722/8000
a=ptime:20
a=rtpmap:0 PCMU/8000
a=ptime:20
a=rtpmap:8 PCMA/8000

CISCO CONFIDENTIAL

```
a=ptime:20
a=rtpmap:18 G729/8000
a=ptime:20
a=sendonly
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
```

[diagram] Call-ID:[prev][next]

[5] SIP/2.0 200 OK

```
Date: Thu, 04 Jun 2009 20:18:17 GMT
Call-Info: <sip:10.10.199.251:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: "Alice, Connect" <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763522
Allow-Events: presence, kpml
P-Asserted-Identity: "Bob, Connect" <sip:2002@10.10.199.251>
Supported: replaces
Supported: Geolocation
Remote-Party-ID: "Bob, Connect" <sip:2002@10.10.199.251>;party=called;screen=yes;privacy=off
Content-Length: 337
Require:  timer
To: <sip:2002@siptrunk17.cisco.com>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763438
Contact: <sip:2002@10.10.199.251:5060;transport=tcp>
Content-Type: application/sdp
Call-ID: b0901d00-a2812bcb-25-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK744bbb208f
CSeq: 101 INVITE
Session-Expires:  1800;refresher=uas

v=0
o=CiscoSystemsCCM-SIP 2000 1 IN IP4 10.10.199.251
s=SIP Call
c=IN IP4 10.10.199.179
t=0 0
m=audio 4000 RTP/AVP 9 0 8 18 101
a=rtpmap:9 G722/8000
a=ptime:20
a=rtpmap:0 PCMU/8000
a=ptime:20
a=rtpmap:8 PCMA/8000
a=ptime:20
a=rtpmap:18 G729/8000
a=ptime:20
a=sendonly
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
```

[diagram] Call-ID:[prev][next]

[6] ACK sip:2002@10.10.199.251:5060;transport=tcp SIP/2.0

```
Date: Thu, 04 Jun 2009 20:17:15 GMT
From: "Alice, Connect" <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763522
Allow-Events: presence, kpml
Content-Length: 228
To: <sip:2002@siptrunk17.cisco.com>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763438
Content-Type: application/sdp
Call-ID: b0901d00-a2812bcb-25-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK751863e465
CSeq: 101 ACK
Max-Forwards: 70

v=0
o=CiscoSystemsCCM-SIP 2000 1 IN IP4 10.10.199.250
s=SIP Call
c=IN IP4 10.10.199.130
t=0 0
m=audio 22274 RTP/AVP 9 101
a=rtpmap:9 G722/8000
a=ptime:20
a=recvonly
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
```

[diagram] Call-ID:[prev][next]

[7] INVITE sip:1001@10.10.199.250:5060;transport=tcp SIP/2.0

```
Date: Thu, 04 Jun 2009 20:18:21 GMT
Call-Info: <sip:10.10.199.251:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:2002@siptrunk17.cisco.com>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763438
Allow-Events: presence, kpml
P-Asserted-Identity: "Bob, Connect" <sip:2002@10.10.199.251>
Supported: timer,resource-priority,replaces
```

CISCO CONFIDENTIAL

```
Min-SE:  1800
Remote-Party-ID: "Bob, Connect" <sip:2002@10.10.199.251>;party=calling;screen=yes;privacy=off
Content-Length: 216
User-Agent: Cisco-CUCM7.1
To: "Alice, Connect" <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763522
Contact: <sip:2002@10.10.199.251:5060;transport=tcp>
Expires: 180
Content-Type: application/sdp
Call-ID: b0901d00-a2812bcb-25-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bK7322d63d7b
CSeq: 101 INVITE
Session-Expires:  1800;refresher=uac
Max-Forwards: 70

v=0
o=CiscoSystemsCCM-SIP 2000 2 IN IP4 10.10.199.251
s=SIP Call
c=IN IP4 10.10.199.179
t=0 0
m=audio 32066 RTP/AVP 9 101
a=rtpmap:9 G722/8000
a=ptime:20
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
```

[diagram] Call-ID:[prev][next]

[8] SIP/2.0 100 Trying

```
Date: Thu, 04 Jun 2009 20:17:19 GMT
From: <sip:2002@siptrunk17.cisco.com>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763438
Allow-Events: presence, kpml
Content-Length: 0
To: "Alice, Connect" <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763522
Call-ID: b0901d00-a2812bcb-25-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bK7322d63d7b
CSeq: 101 INVITE
```

[diagram] Call-ID:[prev][next]

[9] SIP/2.0 200 OK

```
Date: Thu, 04 Jun 2009 20:17:19 GMT
Call-Info: <sip:10.10.199.250:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:2002@siptrunk17.cisco.com>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763438
Allow-Events: presence, kpml
P-Asserted-Identity: "Alice, Connect" <sip:1001@10.10.199.250>
Supported: replaces
Supported: Geolocation
Remote-Party-ID: "Alice, Connect" <sip:1001@10.10.199.250>;party=called;screen=yes;privacy=off
Content-Length: 216
Require:  timer
To: "Alice, Connect" <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763522
Contact: <sip:1001@10.10.199.250:5060;transport=tcp>
Content-Type: application/sdp
Call-ID: b0901d00-a2812bcb-25-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bK7322d63d7b
CSeq: 101 INVITE
Session-Expires:  1800;refresher=uac

v=0
o=CiscoSystemsCCM-SIP 2000 2 IN IP4 10.10.199.250
s=SIP Call
c=IN IP4 10.10.199.130
t=0 0
m=audio 22274 RTP/AVP 9 101
a=rtpmap:9 G722/8000
a=ptime:20
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
```

[diagram] Call-ID:[prev][next]

[10] ACK sip:1001@10.10.199.250:5060;transport=tcp SIP/2.0

```
Date: Thu, 04 Jun 2009 20:18:21 GMT
From: <sip:2002@siptrunk17.cisco.com>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763438
Allow-Events: presence, kpml
Content-Length: 0
To: "Alice, Connect" <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763522
Call-ID: b0901d00-a2812bcb-25-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bK7412ef9bb2
CSeq: 101 ACK
Max-Forwards: 70
```

CISCO CONFIDENTIAL

[diagram] Call-ID:[prev][next]
[11] BYE sip:2002@10.10.199.251:5060;transport=tcp SIP/2.0
Date: Thu, 04 Jun 2009 20:17:19 GMT
From: "Alice, Connect" <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763522
P-Asserted-Identity: "Alice, Connect" <sip:1001@10.10.199.250>
Content-Length: 0
User-Agent: Cisco-CUCM7.1
To: <sip:2002@siptrunk17.cisco.com>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763438
Call-ID: b0901d00-a2812bcb-25-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK763017d295
CSeq: 102 BYE
Max-Forwards: 70

[diagram] Call-ID:[prev][next]
[12] SIP/2.0 200 OK
Date: Thu, 04 Jun 2009 20:18:28 GMT
From: "Alice, Connect" <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763522
Content-Length: 0
To: <sip:2002@siptrunk17.cisco.com>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763438
Call-ID: b0901d00-a2812bcb-25-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK763017d295
CSeq: 102 BYE

CISCO CONFIDENTIAL

19.2 Basic Outgoing Call with identity in only From header

Title: Basic Outgoing Call with identity in only From header

Description:

Basic Unified CM to Unified CM SIP Trunk Call with Remote-Party-Id [] Asserted-Identity [] i.e no RPID or Asserted-Identity

The following basic call flow illustrates the SIP messaging for an outgoing SIP Trunk call from a Unified CM1 to a remote Unified CM2.

The Unified CM1 sends an INVITE over the SIP Trunk for inviting Unified CM2 to the call.

The INVITE request carries a Display Name/Number identity in a From header with no Remote-Party-Id or Asserted-Identity headers.

Configuration:

Node = Unified CM1, IP = 10.10.199.250

Node = Unified CM2, IP = 10.10.199.251

Phone = A, Line = 1001, IP = 10.10.199.130, Model = SCCP

Phone = B, Line = 2002, IP = 10.10.199.179, Model = SCCP

SIP Trunk from Unified CM1 to Unified CM2 has

a) route pattern 2.XXXX

b) Has destination port configured to be 5060

c) Remote-Party-Id [] Asserted-Identity [], SIP Privacy=Default, Asserted-Type=Default

Scenario:

Phone A DN 1001 calls Phone B DN 2002 over the SIP Trunk by dialing 22002

Phone B answers the call

Phone A goes onHook

End of Scenario

CISCO CONFIDENTIAL

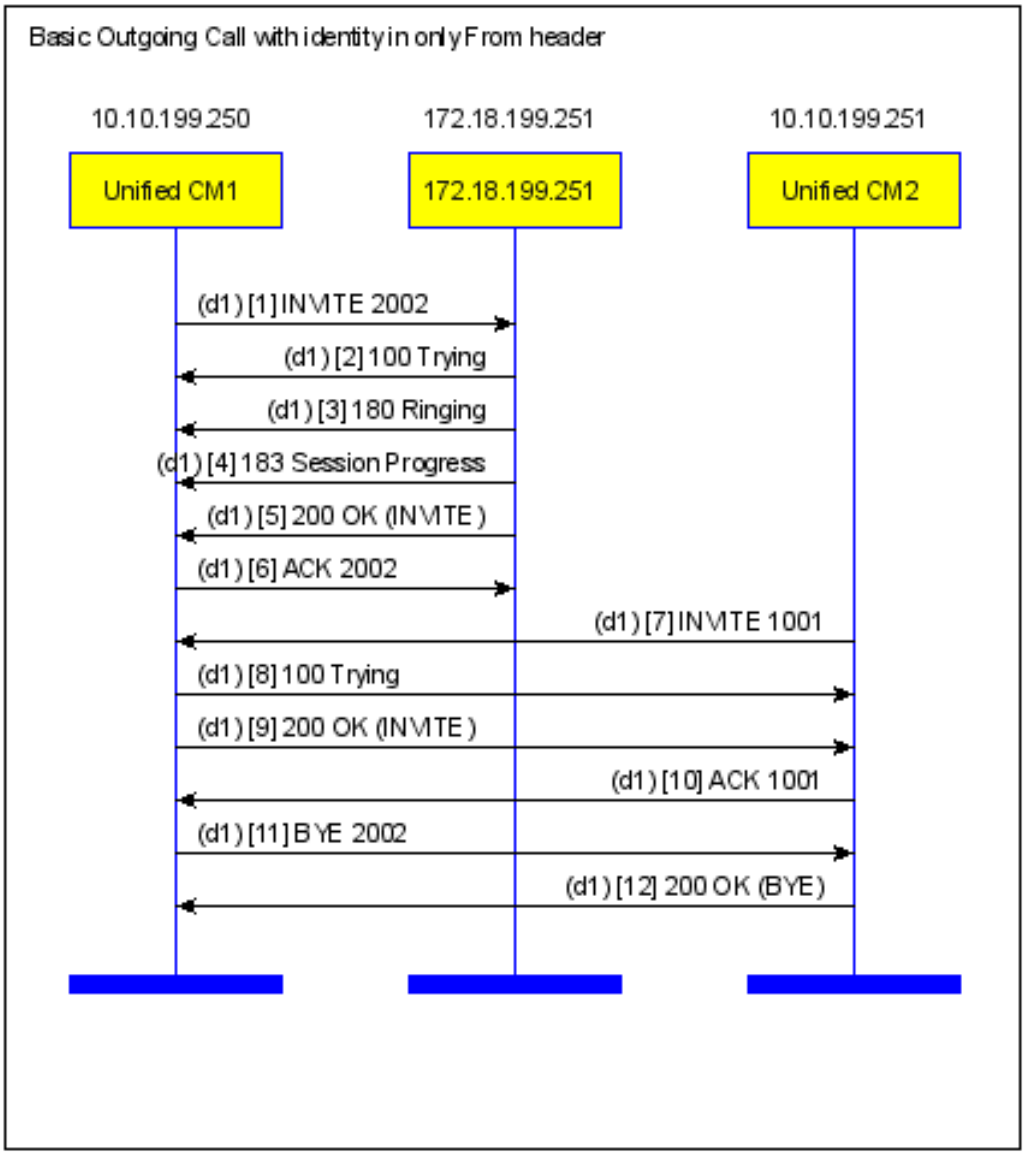

CISCO CONFIDENTIAL

```
[diagram]   Call-ID:[prev][next]
[1] INVITE sip:2002@siptrunk17.cisco.com:5060 SIP/2.0
Date: Thu, 04 Jun 2009 21:14:21 GMT
Call-Info: <sip:10.10.199.250:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: "Alice, Connect" <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763546
Allow-Events: presence, kpml
Supported: timer,resource-priority,replaces
Supported: Geolocation
Min-SE:  1800
Content-Length: 0
User-Agent: Cisco-CUCM7.1
To: <sip:2002@siptrunk17.cisco.com>
Contact: <sip:1001@10.10.199.250:5060;transport=tcp>
Expires: 180
Call-ID: aa9e3a00-a281392d-29-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK9538be33c1
CSeq: 101 INVITE
Session-Expires:  1800
Max-Forwards: 70

[diagram]   Call-ID:[prev][next]
[2] SIP/2.0 100 Trying
Date: Thu, 04 Jun 2009 21:15:23 GMT
From: "Alice, Connect" <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763546
Allow-Events: presence
Content-Length: 0
To: <sip:2002@siptrunk17.cisco.com>
Call-ID: aa9e3a00-a281392d-29-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK9538be33c1
CSeq: 101 INVITE

[diagram]   Call-ID:[prev][next]
[3] SIP/2.0 180 Ringing
Date: Thu, 04 Jun 2009 21:15:23 GMT
Call-Info: <sip:10.10.199.251:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: "Alice, Connect" <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763546
Allow-Events: presence
P-Asserted-Identity: "Bob, Alert" <sip:2002@10.10.199.251>
Supported: Geolocation
Remote-Party-ID: "Bob, Alert" <sip:2002@10.10.199.251>;party=called;screen=yes;privacy=off
Content-Length: 0
To: <sip:2002@siptrunk17.cisco.com>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763458
Contact: <sip:2002@10.10.199.251:5060;transport=tcp>
Call-ID: aa9e3a00-a281392d-29-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK9538be33c1
CSeq: 101 INVITE

[diagram]   Call-ID:[prev][next]
[4] SIP/2.0 183 Session Progress
Date: Thu, 04 Jun 2009 21:15:23 GMT
Call-Info: <sip:10.10.199.251:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: "Alice, Connect" <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763546
Allow-Events: presence, kpml
P-Asserted-Identity: "Bob, Alert" <sip:2002@10.10.199.251>
Supported: Geolocation
Remote-Party-ID: "Bob, Alert" <sip:2002@10.10.199.251>;party=called;screen=yes;privacy=off
Content-Length: 337
To: <sip:2002@siptrunk17.cisco.com>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763458
Contact: <sip:2002@10.10.199.251:5060;transport=tcp>
Content-Type: application/sdp
Call-ID: aa9e3a00-a281392d-29-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK9538be33c1
CSeq: 101 INVITE

v=0
o=CiscoSystemsCCM-SIP 2000 1 IN IP4 10.10.199.251
s=SIP Call
c=IN IP4 10.10.199.179
t=0 0
m=audio 4000 RTP/AVP 9 0 8 18 101
a=rtpmap:9 G722/8000
a=ptime:20
a=rtpmap:0 PCMU/8000
a=ptime:20
a=rtpmap:8 PCMA/8000
a=ptime:20
a=rtpmap:18 G729/8000
```

CISCO CONFIDENTIAL

```
a=ptime:20
a=sendonly
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
```

[diagram] Call-ID:[prev][next]

[5] SIP/2.0 200 OK

```
Date: Thu, 04 Jun 2009 21:15:23 GMT
Call-Info: <sip:10.10.199.251:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: "Alice, Connect" <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763546
Allow-Events: presence, kpml
P-Asserted-Identity: "Bob, Connect" <sip:2002@10.10.199.251>
Supported: replaces
Supported: Geolocation
Remote-Party-ID: "Bob, Connect" <sip:2002@10.10.199.251>;party=called;screen=yes;privacy=off
Content-Length: 337
Require:  timer
To: <sip:2002@siptrunk17.cisco.com>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763458
Contact: <sip:2002@10.10.199.251:5060;transport=tcp>
Content-Type: application/sdp
Call-ID: aa9e3a00-a281392d-29-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK9538be33c1
CSeq: 101 INVITE
Session-Expires:  1800;refresher=uas

v=0
o=CiscoSystemsCCM-SIP 2000 1 IN IP4 10.10.199.251
s=SIP Call
c=IN IP4 10.10.199.179
t=0 0
m=audio 4000 RTP/AVP 9 0 8 18 101
a=rtpmap:9 G722/8000
a=ptime:20
a=rtpmap:0 PCMU/8000
a=ptime:20
a=rtpmap:8 PCMA/8000
a=ptime:20
a=rtpmap:18 G729/8000
a=ptime:20
a=sendonly
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
```

[diagram] Call-ID:[prev][next]

[6] ACK sip:2002@10.10.199.251:5060;transport=tcp SIP/2.0

```
Date: Thu, 04 Jun 2009 21:14:21 GMT
From: "Alice, Connect" <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763546
Allow-Events: presence, kpml
Content-Length: 228
To: <sip:2002@siptrunk17.cisco.com>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763458
Content-Type: application/sdp
Call-ID: aa9e3a00-a281392d-29-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK964ca82ce5
CSeq: 101 ACK
Max-Forwards: 70

v=0
o=CiscoSystemsCCM-SIP 2000 1 IN IP4 10.10.199.250
s=SIP Call
c=IN IP4 10.10.199.130
t=0 0
m=audio 20578 RTP/AVP 9 101
a=rtpmap:9 G722/8000
a=ptime:20
a=recvonly
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
```

[diagram] Call-ID:[prev][next]

[7] INVITE sip:1001@10.10.199.250:5060;transport=tcp SIP/2.0

```
Date: Thu, 04 Jun 2009 21:15:25 GMT
Call-Info: <sip:10.10.199.251:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:2002@siptrunk17.cisco.com>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763458
Allow-Events: presence, kpml
P-Asserted-Identity: "Bob, Connect" <sip:2002@10.10.199.251>
Supported: timer,resource-priority,replaces
Min-SE:  1800
Remote-Party-ID: "Bob, Connect" <sip:2002@10.10.199.251>;party=calling;screen=yes;privacy=off
```

CISCO CONFIDENTIAL

```
Content-Length: 216
User-Agent: Cisco-CUCM7.1
To: "Alice, Connect" <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763546
Contact: <sip:2002@10.10.199.251:5060;transport=tcp>
Expires: 180
Content-Type: application/sdp
Call-ID: aa9e3a00-a281392d-29-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bK877452933
CSeq: 101 INVITE
Session-Expires:  1800;refresher=uac
Max-Forwards: 70

v=0
o=CiscoSystemsCCM-SIP 2000 2 IN IP4 10.10.199.251
s=SIP Call
c=IN IP4 10.10.199.179
t=0 0
m=audio 30366 RTP/AVP 9 101
a=rtpmap:9 G722/8000
a=ptime:20
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
```

[diagram] Call-ID:[prev][next]

[8] SIP/2.0 100 Trying

```
Date: Thu, 04 Jun 2009 21:14:23 GMT
From: <sip:2002@siptrunk17.cisco.com>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763458
Allow-Events: presence, kpml
Content-Length: 0
To: "Alice, Connect" <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763546
Call-ID: aa9e3a00-a281392d-29-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bK877452933
CSeq: 101 INVITE
```

[diagram] Call-ID:[prev][next]

[9] SIP/2.0 200 OK

```
Date: Thu, 04 Jun 2009 21:14:23 GMT
Call-Info: <sip:10.10.199.250:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:2002@siptrunk17.cisco.com>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763458
Allow-Events: presence, kpml
Supported: replaces
Supported: Geolocation
Content-Length: 216
Require:  timer
To: "Alice, Connect" <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763546
Contact: <sip:1001@10.10.199.250:5060;transport=tcp>
Content-Type: application/sdp
Call-ID: aa9e3a00-a281392d-29-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bK877452933
CSeq: 101 INVITE
Session-Expires:  1800;refresher=uac

v=0
o=CiscoSystemsCCM-SIP 2000 2 IN IP4 10.10.199.250
s=SIP Call
c=IN IP4 10.10.199.130
t=0 0
m=audio 20578 RTP/AVP 9 101
a=rtpmap:9 G722/8000
a=ptime:20
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
```

[diagram] Call-ID:[prev][next]

[10] ACK sip:1001@10.10.199.250:5060;transport=tcp SIP/2.0

```
Date: Thu, 04 Jun 2009 21:15:25 GMT
From: <sip:2002@siptrunk17.cisco.com>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763458
Allow-Events: presence, kpml
Content-Length: 0
To: "Alice, Connect" <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763546
Call-ID: aa9e3a00-a281392d-29-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bK8861773fd
CSeq: 101 ACK
Max-Forwards: 70
```

[diagram] Call-ID:[prev][next]

[11] BYE sip:2002@10.10.199.251:5060;transport=tcp SIP/2.0

```
Date: Thu, 04 Jun 2009 21:14:23 GMT
From: "Alice, Connect" <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763546
```

CISCO CONFIDENTIAL

```
Content-Length: 0
User-Agent: Cisco-CUCM7.1
To: <sip:2002@siptrunk17.cisco.com>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763458
Call-ID: aa9e3a00-a281392d-29-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK9770f715c5
CSeq: 102 BYE
Max-Forwards: 70

[diagram]   Call-ID:[prev][next]
[12] SIP/2.0 200 OK
Date: Thu, 04 Jun 2009 21:15:31 GMT
From: "Alice, Connect" <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763546
Content-Length: 0
To: <sip:2002@siptrunk17.cisco.com>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763458
Call-ID: aa9e3a00-a281392d-29-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK9770f715c5
CSeq: 102 BYE
```

CISCO CONFIDENTIAL

19.3 Basic Outgoing Call with only Remote-Party-Id

Title: Basic Outgoing Call with only Remote-Party-Id

Description:

Basic Unified CM to Unified CM SIP Trunk Call with Remote-Party-Id [v] Asserted-Identity []
The following basic call flow illustrates the SIP messaging for an outgoing SIP Trunk call from a Unified CM1 to a remote Unified CM2.

The Unified CM1 sends an INVITE over the SIP Trunk for inviting Unified CM2 to the call.
The INVITE request carries a Remote-Party-Id header & no Asserted-Identity header.

Configuration:

Node = Unified CM1, IP = 10.10.199.250
Node = Unified CM2, IP = 10.10.199.251

Phone = A, Line = 1001, IP = 10.10.199.130, Model = SCCP
Phone = B, Line = 2002, IP = 10.10.199.179, Model = SCCP

SIP Trunk from Unified CM1 to Unified CM2 has
a) route pattern 2.XXXX
b) Has destination port configured to be 5060
c) Remote-Party-Id [v] Asserted-Identity [], SIP Privacy= Default, Asserted-Type=Default

Scenario:

Phone A DN 1001 calls Phone B DN 2002 over the SIP Trunk by dialing 22002
Phone B answers the call
Phone A goes onHook
End of Scenario

CISCO CONFIDENTIAL

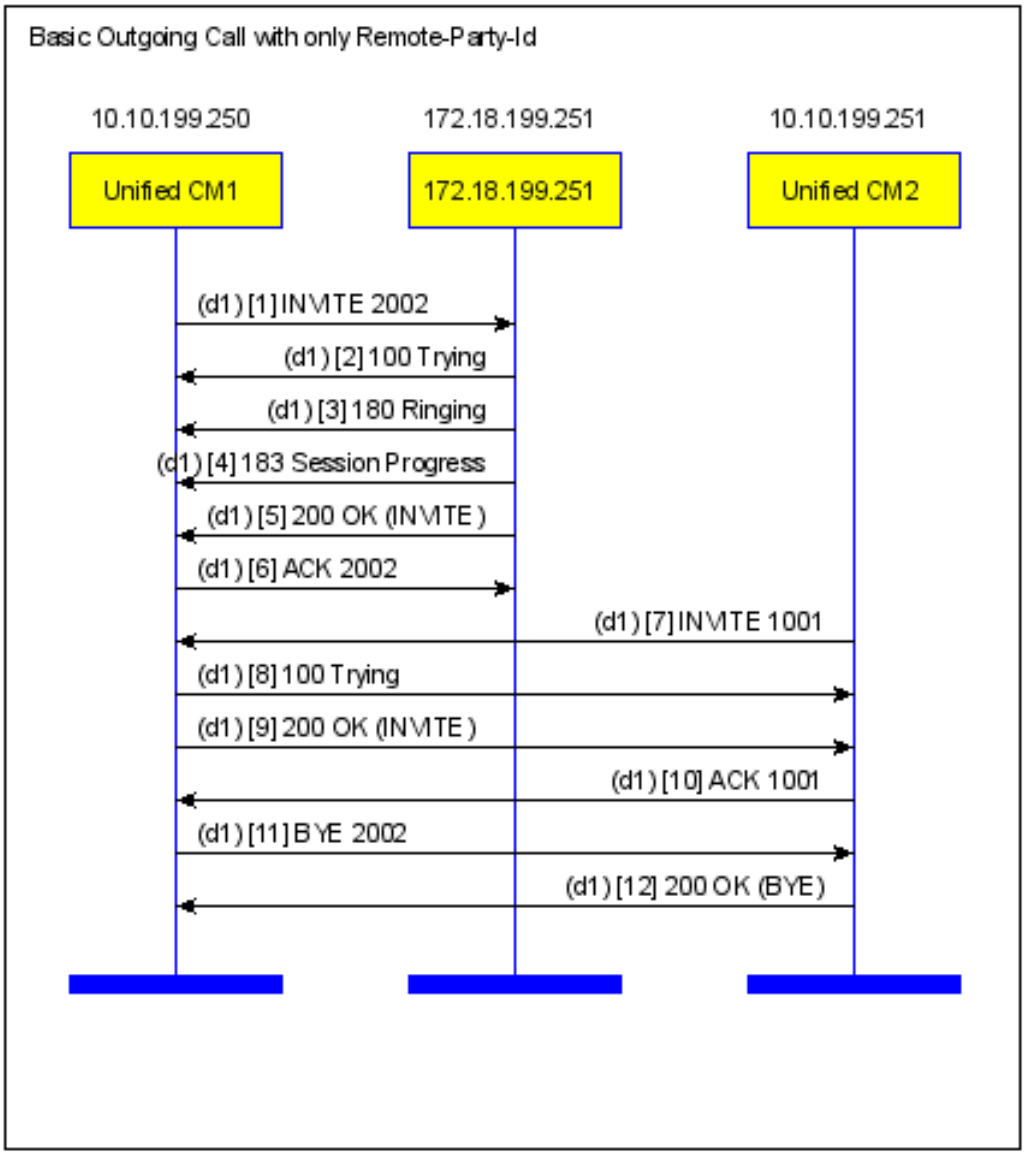

CISCO CONFIDENTIAL

[diagram] Call-ID:[prev][next]
[1] INVITE sip:2002@siptrunk17.cisco.com:5060 SIP/2.0
Date: Thu, 04 Jun 2009 21:18:31 GMT
Call-Info: <sip:10.10.199.250:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: "Alice, Connect" <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763550
Allow-Events: presence, kpml
Supported: timer,resource-priority,replaces
Supported: Geolocation
Min-SE: 1800
Remote-Party-ID: "Alice, Connect" <sip:1001@10.10.199.250;x-cisco-callback-
number=1001>;party=calling;screen=yes;privacy=off
Content-Length: 0
User-Agent: Cisco-CUCM7.1
To: <sip:2002@siptrunk17.cisco.com>
Contact: <sip:1001@10.10.199.250:5060;transport=tcp>
Expires: 180
Call-ID: 3fa13300-a2813a27-2b-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK9b54182bfa
CSeq: 101 INVITE
Session-Expires: 1800
Max-Forwards: 70

[diagram] Call-ID:[prev][next]
[2] SIP/2.0 100 Trying
Date: Thu, 04 Jun 2009 21:19:33 GMT
From: "Alice, Connect" <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763550
Allow-Events: presence
Content-Length: 0
To: <sip:2002@siptrunk17.cisco.com>
Call-ID: 3fa13300-a2813a27-2b-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK9b54182bfa
CSeq: 101 INVITE

[diagram] Call-ID:[prev][next]
[3] SIP/2.0 180 Ringing
Date: Thu, 04 Jun 2009 21:19:33 GMT
Call-Info: <sip:10.10.199.251:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: "Alice, Connect" <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763550
Allow-Events: presence
P-Asserted-Identity: "Bob, Alert" <sip:2002@10.10.199.251>
Supported: Geolocation
Remote-Party-ID: "Bob, Alert" <sip:2002@10.10.199.251>;party=called;screen=yes;privacy=off
Content-Length: 0
To: <sip:2002@siptrunk17.cisco.com>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763462
Contact: <sip:2002@10.10.199.251:5060;transport=tcp>
Call-ID: 3fa13300-a2813a27-2b-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK9b54182bfa
CSeq: 101 INVITE

[diagram] Call-ID:[prev][next]
[4] SIP/2.0 183 Session Progress
Date: Thu, 04 Jun 2009 21:19:33 GMT
Call-Info: <sip:10.10.199.251:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: "Alice, Connect" <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763550
Allow-Events: presence, kpml
P-Asserted-Identity: "Bob, Alert" <sip:2002@10.10.199.251>
Supported: Geolocation
Remote-Party-ID: "Bob, Alert" <sip:2002@10.10.199.251>;party=called;screen=yes;privacy=off
Content-Length: 337
To: <sip:2002@siptrunk17.cisco.com>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763462
Contact: <sip:2002@10.10.199.251:5060;transport=tcp>
Content-Type: application/sdp
Call-ID: 3fa13300-a2813a27-2b-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK9b54182bfa
CSeq: 101 INVITE

v=0
o=CiscoSystemsCCM-SIP 2000 1 IN IP4 10.10.199.251
s=SIP Call
c=IN IP4 10.10.199.179
t=0 0
m=audio 4000 RTP/AVP 9 0 8 18 101
a=rtpmap:9 G722/8000
a=ptime:20
a=rtpmap:0 PCMU/8000
a=ptime:20
a=rtpmap:8 PCMA/8000

CISCO CONFIDENTIAL

```
a=ptime:20
a=rtpmap:18 G729/8000
a=ptime:20
a=sendonly
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
```

[diagram] Call-ID:[prev][next]

[5] SIP/2.0 200 OK

```
Date: Thu, 04 Jun 2009 21:19:33 GMT
Call-Info: <sip:10.10.199.251:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: "Alice, Connect" <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763550
Allow-Events: presence, kpml
P-Asserted-Identity: "Bob, Connect" <sip:2002@10.10.199.251>
Supported: replaces
Supported: Geolocation
Remote-Party-ID: "Bob, Connect" <sip:2002@10.10.199.251>;party=called;screen=yes;privacy=off
Content-Length: 337
Require:  timer
To: <sip:2002@siptrunk17.cisco.com>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763462
Contact: <sip:2002@10.10.199.251:5060;transport=tcp>
Content-Type: application/sdp
Call-ID: 3fa13300-a2813a27-2b-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK9b54182bfa
CSeq: 101 INVITE
Session-Expires:  1800;refresher=uas

v=0
o=CiscoSystemsCCM-SIP 2000 1 IN IP4 10.10.199.251
s=SIP Call
c=IN IP4 10.10.199.179
t=0 0
m=audio 4000 RTP/AVP 9 0 8 18 101
a=rtpmap:9 G722/8000
a=ptime:20
a=rtpmap:0 PCMU/8000
a=ptime:20
a=rtpmap:8 PCMA/8000
a=ptime:20
a=rtpmap:18 G729/8000
a=ptime:20
a=sendonly
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
```

[diagram] Call-ID:[prev][next]

[6] ACK sip:2002@10.10.199.251:5060;transport=tcp SIP/2.0

```
Date: Thu, 04 Jun 2009 21:18:31 GMT
From: "Alice, Connect" <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763550
Allow-Events: presence, kpml
Content-Length: 228
To: <sip:2002@siptrunk17.cisco.com>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763462
Content-Type: application/sdp
Call-ID: 3fa13300-a2813a27-2b-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK9c3bf50e5e
CSeq: 101 ACK
Max-Forwards: 70

v=0
o=CiscoSystemsCCM-SIP 2000 1 IN IP4 10.10.199.250
s=SIP Call
c=IN IP4 10.10.199.130
t=0 0
m=audio 29162 RTP/AVP 9 101
a=rtpmap:9 G722/8000
a=ptime:20
a=recvonly
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
```

[diagram] Call-ID:[prev][next]

[7] INVITE sip:1001@10.10.199.250:5060;transport=tcp SIP/2.0

```
Date: Thu, 04 Jun 2009 21:19:35 GMT
Call-Info: <sip:10.10.199.251:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:2002@siptrunk17.cisco.com>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763462
Allow-Events: presence, kpml
P-Asserted-Identity: "Bob, Connect" <sip:2002@10.10.199.251>
Supported: timer,resource-priority,replaces
```

CISCO CONFIDENTIAL

```
Min-SE:  1800
Remote-Party-ID: "Bob, Connect" <sip:2002@10.10.199.251>;party=calling;screen=yes;privacy=off
Content-Length: 216
User-Agent: Cisco-CUCM7.1
To: "Alice, Connect" <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763550
Contact: <sip:2002@10.10.199.251:5060;transport=tcp>
Expires: 180
Content-Type: application/sdp
Call-ID: 3fa13300-a2813a27-2b-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bK8b30ecba8b
CSeq: 101 INVITE
Session-Expires:  1800;refresher=uac
Max-Forwards: 70

v=0
o=CiscoSystemsCCM-SIP 2000 2 IN IP4 10.10.199.251
s=SIP Call
c=IN IP4 10.10.199.179
t=0 0
m=audio 22566 RTP/AVP 9 101
a=rtpmap:9 G722/8000
a=ptime:20
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15

[diagram]   Call-ID:[prev][next]
[8] SIP/2.0 100 Trying
Date: Thu, 04 Jun 2009 21:18:33 GMT
From: <sip:2002@siptrunk17.cisco.com>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763462
Allow-Events: presence, kpml
Content-Length: 0
To: "Alice, Connect" <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763550
Call-ID: 3fa13300-a2813a27-2b-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bK8b30ecba8b
CSeq: 101 INVITE

[diagram]   Call-ID:[prev][next]
[9] SIP/2.0 200 OK
Date: Thu, 04 Jun 2009 21:18:33 GMT
Call-Info: <sip:10.10.199.250:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:2002@siptrunk17.cisco.com>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763462
Allow-Events: presence, kpml
Supported: replaces
Supported: Geolocation
Remote-Party-ID: "Alice, Connect" <sip:1001@10.10.199.250>;party=called;screen=yes;privacy=off
Content-Length: 216
Require:  timer
To: "Alice, Connect" <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763550
Contact: <sip:1001@10.10.199.250:5060;transport=tcp>
Content-Type: application/sdp
Call-ID: 3fa13300-a2813a27-2b-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bK8b30ecba8b
CSeq: 101 INVITE
Session-Expires:  1800;refresher=uac

v=0
o=CiscoSystemsCCM-SIP 2000 2 IN IP4 10.10.199.250
s=SIP Call
c=IN IP4 10.10.199.130
t=0 0
m=audio 29162 RTP/AVP 9 101
a=rtpmap:9 G722/8000
a=ptime:20
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15

[diagram]   Call-ID:[prev][next]
[10] ACK sip:1001@10.10.199.250:5060;transport=tcp SIP/2.0
Date: Thu, 04 Jun 2009 21:19:35 GMT
From: <sip:2002@siptrunk17.cisco.com>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763462
Allow-Events: presence, kpml
Content-Length: 0
To: "Alice, Connect" <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763550
Call-ID: 3fa13300-a2813a27-2b-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bK8cac63254
CSeq: 101 ACK
Max-Forwards: 70
```

CISCO CONFIDENTIAL

[diagram] Call-ID:[prev][next]
[11] BYE sip:2002@10.10.199.251:5060;transport=tcp SIP/2.0
Date: Thu, 04 Jun 2009 21:18:33 GMT
From: "Alice, Connect" <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763550
Content-Length: 0
User-Agent: Cisco-CUCM7.1
To: <sip:2002@siptrunk17.cisco.com>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763462
Call-ID: 3fa13300-a2813a27-2b-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK9d1e899078
CSeq: 102 BYE
Max-Forwards: 70

[diagram] Call-ID:[prev][next]
[12] SIP/2.0 200 OK
Date: Thu, 04 Jun 2009 21:19:39 GMT
From: "Alice, Connect" <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763550
Content-Length: 0
To: <sip:2002@siptrunk17.cisco.com>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763462
Call-ID: 3fa13300-a2813a27-2b-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK9d1e899078
CSeq: 102 BYE

CISCO CONFIDENTIAL

19.4 Basic Outgoing Call with identity in P-Preferred-Identity header.

Title: Basic Outgoing Call with identity in P-Preferred-Identity header.

Description:

Basic Unified CM to Unified CM SIP Trunk Call with Remote-Party-Id [] Asserted-Identity [v], Asserted-Type=PPI

The following basic call flow illustrates the SIP messaging for an outgoing SIP Trunk call from a Unified CM1 to a remote Unified CM2.

The Unified CM1 sends an INVITE over the SIP Trunk for inviting Unified CM2 to the call. The INVITE request carries a P-Preferred-Identity header.

Configuration:

Node = Unified CM1, IP = 10.10.199.250
Node = Unified CM2, IP = 10.10.199.251

Phone = A, Line = 1001, IP = 10.10.199.130, Model = SCCP
Phone = B, Line = 2002, IP = 10.10.199.179, Model = SCCP

SIP Trunk from Unified CM1 & Unified CM2 has
a) route pattern 2.XXXX
b) Has destination port configured to be 5060
c) Remote-Party-Id [] Asserted-Identity [v], SIP Privacy= Default, Asserted-Type=PPI

Scenario:

Phone A DN 1001 calls Phone B DN 2002 over the SIP Trunk by dialing 22002
Phone B answers the call
Phone A goes onHook
End of Scenario

CISCO CONFIDENTIAL

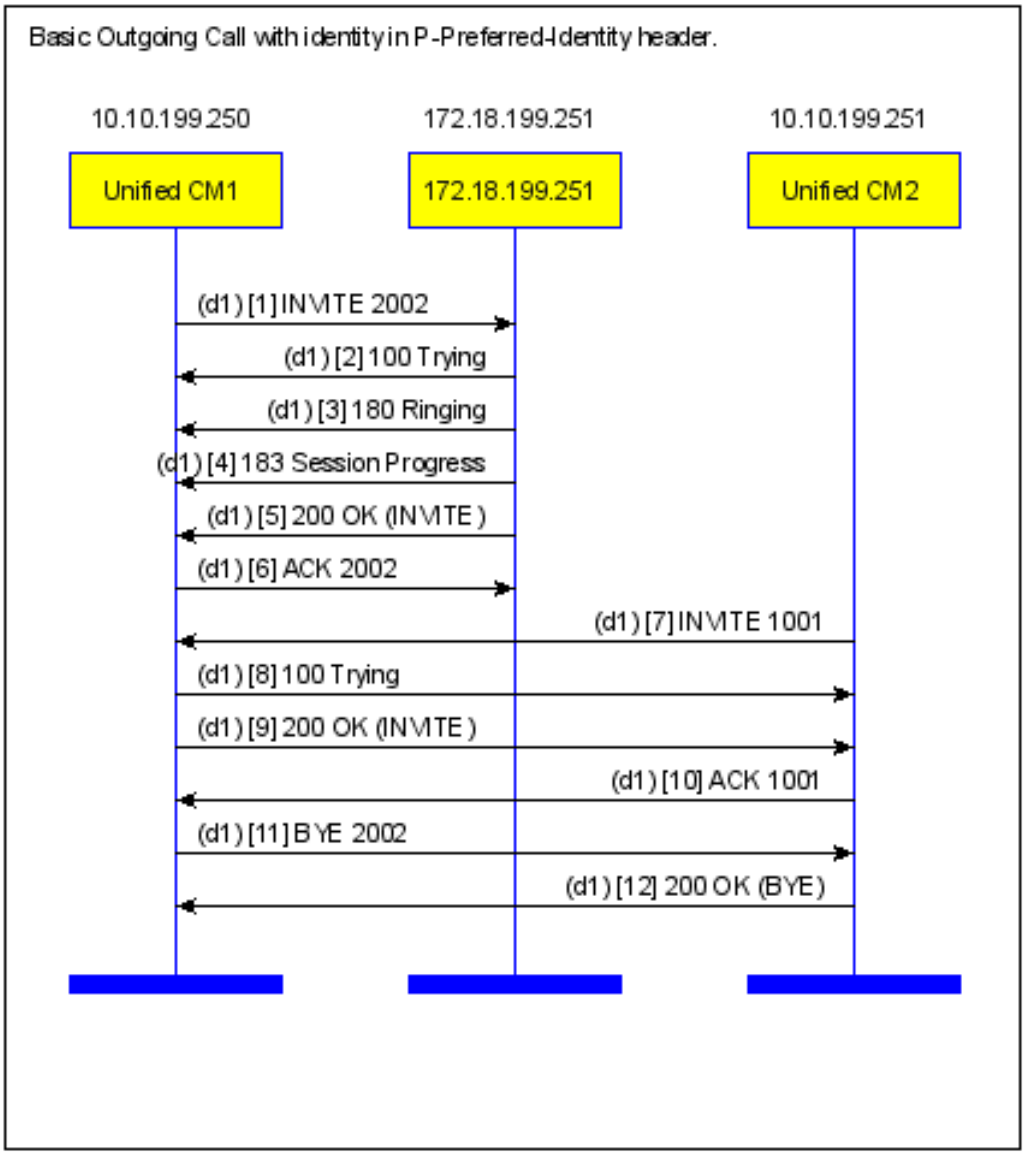

CISCO CONFIDENTIAL

[diagram] Call-ID:[prev][next]
[1] INVITE sip:2002@siptrunk17.cisco.com:5060 SIP/2.0
Date: Thu, 04 Jun 2009 21:21:17 GMT
Call-Info: <sip:10.10.199.250:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: "Alice, Connect" <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763552
Allow-Events: presence, kpml
Supported: timer,resource-priority,replaces
Supported: Geolocation
Min-SE: 1800
Content-Length: 0
User-Agent: Cisco-CUCM7.1
To: <sip:2002@siptrunk17.cisco.com>
Contact: <sip:1001@10.10.199.250:5060;transport=tcp>
Expires: 180
Call-ID: a292ca00-a2813acd-2c-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK9e6c0faefd
CSeq: 101 INVITE
P-Preferred-Identity: "Alice, Connect" <sip:1001@10.10.199.250>
Session-Expires: 1800
Max-Forwards: 70

[diagram] Call-ID:[prev][next]
[2] SIP/2.0 100 Trying
Date: Thu, 04 Jun 2009 21:22:20 GMT
From: "Alice, Connect" <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763552
Allow-Events: presence
Content-Length: 0
To: <sip:2002@siptrunk17.cisco.com>
Call-ID: a292ca00-a2813acd-2c-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK9e6c0faefd
CSeq: 101 INVITE

[diagram] Call-ID:[prev][next]
[3] SIP/2.0 180 Ringing
Date: Thu, 04 Jun 2009 21:22:20 GMT
Call-Info: <sip:10.10.199.251:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: "Alice, Connect" <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763552
Allow-Events: presence
P-Asserted-Identity: "Bob, Alert" <sip:2002@10.10.199.251>
Supported: Geolocation
Remote-Party-ID: "Bob, Alert" <sip:2002@10.10.199.251>;party=called;screen=yes;privacy=off
Content-Length: 0
To: <sip:2002@siptrunk17.cisco.com>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763464
Contact: <sip:2002@10.10.199.251:5060;transport=tcp>
Call-ID: a292ca00-a2813acd-2c-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK9e6c0faefd
CSeq: 101 INVITE

[diagram] Call-ID:[prev][next]
[4] SIP/2.0 183 Session Progress
Date: Thu, 04 Jun 2009 21:22:20 GMT
Call-Info: <sip:10.10.199.251:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: "Alice, Connect" <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763552
Allow-Events: presence, kpml
P-Asserted-Identity: "Bob, Alert" <sip:2002@10.10.199.251>
Supported: Geolocation
Remote-Party-ID: "Bob, Alert" <sip:2002@10.10.199.251>;party=called;screen=yes;privacy=off
Content-Length: 337
To: <sip:2002@siptrunk17.cisco.com>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763464
Contact: <sip:2002@10.10.199.251:5060;transport=tcp>
Content-Type: application/sdp
Call-ID: a292ca00-a2813acd-2c-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK9e6c0faefd
CSeq: 101 INVITE

v=0
o=CiscoSystemsCCM-SIP 2000 1 IN IP4 10.10.199.251
s=SIP Call
c=IN IP4 10.10.199.179
t=0 0
m=audio 4000 RTP/AVP 9 0 8 18 101
a=rtpmap:9 G722/8000
a=ptime:20
a=rtpmap:0 PCMU/8000
a=ptime:20
a=rtpmap:8 PCMA/8000
a=ptime:20

CISCO CONFIDENTIAL

```
a=rtpmap:18 G729/8000
a=ptime:20
a=sendonly
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
```

[diagram] Call-ID:[prev][next]

[5] SIP/2.0 200 OK

```
Date: Thu, 04 Jun 2009 21:22:20 GMT
Call-Info: <sip:10.10.199.251:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: "Alice, Connect" <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763552
Allow-Events: presence, kpml
P-Asserted-Identity: "Bob, Connect" <sip:2002@10.10.199.251>
Supported: replaces
Supported: Geolocation
Remote-Party-ID: "Bob, Connect" <sip:2002@10.10.199.251>;party=called;screen=yes;privacy=off
Content-Length: 337
Require:  timer
To: <sip:2002@siptrunk17.cisco.com>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763464
Contact: <sip:2002@10.10.199.251:5060;transport=tcp>
Content-Type: application/sdp
Call-ID: a292ca00-a2813acd-2c-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK9e6c0faefd
CSeq: 101 INVITE
Session-Expires:  1800;refresher=uas

v=0
o=CiscoSystemsCCM-SIP 2000 1 IN IP4 10.10.199.251
s=SIP Call
c=IN IP4 10.10.199.179
t=0 0
m=audio 4000 RTP/AVP 9 0 8 18 101
a=rtpmap:9 G722/8000
a=ptime:20
a=rtpmap:0 PCMU/8000
a=ptime:20
a=rtpmap:8 PCMA/8000
a=ptime:20
a=rtpmap:18 G729/8000
a=ptime:20
a=sendonly
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
```

[diagram] Call-ID:[prev][next]

[6] ACK sip:2002@10.10.199.251:5060;transport=tcp SIP/2.0

```
Date: Thu, 04 Jun 2009 21:21:17 GMT
From: "Alice, Connect" <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763552
Allow-Events: presence, kpml
Content-Length: 228
To: <sip:2002@siptrunk17.cisco.com>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763464
Content-Type: application/sdp
Call-ID: a292ca00-a2813acd-2c-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK9f2dafc04f
CSeq: 101 ACK
Max-Forwards: 70

v=0
o=CiscoSystemsCCM-SIP 2000 1 IN IP4 10.10.199.250
s=SIP Call
c=IN IP4 10.10.199.130
t=0 0
m=audio 29476 RTP/AVP 9 101
a=rtpmap:9 G722/8000
a=ptime:20
a=recvonly
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
```

[diagram] Call-ID:[prev][next]

[7] INVITE sip:1001@10.10.199.250:5060;transport=tcp SIP/2.0

```
Date: Thu, 04 Jun 2009 21:22:22 GMT
Call-Info: <sip:10.10.199.251:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:2002@siptrunk17.cisco.com>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763464
Allow-Events: presence, kpml
P-Asserted-Identity: "Bob, Connect" <sip:2002@10.10.199.251>
Supported: timer,resource-priority,replaces
Min-SE:  1800
```

CISCO CONFIDENTIAL

```
Remote-Party-ID: "Bob, Connect" <sip:2002@10.10.199.251>;party=calling;screen=yes;privacy=off
Content-Length: 216
User-Agent: Cisco-CUCM7.1
To: "Alice, Connect" <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763552
Contact: <sip:2002@10.10.199.251:5060;transport=tcp>
Expires: 180
Content-Type: application/sdp
Call-ID: a292ca00-a2813acd-2c-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bK8d6d313e3e
CSeq: 101 INVITE
Session-Expires:  1800;refresher=uac
Max-Forwards: 70

v=0
o=CiscoSystemsCCM-SIP 2000 2 IN IP4 10.10.199.251
s=SIP Call
c=IN IP4 10.10.199.179
t=0 0
m=audio 22880 RTP/AVP 9 101
a=rtpmap:9 G722/8000
a=ptime:20
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15

[diagram]   Call-ID:[prev][next]
[8] SIP/2.0 100 Trying
Date: Thu, 04 Jun 2009 21:21:20 GMT
From: <sip:2002@siptrunk17.cisco.com>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763464
Allow-Events: presence, kpml
Content-Length: 0
To: "Alice, Connect" <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763552
Call-ID: a292ca00-a2813acd-2c-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bK8d6d313e3e
CSeq: 101 INVITE

[diagram]   Call-ID:[prev][next]
[9] SIP/2.0 200 OK
Date: Thu, 04 Jun 2009 21:21:20 GMT
Call-Info: <sip:10.10.199.250:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:2002@siptrunk17.cisco.com>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763464
Allow-Events: presence, kpml
Supported: replaces
Supported: Geolocation
Content-Length: 216
Require:  timer
To: "Alice, Connect" <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763552
Contact: <sip:1001@10.10.199.250:5060;transport=tcp>
Content-Type: application/sdp
Call-ID: a292ca00-a2813acd-2c-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bK8d6d313e3e
CSeq: 101 INVITE
P-Preferred-Identity: "Alice, Connect" <sip:1001@10.10.199.250>
Session-Expires:  1800;refresher=uac

v=0
o=CiscoSystemsCCM-SIP 2000 2 IN IP4 10.10.199.250
s=SIP Call
c=IN IP4 10.10.199.130
t=0 0
m=audio 29476 RTP/AVP 9 101
a=rtpmap:9 G722/8000
a=ptime:20
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15

[diagram]   Call-ID:[prev][next]
[10] ACK sip:1001@10.10.199.250:5060;transport=tcp SIP/2.0
Date: Thu, 04 Jun 2009 21:22:22 GMT
From: <sip:2002@siptrunk17.cisco.com>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763464
Allow-Events: presence, kpml
Content-Length: 0
To: "Alice, Connect" <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763552
Call-ID: a292ca00-a2813acd-2c-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bK8e771e3cc3
CSeq: 101 ACK
Max-Forwards: 70

[diagram]   Call-ID:[prev][next]
[11] BYE sip:2002@10.10.199.251:5060;transport=tcp SIP/2.0
```

CISCO CONFIDENTIAL

```
Date: Thu, 04 Jun 2009 21:21:20 GMT
From: "Alice, Connect" <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763552
Content-Length: 0
User-Agent: Cisco-CUCM7.1
To: <sip:2002@siptrunk17.cisco.com>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763464
Call-ID: a292ca00-a2813acd-2c-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bKa06d942a7e
P-Preferred-Identity: "Alice, Connect" <sip:1001@10.10.199.250>
CSeq: 102 BYE
Max-Forwards: 70

[diagram]   Call-ID:[prev][next]
[12] SIP/2.0 200 OK
Date: Thu, 04 Jun 2009 21:22:28 GMT
From: "Alice, Connect" <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763552
Content-Length: 0
To: <sip:2002@siptrunk17.cisco.com>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763464
Call-ID: a292ca00-a2813acd-2c-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bKa06d942a7e
CSeq: 102 BYE
```

CISCO CONFIDENTIAL

19.5 Basic Incoming SIP TrunkCall, sending 180/200 with Asserted-Identity & Privacy:id

Title: Basic Incoming SIP TrunkCall, sending 180/200 with Asserted-Identity & Privacy:id

Description:

Basic Unified CM to Unified CM SIP Trunk Call with Remote-Party-Id [] Asserted-Identity [v] and SIP Privacy =Id

The following basic call flow illustrates the SIP messaging for an incoming SIP Trunk call to a Unified CM1 from a remote Unified CM2.

The Unified CM1 is shown sending 180 and 200 OK for to Unified CM2.

The 180 and 200 OK response messages carries a Privacy & Asserted-Identity headers. Based on SIP Privacy=Id configuration, there is a Privacy:id header sent

Configuration:

Node = Unified CM1, IP = 10.10.199.250

Node = Unified CM2, IP = 10.10.199.251

Phone = A, Line = 1001, IP = 10.10.199.130, Model = SCCP

Phone = B, Line = 2002, IP = 10.10.199.179, Model = SCCP

SIP Trunk from Unified CM1 to Unified CM2 has

a) route pattern 2.XXXX

b) Has destination port configured to be 5060

c) Remote-Party-Id [] Asserted-Identity [v], Asserted-Type=Default, SIP Privacy=Id

Scenario:

Phone Phone B DN 2002 calls A DN 1001 over the SIP Trunk by dialing 11001

Phone A answers the call

Phone A goes onHook

End of Scenario

CISCO CONFIDENTIAL

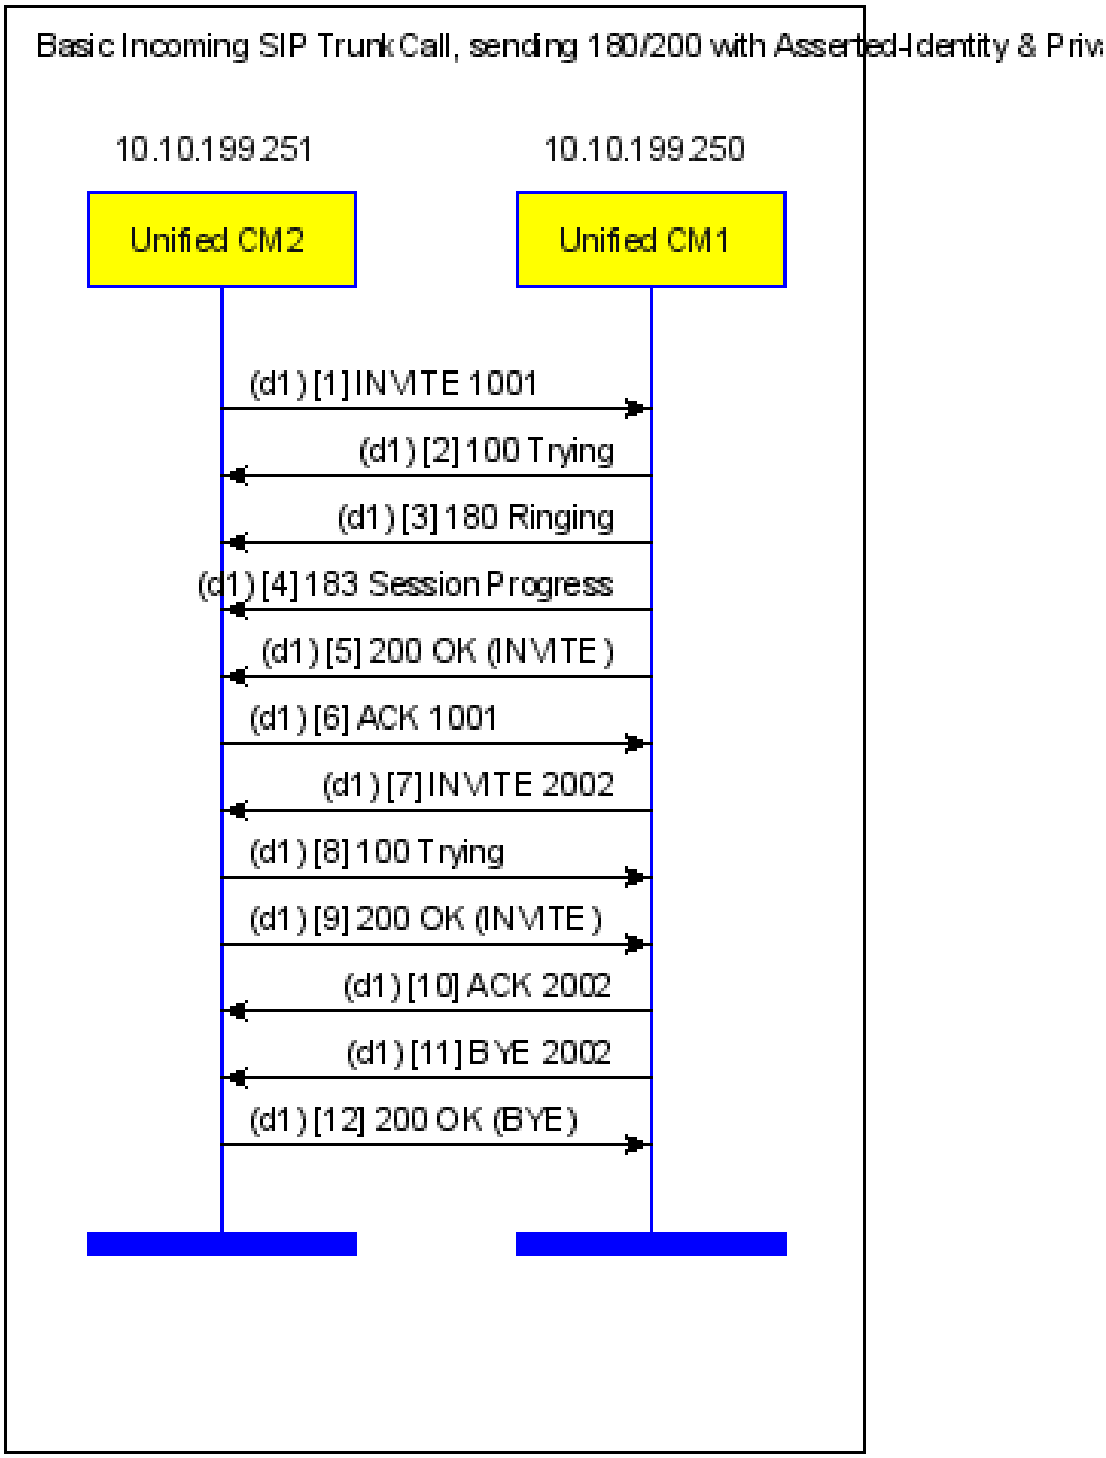

CISCO CONFIDENTIAL

[diagram] Call-ID:[prev][next]
[1] INVITE sip:1001@10.10.199.250:5060 SIP/2.0
Date: Thu, 04 Jun 2009 20:29:58 GMT
Call-Info: <sip:10.10.199.251:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: "Bob, Connect" <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763443
Allow-Events: presence, kpml
P-Asserted-Identity: "Bob, Connect" <sip:2002@10.10.199.251>
Supported: timer,resource-priority,replaces
Supported: Geolocation
Min-SE: 1800
Remote-Party-ID: "Bob, Connect" <sip:2002@10.10.199.251>;party=calling;screen=yes;privacy=off
Content-Length: 0
User-Agent: Cisco-CUCM7.1
To: <sip:1001@10.10.199.250>
Contact: <sip:2002@10.10.199.251:5060;transport=tcp>
Expires: 180
Call-ID: 7758ac80-a2812ec6-19-fbc712ac@10.10.199.251
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bK77358fcce1
CSeq: 101 INVITE
Session-Expires: 1800
Max-Forwards: 70

[diagram] Call-ID:[prev][next]
[2] SIP/2.0 100 Trying
Date: Thu, 04 Jun 2009 20:28:57 GMT
From: "Bob, Connect" <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763443
Allow-Events: presence
Content-Length: 0
To: <sip:1001@10.10.199.250>
Call-ID: 7758ac80-a2812ec6-19-fbc712ac@10.10.199.251
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bK77358fcce1
CSeq: 101 INVITE

[diagram] Call-ID:[prev][next]
[3] SIP/2.0 180 Ringing
Date: Thu, 04 Jun 2009 20:28:57 GMT
Call-Info: <sip:10.10.199.250:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: "Bob, Connect" <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763443
Allow-Events: presence
P-Asserted-Identity: "Alice, Alert" <sip:1001@10.10.199.250>
Supported: Geolocation
Content-Length: 0
Privacy: id
To: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763525
Contact: <sip:1001@10.10.199.250:5060;transport=tcp>
Call-ID: 7758ac80-a2812ec6-19-fbc712ac@10.10.199.251
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bK77358fcce1
CSeq: 101 INVITE

[diagram] Call-ID:[prev][next]
[4] SIP/2.0 183 Session Progress
Date: Thu, 04 Jun 2009 20:28:57 GMT
Call-Info: <sip:10.10.199.250:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: "Bob, Connect" <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763443
Allow-Events: presence, kpml
P-Asserted-Identity: "Alice, Alert" <sip:1001@10.10.199.250>
Supported: Geolocation
Content-Length: 337
Privacy: id
To: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763525
Contact: <sip:1001@10.10.199.250:5060;transport=tcp>
Content-Type: application/sdp
Call-ID: 7758ac80-a2812ec6-19-fbc712ac@10.10.199.251
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bK77358fcce1
CSeq: 101 INVITE

v=0
o=CiscoSystemsCCM-SIP 2000 1 IN IP4 10.10.199.250
s=SIP Call
c=IN IP4 10.10.199.130
t=0 0
m=audio 4000 RTP/AVP 9 0 8 18 101
a=rtpmap:9 G722/8000
a=ptime:20
a=rtpmap:0 PCMU/8000
a=ptime:20
a=rtpmap:8 PCMA/8000

CISCO CONFIDENTIAL

```
a=ptime:20
a=rtpmap:18 G729/8000
a=ptime:20
a=sendonly
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15

[diagram]   Call-ID:[prev][next]
[5] SIP/2.0 200 OK
Date: Thu, 04 Jun 2009 20:28:57 GMT
Call-Info: <sip:10.10.199.250:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: "Bob, Connect" <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763443
Allow-Events: presence, kpml
P-Asserted-Identity: "Alice, Connect" <sip:1001@10.10.199.250>
Supported: replaces
Supported: Geolocation
Content-Length: 337
Require:  timer
Privacy: id
To: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763525
Contact: <sip:1001@10.10.199.250:5060;transport=tcp>
Content-Type: application/sdp
Call-ID: 7758ac80-a2812ec6-19-fbc712ac@10.10.199.251
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bK77358fcce1
CSeq: 101 INVITE
Session-Expires:  1800;refresher=uas

v=0
o=CiscoSystemsCCM-SIP 2000 1 IN IP4 10.10.199.250
s=SIP Call
c=IN IP4 10.10.199.130
t=0 0
m=audio 4000 RTP/AVP 9 0 8 18 101
a=rtpmap:9 G722/8000
a=ptime:20
a=rtpmap:0 PCMU/8000
a=ptime:20
a=rtpmap:8 PCMA/8000
a=ptime:20
a=rtpmap:18 G729/8000
a=ptime:20
a=sendonly
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15

[diagram]   Call-ID:[prev][next]
[6] ACK sip:1001@10.10.199.250:5060;transport=tcp SIP/2.0
Date: Thu, 04 Jun 2009 20:29:58 GMT
From: "Bob, Connect" <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763443
Allow-Events: presence, kpml
Content-Length: 228
To: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763525
Content-Type: application/sdp
Call-ID: 7758ac80-a2812ec6-19-fbc712ac@10.10.199.251
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bK78a975bc6
CSeq: 101 ACK
Max-Forwards: 70

v=0
o=CiscoSystemsCCM-SIP 2000 1 IN IP4 10.10.199.251
s=SIP Call
c=IN IP4 10.10.199.179
t=0 0
m=audio 20084 RTP/AVP 9 101
a=rtpmap:9 G722/8000
a=ptime:20
a=recvonly
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15

[diagram]   Call-ID:[prev][next]
[7] INVITE sip:2002@10.10.199.251:5060;transport=tcp SIP/2.0
Date: Thu, 04 Jun 2009 20:28:59 GMT
Call-Info: <sip:10.10.199.250:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763525
Allow-Events: presence, kpml
P-Asserted-Identity: "Alice, Connect" <sip:1001@10.10.199.250>
Supported: timer,resource-priority,replaces
```

CISCO CONFIDENTIAL

```
Min-SE:  1800
Content-Length: 216
User-Agent: Cisco-CUCM7.1
Privacy: id
To: "Bob, Connect" <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763443
Contact: <sip:1001@10.10.199.250:5060;transport=tcp>
Expires: 180
Content-Type: application/sdp
Call-ID: 7758ac80-a2812ec6-19-fbc712ac@10.10.199.251
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK7a25512f5c
CSeq: 101 INVITE
Session-Expires:  1800;refresher=uac
Max-Forwards: 70

v=0
o=CiscoSystemsCCM-SIP 2000 2 IN IP4 10.10.199.250
s=SIP Call
c=IN IP4 10.10.199.130
t=0 0
m=audio 26694 RTP/AVP 9 101
a=rtpmap:9 G722/8000
a=ptime:20
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
```

[diagram] Call-ID:[prev][next]

[8] SIP/2.0 100 Trying

```
Date: Thu, 04 Jun 2009 20:30:01 GMT
From: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763525
Allow-Events: presence, kpml
Content-Length: 0
To: "Bob, Connect" <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763443
Call-ID: 7758ac80-a2812ec6-19-fbc712ac@10.10.199.251
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK7a25512f5c
CSeq: 101 INVITE
```

[diagram] Call-ID:[prev][next]

[9] SIP/2.0 200 OK

```
Date: Thu, 04 Jun 2009 20:30:01 GMT
Call-Info: <sip:10.10.199.251:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763525
Allow-Events: presence, kpml
P-Asserted-Identity: "Bob, Connect" <sip:2002@10.10.199.251>
Supported: replaces
Supported: Geolocation
Remote-Party-ID: "Bob, Connect" <sip:2002@10.10.199.251>;party=called;screen=yes;privacy=off
Content-Length: 216
Require:  timer
To: "Bob, Connect" <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763443
Contact: <sip:2002@10.10.199.251:5060;transport=tcp>
Content-Type: application/sdp
Call-ID: 7758ac80-a2812ec6-19-fbc712ac@10.10.199.251
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK7a25512f5c
CSeq: 101 INVITE
Session-Expires:  1800;refresher=uac

v=0
o=CiscoSystemsCCM-SIP 2000 2 IN IP4 10.10.199.251
s=SIP Call
c=IN IP4 10.10.199.179
t=0 0
m=audio 20084 RTP/AVP 9 101
a=rtpmap:9 G722/8000
a=ptime:20
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
```

[diagram] Call-ID:[prev][next]

[10] ACK sip:2002@10.10.199.251:5060;transport=tcp SIP/2.0

```
Date: Thu, 04 Jun 2009 20:28:59 GMT
From: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763525
Allow-Events: presence, kpml
Content-Length: 0
To: "Bob, Connect" <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763443
Call-ID: 7758ac80-a2812ec6-19-fbc712ac@10.10.199.251
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK7b63475377
CSeq: 101 ACK
Max-Forwards: 70
```

CISCO CONFIDENTIAL

[diagram] Call-ID:[prev][next]
[11] BYE sip:2002@10.10.199.251:5060;transport=tcp SIP/2.0
Date: Thu, 04 Jun 2009 20:28:59 GMT
From: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763525
Content-Length: 0
User-Agent: Cisco-CUCM7.1
To: "Bob, Connect" <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763443
Call-ID: 7758ac80-a2812ec6-19-fbc712ac@10.10.199.251
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK7c25f0f600
CSeq: 102 BYE
Max-Forwards: 70

[diagram] Call-ID:[prev][next]
[12] SIP/2.0 200 OK
Date: Thu, 04 Jun 2009 20:30:07 GMT
From: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763525
Content-Length: 0
To: "Bob, Connect" <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763443
Call-ID: 7758ac80-a2812ec6-19-fbc712ac@10.10.199.251
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK7c25f0f600
CSeq: 102 BYE

CISCO CONFIDENTIAL

19.6 Incoming SIP TrunkCall, sending identity in Asserted-Identity with Privacy:none

Title: Incoming SIP TrunkCall, sending identity in Asserted-Identity with Privacy:none

Description:

Basic Unified CM to Unified CM SIP Trunk Call with Remote-Party-Id [] Asserted-Identity [v] and SIP Privacy =None

The following basic call flow illustrates the SIP messaging for an incoming SIP Trunk call to a Unified CM1 from a remote Unified CM2.

The Unified CM1 is shown sending 180 and 200 OK for to Unified CM2.

The 180 and 200 OK response messages carries an identity in Asserted-Identity header.
Based on SIP Privacy=None configuration, there is a Privacy:none header sent

Configuration:

Node = Unified CM1, IP = 10.10.199.250
Node = Unified CM2, IP = 10.10.199.251

Phone = A, Line = 1001, IP = 10.10.199.130, Model = SCCP
Phone = B, Line = 2002, IP = 10.10.199.179, Model = SCCP

SIP Trunk from Unified CM1 to Unified CM2 has
a) route pattern 2.XXXX
b) Has destination port configured to be 5060
c) Remote-Party-Id [] Asserted-Identity [v], Asserted-Type=Default, SIP Privacy=None

Scenario:

Phone Phone B DN 2002 calls A DN 1001 over the SIP Trunk by dialing 11001
Phone A answers the call
Phone A goes onHook
End of Scenario

CISCO CONFIDENTIAL

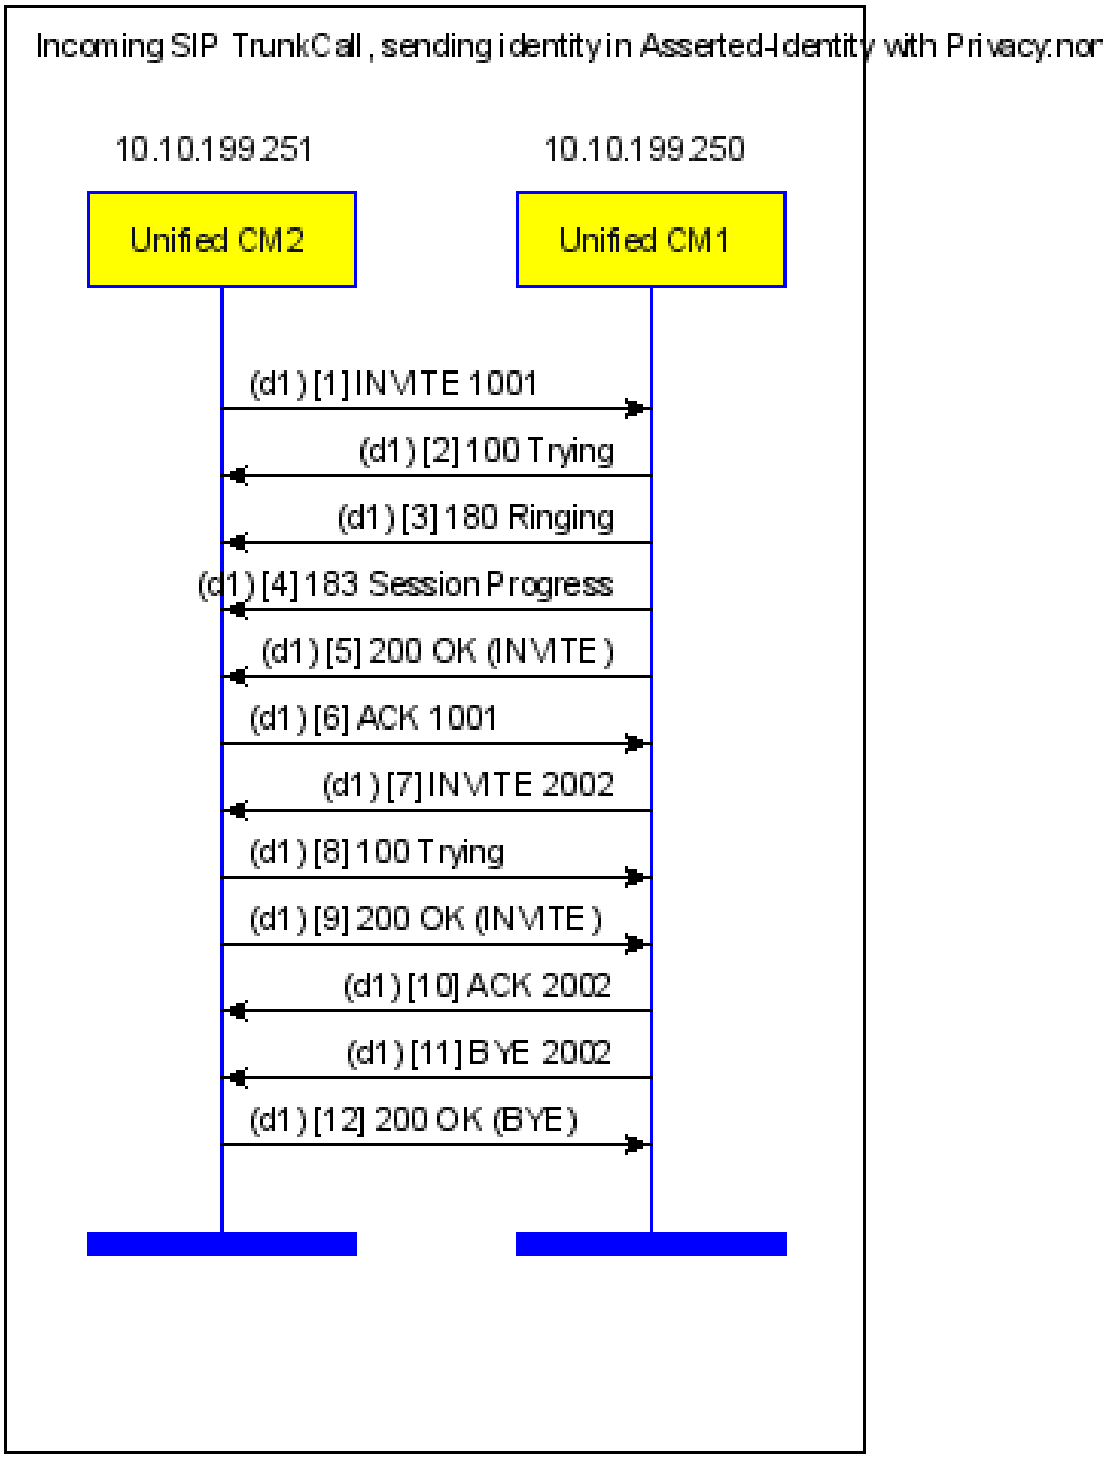

CISCO CONFIDENTIAL

```
[diagram]   Call-ID:[prev][next]
[1] INVITE sip:1001@10.10.199.250:5060 SIP/2.0
Date: Thu, 04 Jun 2009 20:38:10 GMT
Call-Info: <sip:10.10.199.251:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: "Bob, Connect" <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763445
Allow-Events: presence, kpml
P-Asserted-Identity: "Bob, Connect" <sip:2002@10.10.199.251>
Supported: timer,resource-priority,replaces
Supported: Geolocation
Min-SE:  1800
Remote-Party-ID: "Bob, Connect" <sip:2002@10.10.199.251>;party=calling;screen=yes;privacy=off
Content-Length: 0
User-Agent: Cisco-CUCM7.1
To: <sip:1001@10.10.199.250>
Contact: <sip:2002@10.10.199.251:5060;transport=tcp>
Expires: 180
Call-ID: 9c99ea80-a28130b2-1a-fbc712ac@10.10.199.251
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bK795df1e97f
CSeq: 101 INVITE
Session-Expires:  1800
Max-Forwards: 70

[diagram]   Call-ID:[prev][next]
[2] SIP/2.0 100 Trying
Date: Thu, 04 Jun 2009 20:37:08 GMT
From: "Bob, Connect" <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763445
Allow-Events: presence
Content-Length: 0
To: <sip:1001@10.10.199.250>
Call-ID: 9c99ea80-a28130b2-1a-fbc712ac@10.10.199.251
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bK795df1e97f
CSeq: 101 INVITE

[diagram]   Call-ID:[prev][next]
[3] SIP/2.0 180 Ringing
Date: Thu, 04 Jun 2009 20:37:08 GMT
Call-Info: <sip:10.10.199.250:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: "Bob, Connect" <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763445
Allow-Events: presence
P-Asserted-Identity: "Alice, Alert" <sip:1001@10.10.199.250>
Supported: Geolocation
Content-Length: 0
Privacy: none
To: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763527
Contact: <sip:1001@10.10.199.250:5060;transport=tcp>
Call-ID: 9c99ea80-a28130b2-1a-fbc712ac@10.10.199.251
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bK795df1e97f
CSeq: 101 INVITE

[diagram]   Call-ID:[prev][next]
[4] SIP/2.0 183 Session Progress
Date: Thu, 04 Jun 2009 20:37:08 GMT
Call-Info: <sip:10.10.199.250:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: "Bob, Connect" <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763445
Allow-Events: presence, kpml
P-Asserted-Identity: "Alice, Alert" <sip:1001@10.10.199.250>
Supported: Geolocation
Content-Length: 337
Privacy: none
To: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763527
Contact: <sip:1001@10.10.199.250:5060;transport=tcp>
Content-Type: application/sdp
Call-ID: 9c99ea80-a28130b2-1a-fbc712ac@10.10.199.251
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bK795df1e97f
CSeq: 101 INVITE

v=0
o=CiscoSystemsCCM-SIP 2000 1 IN IP4 10.10.199.250
s=SIP Call
c=IN IP4 10.10.199.130
t=0 0
m=audio 4000 RTP/AVP 9 0 8 18 101
a=rtpmap:9 G722/8000
a=ptime:20
a=rtpmap:0 PCMU/8000
a=ptime:20
a=rtpmap:8 PCMA/8000
```

CISCO CONFIDENTIAL

```
a=ptime:20
a=rtpmap:18 G729/8000
a=ptime:20
a=sendonly
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15

[diagram]   Call-ID:[prev][next]
[5] SIP/2.0 200 OK
Date: Thu, 04 Jun 2009 20:37:08 GMT
Call-Info: <sip:10.10.199.250:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: "Bob, Connect" <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763445
Allow-Events: presence, kpml
P-Asserted-Identity: "Alice, Connect" <sip:1001@10.10.199.250>
Supported: replaces
Supported: Geolocation
Content-Length: 337
Require:  timer
Privacy: none
To: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763527
Contact: <sip:1001@10.10.199.250:5060;transport=tcp>
Content-Type: application/sdp
Call-ID: 9c99ea80-a28130b2-1a-fbc712ac@10.10.199.251
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bK795df1e97f
CSeq: 101 INVITE
Session-Expires:  1800;refresher=uas

v=0
o=CiscoSystemsCCM-SIP 2000 1 IN IP4 10.10.199.250
s=SIP Call
c=IN IP4 10.10.199.130
t=0 0
m=audio 4000 RTP/AVP 9 0 8 18 101
a=rtpmap:9 G722/8000
a=ptime:20
a=rtpmap:0 PCMU/8000
a=ptime:20
a=rtpmap:8 PCMA/8000
a=ptime:20
a=rtpmap:18 G729/8000
a=ptime:20
a=sendonly
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15

[diagram]   Call-ID:[prev][next]
[6] ACK sip:1001@10.10.199.250:5060;transport=tcp SIP/2.0
Date: Thu, 04 Jun 2009 20:38:10 GMT
From: "Bob, Connect" <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763445
Allow-Events: presence, kpml
Content-Length: 228
To: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763527
Content-Type: application/sdp
Call-ID: 9c99ea80-a28130b2-1a-fbc712ac@10.10.199.251
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bK7a122e08ff
CSeq: 101 ACK
Max-Forwards: 70

v=0
o=CiscoSystemsCCM-SIP 2000 1 IN IP4 10.10.199.251
s=SIP Call
c=IN IP4 10.10.199.179
t=0 0
m=audio 20082 RTP/AVP 9 101
a=rtpmap:9 G722/8000
a=ptime:20
a=recvonly
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15

[diagram]   Call-ID:[prev][next]
[7] INVITE sip:2002@10.10.199.251:5060;transport=tcp SIP/2.0
Date: Thu, 04 Jun 2009 20:37:10 GMT
Call-Info: <sip:10.10.199.250:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763527
Allow-Events: presence, kpml
P-Asserted-Identity: "Alice, Connect" <sip:1001@10.10.199.250>
Supported: timer,resource-priority,replaces
```

CISCO CONFIDENTIAL

```
Min-SE:  1800
Content-Length: 216
User-Agent: Cisco-CUCM7.1
Privacy: none
To: "Bob, Connect" <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763445
Contact: <sip:1001@10.10.199.250:5060;transport=tcp>
Expires: 180
Content-Type: application/sdp
Call-ID: 9c99ea80-a28130b2-1a-fbc712ac@10.10.199.251
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK7d6a393852
CSeq: 101 INVITE
Session-Expires:  1800;refresher=uac
Max-Forwards: 70

v=0
o=CiscoSystemsCCM-SIP 2000 2 IN IP4 10.10.199.250
s=SIP Call
c=IN IP4 10.10.199.130
t=0 0
m=audio 26692 RTP/AVP 9 101
a=rtpmap:9 G722/8000
a=ptime:20
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
```

[diagram] Call-ID:[prev][next]

[8] SIP/2.0 100 Trying

```
Date: Thu, 04 Jun 2009 20:38:12 GMT
From: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763527
Allow-Events: presence, kpml
Content-Length: 0
To: "Bob, Connect" <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763445
Call-ID: 9c99ea80-a28130b2-1a-fbc712ac@10.10.199.251
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK7d6a393852
CSeq: 101 INVITE
```

[diagram] Call-ID:[prev][next]

[9] SIP/2.0 200 OK

```
Date: Thu, 04 Jun 2009 20:38:12 GMT
Call-Info: <sip:10.10.199.251:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763527
Allow-Events: presence, kpml
P-Asserted-Identity: "Bob, Connect" <sip:2002@10.10.199.251>
Supported: replaces
Supported: Geolocation
Remote-Party-ID: "Bob, Connect" <sip:2002@10.10.199.251>;party=called;screen=yes;privacy=off
Content-Length: 216
Require:  timer
To: "Bob, Connect" <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763445
Contact: <sip:2002@10.10.199.251:5060;transport=tcp>
Content-Type: application/sdp
Call-ID: 9c99ea80-a28130b2-1a-fbc712ac@10.10.199.251
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK7d6a393852
CSeq: 101 INVITE
Session-Expires:  1800;refresher=uac

v=0
o=CiscoSystemsCCM-SIP 2000 2 IN IP4 10.10.199.251
s=SIP Call
c=IN IP4 10.10.199.179
t=0 0
m=audio 20082 RTP/AVP 9 101
a=rtpmap:9 G722/8000
a=ptime:20
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
```

[diagram] Call-ID:[prev][next]

[10] ACK sip:2002@10.10.199.251:5060;transport=tcp SIP/2.0

```
Date: Thu, 04 Jun 2009 20:37:10 GMT
From: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763527
Allow-Events: presence, kpml
Content-Length: 0
To: "Bob, Connect" <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763445
Call-ID: 9c99ea80-a28130b2-1a-fbc712ac@10.10.199.251
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK7edb261fb
CSeq: 101 ACK
Max-Forwards: 70
```

CISCO CONFIDENTIAL

[diagram] Call-ID:[prev][next]
[11] BYE sip:2002@10.10.199.251:5060;transport=tcp SIP/2.0
Date: Thu, 04 Jun 2009 20:37:10 GMT
From: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763527
Content-Length: 0
User-Agent: Cisco-CUCM7.1
To: "Bob, Connect" <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763445
Call-ID: 9c99ea80-a28130b2-1a-fbc712ac@10.10.199.251
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK7f23a5864e
CSeq: 102 BYE
Max-Forwards: 70

[diagram] Call-ID:[prev][next]
[12] SIP/2.0 200 OK
Date: Thu, 04 Jun 2009 20:38:17 GMT
From: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763527
Content-Length: 0
To: "Bob, Connect" <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763445
Call-ID: 9c99ea80-a28130b2-1a-fbc712ac@10.10.199.251
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK7f23a5864e
CSeq: 102 BYE

19.7 Basic Incoming SIP TrunkCall

Title: Basic Incoming SIP TrunkCall

Description:

Basic Unified CM to Unified CM SIP Trunk Call with Remote-Party-Id [V] Asserted-Identity [v] and

SIP Privacy =Id

The following basic call flow illustrates the SIP messaging for an incoming SIP Trunk call to a Unified CM1 from a remote Unified CM2.

The Unified CM1 is shown sending 180 and 200 OK for to Unified CM2.

The 180 and 200 OK response messages carries a Remote-Party-Id & Asserted-Identity headers.

Based on SIP Privacy=Id configuration, there is a Privacy:id header sent

Configuration:

Node = Unified CM1, IP = 10.10.199.250

Node = Unified CM2, IP = 10.10.199.251

Phone = A, Line = 1001, IP = 10.10.199.130, Model = SCCP

Phone = B, Line = 2002, IP = 10.10.199.179, Model = SCCP

SIP Trunk from Unified CM1 to Unified CM2 has

a) route pattern 2.XXXX

b) Has destination port configured to be 5060

c) Remote-Party-Id [v] Asserted-Identity [v], Asserted-Type=Default, SIP Privacy=Id

Scenario:

Phone Phone B DN 2002 calls A DN 1001 over the SIP Trunk by dialing 11001

PhoneA answers the call

PhoneA goes onHook

End of Scenario

CISCO CONFIDENTIAL

CISCO CONFIDENTIAL

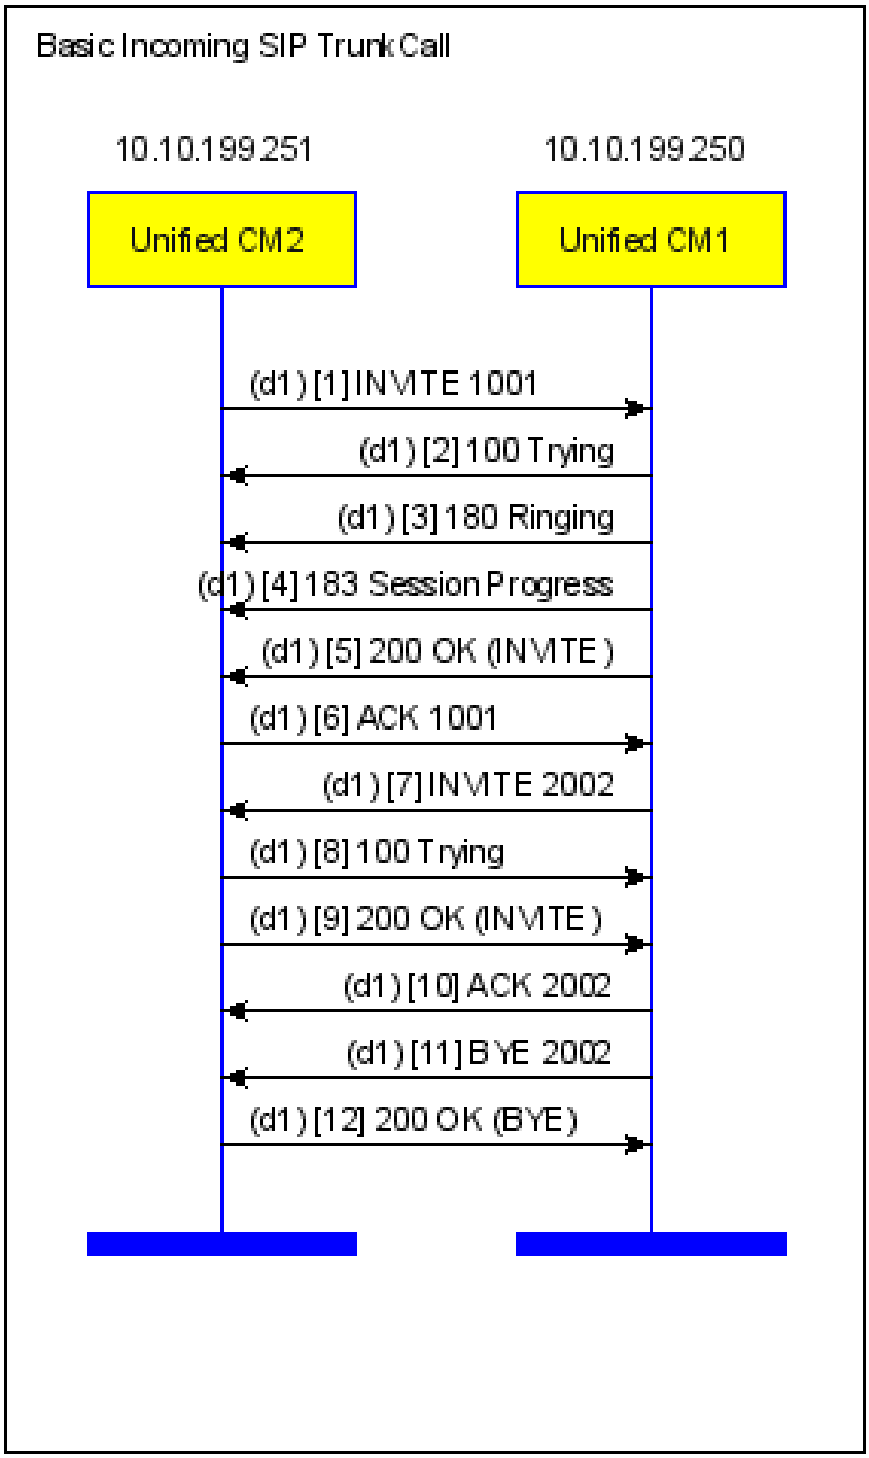

CISCO CONFIDENTIAL

```
[diagram]   Call-ID:[prev][next]
[1] INVITE sip:1001@10.10.199.250:5060 SIP/2.0
Date: Thu, 04 Jun 2009 20:42:41 GMT
Call-Info: <sip:10.10.199.251:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: "Bob, Connect" <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763447
Allow-Events: presence, kpml
P-Asserted-Identity: "Bob, Connect" <sip:2002@10.10.199.251>
Supported: timer,resource-priority,replaces
Supported: Geolocation
Min-SE:  1800
Remote-Party-ID: "Bob, Connect" <sip:2002@10.10.199.251>;party=calling;screen=yes;privacy=off
Content-Length: 0
User-Agent: Cisco-CUCM7.1
To: <sip:1001@10.10.199.250>
Contact: <sip:2002@10.10.199.251:5060;transport=tcp>
Expires: 180
Call-ID: 3e213c00-a28131c1-1b-fbc712ac@10.10.199.251
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bK7b76ae3d81
CSeq: 101 INVITE
Session-Expires:  1800
Max-Forwards: 70

[diagram]   Call-ID:[prev][next]
[2] SIP/2.0 100 Trying
Date: Thu, 04 Jun 2009 20:41:39 GMT
From: "Bob, Connect" <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763447
Allow-Events: presence
Content-Length: 0
To: <sip:1001@10.10.199.250>
Call-ID: 3e213c00-a28131c1-1b-fbc712ac@10.10.199.251
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bK7b76ae3d81
CSeq: 101 INVITE

[diagram]   Call-ID:[prev][next]
[3] SIP/2.0 180 Ringing
Date: Thu, 04 Jun 2009 20:41:39 GMT
Call-Info: <sip:10.10.199.250:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: "Bob, Connect" <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763447
Allow-Events: presence
P-Asserted-Identity: "Alice, Alert" <sip:1001@10.10.199.250>
Supported: Geolocation
Remote-Party-ID: "Alice, Alert" <sip:1001@10.10.199.250>;party=called;screen=yes;privacy=off
Content-Length: 0
Privacy: id
To: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763529
Contact: <sip:1001@10.10.199.250:5060;transport=tcp>
Call-ID: 3e213c00-a28131c1-1b-fbc712ac@10.10.199.251
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bK7b76ae3d81
CSeq: 101 INVITE

[diagram]   Call-ID:[prev][next]
[4] SIP/2.0 183 Session Progress
Date: Thu, 04 Jun 2009 20:41:39 GMT
Call-Info: <sip:10.10.199.250:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: "Bob, Connect" <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763447
Allow-Events: presence, kpml
P-Asserted-Identity: "Alice, Alert" <sip:1001@10.10.199.250>
Supported: Geolocation
Remote-Party-ID: "Alice, Alert" <sip:1001@10.10.199.250>;party=called;screen=yes;privacy=off
Content-Length: 337
Privacy: id
To: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763529
Contact: <sip:1001@10.10.199.250:5060;transport=tcp>
Content-Type: application/sdp
Call-ID: 3e213c00-a28131c1-1b-fbc712ac@10.10.199.251
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bK7b76ae3d81
CSeq: 101 INVITE

v=0
o=CiscoSystemsCCM-SIP 2000 1 IN IP4 10.10.199.250
s=SIP Call
c=IN IP4 10.10.199.130
t=0 0
m=audio 4000 RTP/AVP 9 0 8 18 101
a=rtpmap:9 G722/8000
a=ptime:20
a=rtpmap:0 PCMU/8000
```

CISCO CONFIDENTIAL

```
a=ptime:20
a=rtpmap:8 PCMA/8000
a=ptime:20
a=rtpmap:18 G729/8000
a=ptime:20
a=sendonly
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15

[diagram]   Call-ID:[prev][next]
[5] SIP/2.0 200 OK
Date: Thu, 04 Jun 2009 20:41:39 GMT
Call-Info: <sip:10.10.199.250:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: "Bob, Connect" <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763447
Allow-Events: presence, kpml
P-Asserted-Identity: "Alice, Connect" <sip:1001@10.10.199.250>
Supported: replaces
Supported: Geolocation
Remote-Party-ID: "Alice, Connect" <sip:1001@10.10.199.250>;party=called;screen=yes;privacy=off
Content-Length: 337
Require:  timer
Privacy: id
To: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763529
Contact: <sip:1001@10.10.199.250:5060;transport=tcp>
Content-Type: application/sdp
Call-ID: 3e213c00-a28131c1-1b-fbc712ac@10.10.199.251
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bK7b76ae3d81
CSeq: 101 INVITE
Session-Expires:  1800;refresher=uas

v=0
o=CiscoSystemsCCM-SIP 2000 1 IN IP4 10.10.199.250
s=SIP Call
c=IN IP4 10.10.199.130
t=0 0
m=audio 4000 RTP/AVP 9 0 8 18 101
a=rtpmap:9 G722/8000
a=ptime:20
a=rtpmap:0 PCMU/8000
a=ptime:20
a=rtpmap:8 PCMA/8000
a=ptime:20
a=rtpmap:18 G729/8000
a=ptime:20
a=sendonly
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15

[diagram]   Call-ID:[prev][next]
[6] ACK sip:1001@10.10.199.250:5060;transport=tcp SIP/2.0
Date: Thu, 04 Jun 2009 20:42:41 GMT
From: "Bob, Connect" <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763447
Allow-Events: presence, kpml
Content-Length: 228
To: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763529
Content-Type: application/sdp
Call-ID: 3e213c00-a28131c1-1b-fbc712ac@10.10.199.251
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bK7c47b789f1
CSeq: 101 ACK
Max-Forwards: 70

v=0
o=CiscoSystemsCCM-SIP 2000 1 IN IP4 10.10.199.251
s=SIP Call
c=IN IP4 10.10.199.179
t=0 0
m=audio 30806 RTP/AVP 9 101
a=rtpmap:9 G722/8000
a=ptime:20
a=recvonly
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15

[diagram]   Call-ID:[prev][next]
[7] INVITE sip:2002@10.10.199.251:5060;transport=tcp SIP/2.0
Date: Thu, 04 Jun 2009 20:41:41 GMT
Call-Info: <sip:10.10.199.250:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763529
```

CISCO CONFIDENTIAL

```
Allow-Events: presence, kpml
P-Asserted-Identity: "Alice, Connect" <sip:1001@10.10.199.250>
Supported: timer,resource-priority,replaces
Min-SE:  1800
Remote-Party-ID: "Alice, Connect" <sip:1001@10.10.199.250>;party=calling;screen=yes;privacy=off
Content-Length: 216
User-Agent: Cisco-CUCM7.1
Privacy: id
To: "Bob, Connect" <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763447
Contact: <sip:1001@10.10.199.250:5060;transport=tcp>
Expires: 180
Content-Type: application/sdp
Call-ID: 3e213c00-a28131c1-1b-fbc712ac@10.10.199.251
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK804150b0a4
CSeq: 101 INVITE
Session-Expires:  1800;refresher=uac
Max-Forwards: 70

v=0
o=CiscoSystemsCCM-SIP 2000 2 IN IP4 10.10.199.250
s=SIP Call
c=IN IP4 10.10.199.130
t=0 0
m=audio 21032 RTP/AVP 9 101
a=rtpmap:9 G722/8000
a=ptime:20
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15

[diagram]   Call-ID:[prev][next]
[8] SIP/2.0 100 Trying
Date: Thu, 04 Jun 2009 20:42:43 GMT
From: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763529
Allow-Events: presence, kpml
Content-Length: 0
To: "Bob, Connect" <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763447
Call-ID: 3e213c00-a28131c1-1b-fbc712ac@10.10.199.251
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK804150b0a4
CSeq: 101 INVITE

[diagram]   Call-ID:[prev][next]
[9] SIP/2.0 200 OK
Date: Thu, 04 Jun 2009 20:42:43 GMT
Call-Info: <sip:10.10.199.251:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763529
Allow-Events: presence, kpml
P-Asserted-Identity: "Bob, Connect" <sip:2002@10.10.199.251>
Supported: replaces
Supported: Geolocation
Remote-Party-ID: "Bob, Connect" <sip:2002@10.10.199.251>;party=called;screen=yes;privacy=off
Content-Length: 216
Require:  timer
To: "Bob, Connect" <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763447
Contact: <sip:2002@10.10.199.251:5060;transport=tcp>
Content-Type: application/sdp
Call-ID: 3e213c00-a28131c1-1b-fbc712ac@10.10.199.251
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK804150b0a4
CSeq: 101 INVITE
Session-Expires:  1800;refresher=uac

v=0
o=CiscoSystemsCCM-SIP 2000 2 IN IP4 10.10.199.251
s=SIP Call
c=IN IP4 10.10.199.179
t=0 0
m=audio 30806 RTP/AVP 9 101
a=rtpmap:9 G722/8000
a=ptime:20
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15

[diagram]   Call-ID:[prev][next]
[10] ACK sip:2002@10.10.199.251:5060;transport=tcp SIP/2.0
Date: Thu, 04 Jun 2009 20:41:41 GMT
From: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763529
Allow-Events: presence, kpml
Content-Length: 0
To: "Bob, Connect" <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763447
Call-ID: 3e213c00-a28131c1-1b-fbc712ac@10.10.199.251
```

CISCO CONFIDENTIAL

```
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK817e182edf
CSeq: 101 ACK
Max-Forwards: 70

[diagram]   Call-ID:[prev][next]
[11] BYE sip:2002@10.10.199.251:5060;transport=tcp SIP/2.0
Date: Thu, 04 Jun 2009 20:41:41 GMT
From: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763529
Content-Length: 0
User-Agent: Cisco-CUCM7.1
To: "Bob, Connect" <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763447
Call-ID: 3e213c00-a28131c1-1b-fbc712ac@10.10.199.251
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK8247c650d0
CSeq: 102 BYE
Max-Forwards: 70

[diagram]   Call-ID:[prev][next]
[12] SIP/2.0 200 OK
Date: Thu, 04 Jun 2009 20:42:49 GMT
From: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763529
Content-Length: 0
To: "Bob, Connect" <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763447
Call-ID: 3e213c00-a28131c1-1b-fbc712ac@10.10.199.251
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK8247c650d0
CSeq: 102 BYE
```

CISCO CONFIDENTIAL

19.8 Incoming SIP TrunkCall, sending 180, 200 without any identity headers

Title: Incoming SIP TrunkCall, sending 180, 200 without any identity headers

Description:

Basic Unified CM to Unified CM SIP Trunk Call with Remote-Party-Id [] Asserted-Identity []

The following basic call flow illustrates the SIP messaging for an incoming SIP Trunk call to a Unified CM1 from a remote Unified CM2.

The Unified CM1 is shown sending 180 and 200 OK for to Unified CM2.

The 180 and 200 OK response messages doesn't carry Remote-Party-Id or Asserted-Identity headers.

Configuration:

Node = Unified CM1, IP = 10.10.199.250

Node = Unified CM2, IP = 10.10.199.251

Phone = A, Line = 1001, IP = 10.10.199.130, Model = SCCP

Phone = B, Line = 2002, IP = 10.10.199.179, Model = SCCP

SIP Trunk from Unified CM1 to Unified CM2 has

a) route pattern 2.XXXX

b) Has destination port configured to be 5060

c) Remote-Party-Id [], Asserted-Identity [], Asserted-Type=Default, SIP Privacy=Default

Scenario:

Phone Phone B DN 2002 calls A DN 1001 over the SIP Trunk by dialing 11001

Phone A answers the call

Phone A goes onHook

End of Scenario

CISCO CONFIDENTIAL

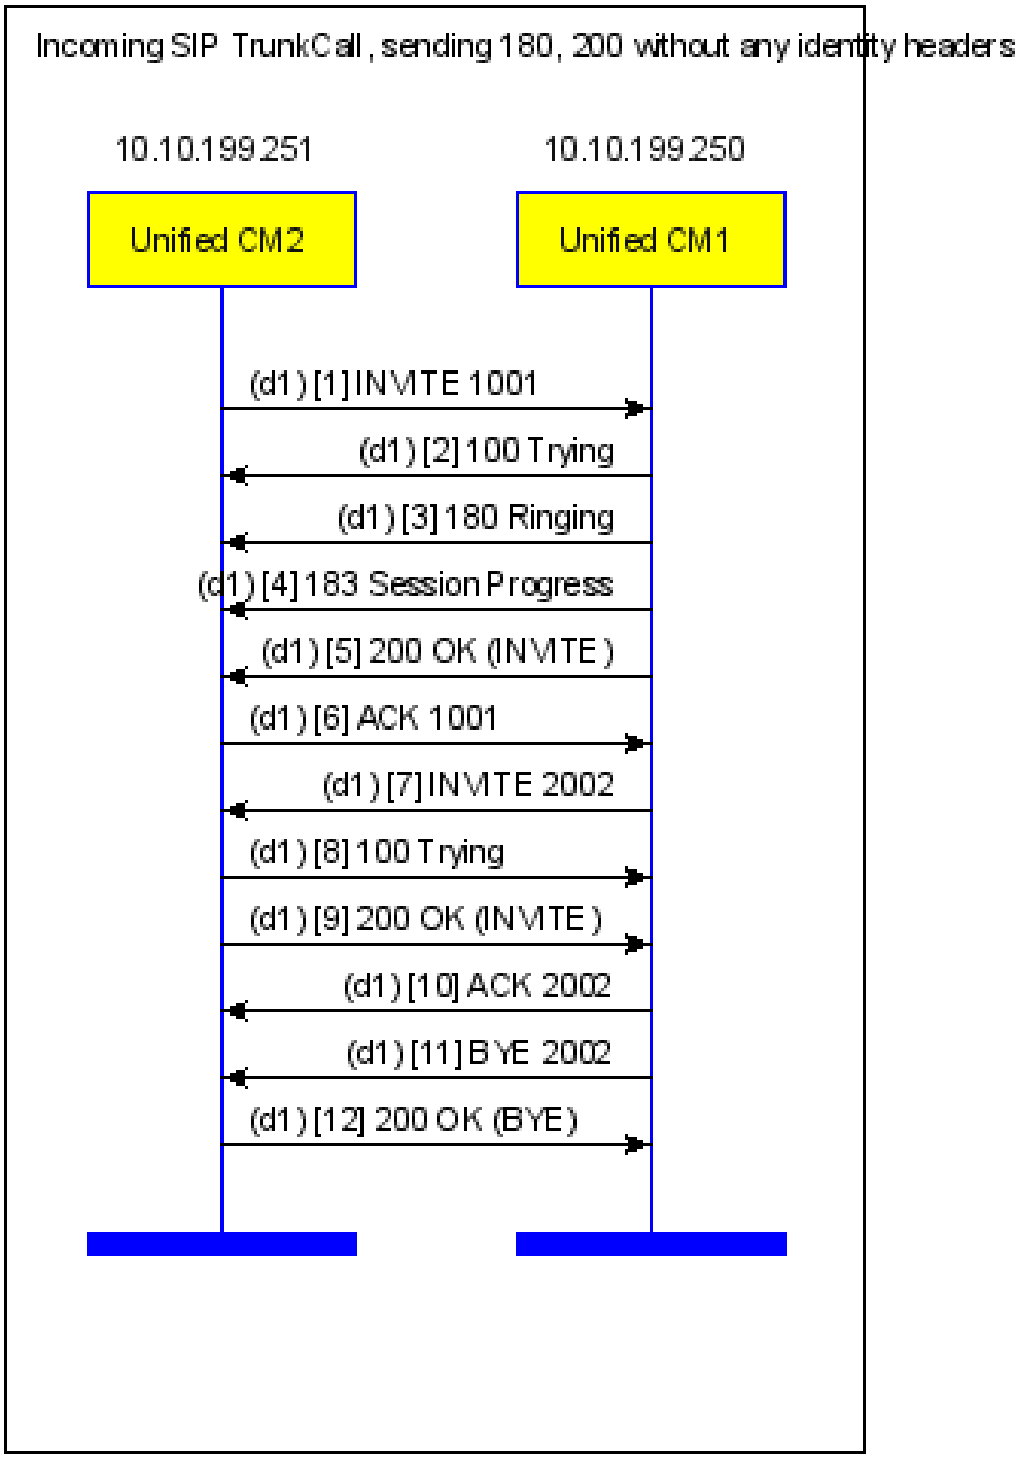

CISCO CONFIDENTIAL

```
[diagram]   Call-ID:[prev][next]
[1] INVITE sip:1001@10.10.199.250:5060 SIP/2.0
Date: Thu, 04 Jun 2009 20:47:41 GMT
Call-Info: <sip:10.10.199.251:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: "Bob, Connect" <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763449
Allow-Events: presence, kpml
P-Asserted-Identity: "Bob, Connect" <sip:2002@10.10.199.251>
Supported: timer,resource-priority,replaces
Supported: Geolocation
Min-SE:  1800
Remote-Party-ID: "Bob, Connect" <sip:2002@10.10.199.251>;party=calling;screen=yes;privacy=off
Content-Length: 0
User-Agent: Cisco-CUCM7.1
To: <sip:1001@10.10.199.250>
Contact: <sip:2002@10.10.199.251:5060;transport=tcp>
Expires: 180
Call-ID: f0f19a00-a28132ed-1c-fbc712ac@10.10.199.251
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bK7d64d92530
CSeq: 101 INVITE
Session-Expires:  1800
Max-Forwards: 70

[diagram]   Call-ID:[prev][next]
[2] SIP/2.0 100 Trying
Date: Thu, 04 Jun 2009 20:46:39 GMT
From: "Bob, Connect" <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763449
Allow-Events: presence
Content-Length: 0
To: <sip:1001@10.10.199.250>
Call-ID: f0f19a00-a28132ed-1c-fbc712ac@10.10.199.251
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bK7d64d92530
CSeq: 101 INVITE

[diagram]   Call-ID:[prev][next]
[3] SIP/2.0 180 Ringing
Date: Thu, 04 Jun 2009 20:46:39 GMT
Call-Info: <sip:10.10.199.250:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: "Bob, Connect" <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763449
Allow-Events: presence
Supported: Geolocation
Content-Length: 0
To: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763531
Contact: <sip:1001@10.10.199.250:5060;transport=tcp>
Call-ID: f0f19a00-a28132ed-1c-fbc712ac@10.10.199.251
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bK7d64d92530
CSeq: 101 INVITE

[diagram]   Call-ID:[prev][next]
[4] SIP/2.0 183 Session Progress
Date: Thu, 04 Jun 2009 20:46:39 GMT
Call-Info: <sip:10.10.199.250:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: "Bob, Connect" <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763449
Allow-Events: presence, kpml
Supported: Geolocation
Content-Length: 337
To: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763531
Contact: <sip:1001@10.10.199.250:5060;transport=tcp>
Content-Type: application/sdp
Call-ID: f0f19a00-a28132ed-1c-fbc712ac@10.10.199.251
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bK7d64d92530
CSeq: 101 INVITE

v=0
o=CiscoSystemsCCM-SIP 2000 1 IN IP4 10.10.199.250
s=SIP Call
c=IN IP4 10.10.199.130
t=0 0
m=audio 4000 RTP/AVP 9 0 8 18 101
a=rtpmap:9 G722/8000
a=ptime:20
a=rtpmap:0 PCMU/8000
a=ptime:20
a=rtpmap:8 PCMA/8000
a=ptime:20
a=rtpmap:18 G729/8000
a=ptime:20
a=sendonly
```

CISCO CONFIDENTIAL

```
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15

[diagram]   Call-ID:[prev][next]
[5] SIP/2.0 200 OK
Date: Thu, 04 Jun 2009 20:46:39 GMT
Call-Info: <sip:10.10.199.250:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: "Bob, Connect" <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763449
Allow-Events: presence, kpml
Supported: replaces
Supported: Geolocation
Content-Length: 337
Require:  timer
To: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763531
Contact: <sip:1001@10.10.199.250:5060;transport=tcp>
Content-Type: application/sdp
Call-ID: f0f19a00-a28132ed-1c-fbc712ac@10.10.199.251
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bK7d64d92530
CSeq: 101 INVITE
Session-Expires:  1800;refresher=uas

v=0
o=CiscoSystemsCCM-SIP 2000 1 IN IP4 10.10.199.250
s=SIP Call
c=IN IP4 10.10.199.130
t=0 0
m=audio 4000 RTP/AVP 9 0 8 18 101
a=rtpmap:9 G722/8000
a=ptime:20
a=rtpmap:0 PCMU/8000
a=ptime:20
a=rtpmap:8 PCMA/8000
a=ptime:20
a=rtpmap:18 G729/8000
a=ptime:20
a=sendonly
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15

[diagram]   Call-ID:[prev][next]
[6] ACK sip:1001@10.10.199.250:5060;transport=tcp SIP/2.0
Date: Thu, 04 Jun 2009 20:47:41 GMT
From: "Bob, Connect" <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763449
Allow-Events: presence, kpml
Content-Length: 228
To: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763531
Content-Type: application/sdp
Call-ID: f0f19a00-a28132ed-1c-fbc712ac@10.10.199.251
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bK7e4ffa4a07
CSeq: 101 ACK
Max-Forwards: 70

v=0
o=CiscoSystemsCCM-SIP 2000 1 IN IP4 10.10.199.251
s=SIP Call
c=IN IP4 10.10.199.179
t=0 0
m=audio 28014 RTP/AVP 9 101
a=rtpmap:9 G722/8000
a=ptime:20
a=recvonly
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15

[diagram]   Call-ID:[prev][next]
[7] INVITE sip:2002@10.10.199.251:5060;transport=tcp SIP/2.0
Date: Thu, 04 Jun 2009 20:46:41 GMT
Call-Info: <sip:10.10.199.250:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763531
Allow-Events: presence, kpml
Supported: timer,resource-priority,replaces
Min-SE:  1800
Content-Length: 216
User-Agent: Cisco-CUCM7.1
To: "Bob, Connect" <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763449
Contact: <sip:1001@10.10.199.250:5060;transport=tcp>
Expires: 180
Content-Type: application/sdp
```

CISCO CONFIDENTIAL

```
Call-ID: f0f19a00-a28132ed-1c-fbc712ac@10.10.199.251
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK83139884f9
CSeq: 101 INVITE
Session-Expires:  1800;refresher=uac
Max-Forwards: 70

v=0
o=CiscoSystemsCCM-SIP 2000 2 IN IP4 10.10.199.250
s=SIP Call
c=IN IP4 10.10.199.130
t=0 0
m=audio 18242 RTP/AVP 9 101
a=rtpmap:9 G722/8000
a=ptime:20
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15

[diagram]   Call-ID:[prev][next]
[8] SIP/2.0 100 Trying
Date: Thu, 04 Jun 2009 20:47:43 GMT
From: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763531
Allow-Events: presence, kpml
Content-Length: 0
To: "Bob, Connect" <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763449
Call-ID: f0f19a00-a28132ed-1c-fbc712ac@10.10.199.251
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK83139884f9
CSeq: 101 INVITE

[diagram]   Call-ID:[prev][next]
[9] SIP/2.0 200 OK
Date: Thu, 04 Jun 2009 20:47:43 GMT
Call-Info: <sip:10.10.199.251:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763531
Allow-Events: presence, kpml
P-Asserted-Identity: "Bob, Connect" <sip:2002@10.10.199.251>
Supported: replaces
Supported: Geolocation
Remote-Party-ID: "Bob, Connect" <sip:2002@10.10.199.251>;party=called;screen=yes;privacy=off
Content-Length: 216
Require:  timer
To: "Bob, Connect" <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763449
Contact: <sip:2002@10.10.199.251:5060;transport=tcp>
Content-Type: application/sdp
Call-ID: f0f19a00-a28132ed-1c-fbc712ac@10.10.199.251
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK83139884f9
CSeq: 101 INVITE
Session-Expires:  1800;refresher=uac

v=0
o=CiscoSystemsCCM-SIP 2000 2 IN IP4 10.10.199.251
s=SIP Call
c=IN IP4 10.10.199.179
t=0 0
m=audio 28014 RTP/AVP 9 101
a=rtpmap:9 G722/8000
a=ptime:20
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15

[diagram]   Call-ID:[prev][next]
[10] ACK sip:2002@10.10.199.251:5060;transport=tcp SIP/2.0
Date: Thu, 04 Jun 2009 20:46:41 GMT
From: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763531
Allow-Events: presence, kpml
Content-Length: 0
To: "Bob, Connect" <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763449
Call-ID: f0f19a00-a28132ed-1c-fbc712ac@10.10.199.251
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK84132659f4
CSeq: 101 ACK
Max-Forwards: 70

[diagram]   Call-ID:[prev][next]
[11] BYE sip:2002@10.10.199.251:5060;transport=tcp SIP/2.0
Date: Thu, 04 Jun 2009 20:46:41 GMT
From: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763531
Content-Length: 0
User-Agent: Cisco-CUCM7.1
To: "Bob, Connect" <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763449
Call-ID: f0f19a00-a28132ed-1c-fbc712ac@10.10.199.251
```

CISCO CONFIDENTIAL

```
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK851c199251
CSeq: 102 BYE
Max-Forwards: 70

[diagram]   Call-ID:[prev][next]
[12] SIP/2.0 200 OK
Date: Thu, 04 Jun 2009 20:47:49 GMT
From: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763531
Content-Length: 0
To: "Bob, Connect" <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763449
Call-ID: f0f19a00-a28132ed-1c-fbc712ac@10.10.199.251
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK851c199251
CSeq: 102 BYE
```

CISCO CONFIDENTIAL

19.9 Basic Incoming SIP TrunkCall, sending PPI in outgoing 180/200

Title: Basic Incoming SIP TrunkCall, sending PPI in outgoing 180/200

Description:

Basic Unified CM to Unified CM SIP Trunk Call with Remote-Party-Id [] Asserted-Identity [v], Asserted-Type=PPI

& SIP Privacy=Default

The following basic call flow illustrates the SIP messaging for an incoming SIP Trunk call to a Unified CM1 from a remote Unified CM2.

The Unified CM1 is shown sending 180 and 200 OK for to Unified CM2.

The 180 and 200 OK response messages carry P-Preferred-Identity header with Alerting & Connected Name.

Configuration:

Node = Unified CM1, IP = 10.10.199.250

Node = Unified CM2, IP = 10.10.199.251

Phone = A, Line = 1001, IP = 10.10.199.130, Model = SCCP

Phone = B, Line = 2002, IP = 10.10.199.179, Model = SCCP

SIP Trunk from Unified CM1 & Unified CM2 has

a) route pattern 2.XXXX

b) Has destination port configured to be 5060

c) Remote-Party-Id [] Asserted-Identity [v], Asserted-Type=PPI, SIP Privacy=Default

Scenario:

Phone Phone B DN 2002 calls A DN 1001 over the SIP Trunk by dialing 11001

Phone A answers the call

Phone A goes onHook

End of Scenario

CISCO CONFIDENTIAL

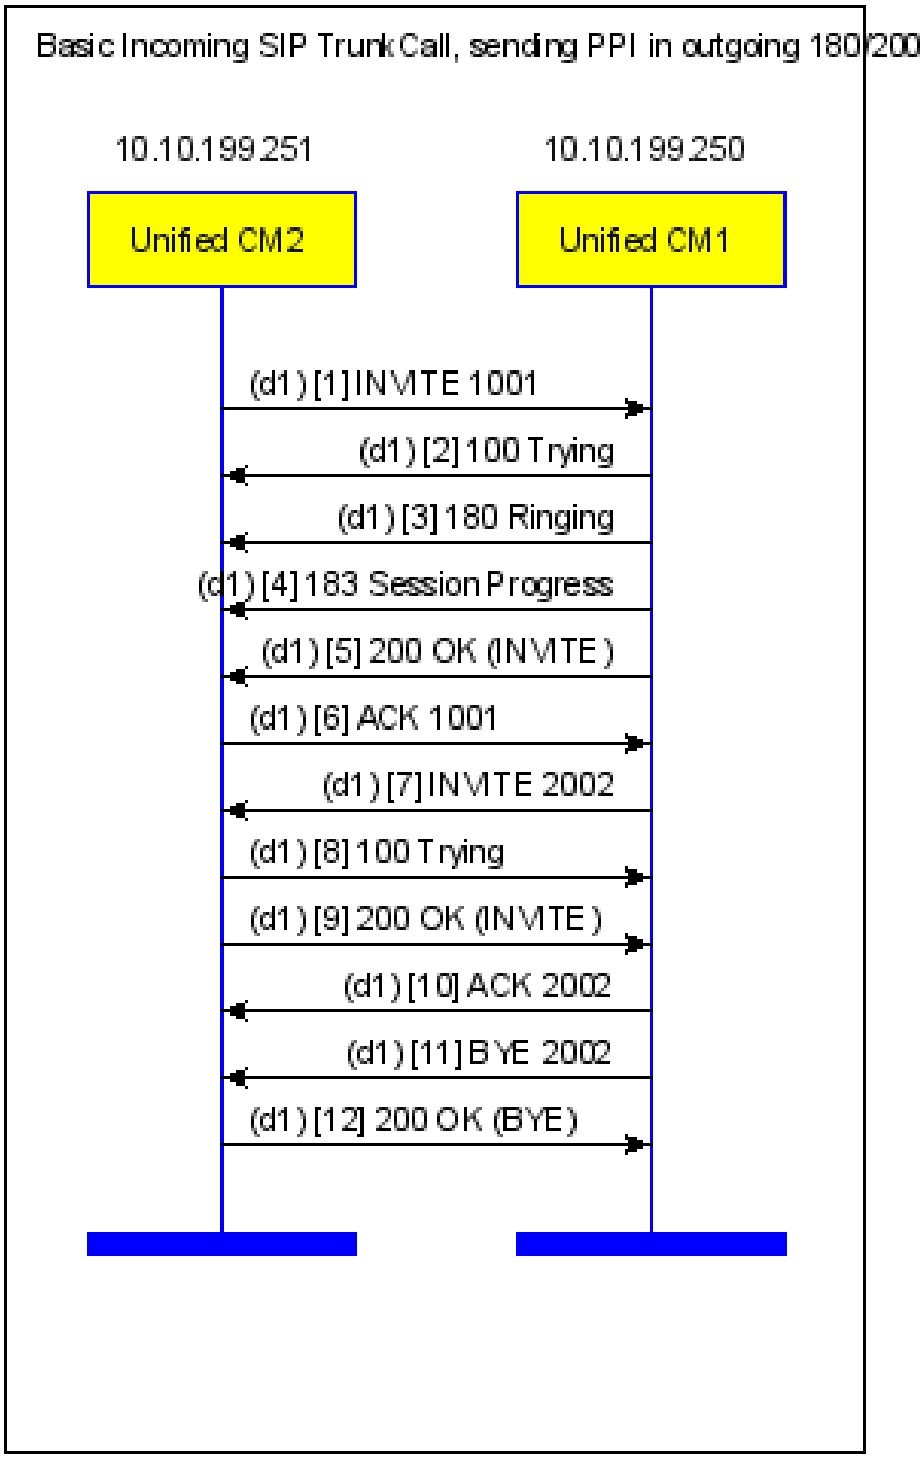

CISCO CONFIDENTIAL

```
[diagram]   Call-ID:[prev][next]
[1] INVITE sip:1001@10.10.199.250:5060 SIP/2.0
Date: Thu, 04 Jun 2009 20:51:16 GMT
Call-Info: <sip:10.10.199.251:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: "Bob, Connect" <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763451
Allow-Events: presence, kpml
P-Asserted-Identity: "Bob, Connect" <sip:2002@10.10.199.251>
Supported: timer,resource-priority,replaces
Supported: Geolocation
Min-SE:  1800
Remote-Party-ID: "Bob, Connect" <sip:2002@10.10.199.251>;party=calling;screen=yes;privacy=off
Content-Length: 0
User-Agent: Cisco-CUCM7.1
To: <sip:1001@10.10.199.250>
Contact: <sip:2002@10.10.199.251:5060;transport=tcp>
Expires: 180
Call-ID: 7117ff80-a28133c4-1d-fbc712ac@10.10.199.251
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bK7f6ca21457
CSeq: 101 INVITE
Session-Expires:  1800
Max-Forwards: 70

[diagram]   Call-ID:[prev][next]
[2] SIP/2.0 100 Trying
Date: Thu, 04 Jun 2009 20:50:14 GMT
From: "Bob, Connect" <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763451
Allow-Events: presence
Content-Length: 0
To: <sip:1001@10.10.199.250>
Call-ID: 7117ff80-a28133c4-1d-fbc712ac@10.10.199.251
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bK7f6ca21457
CSeq: 101 INVITE

[diagram]   Call-ID:[prev][next]
[3] SIP/2.0 180 Ringing
Date: Thu, 04 Jun 2009 20:50:14 GMT
Call-Info: <sip:10.10.199.250:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: "Bob, Connect" <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763451
Allow-Events: presence
Supported: Geolocation
Content-Length: 0
To: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763533
Contact: <sip:1001@10.10.199.250:5060;transport=tcp>
Call-ID: 7117ff80-a28133c4-1d-fbc712ac@10.10.199.251
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bK7f6ca21457
CSeq: 101 INVITE
P-Preferred-Identity: "Alice, Alert" <sip:1001@10.10.199.250>

[diagram]   Call-ID:[prev][next]
[4] SIP/2.0 183 Session Progress
Date: Thu, 04 Jun 2009 20:50:14 GMT
Call-Info: <sip:10.10.199.250:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: "Bob, Connect" <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763451
Allow-Events: presence, kpml
Supported: Geolocation
Content-Length: 337
To: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763533
Contact: <sip:1001@10.10.199.250:5060;transport=tcp>
Content-Type: application/sdp
Call-ID: 7117ff80-a28133c4-1d-fbc712ac@10.10.199.251
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bK7f6ca21457
CSeq: 101 INVITE
P-Preferred-Identity: "Alice, Alert" <sip:1001@10.10.199.250>

v=0
o=CiscoSystemsCCM-SIP 2000 1 IN IP4 10.10.199.250
s=SIP Call
c=IN IP4 10.10.199.130
t=0 0
m=audio 4000 RTP/AVP 9 0 8 18 101
a=rtpmap:9 G722/8000
a=ptime:20
a=rtpmap:0 PCMU/8000
a=ptime:20
a=rtpmap:8 PCMA/8000
a=ptime:20
a=rtpmap:18 G729/8000
```

CISCO CONFIDENTIAL

```
a=ptime:20
a=sendonly
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
```

[diagram] Call-ID:[prev][next]

[5] SIP/2.0 200 OK

```
Date: Thu, 04 Jun 2009 20:50:14 GMT
Call-Info: <sip:10.10.199.250:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: "Bob, Connect" <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763451
Allow-Events: presence, kpml
Supported: replaces
Supported: Geolocation
Content-Length: 337
Require:  timer
To: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763533
Contact: <sip:1001@10.10.199.250:5060;transport=tcp>
Content-Type: application/sdp
Call-ID: 7117ff80-a28133c4-1d-fbc712ac@10.10.199.251
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bK7f6ca21457
CSeq: 101 INVITE
P-Preferred-Identity: "Alice, Connect" <sip:1001@10.10.199.250>
Session-Expires:  1800;refresher=uas

v=0
o=CiscoSystemsCCM-SIP 2000 1 IN IP4 10.10.199.250
s=SIP Call
c=IN IP4 10.10.199.130
t=0 0
m=audio 4000 RTP/AVP 9 0 8 18 101
a=rtpmap:9 G722/8000
a=ptime:20
a=rtpmap:0 PCMU/8000
a=ptime:20
a=rtpmap:8 PCMA/8000
a=ptime:20
a=rtpmap:18 G729/8000
a=ptime:20
a=sendonly
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
```

[diagram] Call-ID:[prev][next]

[6] ACK sip:1001@10.10.199.250:5060;transport=tcp SIP/2.0

```
Date: Thu, 04 Jun 2009 20:51:16 GMT
From: "Bob, Connect" <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763451
Allow-Events: presence, kpml
Content-Length: 228
To: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763533
Content-Type: application/sdp
Call-ID: 7117ff80-a28133c4-1d-fbc712ac@10.10.199.251
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bK8065c2cf60
CSeq: 101 ACK
Max-Forwards: 70

v=0
o=CiscoSystemsCCM-SIP 2000 1 IN IP4 10.10.199.251
s=SIP Call
c=IN IP4 10.10.199.179
t=0 0
m=audio 16758 RTP/AVP 9 101
a=rtpmap:9 G722/8000
a=ptime:20
a=recvonly
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
```

[diagram] Call-ID:[prev][next]

[7] INVITE sip:2002@10.10.199.251:5060;transport=tcp SIP/2.0

```
Date: Thu, 04 Jun 2009 20:50:16 GMT
Call-Info: <sip:10.10.199.250:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763533
Allow-Events: presence, kpml
Supported: timer,resource-priority,replaces
Min-SE:  1800
Content-Length: 216
User-Agent: Cisco-CUCM7.1
To: "Bob, Connect" <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763451
```

CISCO CONFIDENTIAL

```
Contact: <sip:1001@10.10.199.250:5060;transport=tcp>
Expires: 180
Content-Type: application/sdp
Call-ID: 7117ff80-a28133c4-1d-fbc712ac@10.10.199.251
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK864be51b2f
CSeq: 101 INVITE
P-Preferred-Identity: "Alice, Connect" <sip:1001@10.10.199.250>
Session-Expires:  1800;refresher=uac
Max-Forwards: 70

v=0
o=CiscoSystemsCCM-SIP 2000 2 IN IP4 10.10.199.250
s=SIP Call
c=IN IP4 10.10.199.130
t=0 0
m=audio 23368 RTP/AVP 9 101
a=rtpmap:9 G722/8000
a=ptime:20
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
```

[diagram] Call-ID:[prev][next]

[8] SIP/2.0 100 Trying

```
Date: Thu, 04 Jun 2009 20:51:18 GMT
From: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763533
Allow-Events: presence, kpml
Content-Length: 0
To: "Bob, Connect" <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763451
Call-ID: 7117ff80-a28133c4-1d-fbc712ac@10.10.199.251
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK864be51b2f
CSeq: 101 INVITE
```

[diagram] Call-ID:[prev][next]

[9] SIP/2.0 200 OK

```
Date: Thu, 04 Jun 2009 20:51:18 GMT
Call-Info: <sip:10.10.199.251:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763533
Allow-Events: presence, kpml
P-Asserted-Identity: "Bob, Connect" <sip:2002@10.10.199.251>
Supported: replaces
Supported: Geolocation
Remote-Party-ID: "Bob, Connect" <sip:2002@10.10.199.251>;party=called;screen=yes;privacy=off
Content-Length: 216
Require:  timer
To: "Bob, Connect" <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763451
Contact: <sip:2002@10.10.199.251:5060;transport=tcp>
Content-Type: application/sdp
Call-ID: 7117ff80-a28133c4-1d-fbc712ac@10.10.199.251
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK864be51b2f
CSeq: 101 INVITE
Session-Expires:  1800;refresher=uac

v=0
o=CiscoSystemsCCM-SIP 2000 2 IN IP4 10.10.199.251
s=SIP Call
c=IN IP4 10.10.199.179
t=0 0
m=audio 16758 RTP/AVP 9 101
a=rtpmap:9 G722/8000
a=ptime:20
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
```

[diagram] Call-ID:[prev][next]

[10] ACK sip:2002@10.10.199.251:5060;transport=tcp SIP/2.0

```
Date: Thu, 04 Jun 2009 20:50:16 GMT
From: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763533
Allow-Events: presence, kpml
Content-Length: 0
To: "Bob, Connect" <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763451
Call-ID: 7117ff80-a28133c4-1d-fbc712ac@10.10.199.251
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK873c58c3d6
CSeq: 101 ACK
Max-Forwards: 70
```

[diagram] Call-ID:[prev][next]

[11] BYE sip:2002@10.10.199.251:5060;transport=tcp SIP/2.0

```
Date: Thu, 04 Jun 2009 20:50:16 GMT
From: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763533
```

CISCO CONFIDENTIAL

```
Content-Length: 0
User-Agent: Cisco-CUCM7.1
To: "Bob, Connect" <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763451
Call-ID: 7117ff80-a28133c4-1d-fbc712ac@10.10.199.251
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK884913f549
CSeq: 102 BYE
Max-Forwards: 70
```

[diagram] Call-ID:[prev][next]

[12] SIP/2.0 200 OK

```
Date: Thu, 04 Jun 2009 20:51:24 GMT
From: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763533
Content-Length: 0
To: "Bob, Connect" <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763451
Call-ID: 7117ff80-a28133c4-1d-fbc712ac@10.10.199.251
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK884913f549
CSeq: 102 BYE
```

19.10 Mid-Call UPDATE for Display identity change using Asserted-Identity.

Title: Mid-Call UPDATE for Display identity change using Asserted-Identity.

Description:
Unified CM to Unified CM SIP Trunk Call with Remote-Party-Id [] Asserted-Identity [v] & Privacy=Default
sending UPDATE for mid call Display Name/Number update.

The following call flow illustrates the SIP messaging for an outgoing SIP Trunk call from a
Unified CM1 to a remote Unified CM2. The call is Transferred to another endpoint registered to Unified CM1,
which results in sending of UPDATE from Unified CM1 to Unified CM2.

The Unified CM1 sends an initial INVITE over the SIP Trunk and later sending UPDATE.

The INVITE request carries an identity in Asserted-Identity header. There is "no" Privacy header sent
as Display name & Number are not restricted.

Configuration:
Node = Unified CM1, IP = 10.10.199.250
Node = Unified CM2, IP = 10.10.199.251

Phone = A, Line = 1003, IP = 10.10.199.66, Model = SCCP
Phone = C, Line = 1001, IP = 10.10.199.130, Model = SCCP
Phone = B, Line = 2002, IP = 10.10.199.179, Model = SCCP

SIP Trunk from Unified CM1 to Unified CM2 has
a) route pattern 2.XXXX
b) Has destination port configured to be 5060
c) Remote-Party-Id [] Asserted-Identity [v], SIP Privacy= Default, Asserted-Type=Default

Scenario:
Phone A DN 1003 calls Phone B DN 2002 over the SIP Trunk by dialing 22002
Phone A Transfers call to C DN 1001 and an UPDATE is sent from Unified CM1 to Unified CM2, with

CISCO CONFIDENTIAL

P-Asserted-Identity having identity of Phone = C.

End of Scenario

CISCO CONFIDENTIAL

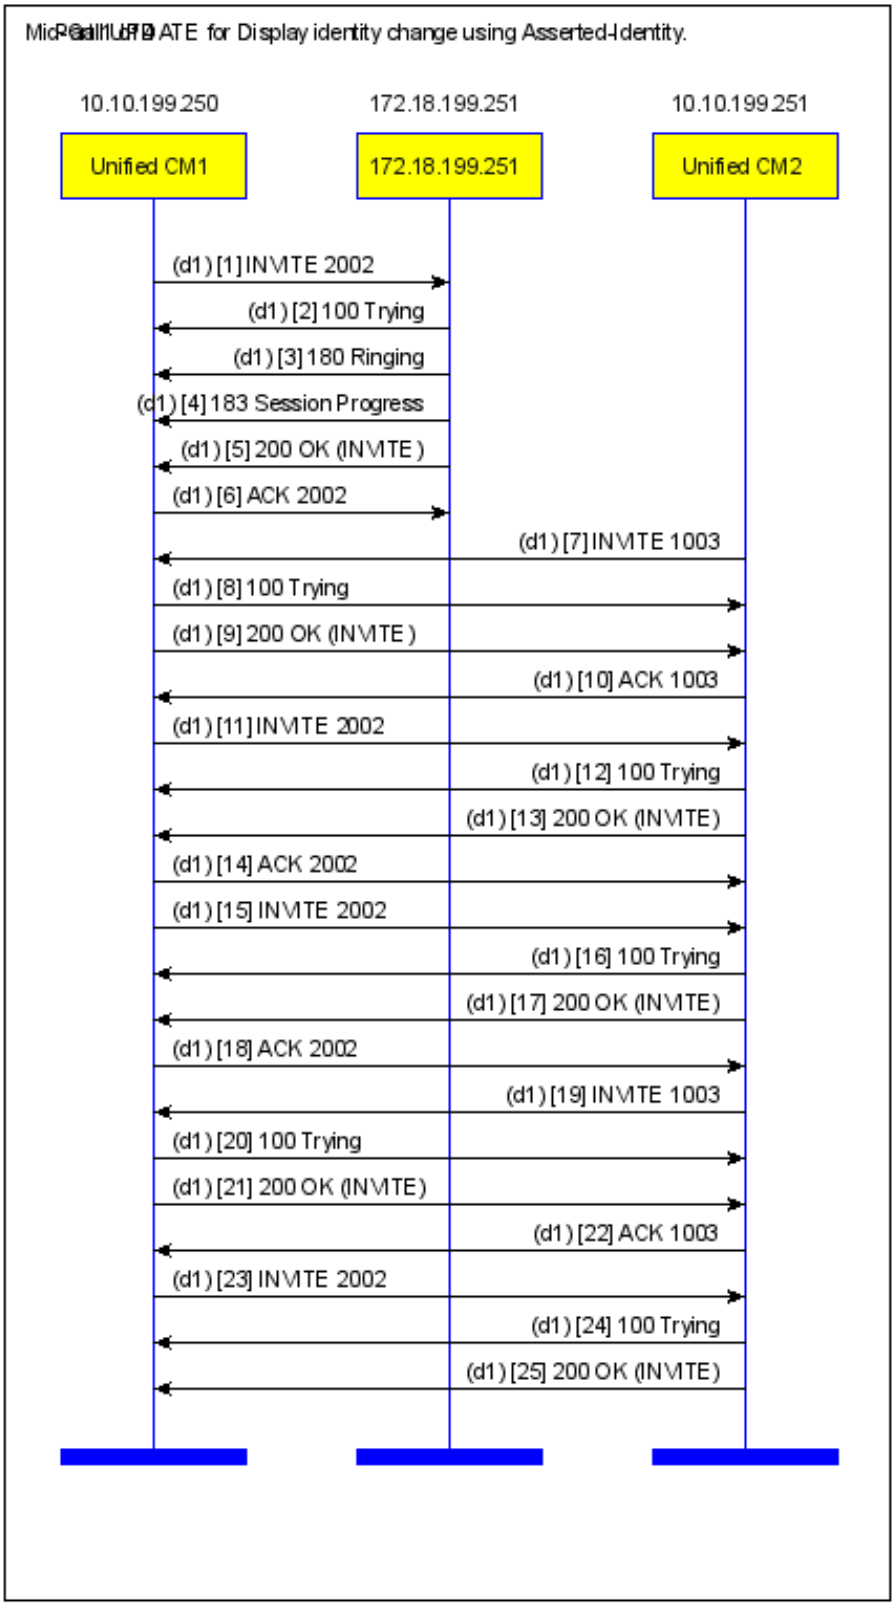

CISCO CONFIDENTIAL

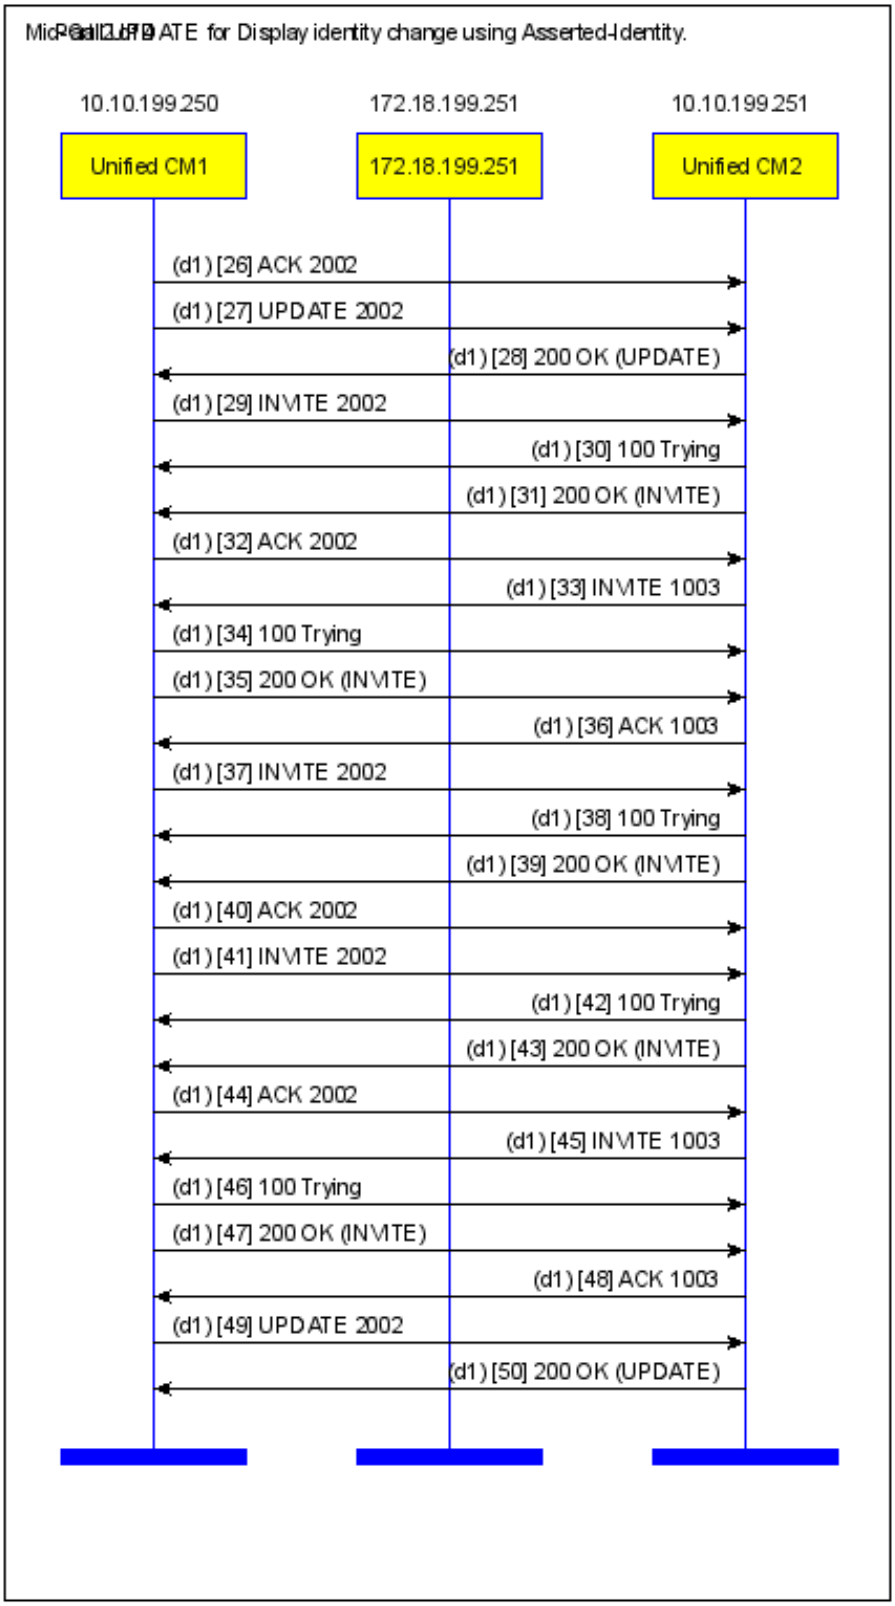

CISCO CONFIDENTIAL

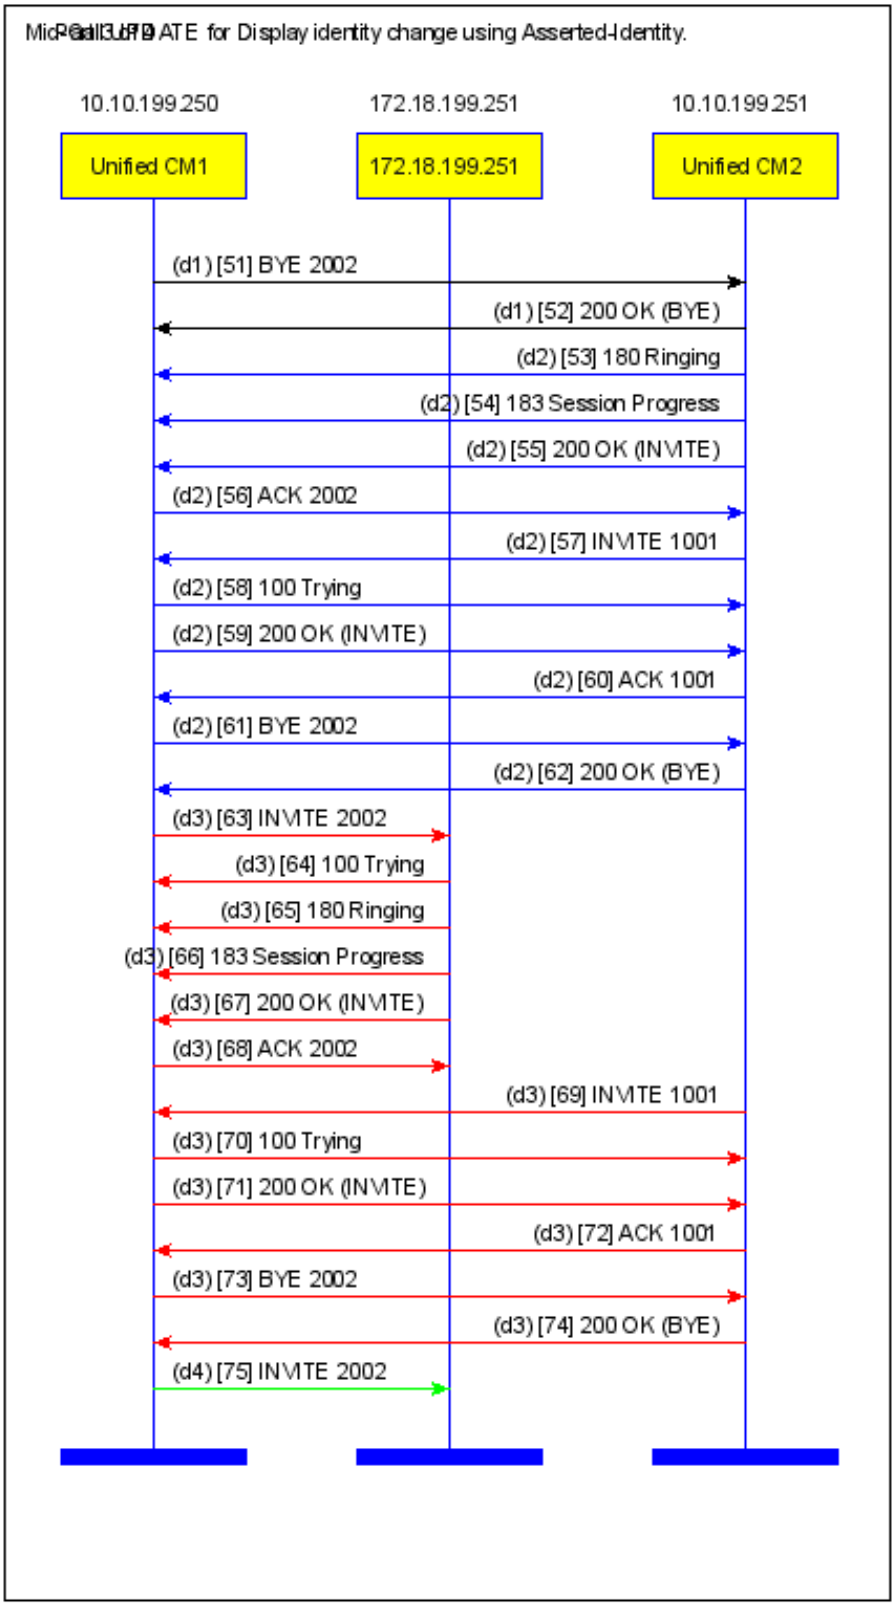

CISCO CONFIDENTIAL

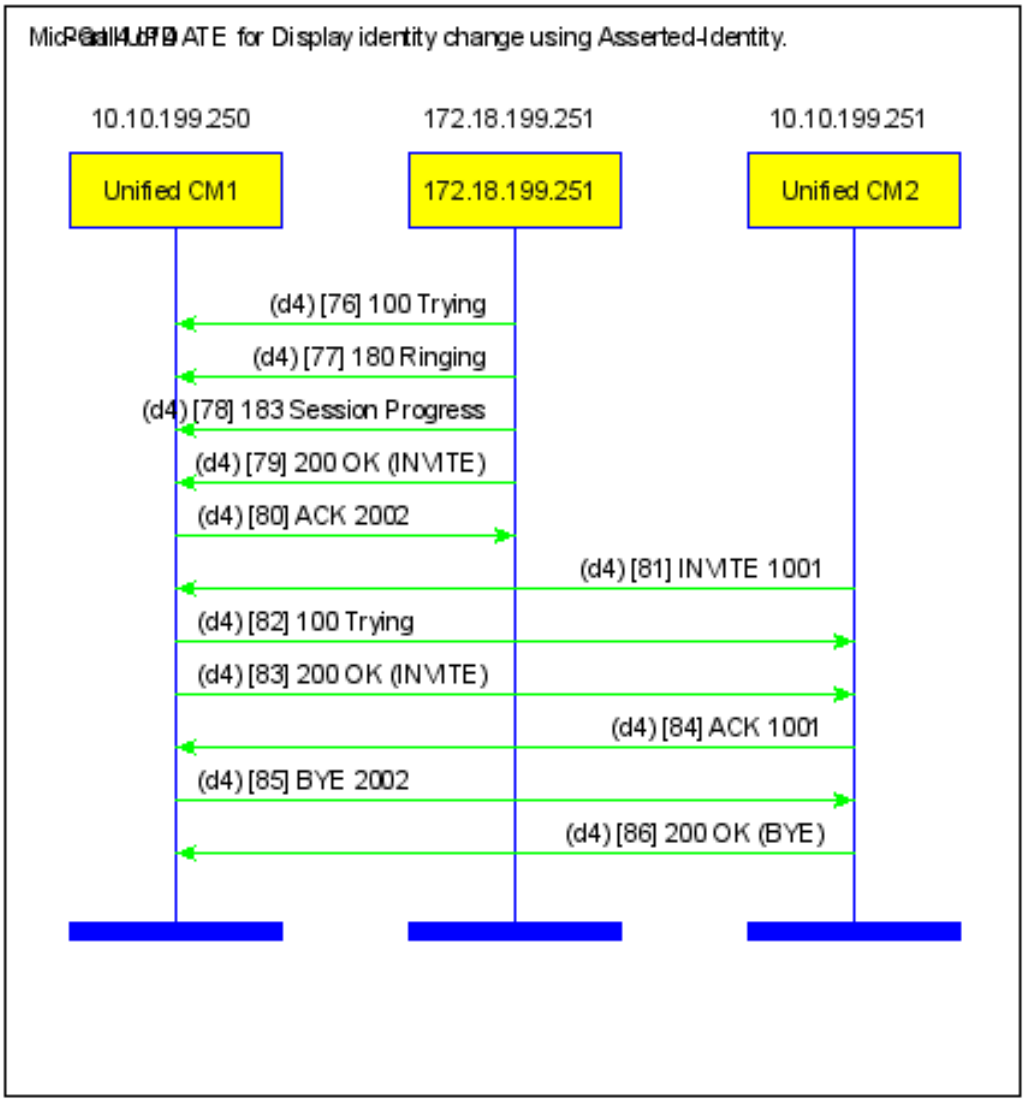

CISCO CONFIDENTIAL

[diagram] Call-ID:[prev][next]
[1] INVITE sip:2002@siptrunk17.cisco.com:5060 SIP/2.0
```
Date: Thu, 04 Jun 2009 21:24:37 GMT
Call-Info: <sip:10.10.199.250:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: "Charlie, Connect" <sip:1003@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763554
Allow-Events: presence, kpml
P-Asserted-Identity: "Charlie, Connect" <sip:1003@10.10.199.250>
Supported: timer,resource-priority,replaces
Supported: Geolocation
Min-SE:  1800
Content-Length: 0
User-Agent: Cisco-CUCM7.1
To: <sip:2002@siptrunk17.cisco.com>
Contact: <sip:1003@10.10.199.250:5060;transport=tcp>
Expires: 180
Call-ID: 19c85e00-a2813b95-2d-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bKa173441d0d
CSeq: 101 INVITE
Session-Expires:  1800
Max-Forwards: 70
```

[diagram] Call-ID:[prev][next]
[2] SIP/2.0 100 Trying
```
Date: Thu, 04 Jun 2009 21:25:39 GMT
From: "Charlie, Connect" <sip:1003@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763554
Allow-Events: presence
Content-Length: 0
To: <sip:2002@siptrunk17.cisco.com>
Call-ID: 19c85e00-a2813b95-2d-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bKa173441d0d
CSeq: 101 INVITE
```

[diagram] Call-ID:[prev][next]
[3] SIP/2.0 180 Ringing
```
Date: Thu, 04 Jun 2009 21:25:39 GMT
Call-Info: <sip:10.10.199.251:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: "Charlie, Connect" <sip:1003@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763554
Allow-Events: presence
P-Asserted-Identity: "Bob, Alert" <sip:2002@10.10.199.251>
Supported: Geolocation
Remote-Party-ID: "Bob, Alert" <sip:2002@10.10.199.251>;party=called;screen=yes;privacy=off
Content-Length: 0
To: <sip:2002@siptrunk17.cisco.com>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763466
Contact: <sip:2002@10.10.199.251:5060;transport=tcp>
Call-ID: 19c85e00-a2813b95-2d-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bKa173441d0d
CSeq: 101 INVITE
```

[diagram] Call-ID:[prev][next]
[4] SIP/2.0 183 Session Progress
```
Date: Thu, 04 Jun 2009 21:25:39 GMT
Call-Info: <sip:10.10.199.251:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: "Charlie, Connect" <sip:1003@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763554
Allow-Events: presence, kpml
P-Asserted-Identity: "Bob, Alert" <sip:2002@10.10.199.251>
Supported: Geolocation
Remote-Party-ID: "Bob, Alert" <sip:2002@10.10.199.251>;party=called;screen=yes;privacy=off
Content-Length: 337
To: <sip:2002@siptrunk17.cisco.com>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763466
Contact: <sip:2002@10.10.199.251:5060;transport=tcp>
Content-Type: application/sdp
Call-ID: 19c85e00-a2813b95-2d-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bKa173441d0d
CSeq: 101 INVITE

v=0
o=CiscoSystemsCCM-SIP 2000 1 IN IP4 10.10.199.251
s=SIP Call
c=IN IP4 10.10.199.179
t=0 0
m=audio 4000 RTP/AVP 9 0 8 18 101
a=rtpmap:9 G722/8000
a=ptime:20
a=rtpmap:0 PCMU/8000
a=ptime:20
a=rtpmap:8 PCMA/8000
a=ptime:20
```

CISCO CONFIDENTIAL

```
a=rtpmap:18 G729/8000
a=ptime:20
a=sendonly
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
```

[diagram] Call-ID:[prev][next]

```
[5] SIP/2.0 200 OK
Date: Thu, 04 Jun 2009 21:25:39 GMT
Call-Info: <sip:10.10.199.251:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: "Charlie, Connect" <sip:1003@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763554
Allow-Events: presence, kpml
P-Asserted-Identity: "Bob, Connect" <sip:2002@10.10.199.251>
Supported: replaces
Supported: Geolocation
Remote-Party-ID: "Bob, Connect" <sip:2002@10.10.199.251>;party=called;screen=yes;privacy=off
Content-Length: 337
Require:  timer
To: <sip:2002@siptrunk17.cisco.com>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763466
Contact: <sip:2002@10.10.199.251:5060;transport=tcp>
Content-Type: application/sdp
Call-ID: 19c85e00-a2813b95-2d-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bKa173441d0d
CSeq: 101 INVITE
Session-Expires:  1800;refresher=uas

v=0
o=CiscoSystemsCCM-SIP 2000 1 IN IP4 10.10.199.251
s=SIP Call
c=IN IP4 10.10.199.179
t=0 0
m=audio 4000 RTP/AVP 9 0 8 18 101
a=rtpmap:9 G722/8000
a=ptime:20
a=rtpmap:0 PCMU/8000
a=ptime:20
a=rtpmap:8 PCMA/8000
a=ptime:20
a=rtpmap:18 G729/8000
a=ptime:20
a=sendonly
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
```

[diagram] Call-ID:[prev][next]

```
[6] ACK sip:2002@10.10.199.251:5060;transport=tcp SIP/2.0
Date: Thu, 04 Jun 2009 21:24:37 GMT
From: "Charlie, Connect" <sip:1003@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763554
Allow-Events: presence, kpml
Content-Length: 227
To: <sip:2002@siptrunk17.cisco.com>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763466
Content-Type: application/sdp
Call-ID: 19c85e00-a2813b95-2d-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bKa27a8cf4f
CSeq: 101 ACK
Max-Forwards: 70

v=0
o=CiscoSystemsCCM-SIP 2000 1 IN IP4 10.10.199.250
s=SIP Call
c=IN IP4 10.10.199.66
t=0 0
m=audio 16620 RTP/AVP 9 101
a=rtpmap:9 G722/8000
a=ptime:20
a=recvonly
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
```

[diagram] Call-ID:[prev][next]

```
[7] INVITE sip:1003@10.10.199.250:5060;transport=tcp SIP/2.0
Date: Thu, 04 Jun 2009 21:25:41 GMT
Call-Info: <sip:10.10.199.251:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:2002@siptrunk17.cisco.com>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763466
Allow-Events: presence, kpml
P-Asserted-Identity: "Bob, Connect" <sip:2002@10.10.199.251>
Supported: timer,resource-priority,replaces
Min-SE:  1800
```

CISCO CONFIDENTIAL

```
Remote-Party-ID: "Bob, Connect" <sip:2002@10.10.199.251>;party=calling;screen=yes;privacy=off
Content-Length: 216
User-Agent: Cisco-CUCM7.1
To: "Charlie, Connect" <sip:1003@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763554
Contact: <sip:2002@10.10.199.251:5060;transport=tcp>
Expires: 180
Content-Type: application/sdp
Call-ID: 19c85e00-a2813b95-2d-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bK8f26910e0
CSeq: 101 INVITE
Session-Expires:  1800;refresher=uac
Max-Forwards: 70

v=0
o=CiscoSystemsCCM-SIP 2000 2 IN IP4 10.10.199.251
s=SIP Call
c=IN IP4 10.10.199.179
t=0 0
m=audio 26402 RTP/AVP 9 101
a=rtpmap:9 G722/8000
a=ptime:20
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15

[diagram]   Call-ID:[prev][next]
[8] SIP/2.0 100 Trying
Date: Thu, 04 Jun 2009 21:24:39 GMT
From: <sip:2002@siptrunk17.cisco.com>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763466
Allow-Events: presence, kpml
Content-Length: 0
To: "Charlie, Connect" <sip:1003@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763554
Call-ID: 19c85e00-a2813b95-2d-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bK8f26910e0
CSeq: 101 INVITE

[diagram]   Call-ID:[prev][next]
[9] SIP/2.0 200 OK
Date: Thu, 04 Jun 2009 21:24:39 GMT
Call-Info: <sip:10.10.199.250:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:2002@siptrunk17.cisco.com>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763466
Allow-Events: presence, kpml
P-Asserted-Identity: "Charlie, Connect" <sip:1003@10.10.199.250>
Supported: replaces
Supported: Geolocation
Content-Length: 215
Require:  timer
To: "Charlie, Connect" <sip:1003@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763554
Contact: <sip:1003@10.10.199.250:5060;transport=tcp>
Content-Type: application/sdp
Call-ID: 19c85e00-a2813b95-2d-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bK8f26910e0
CSeq: 101 INVITE
Session-Expires:  1800;refresher=uac

v=0
o=CiscoSystemsCCM-SIP 2000 2 IN IP4 10.10.199.250
s=SIP Call
c=IN IP4 10.10.199.66
t=0 0
m=audio 16620 RTP/AVP 9 101
a=rtpmap:9 G722/8000
a=ptime:20
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15

[diagram]   Call-ID:[prev][next]
[10] ACK sip:1003@10.10.199.250:5060;transport=tcp SIP/2.0
Date: Thu, 04 Jun 2009 21:25:41 GMT
From: <sip:2002@siptrunk17.cisco.com>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763466
Allow-Events: presence, kpml
Content-Length: 0
To: "Charlie, Connect" <sip:1003@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763554
Call-ID: 19c85e00-a2813b95-2d-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bK9065d341ae
CSeq: 101 ACK
Max-Forwards: 70

[diagram]   Call-ID:[prev][next]
[11] INVITE sip:2002@10.10.199.251:5060;transport=tcp SIP/2.0
```

CISCO CONFIDENTIAL

```
Date: Thu, 04 Jun 2009 21:24:43 GMT
Call-Info: <sip:10.10.199.250:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: "Charlie, Connect" <sip:1003@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763554
Allow-Events: presence, kpml
P-Asserted-Identity: "Charlie, Connect" <sip:1003@10.10.199.250>
Supported: timer,resource-priority,replaces
Min-SE:  1800
Content-Length: 221
User-Agent: Cisco-CUCM7.1
To: <sip:2002@siptrunk17.cisco.com>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763466
Contact: <sip:1003@10.10.199.250:5060;transport=tcp>
Expires: 180
Content-Type: application/sdp
Call-ID: 19c85e00-a2813b95-2d-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bKa336728a5c
CSeq: 102 INVITE
Session-Expires:  1800;refresher=uas
Max-Forwards: 70

v=0
o=CiscoSystemsCCM-SIP 2000 3 IN IP4 10.10.199.250
s=SIP Call
c=IN IP4 0.0.0.0
t=0 0
m=audio 16620 RTP/AVP 9 101
a=rtpmap:9 G722/8000
a=ptime:20
a=inactive
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15

[diagram]   Call-ID:[prev][next]
[12] SIP/2.0 100 Trying
Date: Thu, 04 Jun 2009 21:25:45 GMT
From: "Charlie, Connect" <sip:1003@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763554
Allow-Events: presence, kpml
Content-Length: 0
To: <sip:2002@siptrunk17.cisco.com>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763466
Call-ID: 19c85e00-a2813b95-2d-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bKa336728a5c
CSeq: 102 INVITE

[diagram]   Call-ID:[prev][next]
[13] SIP/2.0 200 OK
Date: Thu, 04 Jun 2009 21:25:45 GMT
Call-Info: <sip:10.10.199.251:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: "Charlie, Connect" <sip:1003@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763554
Allow-Events: presence, kpml
P-Asserted-Identity: "Bob, Connect" <sip:2002@10.10.199.251>
Supported: replaces
Supported: Geolocation
Remote-Party-ID: "Bob, Connect" <sip:2002@10.10.199.251>;party=called;screen=yes;privacy=off
Content-Length: 228
Require:  timer
To: <sip:2002@siptrunk17.cisco.com>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763466
Contact: <sip:2002@10.10.199.251:5060;transport=tcp>
Content-Type: application/sdp
Call-ID: 19c85e00-a2813b95-2d-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bKa336728a5c
CSeq: 102 INVITE
Session-Expires:  1800;refresher=uas

v=0
o=CiscoSystemsCCM-SIP 2000 3 IN IP4 10.10.199.251
s=SIP Call
c=IN IP4 10.10.199.179
t=0 0
m=audio 26402 RTP/AVP 9 101
a=rtpmap:9 G722/8000
a=ptime:20
a=inactive
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15

[diagram]   Call-ID:[prev][next]
[14] ACK sip:2002@10.10.199.251:5060;transport=tcp SIP/2.0
Date: Thu, 04 Jun 2009 21:24:43 GMT
From: "Charlie, Connect" <sip:1003@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763554
```

CISCO CONFIDENTIAL

```
Allow-Events: presence, kpml
Content-Length: 0
To: <sip:2002@siptrunk17.cisco.com>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763466
Call-ID: 19c85e00-a2813b95-2d-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bKa444d125ff
CSeq: 102 ACK
Max-Forwards: 70
```

[diagram] Call-ID:[prev][next]

[15] INVITE sip:2002@10.10.199.251:5060;transport=tcp SIP/2.0

```
Date: Thu, 04 Jun 2009 21:24:43 GMT
Call-Info: <sip:10.10.199.250:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: "Charlie, Connect" <sip:1003@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763554
Allow-Events: presence, kpml
P-Asserted-Identity: "Charlie, Connect" <sip:1003@10.10.199.250>
Supported: timer,resource-priority,replaces
Min-SE:  1800
Content-Length: 0
User-Agent: Cisco-CUCM7.1
To: <sip:2002@siptrunk17.cisco.com>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763466
Contact: <sip:1003@10.10.199.250:5060;transport=tcp>
Expires: 180
Call-ID: 19c85e00-a2813b95-2d-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bKa513e2fcc7
CSeq: 103 INVITE
Session-Expires:  1800;refresher=uas
Max-Forwards: 70
```

[diagram] Call-ID:[prev][next]

[16] SIP/2.0 100 Trying

```
Date: Thu, 04 Jun 2009 21:25:45 GMT
From: "Charlie, Connect" <sip:1003@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763554
Allow-Events: presence, kpml
Content-Length: 0
To: <sip:2002@siptrunk17.cisco.com>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763466
Call-ID: 19c85e00-a2813b95-2d-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bKa513e2fcc7
CSeq: 103 INVITE
```

[diagram] Call-ID:[prev][next]

[17] SIP/2.0 200 OK

```
Date: Thu, 04 Jun 2009 21:25:45 GMT
Call-Info: <sip:10.10.199.251:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: "Charlie, Connect" <sip:1003@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763554
Allow-Events: presence, kpml
P-Asserted-Identity: "Bob, Connect" <sip:2002@10.10.199.251>
Supported: replaces
Remote-Party-ID: "Bob, Connect" <sip:2002@10.10.199.251>;party=called;screen=yes;privacy=off
Content-Length: 337
Require:  timer
To: <sip:2002@siptrunk17.cisco.com>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763466
Contact: <sip:2002@10.10.199.251:5060;transport=tcp>
Content-Type: application/sdp
Call-ID: 19c85e00-a2813b95-2d-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bKa513e2fcc7
CSeq: 103 INVITE
Session-Expires:  1800;refresher=uas

v=0
o=CiscoSystemsCCM-SIP 2000 4 IN IP4 10.10.199.251
s=SIP Call
c=IN IP4 10.10.199.179
t=0 0
m=audio 4000 RTP/AVP 9 0 8 18 101
a=rtpmap:9 G722/8000
a=ptime:20
a=rtpmap:0 PCMU/8000
a=ptime:20
a=rtpmap:8 PCMA/8000
a=ptime:20
a=rtpmap:18 G729/8000
a=ptime:20
a=sendonly
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
```

[diagram] Call-ID:[prev][next]

[18] ACK sip:2002@10.10.199.251:5060;transport=tcp SIP/2.0

CISCO CONFIDENTIAL

```
Date: Thu, 04 Jun 2009 21:24:43 GMT
From: "Charlie, Connect" <sip:1003@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763554
Allow-Events: presence, kpml
Content-Length: 171
To: <sip:2002@siptrunk17.cisco.com>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763466
Content-Type: application/sdp
Call-ID: 19c85e00-a2813b95-2d-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bKa61fb3fcee
CSeq: 103 ACK
Max-Forwards: 70

v=0
o=CiscoSystemsCCM-SIP 2000 4 IN IP4 10.10.199.250
s=SIP Call
c=IN IP4 10.10.199.250
t=0 0
m=audio 4000 RTP/AVP 0
a=rtpmap:0 PCMU/8000
a=ptime:20
a=inactive
```

[diagram] Call-ID:[prev][next]

[19] INVITE sip:1003@10.10.199.250:5060;transport=tcp SIP/2.0

```
Date: Thu, 04 Jun 2009 21:25:45 GMT
Call-Info: <sip:10.10.199.251:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:2002@siptrunk17.cisco.com>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763466
Allow-Events: presence, kpml
P-Asserted-Identity: "Bob, Connect" <sip:2002@10.10.199.251>
Supported: timer,resource-priority,replaces
Min-SE:  1800
Remote-Party-ID: "Bob, Connect" <sip:2002@10.10.199.251>;party=calling;screen=yes;privacy=off
Content-Length: 160
User-Agent: Cisco-CUCM7.1
To: "Charlie, Connect" <sip:1003@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763554
Contact: <sip:2002@10.10.199.251:5060;transport=tcp>
Expires: 180
Content-Type: application/sdp
Call-ID: 19c85e00-a2813b95-2d-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bK9138c85cae
CSeq: 102 INVITE
Session-Expires:  1800;refresher=uac
Max-Forwards: 70

v=0
o=CiscoSystemsCCM-SIP 2000 5 IN IP4 10.10.199.251
s=SIP Call
c=IN IP4 10.10.199.179
t=0 0
m=audio 26858 RTP/AVP 0
a=rtpmap:0 PCMU/8000
a=ptime:20
```

[diagram] Call-ID:[prev][next]

[20] SIP/2.0 100 Trying

```
Date: Thu, 04 Jun 2009 21:24:43 GMT
From: <sip:2002@siptrunk17.cisco.com>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763466
Allow-Events: presence, kpml
Content-Length: 0
To: "Charlie, Connect" <sip:1003@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763554
Call-ID: 19c85e00-a2813b95-2d-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bK9138c85cae
CSeq: 102 INVITE
```

[diagram] Call-ID:[prev][next]

[21] SIP/2.0 200 OK

```
Date: Thu, 04 Jun 2009 21:24:43 GMT
Call-Info: <sip:10.10.199.250:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:2002@siptrunk17.cisco.com>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763466
Allow-Events: presence, kpml
P-Asserted-Identity: "Charlie, Connect" <sip:1003@10.10.199.250>
Supported: replaces
Supported: Geolocation
Content-Length: 171
Require:  timer
To: "Charlie, Connect" <sip:1003@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763554
Contact: <sip:1003@10.10.199.250:5060;transport=tcp>
Content-Type: application/sdp
Call-ID: 19c85e00-a2813b95-2d-fac712ac@10.10.199.250
```

CISCO CONFIDENTIAL

```
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bK9138c85cae
CSeq: 102 INVITE
Session-Expires:  1800;refresher=uac

v=0
o=CiscoSystemsCCM-SIP 2000 5 IN IP4 10.10.199.250
s=SIP Call
c=IN IP4 10.10.199.250
t=0 0
m=audio 4000 RTP/AVP 0
a=rtpmap:0 PCMU/8000
a=ptime:20
a=sendonly
```

[diagram] Call-ID:[prev][next]

[22] ACK sip:1003@10.10.199.250:5060;transport=tcp SIP/2.0

```
Date: Thu, 04 Jun 2009 21:25:45 GMT
From: <sip:2002@siptrunk17.cisco.com>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763466
Allow-Events: presence, kpml
Content-Length: 0
To: "Charlie, Connect" <sip:1003@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763554
Call-ID: 19c85e00-a2813b95-2d-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bK9275b3cbe2
CSeq: 102 ACK
Max-Forwards: 70
```

[diagram] Call-ID:[prev][next]

[23] INVITE sip:2002@10.10.199.251:5060;transport=tcp SIP/2.0

```
Date: Thu, 04 Jun 2009 21:24:47 GMT
Call-Info: <sip:10.10.199.250:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: "Charlie, Connect" <sip:1003@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763554
Allow-Events: presence, kpml
P-Asserted-Identity: "Charlie, Connect" <sip:1003@10.10.199.250>
Supported: timer,resource-priority,replaces
Min-SE:  1800
Content-Length: 164
User-Agent: Cisco-CUCM7.1
To: <sip:2002@siptrunk17.cisco.com>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763466
Contact: <sip:1003@10.10.199.250:5060;transport=tcp>
Expires: 180
Content-Type: application/sdp
Call-ID: 19c85e00-a2813b95-2d-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bKa741ec0d2b
CSeq: 104 INVITE
Session-Expires:  1800;refresher=uas
Max-Forwards: 70

v=0
o=CiscoSystemsCCM-SIP 2000 6 IN IP4 10.10.199.250
s=SIP Call
c=IN IP4 0.0.0.0
t=0 0
m=audio 4000 RTP/AVP 0
a=rtpmap:0 PCMU/8000
a=ptime:20
a=inactive
```

[diagram] Call-ID:[prev][next]

[24] SIP/2.0 100 Trying

```
Date: Thu, 04 Jun 2009 21:25:49 GMT
From: "Charlie, Connect" <sip:1003@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763554
Allow-Events: presence, kpml
Content-Length: 0
To: <sip:2002@siptrunk17.cisco.com>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763466
Call-ID: 19c85e00-a2813b95-2d-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bKa741ec0d2b
CSeq: 104 INVITE
```

[diagram] Call-ID:[prev][next]

[25] SIP/2.0 200 OK

```
Date: Thu, 04 Jun 2009 21:25:49 GMT
Call-Info: <sip:10.10.199.251:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: "Charlie, Connect" <sip:1003@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763554
Allow-Events: presence, kpml
P-Asserted-Identity: "Bob, Connect" <sip:2002@10.10.199.251>
Supported: replaces
Supported: Geolocation
Remote-Party-ID: "Bob, Connect" <sip:2002@10.10.199.251>;party=called;screen=yes;privacy=off
```

CISCO CONFIDENTIAL

```
Content-Length: 172
Require:  timer
To: <sip:2002@siptrunk17.cisco.com>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763466
Contact: <sip:2002@10.10.199.251:5060;transport=tcp>
Content-Type: application/sdp
Call-ID: 19c85e00-a2813b95-2d-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bKa741ec0d2b
CSeq: 104 INVITE
Session-Expires:  1800;refresher=uas

v=0
o=CiscoSystemsCCM-SIP 2000 6 IN IP4 10.10.199.251
s=SIP Call
c=IN IP4 10.10.199.179
t=0 0
m=audio 26858 RTP/AVP 0
a=rtpmap:0 PCMU/8000
a=ptime:20
a=inactive
```

[diagram] Call-ID:[prev][next]

[26] ACK sip:2002@10.10.199.251:5060;transport=tcp SIP/2.0

```
Date: Thu, 04 Jun 2009 21:24:47 GMT
From: "Charlie, Connect" <sip:1003@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763554
Allow-Events: presence, kpml
Content-Length: 0
To: <sip:2002@siptrunk17.cisco.com>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763466
Call-ID: 19c85e00-a2813b95-2d-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bKa8387d6cbe
CSeq: 104 ACK
Max-Forwards: 70
```

[diagram] Call-ID:[prev][next]

[27] UPDATE sip:2002@10.10.199.251:5060;transport=tcp SIP/2.0

```
Date: Thu, 04 Jun 2009 21:24:47 GMT
Call-Info: <sip:10.10.199.250:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: "Charlie, Connect" <sip:1003@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763554
Allow-Events: presence, kpml
P-Asserted-Identity: "Alice, Alert" <sip:1001@10.10.199.250>
Supported: timer,resource-priority,replaces
Content-Length: 0
User-Agent: Cisco-CUCM7.1
To: <sip:2002@siptrunk17.cisco.com>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763466
Contact: <sip:1003@10.10.199.250:5060;transport=tcp>
Call-ID: 19c85e00-a2813b95-2d-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bKa943f8ebcd
CSeq: 105 UPDATE
Max-Forwards: 70
```

[diagram] Call-ID:[prev][next]

[28] SIP/2.0 200 OK

```
Date: Thu, 04 Jun 2009 21:25:50 GMT
From: "Charlie, Connect" <sip:1003@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763554
Allow-Events: presence, kpml
P-Asserted-Identity: "Bob, Connect" <sip:2002@10.10.199.251>
Remote-Party-ID: "Bob, Connect" <sip:2002@10.10.199.251>;party=called;screen=yes;privacy=off
Content-Length: 0
Require:  timer
To: <sip:2002@siptrunk17.cisco.com>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763466
Contact: <sip:2002@10.10.199.251:5060;transport=tcp>
Call-ID: 19c85e00-a2813b95-2d-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bKa943f8ebcd
CSeq: 105 UPDATE
Session-Expires:  1800;refresher=uas
```

[diagram] Call-ID:[prev][next]

[29] INVITE sip:2002@10.10.199.251:5060;transport=tcp SIP/2.0

```
Date: Thu, 04 Jun 2009 21:24:48 GMT
Call-Info: <sip:10.10.199.250:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: "Charlie, Connect" <sip:1003@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763554
Allow-Events: presence, kpml
P-Asserted-Identity: "Alice, Alert" <sip:1001@10.10.199.250>
Supported: timer,resource-priority,replaces
Min-SE:  1800
Content-Length: 0
User-Agent: Cisco-CUCM7.1
To: <sip:2002@siptrunk17.cisco.com>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763466
Contact: <sip:1003@10.10.199.250:5060;transport=tcp>
```

CISCO CONFIDENTIAL

```
Expires: 180
Call-ID: 19c85e00-a2813b95-2d-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bKaaa7cc14
CSeq: 106 INVITE
Session-Expires:  1800;refresher=uas
Max-Forwards: 70

[diagram]   Call-ID:[prev][next]
[30] SIP/2.0 100 Trying
Date: Thu, 04 Jun 2009 21:25:50 GMT
From: "Charlie, Connect" <sip:1003@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763554
Allow-Events: presence, kpml
Content-Length: 0
To: <sip:2002@siptrunk17.cisco.com>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763466
Call-ID: 19c85e00-a2813b95-2d-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bKaaa7cc14
CSeq: 106 INVITE

[diagram]   Call-ID:[prev][next]
[31] SIP/2.0 200 OK
Date: Thu, 04 Jun 2009 21:25:50 GMT
Call-Info: <sip:10.10.199.251:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: "Charlie, Connect" <sip:1003@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763554
Allow-Events: presence, kpml
P-Asserted-Identity: "Bob, Connect" <sip:2002@10.10.199.251>
Supported: replaces
Remote-Party-ID: "Bob, Connect" <sip:2002@10.10.199.251>;party=called;screen=yes;privacy=off
Content-Length: 337
Require:  timer
To: <sip:2002@siptrunk17.cisco.com>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763466
Contact: <sip:2002@10.10.199.251:5060;transport=tcp>
Content-Type: application/sdp
Call-ID: 19c85e00-a2813b95-2d-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bKaaa7cc14
CSeq: 106 INVITE
Session-Expires:  1800;refresher=uas

v=0
o=CiscoSystemsCCM-SIP 2000 7 IN IP4 10.10.199.251
s=SIP Call
c=IN IP4 10.10.199.179
t=0 0
m=audio 4000 RTP/AVP 9 0 8 18 101
a=rtpmap:9 G722/8000
a=ptime:20
a=rtpmap:0 PCMU/8000
a=ptime:20
a=rtpmap:8 PCMA/8000
a=ptime:20
a=rtpmap:18 G729/8000
a=ptime:20
a=sendonly
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15

[diagram]   Call-ID:[prev][next]
[32] ACK sip:2002@10.10.199.251:5060;transport=tcp SIP/2.0
Date: Thu, 04 Jun 2009 21:24:48 GMT
From: "Charlie, Connect" <sip:1003@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763554
Allow-Events: presence, kpml
Content-Length: 171
To: <sip:2002@siptrunk17.cisco.com>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763466
Content-Type: application/sdp
Call-ID: 19c85e00-a2813b95-2d-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bKab2caee4b
CSeq: 106 ACK
Max-Forwards: 70

v=0
o=CiscoSystemsCCM-SIP 2000 7 IN IP4 10.10.199.250
s=SIP Call
c=IN IP4 10.10.199.250
t=0 0
m=audio 4000 RTP/AVP 0
a=rtpmap:0 PCMU/8000
a=ptime:20
a=inactive
```

CISCO CONFIDENTIAL

[diagram] Call-ID:[prev][next]
[33] INVITE sip:1003@10.10.199.250:5060;transport=tcp SIP/2.0
Date: Thu, 04 Jun 2009 21:25:50 GMT
Call-Info: <sip:10.10.199.251:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:2002@siptrunk17.cisco.com>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763466
Allow-Events: presence, kpml
P-Asserted-Identity: "Bob, Connect" <sip:2002@10.10.199.251>
Supported: timer,resource-priority,replaces
Min-SE: 1800
Remote-Party-ID: "Bob, Connect" <sip:2002@10.10.199.251>;party=calling;screen=yes;privacy=off
Content-Length: 160
User-Agent: Cisco-CUCM7.1
To: "Charlie, Connect" <sip:1003@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763554
Contact: <sip:2002@10.10.199.251:5060;transport=tcp>
Expires: 180
Content-Type: application/sdp
Call-ID: 19c85e00-a2813b95-2d-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bK937024010a
CSeq: 103 INVITE
Session-Expires: 1800;refresher=uac
Max-Forwards: 70

v=0
o=CiscoSystemsCCM-SIP 2000 8 IN IP4 10.10.199.251
s=SIP Call
c=IN IP4 10.10.199.179
t=0 0
m=audio 27298 RTP/AVP 0
a=rtpmap:0 PCMU/8000
a=ptime:20

[diagram] Call-ID:[prev][next]
[34] SIP/2.0 100 Trying
Date: Thu, 04 Jun 2009 21:24:48 GMT
From: <sip:2002@siptrunk17.cisco.com>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763466
Allow-Events: presence, kpml
Content-Length: 0
To: "Charlie, Connect" <sip:1003@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763554
Call-ID: 19c85e00-a2813b95-2d-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bK937024010a
CSeq: 103 INVITE

[diagram] Call-ID:[prev][next]
[35] SIP/2.0 200 OK
Date: Thu, 04 Jun 2009 21:24:48 GMT
Call-Info: <sip:10.10.199.250:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:2002@siptrunk17.cisco.com>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763466
Allow-Events: presence, kpml
P-Asserted-Identity: "Alice, Alert" <sip:1001@10.10.199.250>
Supported: replaces
Supported: Geolocation
Content-Length: 171
Require: timer
To: "Charlie, Connect" <sip:1003@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763554
Contact: <sip:1003@10.10.199.250:5060;transport=tcp>
Content-Type: application/sdp
Call-ID: 19c85e00-a2813b95-2d-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bK937024010a
CSeq: 103 INVITE
Session-Expires: 1800;refresher=uac

v=0
o=CiscoSystemsCCM-SIP 2000 8 IN IP4 10.10.199.250
s=SIP Call
c=IN IP4 10.10.199.250
t=0 0
m=audio 4000 RTP/AVP 0
a=rtpmap:0 PCMU/8000
a=ptime:20
a=sendonly

[diagram] Call-ID:[prev][next]
[36] ACK sip:1003@10.10.199.250:5060;transport=tcp SIP/2.0
Date: Thu, 04 Jun 2009 21:25:50 GMT
From: <sip:2002@siptrunk17.cisco.com>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763466
Allow-Events: presence, kpml
Content-Length: 0
To: "Charlie, Connect" <sip:1003@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763554

CISCO CONFIDENTIAL

```
Call-ID: 19c85e00-a2813b95-2d-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bK941ef7a78a
CSeq: 103 ACK
Max-Forwards: 70
```

[diagram] Call-ID:[prev][next]

[37] INVITE sip:2002@10.10.199.251:5060;transport=tcp SIP/2.0

```
Date: Thu, 04 Jun 2009 21:24:49 GMT
Call-Info: <sip:10.10.199.250:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: "Charlie, Connect" <sip:1003@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763554
Allow-Events: presence, kpml
P-Asserted-Identity: "Alice, Alert" <sip:1001@10.10.199.250>
Supported: timer,resource-priority,replaces
Min-SE:  1800
Content-Length: 164
User-Agent: Cisco-CUCM7.1
To: <sip:2002@siptrunk17.cisco.com>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763466
Contact: <sip:1003@10.10.199.250:5060;transport=tcp>
Expires: 180
Content-Type: application/sdp
Call-ID: 19c85e00-a2813b95-2d-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bKac19d21b12
CSeq: 107 INVITE
Session-Expires:  1800;refresher=uas
Max-Forwards: 70

v=0
o=CiscoSystemsCCM-SIP 2000 9 IN IP4 10.10.199.250
s=SIP Call
c=IN IP4 0.0.0.0
t=0 0
m=audio 4000 RTP/AVP 0
a=rtpmap:0 PCMU/8000
a=ptime:20
a=inactive
```

[diagram] Call-ID:[prev][next]

[38] SIP/2.0 100 Trying

```
Date: Thu, 04 Jun 2009 21:25:51 GMT
From: "Charlie, Connect" <sip:1003@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763554
Allow-Events: presence, kpml
Content-Length: 0
To: <sip:2002@siptrunk17.cisco.com>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763466
Call-ID: 19c85e00-a2813b95-2d-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bKac19d21b12
CSeq: 107 INVITE
```

[diagram] Call-ID:[prev][next]

[39] SIP/2.0 200 OK

```
Date: Thu, 04 Jun 2009 21:25:51 GMT
Call-Info: <sip:10.10.199.251:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: "Charlie, Connect" <sip:1003@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763554
Allow-Events: presence, kpml
P-Asserted-Identity: "Bob, Connect" <sip:2002@10.10.199.251>
Supported: replaces
Supported: Geolocation
Remote-Party-ID: "Bob, Connect" <sip:2002@10.10.199.251>;party=called;screen=yes;privacy=off
Content-Length: 172
Require:  timer
To: <sip:2002@siptrunk17.cisco.com>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763466
Contact: <sip:2002@10.10.199.251:5060;transport=tcp>
Content-Type: application/sdp
Call-ID: 19c85e00-a2813b95-2d-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bKac19d21b12
CSeq: 107 INVITE
Session-Expires:  1800;refresher=uas

v=0
o=CiscoSystemsCCM-SIP 2000 9 IN IP4 10.10.199.251
s=SIP Call
c=IN IP4 10.10.199.179
t=0 0
m=audio 27298 RTP/AVP 0
a=rtpmap:0 PCMU/8000
a=ptime:20
a=inactive
```

CISCO CONFIDENTIAL

[diagram] Call-ID:[prev][next]
[40] ACK sip:2002@10.10.199.251:5060;transport=tcp SIP/2.0
Date: Thu, 04 Jun 2009 21:24:49 GMT
From: "Charlie, Connect" <sip:1003@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763554
Allow-Events: presence, kpml
Content-Length: 0
To: <sip:2002@siptrunk17.cisco.com>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763466
Call-ID: 19c85e00-a2813b95-2d-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bKad15cac4ed
CSeq: 107 ACK
Max-Forwards: 70

[diagram] Call-ID:[prev][next]
[41] INVITE sip:2002@10.10.199.251:5060;transport=tcp SIP/2.0
Date: Thu, 04 Jun 2009 21:24:49 GMT
Call-Info: <sip:10.10.199.250:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: "Charlie, Connect" <sip:1003@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763554
Allow-Events: presence, kpml
P-Asserted-Identity: "Alice, Alert" <sip:1001@10.10.199.250>
Supported: timer,resource-priority,replaces
Min-SE: 1800
Content-Length: 0
User-Agent: Cisco-CUCM7.1
To: <sip:2002@siptrunk17.cisco.com>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763466
Contact: <sip:1003@10.10.199.250:5060;transport=tcp>
Expires: 180
Call-ID: 19c85e00-a2813b95-2d-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bKae6fff7e1f
CSeq: 108 INVITE
Session-Expires: 1800;refresher=uas
Max-Forwards: 70

[diagram] Call-ID:[prev][next]
[42] SIP/2.0 100 Trying
Date: Thu, 04 Jun 2009 21:25:51 GMT
From: "Charlie, Connect" <sip:1003@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763554
Allow-Events: presence, kpml
Content-Length: 0
To: <sip:2002@siptrunk17.cisco.com>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763466
Call-ID: 19c85e00-a2813b95-2d-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bKae6fff7e1f
CSeq: 108 INVITE

[diagram] Call-ID:[prev][next]
[43] SIP/2.0 200 OK
Date: Thu, 04 Jun 2009 21:25:51 GMT
Call-Info: <sip:10.10.199.251:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: "Charlie, Connect" <sip:1003@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763554
Allow-Events: presence, kpml
P-Asserted-Identity: "Bob, Connect" <sip:2002@10.10.199.251>
Supported: replaces
Remote-Party-ID: "Bob, Connect" <sip:2002@10.10.199.251>;party=called;screen=yes;privacy=off
Content-Length: 338
Require: timer
To: <sip:2002@siptrunk17.cisco.com>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763466
Contact: <sip:2002@10.10.199.251:5060;transport=tcp>
Content-Type: application/sdp
Call-ID: 19c85e00-a2813b95-2d-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bKae6fff7e1f
CSeq: 108 INVITE
Session-Expires: 1800;refresher=uas

v=0
o=CiscoSystemsCCM-SIP 2000 10 IN IP4 10.10.199.251
s=SIP Call
c=IN IP4 10.10.199.179
t=0 0
m=audio 4000 RTP/AVP 9 0 8 18 101
a=rtpmap:9 G722/8000
a=ptime:20
a=rtpmap:0 PCMU/8000
a=ptime:20
a=rtpmap:8 PCMA/8000
a=ptime:20
a=rtpmap:18 G729/8000
a=ptime:20
a=sendonly
a=rtpmap:101 telephone-event/8000

CISCO CONFIDENTIAL

```
a=fmtp:101 0-15

[diagram]   Call-ID:[prev][next]
[44] ACK sip:2002@10.10.199.251:5060;transport=tcp SIP/2.0
Date: Thu, 04 Jun 2009 21:24:49 GMT
From: "Charlie, Connect" <sip:1003@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763554
Allow-Events: presence, kpml
Content-Length: 229
To: <sip:2002@siptrunk17.cisco.com>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763466
Content-Type: application/sdp
Call-ID: 19c85e00-a2813b95-2d-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bKaf2e2c5c77
CSeq: 108 ACK
Max-Forwards: 70

v=0
o=CiscoSystemsCCM-SIP 2000 10 IN IP4 10.10.199.250
s=SIP Call
c=IN IP4 10.10.199.130
t=0 0
m=audio 17646 RTP/AVP 9 101
a=rtpmap:9 G722/8000
a=ptime:20
a=recvonly
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15

[diagram]   Call-ID:[prev][next]
[45] INVITE sip:1003@10.10.199.250:5060;transport=tcp SIP/2.0
Date: Thu, 04 Jun 2009 21:25:51 GMT
Call-Info: <sip:10.10.199.251:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:2002@siptrunk17.cisco.com>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763466
Allow-Events: presence, kpml
P-Asserted-Identity: "Bob, Connect" <sip:2002@10.10.199.251>
Supported: timer,resource-priority,replaces
Min-SE:  1800
Remote-Party-ID: "Bob, Connect" <sip:2002@10.10.199.251>;party=calling;screen=yes;privacy=off
Content-Length: 217
User-Agent: Cisco-CUCM7.1
To: "Charlie, Connect" <sip:1003@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763554
Contact: <sip:2002@10.10.199.251:5060;transport=tcp>
Expires: 180
Content-Type: application/sdp
Call-ID: 19c85e00-a2813b95-2d-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bK959dd8e38
CSeq: 104 INVITE
Session-Expires:  1800;refresher=uac
Max-Forwards: 70

v=0
o=CiscoSystemsCCM-SIP 2000 11 IN IP4 10.10.199.251
s=SIP Call
c=IN IP4 10.10.199.179
t=0 0
m=audio 27432 RTP/AVP 9 101
a=rtpmap:9 G722/8000
a=ptime:20
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15

[diagram]   Call-ID:[prev][next]
[46] SIP/2.0 100 Trying
Date: Thu, 04 Jun 2009 21:24:49 GMT
From: <sip:2002@siptrunk17.cisco.com>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763466
Allow-Events: presence, kpml
Content-Length: 0
To: "Charlie, Connect" <sip:1003@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763554
Call-ID: 19c85e00-a2813b95-2d-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bK959dd8e38
CSeq: 104 INVITE

[diagram]   Call-ID:[prev][next]
[47] SIP/2.0 200 OK
Date: Thu, 04 Jun 2009 21:24:49 GMT
Call-Info: <sip:10.10.199.250:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:2002@siptrunk17.cisco.com>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763466
Allow-Events: presence, kpml
P-Asserted-Identity: "Alice, Connect" <sip:1001@10.10.199.250>
```

CISCO CONFIDENTIAL

```
Supported: replaces
Supported: Geolocation
Content-Length: 217
Require:  timer
To: "Charlie, Connect" <sip:1003@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763554
Contact: <sip:1003@10.10.199.250:5060;transport=tcp>
Content-Type: application/sdp
Call-ID: 19c85e00-a2813b95-2d-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bK959dd8e38
CSeq: 104 INVITE
Session-Expires:  1800;refresher=uac

v=0
o=CiscoSystemsCCM-SIP 2000 11 IN IP4 10.10.199.250
s=SIP Call
c=IN IP4 10.10.199.130
t=0 0
m=audio 17646 RTP/AVP 9 101
a=rtpmap:9 G722/8000
a=ptime:20
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
```

[diagram] Call-ID:[prev][next]

[48] ACK sip:1003@10.10.199.250:5060;transport=tcp SIP/2.0

```
Date: Thu, 04 Jun 2009 21:25:51 GMT
From: <sip:2002@siptrunk17.cisco.com>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763466
Allow-Events: presence, kpml
Content-Length: 0
To: "Charlie, Connect" <sip:1003@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763554
Call-ID: 19c85e00-a2813b95-2d-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bK967caa02e3
CSeq: 104 ACK
Max-Forwards: 70
```

[diagram] Call-ID:[prev][next]

[49] UPDATE sip:2002@10.10.199.251:5060;transport=tcp SIP/2.0

```
Date: Thu, 04 Jun 2009 21:24:49 GMT
Call-Info: <sip:10.10.199.250:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: "Charlie, Connect" <sip:1003@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763554
Allow-Events: presence, kpml
P-Asserted-Identity: "Alice, Connect" <sip:1001@10.10.199.250>
Supported: timer,resource-priority,replaces
Content-Length: 0
User-Agent: Cisco-CUCM7.1
To: <sip:2002@siptrunk17.cisco.com>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763466
Contact: <sip:1003@10.10.199.250:5060;transport=tcp>
Call-ID: 19c85e00-a2813b95-2d-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bKb03035fd53
CSeq: 109 UPDATE
Max-Forwards: 70
```

[diagram] Call-ID:[prev][next]

[50] SIP/2.0 200 OK

```
Date: Thu, 04 Jun 2009 21:25:51 GMT
From: "Charlie, Connect" <sip:1003@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763554
Allow-Events: presence, kpml
P-Asserted-Identity: "Bob, Connect" <sip:2002@10.10.199.251>
Remote-Party-ID: "Bob, Connect" <sip:2002@10.10.199.251>;party=called;screen=yes;privacy=off
Content-Length: 0
Require:  timer
To: <sip:2002@siptrunk17.cisco.com>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763466
Contact: <sip:2002@10.10.199.251:5060;transport=tcp>
Call-ID: 19c85e00-a2813b95-2d-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bKb03035fd53
CSeq: 109 UPDATE
Session-Expires:  1800;refresher=uas
```

[diagram] Call-ID:[prev][next]

[51] BYE sip:2002@10.10.199.251:5060;transport=tcp SIP/2.0

```
Date: Thu, 04 Jun 2009 21:24:49 GMT
From: "Charlie, Connect" <sip:1003@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763554
P-Asserted-Identity: "Charlie, Connect" <sip:1003@10.10.199.250>
Content-Length: 0
User-Agent: Cisco-CUCM7.1
To: <sip:2002@siptrunk17.cisco.com>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763466
Call-ID: 19c85e00-a2813b95-2d-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bKb11c2f8c68
CSeq: 110 BYE
```

CISCO CONFIDENTIAL

```
Max-Forwards: 70

[diagram]   Call-ID:[prev][next]
[52] SIP/2.0 200 OK
Date: Thu, 04 Jun 2009 21:25:59 GMT
From: "Charlie, Connect" <sip:1003@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763554
Content-Length: 0
To: <sip:2002@siptrunk17.cisco.com>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763466
Call-ID: 19c85e00-a2813b95-2d-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bKb11c2f8c68
CSeq: 110 BYE

[diagram]   Call-ID:[prev][next]
[53] SIP/2.0 180 Ringing
Date: Thu, 04 Jun 2009 21:17:50 GMT
Call-Info: <sip:10.10.199.251:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: "Alice, Connect" <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763548
Allow-Events: presence
P-Asserted-Identity: "Bob, Alert" <sip:2002@10.10.199.251>
Supported: Geolocation
Remote-Party-ID: "Bob, Alert" <sip:2002@10.10.199.251>;party=called;screen=yes;privacy=off
Content-Length: 0
To: <sip:2002@siptrunk17.cisco.com>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763460
Contact: <sip:2002@10.10.199.251:5060;transport=tcp>
Call-ID: 23ca580-a28139c0-2a-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK985b18e587
CSeq: 101 INVITE

[diagram]   Call-ID:[prev][next]
[54] SIP/2.0 183 Session Progress
Date: Thu, 04 Jun 2009 21:17:50 GMT
Call-Info: <sip:10.10.199.251:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: "Alice, Connect" <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763548
Allow-Events: presence, kpml
P-Asserted-Identity: "Bob, Alert" <sip:2002@10.10.199.251>
Supported: Geolocation
Remote-Party-ID: "Bob, Alert" <sip:2002@10.10.199.251>;party=called;screen=yes;privacy=off
Content-Length: 337
To: <sip:2002@siptrunk17.cisco.com>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763460
Contact: <sip:2002@10.10.199.251:5060;transport=tcp>
Content-Type: application/sdp
Call-ID: 23ca580-a28139c0-2a-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK985b18e587
CSeq: 101 INVITE

v=0
o=CiscoSystemsCCM-SIP 2000 1 IN IP4 10.10.199.251
s=SIP Call
c=IN IP4 10.10.199.179
t=0 0
m=audio 4000 RTP/AVP 9 0 8 18 101
a=rtpmap:9 G722/8000
a=ptime:20
a=rtpmap:0 PCMU/8000
a=ptime:20
a=rtpmap:8 PCMA/8000
a=ptime:20
a=rtpmap:18 G729/8000
a=ptime:20
a=sendonly
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15

[diagram]   Call-ID:[prev][next]
[55] SIP/2.0 200 OK
Date: Thu, 04 Jun 2009 21:17:50 GMT
Call-Info: <sip:10.10.199.251:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: "Alice, Connect" <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763548
Allow-Events: presence, kpml
P-Asserted-Identity: "Bob, Connect" <sip:2002@10.10.199.251>
Supported: replaces
Supported: Geolocation
Remote-Party-ID: "Bob, Connect" <sip:2002@10.10.199.251>;party=called;screen=yes;privacy=off
Content-Length: 337
Require:  timer
To: <sip:2002@siptrunk17.cisco.com>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763460
Contact: <sip:2002@10.10.199.251:5060;transport=tcp>
```

CISCO CONFIDENTIAL

```
Content-Type: application/sdp
Call-ID: 23ca580-a28139c0-2a-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK985b18e587
CSeq: 101 INVITE
Session-Expires:  1800;refresher=uas

v=0
o=CiscoSystemsCCM-SIP 2000 1 IN IP4 10.10.199.251
s=SIP Call
c=IN IP4 10.10.199.179
t=0 0
m=audio 4000 RTP/AVP 9 0 8 18 101
a=rtpmap:9 G722/8000
a=ptime:20
a=rtpmap:0 PCMU/8000
a=ptime:20
a=rtpmap:8 PCMA/8000
a=ptime:20
a=rtpmap:18 G729/8000
a=ptime:20
a=sendonly
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
```

[diagram] Call-ID:[prev][next]

```
[56] ACK sip:2002@10.10.199.251:5060;transport=tcp SIP/2.0
Date: Thu, 04 Jun 2009 21:16:48 GMT
From: "Alice, Connect" <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763548
Allow-Events: presence, kpml
Content-Length: 228
To: <sip:2002@siptrunk17.cisco.com>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763460
Content-Type: application/sdp
Call-ID: 23ca580-a28139c0-2a-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK9961e687dc
CSeq: 101 ACK
Max-Forwards: 70

v=0
o=CiscoSystemsCCM-SIP 2000 1 IN IP4 10.10.199.250
s=SIP Call
c=IN IP4 10.10.199.130
t=0 0
m=audio 18954 RTP/AVP 9 101
a=rtpmap:9 G722/8000
a=ptime:20
a=recvonly
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
```

[diagram] Call-ID:[prev][next]

```
[57] INVITE sip:1001@10.10.199.250:5060;transport=tcp SIP/2.0
Date: Thu, 04 Jun 2009 21:17:53 GMT
Call-Info: <sip:10.10.199.251:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:2002@siptrunk17.cisco.com>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763460
Allow-Events: presence, kpml
P-Asserted-Identity: "Bob, Connect" <sip:2002@10.10.199.251>
Supported: timer,resource-priority,replaces
Min-SE:  1800
Remote-Party-ID: "Bob, Connect" <sip:2002@10.10.199.251>;party=calling;screen=yes;privacy=off
Content-Length: 216
User-Agent: Cisco-CUCM7.1
To: "Alice, Connect" <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763548
Contact: <sip:2002@10.10.199.251:5060;transport=tcp>
Expires: 180
Content-Type: application/sdp
Call-ID: 23ca580-a28139c0-2a-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bK89755379d4
CSeq: 101 INVITE
Session-Expires:  1800;refresher=uac
Max-Forwards: 70

v=0
o=CiscoSystemsCCM-SIP 2000 2 IN IP4 10.10.199.251
s=SIP Call
c=IN IP4 10.10.199.179
t=0 0
m=audio 28742 RTP/AVP 9 101
a=rtpmap:9 G722/8000
a=ptime:20
```

CISCO CONFIDENTIAL

```
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15

[diagram]   Call-ID:[prev][next]
[58] SIP/2.0 100 Trying
Date: Thu, 04 Jun 2009 21:16:51 GMT
From: <sip:2002@siptrunk17.cisco.com>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763460
Allow-Events: presence, kpml
Content-Length: 0
To: "Alice, Connect" <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763548
Call-ID: 23ca580-a28139c0-2a-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bK89755379d4
CSeq: 101 INVITE

[diagram]   Call-ID:[prev][next]
[59] SIP/2.0 200 OK
Date: Thu, 04 Jun 2009 21:16:51 GMT
Call-Info: <sip:10.10.199.250:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:2002@siptrunk17.cisco.com>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763460
Allow-Events: presence, kpml
Supported: replaces
Supported: Geolocation
Remote-Party-ID: "Alice, Connect" <sip:1001@10.10.199.250>;party=called;screen=yes;privacy=off
Content-Length: 216
Require:  timer
To: "Alice, Connect" <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763548
Contact: <sip:1001@10.10.199.250:5060;transport=tcp>
Content-Type: application/sdp
Call-ID: 23ca580-a28139c0-2a-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bK89755379d4
CSeq: 101 INVITE
Session-Expires:  1800;refresher=uac

v=0
o=CiscoSystemsCCM-SIP 2000 2 IN IP4 10.10.199.250
s=SIP Call
c=IN IP4 10.10.199.130
t=0 0
m=audio 18954 RTP/AVP 9 101
a=rtpmap:9 G722/8000
a=ptime:20
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15

[diagram]   Call-ID:[prev][next]
[60] ACK sip:1001@10.10.199.250:5060;transport=tcp SIP/2.0
Date: Thu, 04 Jun 2009 21:17:53 GMT
From: <sip:2002@siptrunk17.cisco.com>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763460
Allow-Events: presence, kpml
Content-Length: 0
To: "Alice, Connect" <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763548
Call-ID: 23ca580-a28139c0-2a-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bK8a557291d4
CSeq: 101 ACK
Max-Forwards: 70

[diagram]   Call-ID:[prev][next]
[61] BYE sip:2002@10.10.199.251:5060;transport=tcp SIP/2.0
Date: Thu, 04 Jun 2009 21:16:51 GMT
From: "Alice, Connect" <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763548
Content-Length: 0
User-Agent: Cisco-CUCM7.1
To: <sip:2002@siptrunk17.cisco.com>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763460
Call-ID: 23ca580-a28139c0-2a-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK9a7e3e481f
CSeq: 102 BYE
Max-Forwards: 70

[diagram]   Call-ID:[prev][next]
[62] SIP/2.0 200 OK
Date: Thu, 04 Jun 2009 21:17:59 GMT
From: "Alice, Connect" <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763548
Content-Length: 0
To: <sip:2002@siptrunk17.cisco.com>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763460
Call-ID: 23ca580-a28139c0-2a-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK9a7e3e481f
CSeq: 102 BYE
```

CISCO CONFIDENTIAL

[diagram] Call-ID:[prev][next]
[63] INVITE sip:2002@siptrunk17.cisco.com:5060 SIP/2.0
Date: Thu, 04 Jun 2009 21:18:31 GMT
Call-Info: <sip:10.10.199.250:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: "Alice, Connect" <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763550
Allow-Events: presence, kpml
Supported: timer,resource-priority,replaces
Supported: Geolocation
Min-SE: 1800
Remote-Party-ID: "Alice, Connect" <sip:1001@10.10.199.250;x-cisco-callback-
number=1001>;party=calling;screen=yes;privacy=off
Content-Length: 0
User-Agent: Cisco-CUCM7.1
To: <sip:2002@siptrunk17.cisco.com>
Contact: <sip:1001@10.10.199.250:5060;transport=tcp>
Expires: 180
Call-ID: 3fa13300-a2813a27-2b-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK9b54182bfa
CSeq: 101 INVITE
Session-Expires: 1800
Max-Forwards: 70

[diagram] Call-ID:[prev][next]
[64] SIP/2.0 100 Trying
Date: Thu, 04 Jun 2009 21:19:33 GMT
From: "Alice, Connect" <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763550
Allow-Events: presence
Content-Length: 0
To: <sip:2002@siptrunk17.cisco.com>
Call-ID: 3fa13300-a2813a27-2b-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK9b54182bfa
CSeq: 101 INVITE

[diagram] Call-ID:[prev][next]
[65] SIP/2.0 180 Ringing
Date: Thu, 04 Jun 2009 21:19:33 GMT
Call-Info: <sip:10.10.199.251:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: "Alice, Connect" <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763550
Allow-Events: presence
P-Asserted-Identity: "Bob, Alert" <sip:2002@10.10.199.251>
Supported: Geolocation
Remote-Party-ID: "Bob, Alert" <sip:2002@10.10.199.251>;party=called;screen=yes;privacy=off
Content-Length: 0
To: <sip:2002@siptrunk17.cisco.com>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763462
Contact: <sip:2002@10.10.199.251:5060;transport=tcp>
Call-ID: 3fa13300-a2813a27-2b-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK9b54182bfa
CSeq: 101 INVITE

[diagram] Call-ID:[prev][next]
[66] SIP/2.0 183 Session Progress
Date: Thu, 04 Jun 2009 21:19:33 GMT
Call-Info: <sip:10.10.199.251:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: "Alice, Connect" <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763550
Allow-Events: presence, kpml
P-Asserted-Identity: "Bob, Alert" <sip:2002@10.10.199.251>
Supported: Geolocation
Remote-Party-ID: "Bob, Alert" <sip:2002@10.10.199.251>;party=called;screen=yes;privacy=off
Content-Length: 337
To: <sip:2002@siptrunk17.cisco.com>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763462
Contact: <sip:2002@10.10.199.251:5060;transport=tcp>
Content-Type: application/sdp
Call-ID: 3fa13300-a2813a27-2b-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK9b54182bfa
CSeq: 101 INVITE

v=0
o=CiscoSystemsCCM-SIP 2000 1 IN IP4 10.10.199.251
s=SIP Call
c=IN IP4 10.10.199.179
t=0 0
m=audio 4000 RTP/AVP 9 0 8 18 101
a=rtpmap:9 G722/8000
a=ptime:20
a=rtpmap:0 PCMU/8000
a=ptime:20
a=rtpmap:8 PCMA/8000

CISCO CONFIDENTIAL

```
a=ptime:20
a=rtpmap:18 G729/8000
a=ptime:20
a=sendonly
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
```

[diagram] Call-ID:[prev][next]

[67] SIP/2.0 200 OK

```
Date: Thu, 04 Jun 2009 21:19:33 GMT
Call-Info: <sip:10.10.199.251:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: "Alice, Connect" <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763550
Allow-Events: presence, kpml
P-Asserted-Identity: "Bob, Connect" <sip:2002@10.10.199.251>
Supported: replaces
Supported: Geolocation
Remote-Party-ID: "Bob, Connect" <sip:2002@10.10.199.251>;party=called;screen=yes;privacy=off
Content-Length: 337
Require:  timer
To: <sip:2002@siptrunk17.cisco.com>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763462
Contact: <sip:2002@10.10.199.251:5060;transport=tcp>
Content-Type: application/sdp
Call-ID: 3fa13300-a2813a27-2b-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK9b54182bfa
CSeq: 101 INVITE
Session-Expires:  1800;refresher=uas

v=0
o=CiscoSystemsCCM-SIP 2000 1 IN IP4 10.10.199.251
s=SIP Call
c=IN IP4 10.10.199.179
t=0 0
m=audio 4000 RTP/AVP 9 0 8 18 101
a=rtpmap:9 G722/8000
a=ptime:20
a=rtpmap:0 PCMU/8000
a=ptime:20
a=rtpmap:8 PCMA/8000
a=ptime:20
a=rtpmap:18 G729/8000
a=ptime:20
a=sendonly
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
```

[diagram] Call-ID:[prev][next]

[68] ACK sip:2002@10.10.199.251:5060;transport=tcp SIP/2.0

```
Date: Thu, 04 Jun 2009 21:18:31 GMT
From: "Alice, Connect" <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763550
Allow-Events: presence, kpml
Content-Length: 228
To: <sip:2002@siptrunk17.cisco.com>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763462
Content-Type: application/sdp
Call-ID: 3fa13300-a2813a27-2b-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK9c3bf50e5e
CSeq: 101 ACK
Max-Forwards: 70

v=0
o=CiscoSystemsCCM-SIP 2000 1 IN IP4 10.10.199.250
s=SIP Call
c=IN IP4 10.10.199.130
t=0 0
m=audio 29162 RTP/AVP 9 101
a=rtpmap:9 G722/8000
a=ptime:20
a=recvonly
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
```

[diagram] Call-ID:[prev][next]

[69] INVITE sip:1001@10.10.199.250:5060;transport=tcp SIP/2.0

```
Date: Thu, 04 Jun 2009 21:19:35 GMT
Call-Info: <sip:10.10.199.251:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:2002@siptrunk17.cisco.com>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763462
Allow-Events: presence, kpml
P-Asserted-Identity: "Bob, Connect" <sip:2002@10.10.199.251>
Supported: timer,resource-priority,replaces
```

CISCO CONFIDENTIAL

```
Min-SE:  1800
Remote-Party-ID: "Bob, Connect" <sip:2002@10.10.199.251>;party=calling;screen=yes;privacy=off
Content-Length: 216
User-Agent: Cisco-CUCM7.1
To: "Alice, Connect" <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763550
Contact: <sip:2002@10.10.199.251:5060;transport=tcp>
Expires: 180
Content-Type: application/sdp
Call-ID: 3fa13300-a2813a27-2b-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bK8b30ecba8b
CSeq: 101 INVITE
Session-Expires:  1800;refresher=uac
Max-Forwards: 70

v=0
o=CiscoSystemsCCM-SIP 2000 2 IN IP4 10.10.199.251
s=SIP Call
c=IN IP4 10.10.199.179
t=0 0
m=audio 22566 RTP/AVP 9 101
a=rtpmap:9 G722/8000
a=ptime:20
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15

[diagram]   Call-ID:[prev][next]
[70] SIP/2.0 100 Trying
Date: Thu, 04 Jun 2009 21:18:33 GMT
From: <sip:2002@siptrunk17.cisco.com>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763462
Allow-Events: presence, kpml
Content-Length: 0
To: "Alice, Connect" <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763550
Call-ID: 3fa13300-a2813a27-2b-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bK8b30ecba8b
CSeq: 101 INVITE

[diagram]   Call-ID:[prev][next]
[71] SIP/2.0 200 OK
Date: Thu, 04 Jun 2009 21:18:33 GMT
Call-Info: <sip:10.10.199.250:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:2002@siptrunk17.cisco.com>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763462
Allow-Events: presence, kpml
Supported: replaces
Supported: Geolocation
Remote-Party-ID: "Alice, Connect" <sip:1001@10.10.199.250>;party=called;screen=yes;privacy=off
Content-Length: 216
Require:  timer
To: "Alice, Connect" <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763550
Contact: <sip:1001@10.10.199.250:5060;transport=tcp>
Content-Type: application/sdp
Call-ID: 3fa13300-a2813a27-2b-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bK8b30ecba8b
CSeq: 101 INVITE
Session-Expires:  1800;refresher=uac

v=0
o=CiscoSystemsCCM-SIP 2000 2 IN IP4 10.10.199.250
s=SIP Call
c=IN IP4 10.10.199.130
t=0 0
m=audio 29162 RTP/AVP 9 101
a=rtpmap:9 G722/8000
a=ptime:20
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15

[diagram]   Call-ID:[prev][next]
[72] ACK sip:1001@10.10.199.250:5060;transport=tcp SIP/2.0
Date: Thu, 04 Jun 2009 21:19:35 GMT
From: <sip:2002@siptrunk17.cisco.com>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763462
Allow-Events: presence, kpml
Content-Length: 0
To: "Alice, Connect" <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763550
Call-ID: 3fa13300-a2813a27-2b-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bK8cac63254
CSeq: 101 ACK
Max-Forwards: 70
```

CISCO CONFIDENTIAL

[diagram] Call-ID:[prev][next]
[73] BYE sip:2002@10.10.199.251:5060;transport=tcp SIP/2.0
Date: Thu, 04 Jun 2009 21:18:33 GMT
From: "Alice, Connect" <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763550
Content-Length: 0
User-Agent: Cisco-CUCM7.1
To: <sip:2002@siptrunk17.cisco.com>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763462
Call-ID: 3fa13300-a2813a27-2b-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK9d1e899078
CSeq: 102 BYE
Max-Forwards: 70

[diagram] Call-ID:[prev][next]
[74] SIP/2.0 200 OK
Date: Thu, 04 Jun 2009 21:19:39 GMT
From: "Alice, Connect" <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763550
Content-Length: 0
To: <sip:2002@siptrunk17.cisco.com>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763462
Call-ID: 3fa13300-a2813a27-2b-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK9d1e899078
CSeq: 102 BYE

[diagram] Call-ID:[prev][next]
[75] INVITE sip:2002@siptrunk17.cisco.com:5060 SIP/2.0
Date: Thu, 04 Jun 2009 21:21:17 GMT
Call-Info: <sip:10.10.199.250:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: "Alice, Connect" <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763552
Allow-Events: presence, kpml
Supported: timer,resource-priority,replaces
Supported: Geolocation
Min-SE: 1800
Content-Length: 0
User-Agent: Cisco-CUCM7.1
To: <sip:2002@siptrunk17.cisco.com>
Contact: <sip:1001@10.10.199.250:5060;transport=tcp>
Expires: 180
Call-ID: a292ca00-a2813acd-2c-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK9e6c0faefd
CSeq: 101 INVITE
P-Preferred-Identity: "Alice, Connect" <sip:1001@10.10.199.250>
Session-Expires: 1800
Max-Forwards: 70

[diagram] Call-ID:[prev][next]
[76] SIP/2.0 100 Trying
Date: Thu, 04 Jun 2009 21:22:20 GMT
From: "Alice, Connect" <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763552
Allow-Events: presence
Content-Length: 0
To: <sip:2002@siptrunk17.cisco.com>
Call-ID: a292ca00-a2813acd-2c-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK9e6c0faefd
CSeq: 101 INVITE

[diagram] Call-ID:[prev][next]
[77] SIP/2.0 180 Ringing
Date: Thu, 04 Jun 2009 21:22:20 GMT
Call-Info: <sip:10.10.199.251:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: "Alice, Connect" <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763552
Allow-Events: presence
P-Asserted-Identity: "Bob, Alert" <sip:2002@10.10.199.251>
Supported: Geolocation
Remote-Party-ID: "Bob, Alert" <sip:2002@10.10.199.251>;party=called;screen=yes;privacy=off
Content-Length: 0
To: <sip:2002@siptrunk17.cisco.com>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763464
Contact: <sip:2002@10.10.199.251:5060;transport=tcp>
Call-ID: a292ca00-a2813acd-2c-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK9e6c0faefd
CSeq: 101 INVITE

[diagram] Call-ID:[prev][next]
[78] SIP/2.0 183 Session Progress
Date: Thu, 04 Jun 2009 21:22:20 GMT
Call-Info: <sip:10.10.199.251:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: "Alice, Connect" <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763552
Allow-Events: presence, kpml
P-Asserted-Identity: "Bob, Alert" <sip:2002@10.10.199.251>

CISCO CONFIDENTIAL

```
Supported: Geolocation
Remote-Party-ID: "Bob, Alert" <sip:2002@10.10.199.251>;party=called;screen=yes;privacy=off
Content-Length: 337
To: <sip:2002@siptrunk17.cisco.com>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763464
Contact: <sip:2002@10.10.199.251:5060;transport=tcp>
Content-Type: application/sdp
Call-ID: a292ca00-a2813acd-2c-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK9e6c0faefd
CSeq: 101 INVITE

v=0
o=CiscoSystemsCCM-SIP 2000 1 IN IP4 10.10.199.251
s=SIP Call
c=IN IP4 10.10.199.179
t=0 0
m=audio 4000 RTP/AVP 9 0 8 18 101
a=rtpmap:9 G722/8000
a=ptime:20
a=rtpmap:0 PCMU/8000
a=ptime:20
a=rtpmap:8 PCMA/8000
a=ptime:20
a=rtpmap:18 G729/8000
a=ptime:20
a=sendonly
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
```

[diagram] Call-ID:[prev][next]

[79] SIP/2.0 200 OK

```
Date: Thu, 04 Jun 2009 21:22:20 GMT
Call-Info: <sip:10.10.199.251:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: "Alice, Connect" <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763552
Allow-Events: presence, kpml
P-Asserted-Identity: "Bob, Connect" <sip:2002@10.10.199.251>
Supported: replaces
Supported: Geolocation
Remote-Party-ID: "Bob, Connect" <sip:2002@10.10.199.251>;party=called;screen=yes;privacy=off
Content-Length: 337
Require:  timer
To: <sip:2002@siptrunk17.cisco.com>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763464
Contact: <sip:2002@10.10.199.251:5060;transport=tcp>
Content-Type: application/sdp
Call-ID: a292ca00-a2813acd-2c-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK9e6c0faefd
CSeq: 101 INVITE
Session-Expires:  1800;refresher=uas

v=0
o=CiscoSystemsCCM-SIP 2000 1 IN IP4 10.10.199.251
s=SIP Call
c=IN IP4 10.10.199.179
t=0 0
m=audio 4000 RTP/AVP 9 0 8 18 101
a=rtpmap:9 G722/8000
a=ptime:20
a=rtpmap:0 PCMU/8000
a=ptime:20
a=rtpmap:8 PCMA/8000
a=ptime:20
a=rtpmap:18 G729/8000
a=ptime:20
a=sendonly
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
```

[diagram] Call-ID:[prev][next]

[80] ACK sip:2002@10.10.199.251:5060;transport=tcp SIP/2.0

```
Date: Thu, 04 Jun 2009 21:21:17 GMT
From: "Alice, Connect" <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763552
Allow-Events: presence, kpml
Content-Length: 228
To: <sip:2002@siptrunk17.cisco.com>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763464
Content-Type: application/sdp
Call-ID: a292ca00-a2813acd-2c-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK9f2dafc04f
CSeq: 101 ACK
Max-Forwards: 70
```

CISCO CONFIDENTIAL

```
v=0
o=CiscoSystemsCCM-SIP 2000 1 IN IP4 10.10.199.250
s=SIP Call
c=IN IP4 10.10.199.130
t=0 0
m=audio 29476 RTP/AVP 9 101
a=rtpmap:9 G722/8000
a=ptime:20
a=recvonly
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
```

[diagram] Call-ID:[prev][next]

[81] INVITE sip:1001@10.10.199.250:5060;transport=tcp SIP/2.0

```
Date: Thu, 04 Jun 2009 21:22:22 GMT
Call-Info: <sip:10.10.199.251:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:2002@siptrunk17.cisco.com>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763464
Allow-Events: presence, kpml
P-Asserted-Identity: "Bob, Connect" <sip:2002@10.10.199.251>
Supported: timer,resource-priority,replaces
Min-SE:  1800
Remote-Party-ID: "Bob, Connect" <sip:2002@10.10.199.251>;party=calling;screen=yes;privacy=off
Content-Length: 216
User-Agent: Cisco-CUCM7.1
To: "Alice, Connect" <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763552
Contact: <sip:2002@10.10.199.251:5060;transport=tcp>
Expires: 180
Content-Type: application/sdp
Call-ID: a292ca00-a2813acd-2c-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bK8d6d313e3e
CSeq: 101 INVITE
Session-Expires:  1800;refresher=uac
Max-Forwards: 70

v=0
o=CiscoSystemsCCM-SIP 2000 2 IN IP4 10.10.199.251
s=SIP Call
c=IN IP4 10.10.199.179
t=0 0
m=audio 22880 RTP/AVP 9 101
a=rtpmap:9 G722/8000
a=ptime:20
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
```

[diagram] Call-ID:[prev][next]

[82] SIP/2.0 100 Trying

```
Date: Thu, 04 Jun 2009 21:21:20 GMT
From: <sip:2002@siptrunk17.cisco.com>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763464
Allow-Events: presence, kpml
Content-Length: 0
To: "Alice, Connect" <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763552
Call-ID: a292ca00-a2813acd-2c-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bK8d6d313e3e
CSeq: 101 INVITE
```

[diagram] Call-ID:[prev][next]

[83] SIP/2.0 200 OK

```
Date: Thu, 04 Jun 2009 21:21:20 GMT
Call-Info: <sip:10.10.199.250:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:2002@siptrunk17.cisco.com>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763464
Allow-Events: presence, kpml
Supported: replaces
Supported: Geolocation
Content-Length: 216
Require:  timer
To: "Alice, Connect" <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763552
Contact: <sip:1001@10.10.199.250:5060;transport=tcp>
Content-Type: application/sdp
Call-ID: a292ca00-a2813acd-2c-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bK8d6d313e3e
CSeq: 101 INVITE
P-Preferred-Identity: "Alice, Connect" <sip:1001@10.10.199.250>
Session-Expires:  1800;refresher=uac

v=0
o=CiscoSystemsCCM-SIP 2000 2 IN IP4 10.10.199.250
s=SIP Call
```

CISCO CONFIDENTIAL

```
c=IN IP4 10.10.199.130
t=0 0
m=audio 29476 RTP/AVP 9 101
a=rtpmap:9 G722/8000
a=ptime:20
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15

[diagram]   Call-ID:[prev][next]
[84] ACK sip:1001@10.10.199.250:5060;transport=tcp SIP/2.0
Date: Thu, 04 Jun 2009 21:22:22 GMT
From: <sip:2002@siptrunk17.cisco.com>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763464
Allow-Events: presence, kpml
Content-Length: 0
To: "Alice, Connect" <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763552
Call-ID: a292ca00-a2813acd-2c-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bK8e771e3cc3
CSeq: 101 ACK
Max-Forwards: 70

[diagram]   Call-ID:[prev][next]
[85] BYE sip:2002@10.10.199.251:5060;transport=tcp SIP/2.0
Date: Thu, 04 Jun 2009 21:21:20 GMT
From: "Alice, Connect" <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763552
Content-Length: 0
User-Agent: Cisco-CUCM7.1
To: <sip:2002@siptrunk17.cisco.com>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763464
Call-ID: a292ca00-a2813acd-2c-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bKa06d942a7e
P-Preferred-Identity: "Alice, Connect" <sip:1001@10.10.199.250>
CSeq: 102 BYE
Max-Forwards: 70

[diagram]   Call-ID:[prev][next]
[86] SIP/2.0 200 OK
Date: Thu, 04 Jun 2009 21:22:28 GMT
From: "Alice, Connect" <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763552
Content-Length: 0
To: <sip:2002@siptrunk17.cisco.com>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763464
Call-ID: a292ca00-a2813acd-2c-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bKa06d942a7e
CSeq: 102 BYE
```

CISCO CONFIDENTIAL

19.11 Mid-Call UPDATE for Display identity change with P-Preferred-Identity

Title: Mid-Call UPDATE for Display identity change with P-Preferred-Identity

Description:
Unified CM to Unified CM SIP Trunk Call with Remote-Party-Id [] Asserted-Identity [v] & SIP Privacy=Default
Asserted-Type=PPI, sending UPDATE for mid call Display Name/Number update.

The following call flow illustrates the SIP messaging for an outgoing SIP Trunk call from a
Unified CM1 to a remote Unified CM2. The call is Transferred to another endpoint registered to Unified CM1,
which results in sending of UPDATE from Unified CM1 to Unified CM2.

The Unified CM1 sends an UPDATE message with P-Preferred-Identity.
There is "no" Privacy header sent as Display name & Number are not restricted.

Configuration:
Node = Unified CM1, IP = 10.10.199.250
Node = Unified CM2, IP = 10.10.199.250

Phone = A, Line = 1003, IP = 10.10.199.66, Model = SCCP
Phone = C, Line = 1001, IP = 10.10.199.130, Model = SCCP
Phone = B, Line = 2002, IP = 10.10.199.179, Model = SCCP

SIP Trunk from Unified CM1 to Unified CM2 has
a) route pattern 2.XXXX
b) Has destination port configured to be 5060
c) Remote-Party-Id [] Asserted-Identity [v], SIP Privacy= Default, Asserted-Type=PPI

Scenario:
Phone A DN 1003 calls Phone B DN 2002 over the SIP Trunk by dialing 22002

Phone A Transfers call to C DN 1001 and an UPDATE is sent from Unified CM1 to Unified CM2, with
P-Preferred-Identity having identity of Phone = C.
End of Scenario

CISCO CONFIDENTIAL

CISCO CONFIDENTIAL

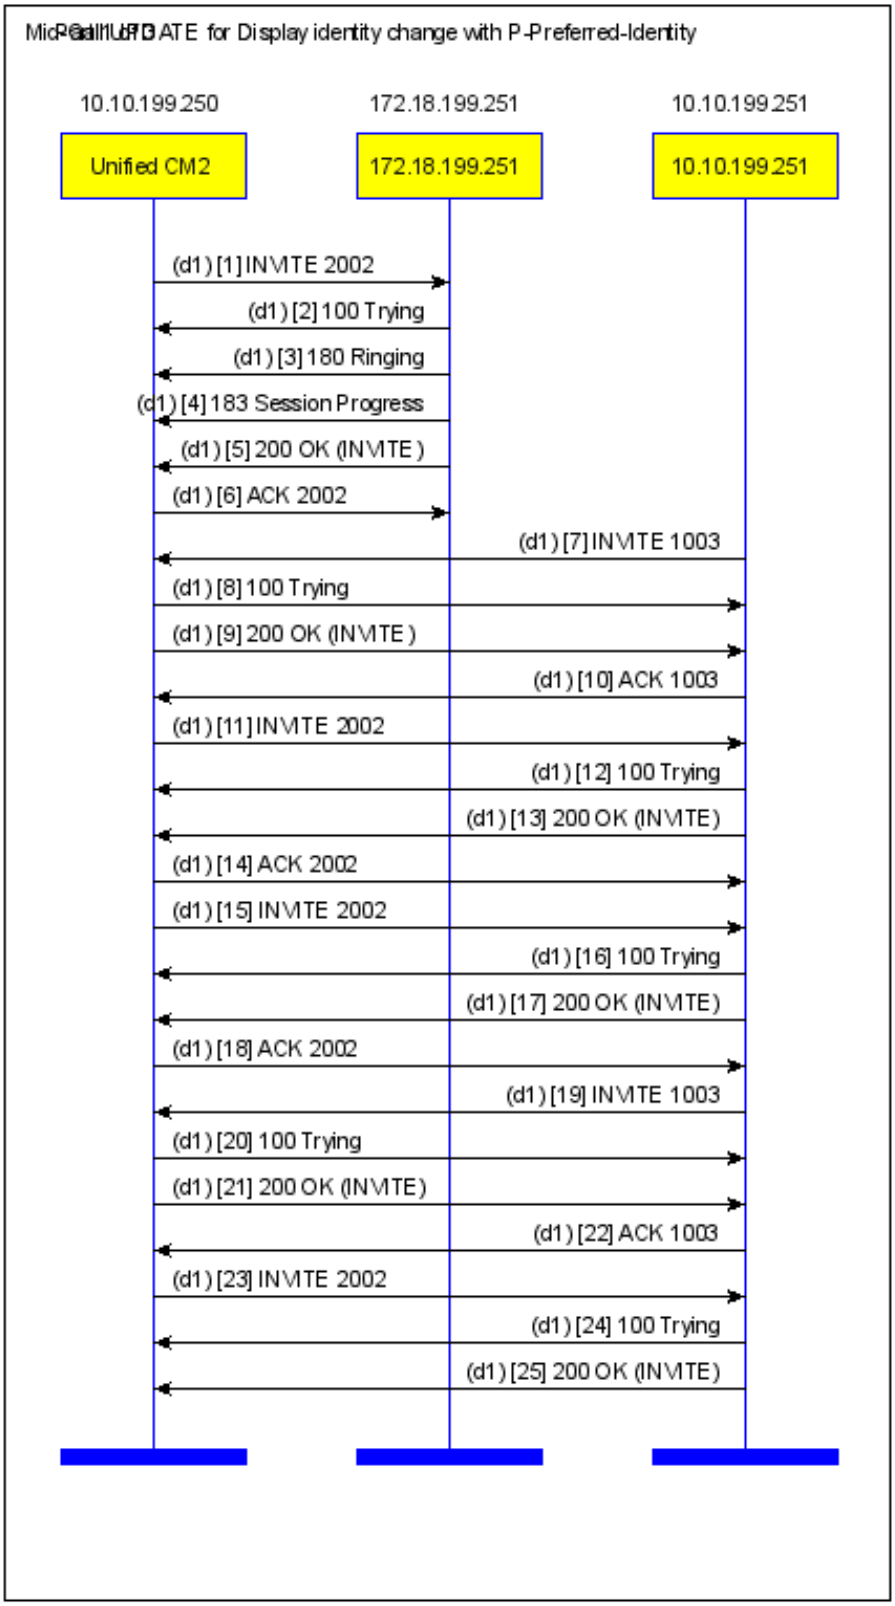

CISCO CONFIDENTIAL

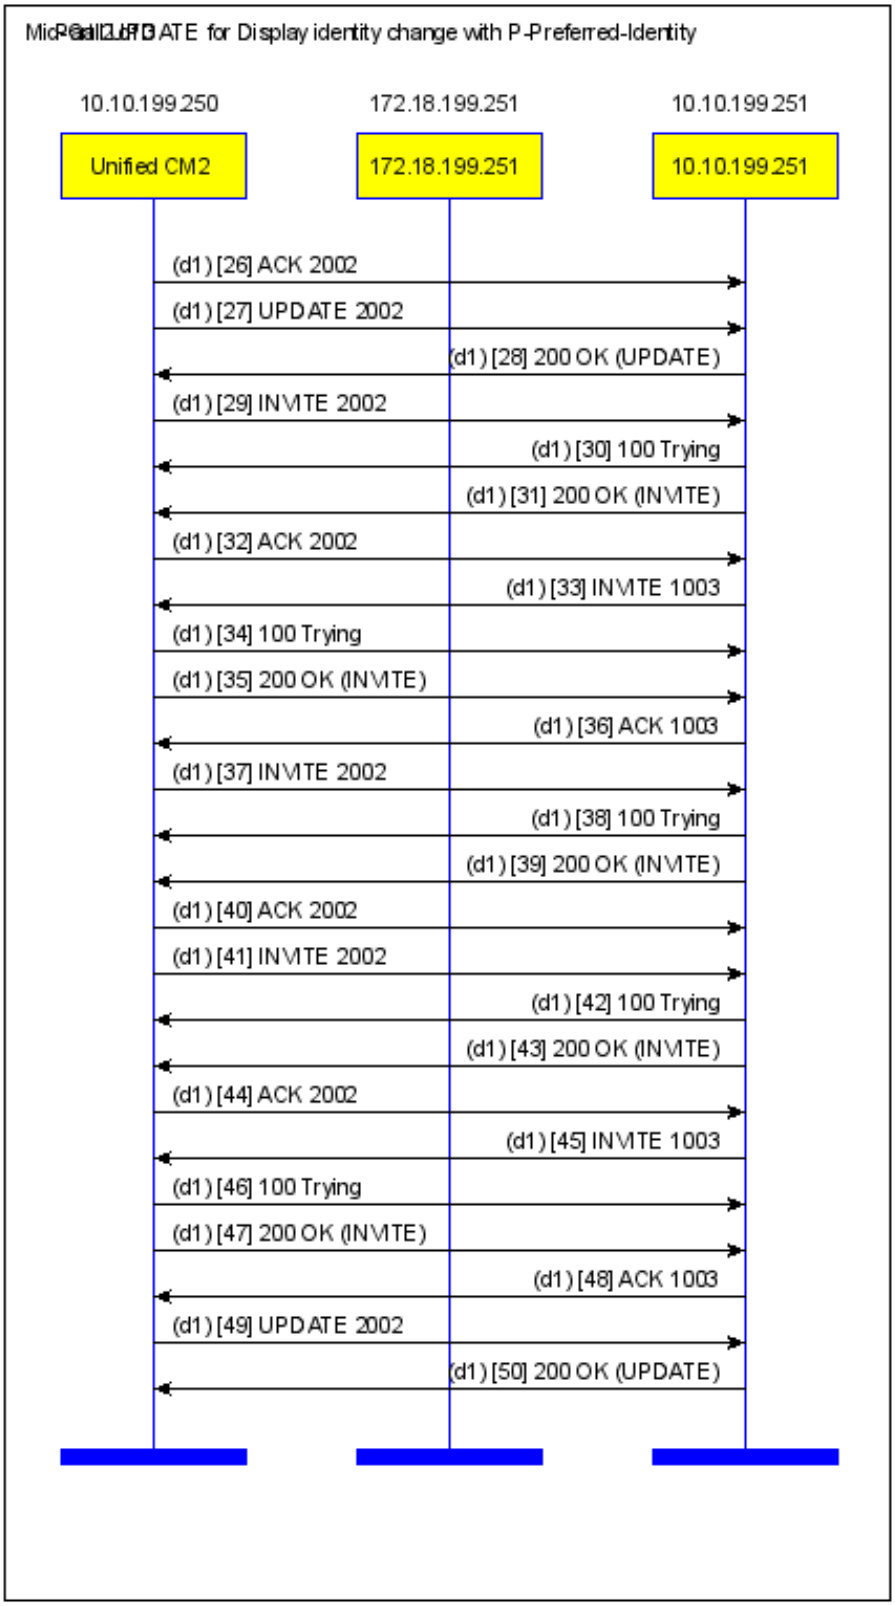

CISCO CONFIDENTIAL

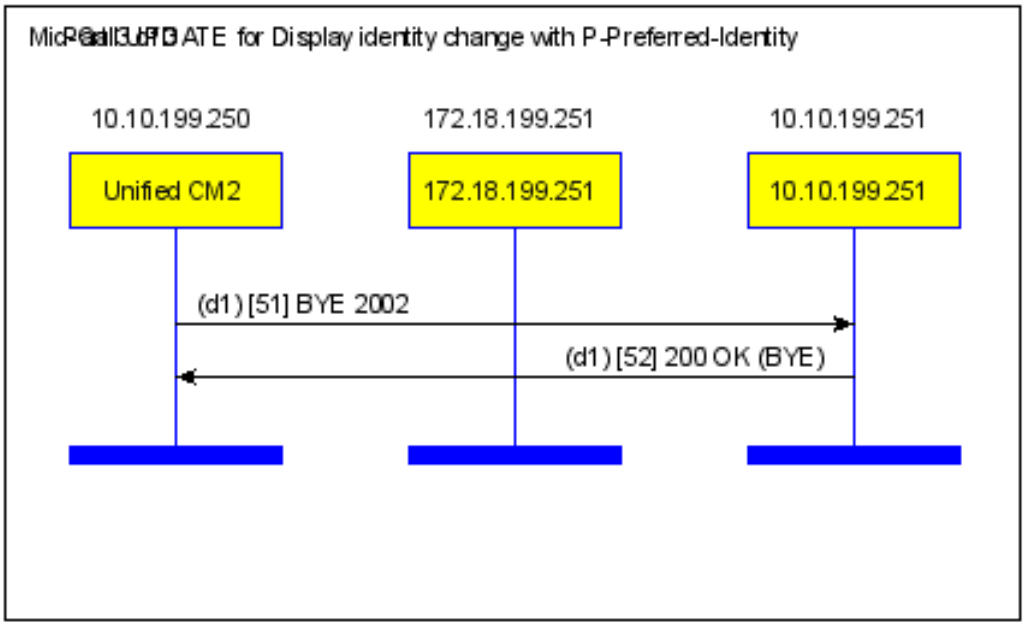

CISCO CONFIDENTIAL

[diagram] Call-ID:[prev][next]
[1] INVITE sip:2002@siptrunk17.cisco.com:5060 SIP/2.0
Date: Thu, 04 Jun 2009 21:35:09 GMT
Call-Info: <sip:10.10.199.250:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: "Charlie, Connect" <sip:1003@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763575
Allow-Events: presence, kpml
Supported: timer,resource-priority,replaces
Supported: Geolocation
Min-SE: 1800
Content-Length: 0
User-Agent: Cisco-CUCM7.1
To: <sip:2002@siptrunk17.cisco.com>
Contact: <sip:1003@10.10.199.250:5060;transport=tcp>
Expires: 180
Call-ID: 927bea00-a2813e0d-30-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bKdd4f21e8bb
CSeq: 101 INVITE
P-Preferred-Identity: "Charlie, Connect" <sip:1003@10.10.199.250>
Session-Expires: 1800
Max-Forwards: 70

[diagram] Call-ID:[prev][next]
[2] SIP/2.0 100 Trying
Date: Thu, 04 Jun 2009 21:36:11 GMT
From: "Charlie, Connect" <sip:1003@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763575
Allow-Events: presence
Content-Length: 0
To: <sip:2002@siptrunk17.cisco.com>
Call-ID: 927bea00-a2813e0d-30-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bKdd4f21e8bb
CSeq: 101 INVITE

[diagram] Call-ID:[prev][next]
[3] SIP/2.0 180 Ringing
Date: Thu, 04 Jun 2009 21:36:11 GMT
Call-Info: <sip:10.10.199.251:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: "Charlie, Connect" <sip:1003@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763575
Allow-Events: presence
P-Asserted-Identity: "Bob, Alert" <sip:2002@10.10.199.251>
Supported: Geolocation
Remote-Party-ID: "Bob, Alert" <sip:2002@10.10.199.251>;party=called;screen=yes;privacy=off
Content-Length: 0
To: <sip:2002@siptrunk17.cisco.com>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763472
Contact: <sip:2002@10.10.199.251:5060;transport=tcp>
Call-ID: 927bea00-a2813e0d-30-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bKdd4f21e8bb
CSeq: 101 INVITE

[diagram] Call-ID:[prev][next]
[4] SIP/2.0 183 Session Progress
Date: Thu, 04 Jun 2009 21:36:11 GMT
Call-Info: <sip:10.10.199.251:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: "Charlie, Connect" <sip:1003@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763575
Allow-Events: presence, kpml
P-Asserted-Identity: "Bob, Alert" <sip:2002@10.10.199.251>
Supported: Geolocation
Remote-Party-ID: "Bob, Alert" <sip:2002@10.10.199.251>;party=called;screen=yes;privacy=off
Content-Length: 337
To: <sip:2002@siptrunk17.cisco.com>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763472
Contact: <sip:2002@10.10.199.251:5060;transport=tcp>
Content-Type: application/sdp
Call-ID: 927bea00-a2813e0d-30-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bKdd4f21e8bb
CSeq: 101 INVITE

v=0
o=CiscoSystemsCCM-SIP 2000 1 IN IP4 10.10.199.251
s=SIP Call
c=IN IP4 10.10.199.179
t=0 0
m=audio 4000 RTP/AVP 9 0 8 18 101
a=rtpmap:9 G722/8000
a=ptime:20
a=rtpmap:0 PCMU/8000
a=ptime:20
a=rtpmap:8 PCMA/8000
a=ptime:20

CISCO CONFIDENTIAL

```
a=rtpmap:18 G729/8000
a=ptime:20
a=sendonly
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
```

[diagram] Call-ID:[prev][next]

[5] SIP/2.0 200 OK

```
Date: Thu, 04 Jun 2009 21:36:11 GMT
Call-Info: <sip:10.10.199.251:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: "Charlie, Connect" <sip:1003@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763575
Allow-Events: presence, kpml
P-Asserted-Identity: "Bob, Connect" <sip:2002@10.10.199.251>
Supported: replaces
Supported: Geolocation
Remote-Party-ID: "Bob, Connect" <sip:2002@10.10.199.251>;party=called;screen=yes;privacy=off
Content-Length: 337
Require:  timer
To: <sip:2002@siptrunk17.cisco.com>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763472
Contact: <sip:2002@10.10.199.251:5060;transport=tcp>
Content-Type: application/sdp
Call-ID: 927bea00-a2813e0d-30-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bKdd4f21e8bb
CSeq: 101 INVITE
Session-Expires:  1800;refresher=uas

v=0
o=CiscoSystemsCCM-SIP 2000 1 IN IP4 10.10.199.251
s=SIP Call
c=IN IP4 10.10.199.179
t=0 0
m=audio 4000 RTP/AVP 9 0 8 18 101
a=rtpmap:9 G722/8000
a=ptime:20
a=rtpmap:0 PCMU/8000
a=ptime:20
a=rtpmap:8 PCMA/8000
a=ptime:20
a=rtpmap:18 G729/8000
a=ptime:20
a=sendonly
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
```

[diagram] Call-ID:[prev][next]

[6] ACK sip:2002@10.10.199.251:5060;transport=tcp SIP/2.0

```
Date: Thu, 04 Jun 2009 21:35:09 GMT
From: "Charlie, Connect" <sip:1003@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763575
Allow-Events: presence, kpml
Content-Length: 227
To: <sip:2002@siptrunk17.cisco.com>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763472
Content-Type: application/sdp
Call-ID: 927bea00-a2813e0d-30-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bKde72f704a5
CSeq: 101 ACK
Max-Forwards: 70

v=0
o=CiscoSystemsCCM-SIP 2000 1 IN IP4 10.10.199.250
s=SIP Call
c=IN IP4 10.10.199.66
t=0 0
m=audio 30642 RTP/AVP 9 101
a=rtpmap:9 G722/8000
a=ptime:20
a=recvonly
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
```

[diagram] Call-ID:[prev][next]

[7] INVITE sip:1003@10.10.199.250:5060;transport=tcp SIP/2.0

```
Date: Thu, 04 Jun 2009 21:36:13 GMT
Call-Info: <sip:10.10.199.251:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:2002@siptrunk17.cisco.com>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763472
Allow-Events: presence, kpml
P-Asserted-Identity: "Bob, Connect" <sip:2002@10.10.199.251>
Supported: timer,resource-priority,replaces
Min-SE:  1800
```

CISCO CONFIDENTIAL

```
Remote-Party-ID: "Bob, Connect" <sip:2002@10.10.199.251>;party=calling;screen=yes;privacy=off
Content-Length: 216
User-Agent: Cisco-CUCM7.1
To: "Charlie, Connect" <sip:1003@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763575
Contact: <sip:2002@10.10.199.251:5060;transport=tcp>
Expires: 180
Content-Type: application/sdp
Call-ID: 927bea00-a2813e0d-30-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bKab7c37762f
CSeq: 101 INVITE
Session-Expires:  1800;refresher=uac
Max-Forwards: 70

v=0
o=CiscoSystemsCCM-SIP 2000 2 IN IP4 10.10.199.251
s=SIP Call
c=IN IP4 10.10.199.179
t=0 0
m=audio 24038 RTP/AVP 9 101
a=rtpmap:9 G722/8000
a=ptime:20
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
```

[diagram] Call-ID:[prev][next]

[8] SIP/2.0 100 Trying

```
Date: Thu, 04 Jun 2009 21:35:10 GMT
From: <sip:2002@siptrunk17.cisco.com>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763472
Allow-Events: presence, kpml
Content-Length: 0
To: "Charlie, Connect" <sip:1003@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763575
Call-ID: 927bea00-a2813e0d-30-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bKab7c37762f
CSeq: 101 INVITE
```

[diagram] Call-ID:[prev][next]

[9] SIP/2.0 200 OK

```
Date: Thu, 04 Jun 2009 21:35:10 GMT
Call-Info: <sip:10.10.199.250:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:2002@siptrunk17.cisco.com>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763472
Allow-Events: presence, kpml
Supported: replaces
Supported: Geolocation
Content-Length: 215
Require:  timer
To: "Charlie, Connect" <sip:1003@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763575
Contact: <sip:1003@10.10.199.250:5060;transport=tcp>
Content-Type: application/sdp
Call-ID: 927bea00-a2813e0d-30-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bKab7c37762f
CSeq: 101 INVITE
P-Preferred-Identity: "Charlie, Connect" <sip:1003@10.10.199.250>
Session-Expires:  1800;refresher=uac

v=0
o=CiscoSystemsCCM-SIP 2000 2 IN IP4 10.10.199.250
s=SIP Call
c=IN IP4 10.10.199.66
t=0 0
m=audio 30642 RTP/AVP 9 101
a=rtpmap:9 G722/8000
a=ptime:20
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
```

[diagram] Call-ID:[prev][next]

[10] ACK sip:1003@10.10.199.250:5060;transport=tcp SIP/2.0

```
Date: Thu, 04 Jun 2009 21:36:13 GMT
From: <sip:2002@siptrunk17.cisco.com>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763472
Allow-Events: presence, kpml
Content-Length: 0
To: "Charlie, Connect" <sip:1003@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763575
Call-ID: 927bea00-a2813e0d-30-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bKac61c752fd
CSeq: 101 ACK
Max-Forwards: 70
```

[diagram] Call-ID:[prev][next]

[11] INVITE sip:2002@10.10.199.251:5060;transport=tcp SIP/2.0

CISCO CONFIDENTIAL

```
Date: Thu, 04 Jun 2009 21:35:13 GMT
Call-Info: <sip:10.10.199.250:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: "Charlie, Connect" <sip:1003@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763575
Allow-Events: presence, kpml
Supported: timer,resource-priority,replaces
Min-SE:  1800
Content-Length: 221
User-Agent: Cisco-CUCM7.1
To: <sip:2002@siptrunk17.cisco.com>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763472
Contact: <sip:1003@10.10.199.250:5060;transport=tcp>
Expires: 180
Content-Type: application/sdp
Call-ID: 927bea00-a2813e0d-30-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bKdf6ec662f2
CSeq: 102 INVITE
P-Preferred-Identity: "Charlie, Connect" <sip:1003@10.10.199.250>
Session-Expires:  1800;refresher=uas
Max-Forwards: 70

v=0
o=CiscoSystemsCCM-SIP 2000 3 IN IP4 10.10.199.250
s=SIP Call
c=IN IP4 0.0.0.0
t=0 0
m=audio 30642 RTP/AVP 9 101
a=rtpmap:9 G722/8000
a=ptime:20
a=inactive
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
```

[diagram] Call-ID:[prev][next]

[12] SIP/2.0 100 Trying

```
Date: Thu, 04 Jun 2009 21:36:16 GMT
From: "Charlie, Connect" <sip:1003@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763575
Allow-Events: presence, kpml
Content-Length: 0
To: <sip:2002@siptrunk17.cisco.com>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763472
Call-ID: 927bea00-a2813e0d-30-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bKdf6ec662f2
CSeq: 102 INVITE
```

[diagram] Call-ID:[prev][next]

[13] SIP/2.0 200 OK

```
Date: Thu, 04 Jun 2009 21:36:16 GMT
Call-Info: <sip:10.10.199.251:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: "Charlie, Connect" <sip:1003@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763575
Allow-Events: presence, kpml
P-Asserted-Identity: "Bob, Connect" <sip:2002@10.10.199.251>
Supported: replaces
Supported: Geolocation
Remote-Party-ID: "Bob, Connect" <sip:2002@10.10.199.251>;party=called;screen=yes;privacy=off
Content-Length: 228
Require:  timer
To: <sip:2002@siptrunk17.cisco.com>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763472
Contact: <sip:2002@10.10.199.251:5060;transport=tcp>
Content-Type: application/sdp
Call-ID: 927bea00-a2813e0d-30-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bKdf6ec662f2
CSeq: 102 INVITE
Session-Expires:  1800;refresher=uas

v=0
o=CiscoSystemsCCM-SIP 2000 3 IN IP4 10.10.199.251
s=SIP Call
c=IN IP4 10.10.199.179
t=0 0
m=audio 24038 RTP/AVP 9 101
a=rtpmap:9 G722/8000
a=ptime:20
a=inactive
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
```

[diagram] Call-ID:[prev][next]

[14] ACK sip:2002@10.10.199.251:5060;transport=tcp SIP/2.0

```
Date: Thu, 04 Jun 2009 21:35:13 GMT
From: "Charlie, Connect" <sip:1003@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763575
```

CISCO CONFIDENTIAL

```
Allow-Events: presence, kpml
Content-Length: 0
To: <sip:2002@siptrunk17.cisco.com>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763472
Call-ID: 927bea00-a2813e0d-30-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bKe0f3b0837
CSeq: 102 ACK
Max-Forwards: 70
```

[diagram] Call-ID:[prev][next]

[15] INVITE sip:2002@10.10.199.251:5060;transport=tcp SIP/2.0

```
Date: Thu, 04 Jun 2009 21:35:13 GMT
Call-Info: <sip:10.10.199.250:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: "Charlie, Connect" <sip:1003@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763575
Allow-Events: presence, kpml
Supported: timer,resource-priority,replaces
Min-SE:  1800
Content-Length: 0
User-Agent: Cisco-CUCM7.1
To: <sip:2002@siptrunk17.cisco.com>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763472
Contact: <sip:1003@10.10.199.250:5060;transport=tcp>
Expires: 180
Call-ID: 927bea00-a2813e0d-30-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bKe1d5e948a
CSeq: 103 INVITE
P-Preferred-Identity: "Charlie, Connect" <sip:1003@10.10.199.250>
Session-Expires:  1800;refresher=uas
Max-Forwards: 70
```

[diagram] Call-ID:[prev][next]

[16] SIP/2.0 100 Trying

```
Date: Thu, 04 Jun 2009 21:36:16 GMT
From: "Charlie, Connect" <sip:1003@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763575
Allow-Events: presence, kpml
Content-Length: 0
To: <sip:2002@siptrunk17.cisco.com>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763472
Call-ID: 927bea00-a2813e0d-30-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bKe1d5e948a
CSeq: 103 INVITE
```

[diagram] Call-ID:[prev][next]

[17] SIP/2.0 200 OK

```
Date: Thu, 04 Jun 2009 21:36:16 GMT
Call-Info: <sip:10.10.199.251:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: "Charlie, Connect" <sip:1003@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763575
Allow-Events: presence, kpml
P-Asserted-Identity: "Bob, Connect" <sip:2002@10.10.199.251>
Supported: replaces
Remote-Party-ID: "Bob, Connect" <sip:2002@10.10.199.251>;party=called;screen=yes;privacy=off
Content-Length: 337
Require:  timer
To: <sip:2002@siptrunk17.cisco.com>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763472
Contact: <sip:2002@10.10.199.251:5060;transport=tcp>
Content-Type: application/sdp
Call-ID: 927bea00-a2813e0d-30-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bKe1d5e948a
CSeq: 103 INVITE
Session-Expires:  1800;refresher=uas

v=0
o=CiscoSystemsCCM-SIP 2000 4 IN IP4 10.10.199.251
s=SIP Call
c=IN IP4 10.10.199.179
t=0 0
m=audio 4000 RTP/AVP 9 0 8 18 101
a=rtpmap:9 G722/8000
a=ptime:20
a=rtpmap:0 PCMU/8000
a=ptime:20
a=rtpmap:8 PCMA/8000
a=ptime:20
a=rtpmap:18 G729/8000
a=ptime:20
a=sendonly
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
```

[diagram] Call-ID:[prev][next]

[18] ACK sip:2002@10.10.199.251:5060;transport=tcp SIP/2.0

CISCO CONFIDENTIAL

```
Date: Thu, 04 Jun 2009 21:35:13 GMT
From: "Charlie, Connect" <sip:1003@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763575
Allow-Events: presence, kpml
Content-Length: 171
To: <sip:2002@siptrunk17.cisco.com>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763472
Content-Type: application/sdp
Call-ID: 927bea00-a2813e0d-30-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bKe276c989c0
CSeq: 103 ACK
Max-Forwards: 70

v=0
o=CiscoSystemsCCM-SIP 2000 4 IN IP4 10.10.199.250
s=SIP Call
c=IN IP4 10.10.199.250
t=0 0
m=audio 4000 RTP/AVP 0
a=rtpmap:0 PCMU/8000
a=ptime:20
a=inactive
```

[diagram] Call-ID:[prev][next]

[19] INVITE sip:1003@10.10.199.250:5060;transport=tcp SIP/2.0

```
Date: Thu, 04 Jun 2009 21:36:16 GMT
Call-Info: <sip:10.10.199.251:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:2002@siptrunk17.cisco.com>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763472
Allow-Events: presence, kpml
P-Asserted-Identity: "Bob, Connect" <sip:2002@10.10.199.251>
Supported: timer,resource-priority,replaces
Min-SE:  1800
Remote-Party-ID: "Bob, Connect" <sip:2002@10.10.199.251>;party=calling;screen=yes;privacy=off
Content-Length: 160
User-Agent: Cisco-CUCM7.1
To: "Charlie, Connect" <sip:1003@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763575
Contact: <sip:2002@10.10.199.251:5060;transport=tcp>
Expires: 180
Content-Type: application/sdp
Call-ID: 927bea00-a2813e0d-30-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bKade2ef581
CSeq: 102 INVITE
Session-Expires:  1800;refresher=uac
Max-Forwards: 70

v=0
o=CiscoSystemsCCM-SIP 2000 5 IN IP4 10.10.199.251
s=SIP Call
c=IN IP4 10.10.199.179
t=0 0
m=audio 24352 RTP/AVP 0
a=rtpmap:0 PCMU/8000
a=ptime:20
```

[diagram] Call-ID:[prev][next]

[20] SIP/2.0 100 Trying

```
Date: Thu, 04 Jun 2009 21:35:14 GMT
From: <sip:2002@siptrunk17.cisco.com>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763472
Allow-Events: presence, kpml
Content-Length: 0
To: "Charlie, Connect" <sip:1003@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763575
Call-ID: 927bea00-a2813e0d-30-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bKade2ef581
CSeq: 102 INVITE
```

[diagram] Call-ID:[prev][next]

[21] SIP/2.0 200 OK

```
Date: Thu, 04 Jun 2009 21:35:14 GMT
Call-Info: <sip:10.10.199.250:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:2002@siptrunk17.cisco.com>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763472
Allow-Events: presence, kpml
Supported: replaces
Supported: Geolocation
Content-Length: 171
Require:  timer
To: "Charlie, Connect" <sip:1003@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763575
Contact: <sip:1003@10.10.199.250:5060;transport=tcp>
Content-Type: application/sdp
Call-ID: 927bea00-a2813e0d-30-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bKade2ef581
```

CISCO CONFIDENTIAL

```
CSeq: 102 INVITE
P-Preferred-Identity: "Charlie, Connect" <sip:1003@10.10.199.250>
Session-Expires:  1800;refresher=uac

v=0
o=CiscoSystemsCCM-SIP 2000 5 IN IP4 10.10.199.250
s=SIP Call
c=IN IP4 10.10.199.250
t=0 0
m=audio 4000 RTP/AVP 0
a=rtpmap:0 PCMU/8000
a=ptime:20
a=sendonly
```

[diagram] Call-ID:[prev][next]

[22] ACK sip:1003@10.10.199.250:5060;transport=tcp SIP/2.0

```
Date: Thu, 04 Jun 2009 21:36:16 GMT
From: <sip:2002@siptrunk17.cisco.com>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763472
Allow-Events: presence, kpml
Content-Length: 0
To: "Charlie, Connect" <sip:1003@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763575
Call-ID: 927bea00-a2813e0d-30-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bKae4f416c1d
CSeq: 102 ACK
Max-Forwards: 70
```

[diagram] Call-ID:[prev][next]

[23] INVITE sip:2002@10.10.199.251:5060;transport=tcp SIP/2.0

```
Date: Thu, 04 Jun 2009 21:35:19 GMT
Call-Info: <sip:10.10.199.250:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: "Charlie, Connect" <sip:1003@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763575
Allow-Events: presence, kpml
Supported: timer,resource-priority,replaces
Min-SE:  1800
Content-Length: 164
User-Agent: Cisco-CUCM7.1
To: <sip:2002@siptrunk17.cisco.com>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763472
Contact: <sip:1003@10.10.199.250:5060;transport=tcp>
Expires: 180
Content-Type: application/sdp
Call-ID: 927bea00-a2813e0d-30-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bKe35b1a7e1c
CSeq: 104 INVITE
P-Preferred-Identity: "Charlie, Connect" <sip:1003@10.10.199.250>
Session-Expires:  1800;refresher=uas
Max-Forwards: 70

v=0
o=CiscoSystemsCCM-SIP 2000 6 IN IP4 10.10.199.250
s=SIP Call
c=IN IP4 0.0.0.0
t=0 0
m=audio 4000 RTP/AVP 0
a=rtpmap:0 PCMU/8000
a=ptime:20
a=inactive
```

[diagram] Call-ID:[prev][next]

[24] SIP/2.0 100 Trying

```
Date: Thu, 04 Jun 2009 21:36:21 GMT
From: "Charlie, Connect" <sip:1003@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763575
Allow-Events: presence, kpml
Content-Length: 0
To: <sip:2002@siptrunk17.cisco.com>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763472
Call-ID: 927bea00-a2813e0d-30-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bKe35b1a7e1c
CSeq: 104 INVITE
```

[diagram] Call-ID:[prev][next]

[25] SIP/2.0 200 OK

```
Date: Thu, 04 Jun 2009 21:36:21 GMT
Call-Info: <sip:10.10.199.251:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: "Charlie, Connect" <sip:1003@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763575
Allow-Events: presence, kpml
P-Asserted-Identity: "Bob, Connect" <sip:2002@10.10.199.251>
Supported: replaces
Supported: Geolocation
Remote-Party-ID: "Bob, Connect" <sip:2002@10.10.199.251>;party=called;screen=yes;privacy=off
```

CISCO CONFIDENTIAL

```
Content-Length: 172
Require:  timer
To: <sip:2002@siptrunk17.cisco.com>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763472
Contact: <sip:2002@10.10.199.251:5060;transport=tcp>
Content-Type: application/sdp
Call-ID: 927bea00-a2813e0d-30-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bKe35b1a7e1c
CSeq: 104 INVITE
Session-Expires:  1800;refresher=uas

v=0
o=CiscoSystemsCCM-SIP 2000 6 IN IP4 10.10.199.251
s=SIP Call
c=IN IP4 10.10.199.179
t=0 0
m=audio 24352 RTP/AVP 0
a=rtpmap:0 PCMU/8000
a=ptime:20
a=inactive
```

[diagram] Call-ID:[prev][next]

[26] ACK sip:2002@10.10.199.251:5060;transport=tcp SIP/2.0

```
Date: Thu, 04 Jun 2009 21:35:19 GMT
From: "Charlie, Connect" <sip:1003@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763575
Allow-Events: presence, kpml
Content-Length: 0
To: <sip:2002@siptrunk17.cisco.com>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763472
Call-ID: 927bea00-a2813e0d-30-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bKe4bcc07c4
CSeq: 104 ACK
Max-Forwards: 70
```

[diagram] Call-ID:[prev][next]

[27] UPDATE sip:2002@10.10.199.251:5060;transport=tcp SIP/2.0

```
Date: Thu, 04 Jun 2009 21:35:19 GMT
Call-Info: <sip:10.10.199.250:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: "Charlie, Connect" <sip:1003@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763575
Allow-Events: presence, kpml
Supported: timer,resource-priority,replaces
Content-Length: 0
User-Agent: Cisco-CUCM7.1
To: <sip:2002@siptrunk17.cisco.com>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763472
Contact: <sip:1003@10.10.199.250:5060;transport=tcp>
Call-ID: 927bea00-a2813e0d-30-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bKe5a2bca9c
CSeq: 105 UPDATE
P-Preferred-Identity: "Alice, Alert" <sip:1001@10.10.199.250>
Max-Forwards: 70
```

[diagram] Call-ID:[prev][next]

[28] SIP/2.0 200 OK

```
Date: Thu, 04 Jun 2009 21:36:21 GMT
From: "Charlie, Connect" <sip:1003@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763575
Allow-Events: presence, kpml
P-Asserted-Identity: "Bob, Connect" <sip:2002@10.10.199.251>
Remote-Party-ID: "Bob, Connect" <sip:2002@10.10.199.251>;party=called;screen=yes;privacy=off
Content-Length: 0
Require:  timer
To: <sip:2002@siptrunk17.cisco.com>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763472
Contact: <sip:2002@10.10.199.251:5060;transport=tcp>
Call-ID: 927bea00-a2813e0d-30-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bKe5a2bca9c
CSeq: 105 UPDATE
Session-Expires:  1800;refresher=uas
```

[diagram] Call-ID:[prev][next]

[29] INVITE sip:2002@10.10.199.251:5060;transport=tcp SIP/2.0

```
Date: Thu, 04 Jun 2009 21:35:19 GMT
Call-Info: <sip:10.10.199.250:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: "Charlie, Connect" <sip:1003@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763575
Allow-Events: presence, kpml
Supported: timer,resource-priority,replaces
Min-SE:  1800
Content-Length: 0
User-Agent: Cisco-CUCM7.1
To: <sip:2002@siptrunk17.cisco.com>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763472
Contact: <sip:1003@10.10.199.250:5060;transport=tcp>
Expires: 180
```

CISCO CONFIDENTIAL

```
Call-ID: 927bea00-a2813e0d-30-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bKe67b1456c3
CSeq: 106 INVITE
P-Preferred-Identity: "Alice, Alert" <sip:1001@10.10.199.250>
Session-Expires:  1800;refresher=uas
Max-Forwards: 70
```

[diagram] Call-ID:[prev][next]

[30] SIP/2.0 100 Trying

```
Date: Thu, 04 Jun 2009 21:36:21 GMT
From: "Charlie, Connect" <sip:1003@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763575
Allow-Events: presence, kpml
Content-Length: 0
To: <sip:2002@siptrunk17.cisco.com>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763472
Call-ID: 927bea00-a2813e0d-30-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bKe67b1456c3
CSeq: 106 INVITE
```

[diagram] Call-ID:[prev][next]

[31] SIP/2.0 200 OK

```
Date: Thu, 04 Jun 2009 21:36:21 GMT
Call-Info: <sip:10.10.199.251:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: "Charlie, Connect" <sip:1003@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763575
Allow-Events: presence, kpml
P-Asserted-Identity: "Bob, Connect" <sip:2002@10.10.199.251>
Supported: replaces
Remote-Party-ID: "Bob, Connect" <sip:2002@10.10.199.251>;party=called;screen=yes;privacy=off
Content-Length: 337
Require:  timer
To: <sip:2002@siptrunk17.cisco.com>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763472
Contact: <sip:2002@10.10.199.251:5060;transport=tcp>
Content-Type: application/sdp
Call-ID: 927bea00-a2813e0d-30-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bKe67b1456c3
CSeq: 106 INVITE
Session-Expires:  1800;refresher=uas

v=0
o=CiscoSystemsCCM-SIP 2000 7 IN IP4 10.10.199.251
s=SIP Call
c=IN IP4 10.10.199.179
t=0 0
m=audio 4000 RTP/AVP 9 0 8 18 101
a=rtpmap:9 G722/8000
a=ptime:20
a=rtpmap:0 PCMU/8000
a=ptime:20
a=rtpmap:8 PCMA/8000
a=ptime:20
a=rtpmap:18 G729/8000
a=ptime:20
a=sendonly
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
```

[diagram] Call-ID:[prev][next]

[32] ACK sip:2002@10.10.199.251:5060;transport=tcp SIP/2.0

```
Date: Thu, 04 Jun 2009 21:35:19 GMT
From: "Charlie, Connect" <sip:1003@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763575
Allow-Events: presence, kpml
Content-Length: 171
To: <sip:2002@siptrunk17.cisco.com>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763472
Content-Type: application/sdp
Call-ID: 927bea00-a2813e0d-30-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bKe71b4c7f2d
CSeq: 106 ACK
Max-Forwards: 70

v=0
o=CiscoSystemsCCM-SIP 2000 7 IN IP4 10.10.199.250
s=SIP Call
c=IN IP4 10.10.199.250
t=0 0
m=audio 4000 RTP/AVP 0
a=rtpmap:0 PCMU/8000
a=ptime:20
a=inactive
```

CISCO CONFIDENTIAL

[diagram] Call-ID:[prev][next]
[33] INVITE sip:1003@10.10.199.250:5060;transport=tcp SIP/2.0
Date: Thu, 04 Jun 2009 21:36:22 GMT
Call-Info: <sip:10.10.199.251:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:2002@siptrunk17.cisco.com>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763472
Allow-Events: presence, kpml
P-Asserted-Identity: "Bob, Connect" <sip:2002@10.10.199.251>
Supported: timer,resource-priority,replaces
Min-SE: 1800
Remote-Party-ID: "Bob, Connect" <sip:2002@10.10.199.251>;party=calling;screen=yes;privacy=off
Content-Length: 160
User-Agent: Cisco-CUCM7.1
To: "Charlie, Connect" <sip:1003@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763575
Contact: <sip:2002@10.10.199.251:5060;transport=tcp>
Expires: 180
Content-Type: application/sdp
Call-ID: 927bea00-a2813e0d-30-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bKaf4997c0a4
CSeq: 103 INVITE
Session-Expires: 1800;refresher=uac
Max-Forwards: 70

v=0
o=CiscoSystemsCCM-SIP 2000 8 IN IP4 10.10.199.251
s=SIP Call
c=IN IP4 10.10.199.179
t=0 0
m=audio 24938 RTP/AVP 0
a=rtpmap:0 PCMU/8000
a=ptime:20

[diagram] Call-ID:[prev][next]
[34] SIP/2.0 100 Trying
Date: Thu, 04 Jun 2009 21:35:19 GMT
From: <sip:2002@siptrunk17.cisco.com>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763472
Allow-Events: presence, kpml
Content-Length: 0
To: "Charlie, Connect" <sip:1003@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763575
Call-ID: 927bea00-a2813e0d-30-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bKaf4997c0a4
CSeq: 103 INVITE

[diagram] Call-ID:[prev][next]
[35] SIP/2.0 200 OK
Date: Thu, 04 Jun 2009 21:35:19 GMT
Call-Info: <sip:10.10.199.250:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:2002@siptrunk17.cisco.com>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763472
Allow-Events: presence, kpml
Supported: replaces
Supported: Geolocation
Content-Length: 171
Require: timer
To: "Charlie, Connect" <sip:1003@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763575
Contact: <sip:1003@10.10.199.250:5060;transport=tcp>
Content-Type: application/sdp
Call-ID: 927bea00-a2813e0d-30-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bKaf4997c0a4
CSeq: 103 INVITE
P-Preferred-Identity: "Alice, Alert" <sip:1001@10.10.199.250>
Session-Expires: 1800;refresher=uac

v=0
o=CiscoSystemsCCM-SIP 2000 8 IN IP4 10.10.199.250
s=SIP Call
c=IN IP4 10.10.199.250
t=0 0
m=audio 4000 RTP/AVP 0
a=rtpmap:0 PCMU/8000
a=ptime:20
a=sendonly

[diagram] Call-ID:[prev][next]
[36] ACK sip:1003@10.10.199.250:5060;transport=tcp SIP/2.0
Date: Thu, 04 Jun 2009 21:36:22 GMT
From: <sip:2002@siptrunk17.cisco.com>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763472
Allow-Events: presence, kpml
Content-Length: 0
To: "Charlie, Connect" <sip:1003@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763575

CISCO CONFIDENTIAL

```
Call-ID: 927bea00-a2813e0d-30-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bKb065067c73
CSeq: 103 ACK
Max-Forwards: 70
```

[diagram] Call-ID:[prev][next]

[37] INVITE sip:2002@10.10.199.251:5060;transport=tcp SIP/2.0

```
Date: Thu, 04 Jun 2009 21:35:20 GMT
Call-Info: <sip:10.10.199.250:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: "Charlie, Connect" <sip:1003@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763575
Allow-Events: presence, kpml
Supported: timer,resource-priority,replaces
Min-SE:  1800
Content-Length: 164
User-Agent: Cisco-CUCM7.1
To: <sip:2002@siptrunk17.cisco.com>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763472
Contact: <sip:1003@10.10.199.250:5060;transport=tcp>
Expires: 180
Content-Type: application/sdp
Call-ID: 927bea00-a2813e0d-30-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bKe88784082
CSeq: 107 INVITE
P-Preferred-Identity: "Alice, Alert" <sip:1001@10.10.199.250>
Session-Expires:  1800;refresher=uas
Max-Forwards: 70

v=0
o=CiscoSystemsCCM-SIP 2000 9 IN IP4 10.10.199.250
s=SIP Call
c=IN IP4 0.0.0.0
t=0 0
m=audio 4000 RTP/AVP 0
a=rtpmap:0 PCMU/8000
a=ptime:20
a=inactive
```

[diagram] Call-ID:[prev][next]

[38] SIP/2.0 100 Trying

```
Date: Thu, 04 Jun 2009 21:36:22 GMT
From: "Charlie, Connect" <sip:1003@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763575
Allow-Events: presence, kpml
Content-Length: 0
To: <sip:2002@siptrunk17.cisco.com>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763472
Call-ID: 927bea00-a2813e0d-30-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bKe88784082
CSeq: 107 INVITE
```

[diagram] Call-ID:[prev][next]

[39] SIP/2.0 200 OK

```
Date: Thu, 04 Jun 2009 21:36:22 GMT
Call-Info: <sip:10.10.199.251:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: "Charlie, Connect" <sip:1003@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763575
Allow-Events: presence, kpml
P-Asserted-Identity: "Bob, Connect" <sip:2002@10.10.199.251>
Supported: replaces
Supported: Geolocation
Remote-Party-ID: "Bob, Connect" <sip:2002@10.10.199.251>;party=called;screen=yes;privacy=off
Content-Length: 172
Require:  timer
To: <sip:2002@siptrunk17.cisco.com>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763472
Contact: <sip:2002@10.10.199.251:5060;transport=tcp>
Content-Type: application/sdp
Call-ID: 927bea00-a2813e0d-30-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bKe88784082
CSeq: 107 INVITE
Session-Expires:  1800;refresher=uas

v=0
o=CiscoSystemsCCM-SIP 2000 9 IN IP4 10.10.199.251
s=SIP Call
c=IN IP4 10.10.199.179
t=0 0
m=audio 24938 RTP/AVP 0
a=rtpmap:0 PCMU/8000
a=ptime:20
a=inactive
```

CISCO CONFIDENTIAL

[diagram] Call-ID:[prev][next]
[40] ACK sip:2002@10.10.199.251:5060;transport=tcp SIP/2.0
Date: Thu, 04 Jun 2009 21:35:20 GMT
From: "Charlie, Connect" <sip:1003@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763575
Allow-Events: presence, kpml
Content-Length: 0
To: <sip:2002@siptrunk17.cisco.com>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763472
Call-ID: 927bea00-a2813e0d-30-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bKe971acf33e
CSeq: 107 ACK
Max-Forwards: 70

[diagram] Call-ID:[prev][next]
[41] INVITE sip:2002@10.10.199.251:5060;transport=tcp SIP/2.0
Date: Thu, 04 Jun 2009 21:35:20 GMT
Call-Info: <sip:10.10.199.250:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: "Charlie, Connect" <sip:1003@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763575
Allow-Events: presence, kpml
Supported: timer,resource-priority,replaces
Min-SE: 1800
Content-Length: 0
User-Agent: Cisco-CUCM7.1
To: <sip:2002@siptrunk17.cisco.com>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763472
Contact: <sip:1003@10.10.199.250:5060;transport=tcp>
Expires: 180
Call-ID: 927bea00-a2813e0d-30-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bKea689c73eb
CSeq: 108 INVITE
P-Preferred-Identity: "Alice, Alert" <sip:1001@10.10.199.250>
Session-Expires: 1800;refresher=uas
Max-Forwards: 70

[diagram] Call-ID:[prev][next]
[42] SIP/2.0 100 Trying
Date: Thu, 04 Jun 2009 21:36:22 GMT
From: "Charlie, Connect" <sip:1003@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763575
Allow-Events: presence, kpml
Content-Length: 0
To: <sip:2002@siptrunk17.cisco.com>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763472
Call-ID: 927bea00-a2813e0d-30-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bKea689c73eb
CSeq: 108 INVITE

[diagram] Call-ID:[prev][next]
[43] SIP/2.0 200 OK
Date: Thu, 04 Jun 2009 21:36:22 GMT
Call-Info: <sip:10.10.199.251:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: "Charlie, Connect" <sip:1003@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763575
Allow-Events: presence, kpml
P-Asserted-Identity: "Bob, Connect" <sip:2002@10.10.199.251>
Supported: replaces
Remote-Party-ID: "Bob, Connect" <sip:2002@10.10.199.251>;party=called;screen=yes;privacy=off
Content-Length: 338
Require: timer
To: <sip:2002@siptrunk17.cisco.com>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763472
Contact: <sip:2002@10.10.199.251:5060;transport=tcp>
Content-Type: application/sdp
Call-ID: 927bea00-a2813e0d-30-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bKea689c73eb
CSeq: 108 INVITE
Session-Expires: 1800;refresher=uas

v=0
o=CiscoSystemsCCM-SIP 2000 10 IN IP4 10.10.199.251
s=SIP Call
c=IN IP4 10.10.199.179
t=0 0
m=audio 4000 RTP/AVP 9 0 8 18 101
a=rtpmap:9 G722/8000
a=ptime:20
a=rtpmap:0 PCMU/8000
a=ptime:20
a=rtpmap:8 PCMA/8000
a=ptime:20
a=rtpmap:18 G729/8000
a=ptime:20
a=sendonly
a=rtpmap:101 telephone-event/8000

CISCO CONFIDENTIAL

```
a=fmtp:101 0-15

[diagram]   Call-ID:[prev][next]
[44] ACK sip:2002@10.10.199.251:5060;transport=tcp SIP/2.0
Date: Thu, 04 Jun 2009 21:35:20 GMT
From: "Charlie, Connect" <sip:1003@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763575
Allow-Events: presence, kpml
Content-Length: 229
To: <sip:2002@siptrunk17.cisco.com>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763472
Content-Type: application/sdp
Call-ID: 927bea00-a2813e0d-30-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bKeb798dcee1
CSeq: 108 ACK
Max-Forwards: 70

v=0
o=CiscoSystemsCCM-SIP 2000 10 IN IP4 10.10.199.250
s=SIP Call
c=IN IP4 10.10.199.130
t=0 0
m=audio 31640 RTP/AVP 9 101
a=rtpmap:9 G722/8000
a=ptime:20
a=recvonly
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15

[diagram]   Call-ID:[prev][next]
[45] INVITE sip:1003@10.10.199.250:5060;transport=tcp SIP/2.0
Date: Thu, 04 Jun 2009 21:36:23 GMT
Call-Info: <sip:10.10.199.251:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:2002@siptrunk17.cisco.com>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763472
Allow-Events: presence, kpml
P-Asserted-Identity: "Bob, Connect" <sip:2002@10.10.199.251>
Supported: timer,resource-priority,replaces
Min-SE:  1800
Remote-Party-ID: "Bob, Connect" <sip:2002@10.10.199.251>;party=calling;screen=yes;privacy=off
Content-Length: 217
User-Agent: Cisco-CUCM7.1
To: "Charlie, Connect" <sip:1003@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763575
Contact: <sip:2002@10.10.199.251:5060;transport=tcp>
Expires: 180
Content-Type: application/sdp
Call-ID: 927bea00-a2813e0d-30-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bKb13ae847b
CSeq: 104 INVITE
Session-Expires:  1800;refresher=uac
Max-Forwards: 70

v=0
o=CiscoSystemsCCM-SIP 2000 11 IN IP4 10.10.199.251
s=SIP Call
c=IN IP4 10.10.199.179
t=0 0
m=audio 25040 RTP/AVP 9 101
a=rtpmap:9 G722/8000
a=ptime:20
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15

[diagram]   Call-ID:[prev][next]
[46] SIP/2.0 100 Trying
Date: Thu, 04 Jun 2009 21:35:20 GMT
From: <sip:2002@siptrunk17.cisco.com>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763472
Allow-Events: presence, kpml
Content-Length: 0
To: "Charlie, Connect" <sip:1003@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763575
Call-ID: 927bea00-a2813e0d-30-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bKb13ae847b
CSeq: 104 INVITE

[diagram]   Call-ID:[prev][next]
[47] SIP/2.0 200 OK
Date: Thu, 04 Jun 2009 21:35:20 GMT
Call-Info: <sip:10.10.199.250:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:2002@siptrunk17.cisco.com>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763472
Allow-Events: presence, kpml
Supported: replaces
```

CISCO CONFIDENTIAL

```
Supported: Geolocation
Content-Length: 217
Require:  timer
To: "Charlie, Connect" <sip:1003@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763575
Contact: <sip:1003@10.10.199.250:5060;transport=tcp>
Content-Type: application/sdp
Call-ID: 927bea00-a2813e0d-30-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bKb13ae847b
CSeq: 104 INVITE
P-Preferred-Identity: "Alice, Connect" <sip:1001@10.10.199.250>
Session-Expires:  1800;refresher=uac

v=0
o=CiscoSystemsCCM-SIP 2000 11 IN IP4 10.10.199.250
s=SIP Call
c=IN IP4 10.10.199.130
t=0 0
m=audio 31640 RTP/AVP 9 101
a=rtpmap:9 G722/8000
a=ptime:20
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
```

[diagram] Call-ID:[prev][next]

[48] ACK sip:1003@10.10.199.250:5060;transport=tcp SIP/2.0

```
Date: Thu, 04 Jun 2009 21:36:23 GMT
From: <sip:2002@siptrunk17.cisco.com>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763472
Allow-Events: presence, kpml
Content-Length: 0
To: "Charlie, Connect" <sip:1003@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763575
Call-ID: 927bea00-a2813e0d-30-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bKb248aa652c
CSeq: 104 ACK
Max-Forwards: 70
```

[diagram] Call-ID:[prev][next]

[49] UPDATE sip:2002@10.10.199.251:5060;transport=tcp SIP/2.0

```
Date: Thu, 04 Jun 2009 21:35:20 GMT
Call-Info: <sip:10.10.199.250:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: "Charlie, Connect" <sip:1003@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763575
Allow-Events: presence, kpml
Supported: timer,resource-priority,replaces
Content-Length: 0
User-Agent: Cisco-CUCM7.1
To: <sip:2002@siptrunk17.cisco.com>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763472
Contact: <sip:1003@10.10.199.250:5060;transport=tcp>
Call-ID: 927bea00-a2813e0d-30-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bKec3d93e518
CSeq: 109 UPDATE
P-Preferred-Identity: "Alice, Connect" <sip:1001@10.10.199.250>
Max-Forwards: 70
```

[diagram] Call-ID:[prev][next]

[50] SIP/2.0 200 OK

```
Date: Thu, 04 Jun 2009 21:36:23 GMT
From: "Charlie, Connect" <sip:1003@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763575
Allow-Events: presence, kpml
P-Asserted-Identity: "Bob, Connect" <sip:2002@10.10.199.251>
Remote-Party-ID: "Bob, Connect" <sip:2002@10.10.199.251>;party=called;screen=yes;privacy=off
Content-Length: 0
Require:  timer
To: <sip:2002@siptrunk17.cisco.com>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763472
Contact: <sip:2002@10.10.199.251:5060;transport=tcp>
Call-ID: 927bea00-a2813e0d-30-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bKec3d93e518
CSeq: 109 UPDATE
Session-Expires:  1800;refresher=uas
```

[diagram] Call-ID:[prev][next]

[51] BYE sip:2002@10.10.199.251:5060;transport=tcp SIP/2.0

```
Date: Thu, 04 Jun 2009 21:35:20 GMT
From: "Charlie, Connect" <sip:1003@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763575
Content-Length: 0
User-Agent: Cisco-CUCM7.1
To: <sip:2002@siptrunk17.cisco.com>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763472
Call-ID: 927bea00-a2813e0d-30-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bKed4a25cd3d
P-Preferred-Identity: "Charlie, Connect" <sip:1003@10.10.199.250>
CSeq: 110 BYE
```

CISCO CONFIDENTIAL

```
Max-Forwards: 70

[diagram]   Call-ID:[prev][next]
[52] SIP/2.0 200 OK
Date: Thu, 04 Jun 2009 21:36:26 GMT
From: "Charlie, Connect" <sip:1003@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763575
Content-Length: 0
To: <sip:2002@siptrunk17.cisco.com>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763472
Call-ID: 927bea00-a2813e0d-30-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bKed4a25cd3d
CSeq: 110 BYE
```

CISCO CONFIDENTIAL

19.12 Incoming OOB REFER request for performing a click to call scenario.

Title: Incoming OOB REFER request for performing a click to call scenario.

Description:
Unified CM to Unified CM SIP Trunk Call with Remote-Party-Id [] Asserted-Identity [v] & SIP Privacy=Default,
Asserted-Type=Default, processing incoming OOB REFER for click to call scenario.
The following call flow illustrates the SIP messaging for an incoming REFER message to Unified CM1.
The Unified CM1 uses REFER and places a call between the party addressed in Request URI and the
party in Refer-To header, which is a device registered on Unified CM1

The REFER request carries an identity in P-Asserted-Identity header. The Unified CM1 uses an identity in the P-Asserted-Identity of REFER for sending an identity in Remote-Party-Id header of an INVITE sent to the party in Request-URI. Once half call is established with party in Request-URI,
it is redirected to party in Refer-To.

Configuration:
Node = Unified CM1, IP = 10.10.199.250
Node = Remote Phone, IP = 10.10.200.179

Phone = A, Line = 1001, IP = 10.10.199.130, Model = SCCP
Phone = B, Line = 1003, IP = 10.10.199.66, Model = SCCP
Remote, Line = 9193929980, Display Name = "REFERPAI" IP = 10.10.200.101, Model = SIP

SIP Trunk from Unified CM1 to remote has
a) Remote-Party-Id [] Asserted-Identity [v], SIP Privacy= Default, Asserted-Type=Default

Scenario:
Remote sends OOB REFER over the SIP Trunk requesting a call from Phone A DN 1003 to Phone B DN 1001

The Unified CM1 sends an INVITE to Phone A DN 1003 and uses identity in Remote-Party-Id as

CISCO CONFIDENTIAL

taken from REFER message's P-Asserted-Identity header.

End of Scenario

CISCO CONFIDENTIAL

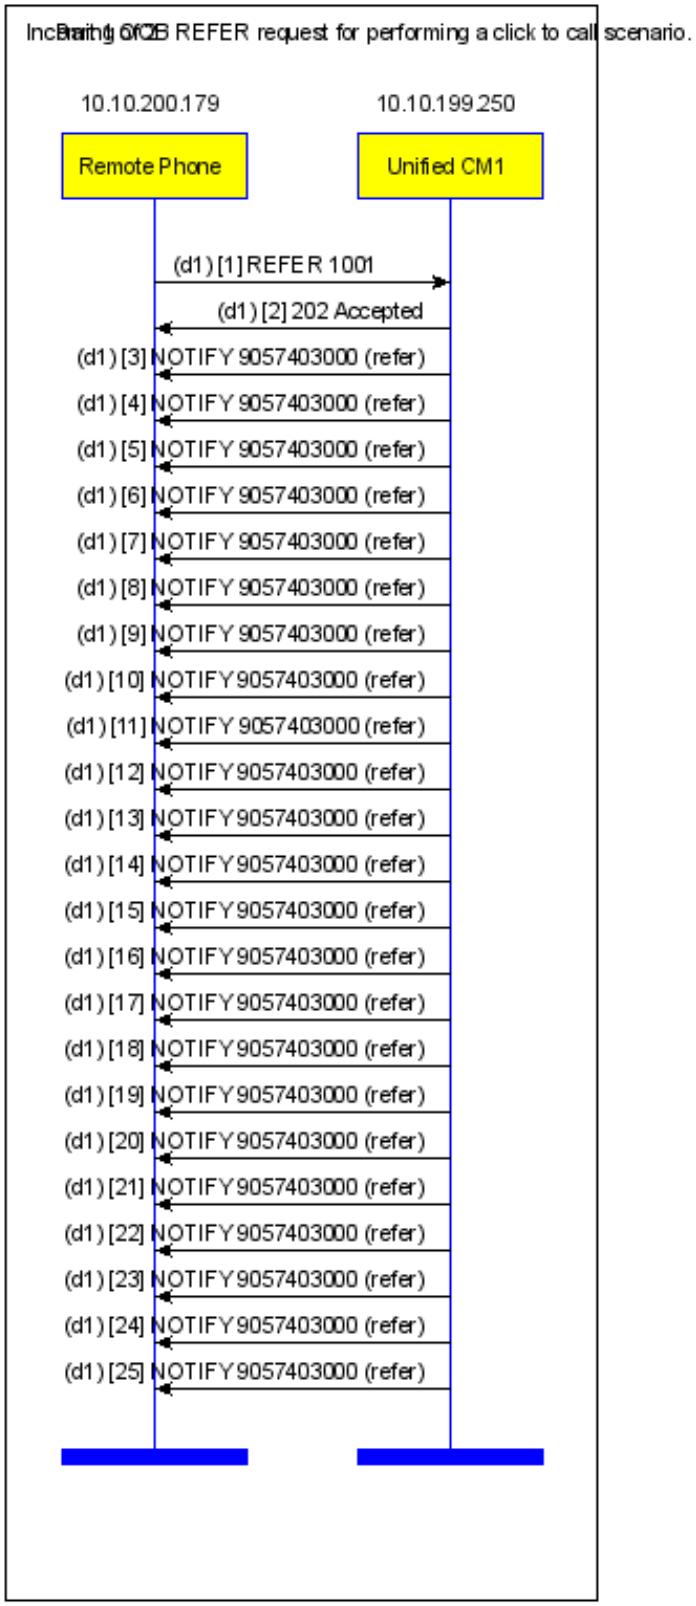

CISCO CONFIDENTIAL

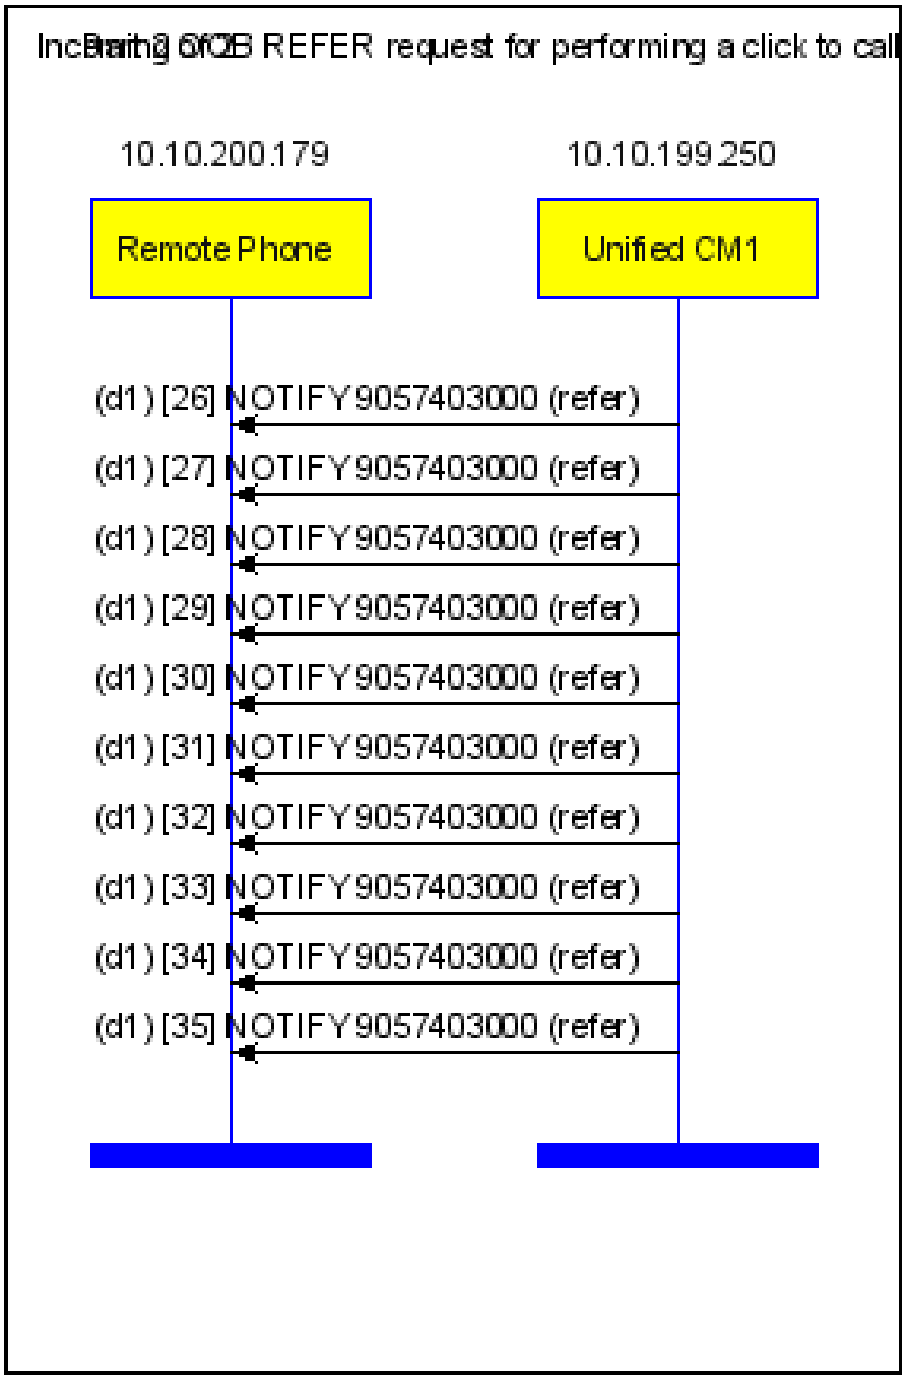

CISCO CONFIDENTIAL

```
[diagram]   Call-ID:[prev][next]
[1] REFER sip:1001@10.10.199.250 SIP/2.0
Call-ID: 1-19864@10.10.200.179
Contact: <sip:9057403000@10.10.200.179>
CSeq: 1 REFER
From: sipp <sip:9193929980@10.10.200.179:5060>;tag=1
To: <sip:1001@10.10.199.250>
Via: SIP/2.0/TCP 10.10.200.179:5060
P-Asserted-Identity: "REFERPAI" <sip:3929980@10.10.200.179>
Privacy: id
Max-Forwards: 70
Refer-To: sip:1003@10.10.199.250
Referred-By:<sip:10.10.200.179>
Content-Length: 0

[diagram]   Call-ID:[prev][next]
[2] SIP/2.0 202 Accepted
Date: Thu, 04 Jun 2009 20:59:56 GMT
From: sipp <sip:9193929980@10.10.200.179:5060>;tag=1
Content-Length: 0
To: <sip:1001@10.10.199.250>;tag=447281731
Contact: <sip:1001@10.10.199.250:5060;transport=tcp>
Call-ID: 1-19864@10.10.200.179
Via: SIP/2.0/TCP 10.10.200.179:5060
CSeq: 1 REFER

[diagram]   Call-ID:[prev][next]
[3] NOTIFY sip:9057403000@10.10.200.179:5060 SIP/2.0
Date: Thu, 04 Jun 2009 20:59:56 GMT
From: <sip:1001@10.10.199.250>;tag=447281731
Event: refer
Content-Length: 20
User-Agent: Cisco-CUCM7.1
To: sipp <sip:9193929980@10.10.200.179:5060>;tag=1
Contact: <sip:1001@10.10.199.250:5060>
Content-Type: message/sipfrag;version=2.0
Call-ID: 1-19864@10.10.200.179
Subscription-State: active;expires=60
Via: SIP/2.0/UDP 10.10.199.250:5060;branch=z9hG4bK891722ef56
CSeq: 101 NOTIFY
Max-Forwards: 70

SIP/2.0 100 Trying

[diagram]   Call-ID:[prev][next]
[4] NOTIFY sip:9057403000@10.10.200.179:5060 SIP/2.0
Date: Thu, 04 Jun 2009 20:59:56 GMT
From: <sip:1001@10.10.199.250>;tag=447281731
Event: refer
Content-Length: 20
User-Agent: Cisco-CUCM7.1
To: sipp <sip:9193929980@10.10.200.179:5060>;tag=1
Contact: <sip:1001@10.10.199.250:5060>
Content-Type: message/sipfrag;version=2.0
Call-ID: 1-19864@10.10.200.179
Subscription-State: active;expires=60
Via: SIP/2.0/UDP 10.10.199.250:5060;branch=z9hG4bK891722ef56
CSeq: 101 NOTIFY
Max-Forwards: 70

SIP/2.0 100 Trying

[diagram]   Call-ID:[prev][next]
[5] NOTIFY sip:9057403000@10.10.200.179:5060 SIP/2.0
Date: Thu, 04 Jun 2009 20:59:56 GMT
From: <sip:1001@10.10.199.250>;tag=447281731
Event: refer
Content-Length: 20
User-Agent: Cisco-CUCM7.1
To: sipp <sip:9193929980@10.10.200.179:5060>;tag=1
Contact: <sip:1001@10.10.199.250:5060>
Content-Type: message/sipfrag;version=2.0
Call-ID: 1-19864@10.10.200.179
Subscription-State: active;expires=60
Via: SIP/2.0/UDP 10.10.199.250:5060;branch=z9hG4bK891722ef56
CSeq: 101 NOTIFY
Max-Forwards: 70

SIP/2.0 100 Trying
```

CISCO CONFIDENTIAL

[diagram] Call-ID:[prev][next]
[6] NOTIFY sip:90574030000@10.10.200.179:5060 SIP/2.0
Date: Thu, 04 Jun 2009 20:59:56 GMT
From: <sip:1001@10.10.199.250>;tag=447281731
Event: refer
Content-Length: 20
User-Agent: Cisco-CUCM7.1
To: sipp <sip:9193929980@10.10.200.179:5060>;tag=1
Contact: <sip:1001@10.10.199.250:5060>
Content-Type: message/sipfrag;version=2.0
Call-ID: 1-19864@10.10.200.179
Subscription-State: active;expires=60
Via: SIP/2.0/UDP 10.10.199.250:5060;branch=z9hG4bK891722ef56
CSeq: 101 NOTIFY
Max-Forwards: 70

SIP/2.0 100 Trying

[diagram] Call-ID:[prev][next]
[7] NOTIFY sip:90574030000@10.10.200.179:5060 SIP/2.0
Date: Thu, 04 Jun 2009 20:59:59 GMT
From: <sip:1001@10.10.199.250>;tag=447281731
Event: refer
Content-Length: 21
User-Agent: Cisco-CUCM7.1
To: sipp <sip:9193929980@10.10.200.179:5060>;tag=1
Contact: <sip:1001@10.10.199.250:5060>
Content-Type: message/sipfrag;version=2.0
Call-ID: 1-19864@10.10.200.179
Subscription-State: active;expires=57
Via: SIP/2.0/UDP 10.10.199.250:5060;branch=z9hG4bK8a5b22a5aa
CSeq: 102 NOTIFY
Max-Forwards: 70

SIP/2.0 180 Ringing

[diagram] Call-ID:[prev][next]
[8] NOTIFY sip:90574030000@10.10.200.179:5060 SIP/2.0
Date: Thu, 04 Jun 2009 20:59:59 GMT
From: <sip:1001@10.10.199.250>;tag=447281731
Event: refer
Content-Length: 21
User-Agent: Cisco-CUCM7.1
To: sipp <sip:9193929980@10.10.200.179:5060>;tag=1
Contact: <sip:1001@10.10.199.250:5060>
Content-Type: message/sipfrag;version=2.0
Call-ID: 1-19864@10.10.200.179
Subscription-State: active;expires=57
Via: SIP/2.0/UDP 10.10.199.250:5060;branch=z9hG4bK8a5b22a5aa
CSeq: 102 NOTIFY
Max-Forwards: 70

SIP/2.0 180 Ringing

[diagram] Call-ID:[prev][next]
[9] NOTIFY sip:90574030000@10.10.200.179:5060 SIP/2.0
Date: Thu, 04 Jun 2009 20:59:59 GMT
From: <sip:1001@10.10.199.250>;tag=447281731
Event: refer
Content-Length: 21
User-Agent: Cisco-CUCM7.1
To: sipp <sip:9193929980@10.10.200.179:5060>;tag=1
Contact: <sip:1001@10.10.199.250:5060>
Content-Type: message/sipfrag;version=2.0
Call-ID: 1-19864@10.10.200.179
Subscription-State: active;expires=57
Via: SIP/2.0/UDP 10.10.199.250:5060;branch=z9hG4bK8a5b22a5aa
CSeq: 102 NOTIFY
Max-Forwards: 70

SIP/2.0 180 Ringing

[diagram] Call-ID:[prev][next]
[10] NOTIFY sip:90574030000@10.10.200.179:5060 SIP/2.0
Date: Thu, 04 Jun 2009 21:00:02 GMT
From: <sip:1001@10.10.199.250>;tag=447281731
Event: refer
Content-Length: 16
User-Agent: Cisco-CUCM7.1
To: sipp <sip:9193929980@10.10.200.179:5060>;tag=1

CISCO CONFIDENTIAL

```
Contact: <sip:1001@10.10.199.250:5060>
Content-Type: message/sipfrag;version=2.0
Call-ID: 1-19864@10.10.200.179
Subscription-State: terminated
Via: SIP/2.0/UDP 10.10.199.250:5060;branch=z9hG4bK8b508d0d4e
CSeq: 103 NOTIFY
Max-Forwards: 70

SIP/2.0 200 OK
```

[diagram] Call-ID:[prev][next]

```
[11] NOTIFY sip:90574030000@10.10.200.179:5060 SIP/2.0
Date: Thu, 04 Jun 2009 21:00:02 GMT
From: <sip:1001@10.10.199.250>;tag=447281731
Event: refer
Content-Length: 16
User-Agent: Cisco-CUCM7.1
To: sipp <sip:9193929980@10.10.200.179:5060>;tag=1
Contact: <sip:1001@10.10.199.250:5060>
Content-Type: message/sipfrag;version=2.0
Call-ID: 1-19864@10.10.200.179
Subscription-State: terminated
Via: SIP/2.0/UDP 10.10.199.250:5060;branch=z9hG4bK8b508d0d4e
CSeq: 103 NOTIFY
Max-Forwards: 70

SIP/2.0 200 OK
```

[diagram] Call-ID:[prev][next]

```
[12] NOTIFY sip:90574030000@10.10.200.179:5060 SIP/2.0
Date: Thu, 04 Jun 2009 20:59:59 GMT
From: <sip:1001@10.10.199.250>;tag=447281731
Event: refer
Content-Length: 21
User-Agent: Cisco-CUCM7.1
To: sipp <sip:9193929980@10.10.200.179:5060>;tag=1
Contact: <sip:1001@10.10.199.250:5060>
Content-Type: message/sipfrag;version=2.0
Call-ID: 1-19864@10.10.200.179
Subscription-State: active;expires=57
Via: SIP/2.0/UDP 10.10.199.250:5060;branch=z9hG4bK8a5b22a5aa
CSeq: 102 NOTIFY
Max-Forwards: 70

SIP/2.0 180 Ringing
```

[diagram] Call-ID:[prev][next]

```
[13] NOTIFY sip:90574030000@10.10.200.179:5060 SIP/2.0
Date: Thu, 04 Jun 2009 20:59:56 GMT
From: <sip:1001@10.10.199.250>;tag=447281731
Event: refer
Content-Length: 20
User-Agent: Cisco-CUCM7.1
To: sipp <sip:9193929980@10.10.200.179:5060>;tag=1
Contact: <sip:1001@10.10.199.250:5060>
Content-Type: message/sipfrag;version=2.0
Call-ID: 1-19864@10.10.200.179
Subscription-State: active;expires=60
Via: SIP/2.0/UDP 10.10.199.250:5060;branch=z9hG4bK891722ef56
CSeq: 101 NOTIFY
Max-Forwards: 70

SIP/2.0 100 Trying
```

[diagram] Call-ID:[prev][next]

```
[14] NOTIFY sip:90574030000@10.10.200.179:5060 SIP/2.0
Date: Thu, 04 Jun 2009 21:00:02 GMT
From: <sip:1001@10.10.199.250>;tag=447281731
Event: refer
Content-Length: 16
User-Agent: Cisco-CUCM7.1
To: sipp <sip:9193929980@10.10.200.179:5060>;tag=1
Contact: <sip:1001@10.10.199.250:5060>
Content-Type: message/sipfrag;version=2.0
Call-ID: 1-19864@10.10.200.179
Subscription-State: terminated
Via: SIP/2.0/UDP 10.10.199.250:5060;branch=z9hG4bK8b508d0d4e
CSeq: 103 NOTIFY
Max-Forwards: 70
```

CISCO CONFIDENTIAL

```
SIP/2.0 200 OK

[diagram]   Call-ID:[prev][next]
[15] NOTIFY sip:90574030000@10.10.200.179:5060 SIP/2.0
Date: Thu, 04 Jun 2009 21:00:02 GMT
From: <sip:1001@10.10.199.250>;tag=447281731
Event: refer
Content-Length: 16
User-Agent: Cisco-CUCM7.1
To: sipp <sip:9193929980@10.10.200.179:5060>;tag=1
Contact: <sip:1001@10.10.199.250:5060>
Content-Type: message/sipfrag;version=2.0
Call-ID: 1-19864@10.10.200.179
Subscription-State: terminated
Via: SIP/2.0/UDP 10.10.199.250:5060;branch=z9hG4bK8b508d0d4e
CSeq: 103 NOTIFY
Max-Forwards: 70

SIP/2.0 200 OK

[diagram]   Call-ID:[prev][next]
[16] NOTIFY sip:90574030000@10.10.200.179:5060 SIP/2.0
Date: Thu, 04 Jun 2009 20:59:59 GMT
From: <sip:1001@10.10.199.250>;tag=447281731
Event: refer
Content-Length: 21
User-Agent: Cisco-CUCM7.1
To: sipp <sip:9193929980@10.10.200.179:5060>;tag=1
Contact: <sip:1001@10.10.199.250:5060>
Content-Type: message/sipfrag;version=2.0
Call-ID: 1-19864@10.10.200.179
Subscription-State: active;expires=57
Via: SIP/2.0/UDP 10.10.199.250:5060;branch=z9hG4bK8a5b22a5aa
CSeq: 102 NOTIFY
Max-Forwards: 70

SIP/2.0 180 Ringing

[diagram]   Call-ID:[prev][next]
[17] NOTIFY sip:90574030000@10.10.200.179:5060 SIP/2.0
Date: Thu, 04 Jun 2009 20:59:56 GMT
From: <sip:1001@10.10.199.250>;tag=447281731
Event: refer
Content-Length: 20
User-Agent: Cisco-CUCM7.1
To: sipp <sip:9193929980@10.10.200.179:5060>;tag=1
Contact: <sip:1001@10.10.199.250:5060>
Content-Type: message/sipfrag;version=2.0
Call-ID: 1-19864@10.10.200.179
Subscription-State: active;expires=60
Via: SIP/2.0/UDP 10.10.199.250:5060;branch=z9hG4bK891722ef56
CSeq: 101 NOTIFY
Max-Forwards: 70

SIP/2.0 100 Trying

[diagram]   Call-ID:[prev][next]
[18] NOTIFY sip:90574030000@10.10.200.179:5060 SIP/2.0
Date: Thu, 04 Jun 2009 21:00:02 GMT
From: <sip:1001@10.10.199.250>;tag=447281731
Event: refer
Content-Length: 16
User-Agent: Cisco-CUCM7.1
To: sipp <sip:9193929980@10.10.200.179:5060>;tag=1
Contact: <sip:1001@10.10.199.250:5060>
Content-Type: message/sipfrag;version=2.0
Call-ID: 1-19864@10.10.200.179
Subscription-State: terminated
Via: SIP/2.0/UDP 10.10.199.250:5060;branch=z9hG4bK8b508d0d4e
CSeq: 103 NOTIFY
Max-Forwards: 70

SIP/2.0 200 OK

[diagram]   Call-ID:[prev][next]
[19] NOTIFY sip:90574030000@10.10.200.179:5060 SIP/2.0
Date: Thu, 04 Jun 2009 20:59:59 GMT
From: <sip:1001@10.10.199.250>;tag=447281731
Event: refer
Content-Length: 21
```

CISCO CONFIDENTIAL

```
User-Agent: Cisco-CUCM7.1
To: sipp <sip:9193929980@10.10.200.179:5060>;tag=1
Contact: <sip:1001@10.10.199.250:5060>
Content-Type: message/sipfrag;version=2.0
Call-ID: 1-19864@10.10.200.179
Subscription-State: active;expires=57
Via: SIP/2.0/UDP 10.10.199.250:5060;branch=z9hG4bK8a5b22a5aa
CSeq: 102 NOTIFY
Max-Forwards: 70

SIP/2.0 180 Ringing
```

[diagram] Call-ID:[prev][next]

```
[20] NOTIFY sip:90574030000@10.10.200.179:5060 SIP/2.0
Date: Thu, 04 Jun 2009 20:59:56 GMT
From: <sip:1001@10.10.199.250>;tag=447281731
Event: refer
Content-Length: 20
User-Agent: Cisco-CUCM7.1
To: sipp <sip:9193929980@10.10.200.179:5060>;tag=1
Contact: <sip:1001@10.10.199.250:5060>
Content-Type: message/sipfrag;version=2.0
Call-ID: 1-19864@10.10.200.179
Subscription-State: active;expires=60
Via: SIP/2.0/UDP 10.10.199.250:5060;branch=z9hG4bK891722ef56
CSeq: 101 NOTIFY
Max-Forwards: 70

SIP/2.0 100 Trying
```

[diagram] Call-ID:[prev][next]

```
[21] NOTIFY sip:90574030000@10.10.200.179:5060 SIP/2.0
Date: Thu, 04 Jun 2009 21:00:02 GMT
From: <sip:1001@10.10.199.250>;tag=447281731
Event: refer
Content-Length: 16
User-Agent: Cisco-CUCM7.1
To: sipp <sip:9193929980@10.10.200.179:5060>;tag=1
Contact: <sip:1001@10.10.199.250:5060>
Content-Type: message/sipfrag;version=2.0
Call-ID: 1-19864@10.10.200.179
Subscription-State: terminated
Via: SIP/2.0/UDP 10.10.199.250:5060;branch=z9hG4bK8b508d0d4e
CSeq: 103 NOTIFY
Max-Forwards: 70

SIP/2.0 200 OK
```

[diagram] Call-ID:[prev][next]

```
[22] NOTIFY sip:90574030000@10.10.200.179:5060 SIP/2.0
Date: Thu, 04 Jun 2009 20:59:59 GMT
From: <sip:1001@10.10.199.250>;tag=447281731
Event: refer
Content-Length: 21
User-Agent: Cisco-CUCM7.1
To: sipp <sip:9193929980@10.10.200.179:5060>;tag=1
Contact: <sip:1001@10.10.199.250:5060>
Content-Type: message/sipfrag;version=2.0
Call-ID: 1-19864@10.10.200.179
Subscription-State: active;expires=57
Via: SIP/2.0/UDP 10.10.199.250:5060;branch=z9hG4bK8a5b22a5aa
CSeq: 102 NOTIFY
Max-Forwards: 70

SIP/2.0 180 Ringing
```

[diagram] Call-ID:[prev][next]

```
[23] NOTIFY sip:90574030000@10.10.200.179:5060 SIP/2.0
Date: Thu, 04 Jun 2009 20:59:56 GMT
From: <sip:1001@10.10.199.250>;tag=447281731
Event: refer
Content-Length: 20
User-Agent: Cisco-CUCM7.1
To: sipp <sip:9193929980@10.10.200.179:5060>;tag=1
Contact: <sip:1001@10.10.199.250:5060>
Content-Type: message/sipfrag;version=2.0
Call-ID: 1-19864@10.10.200.179
Subscription-State: active;expires=60
Via: SIP/2.0/UDP 10.10.199.250:5060;branch=z9hG4bK891722ef56
CSeq: 101 NOTIFY
```

CISCO CONFIDENTIAL

```
Max-Forwards: 70

SIP/2.0 100 Trying

[diagram]   Call-ID:[prev][next]
[24] NOTIFY sip:90574030000@10.10.200.179:5060 SIP/2.0
Date: Thu, 04 Jun 2009 21:00:02 GMT
From: <sip:1001@10.10.199.250>;tag=447281731
Event: refer
Content-Length: 16
User-Agent: Cisco-CUCM7.1
To: sipp <sip:9193929980@10.10.200.179:5060>;tag=1
Contact: <sip:1001@10.10.199.250:5060>
Content-Type: message/sipfrag;version=2.0
Call-ID: 1-19864@10.10.200.179
Subscription-State: terminated
Via: SIP/2.0/UDP 10.10.199.250:5060;branch=z9hG4bK8b508d0d4e
CSeq: 103 NOTIFY
Max-Forwards: 70

SIP/2.0 200 OK

[diagram]   Call-ID:[prev][next]
[25] NOTIFY sip:90574030000@10.10.200.179:5060 SIP/2.0
Date: Thu, 04 Jun 2009 20:59:59 GMT
From: <sip:1001@10.10.199.250>;tag=447281731
Event: refer
Content-Length: 21
User-Agent: Cisco-CUCM7.1
To: sipp <sip:9193929980@10.10.200.179:5060>;tag=1
Contact: <sip:1001@10.10.199.250:5060>
Content-Type: message/sipfrag;version=2.0
Call-ID: 1-19864@10.10.200.179
Subscription-State: active;expires=57
Via: SIP/2.0/UDP 10.10.199.250:5060;branch=z9hG4bK8a5b22a5aa
CSeq: 102 NOTIFY
Max-Forwards: 70

SIP/2.0 180 Ringing

[diagram]   Call-ID:[prev][next]
[26] NOTIFY sip:90574030000@10.10.200.179:5060 SIP/2.0
Date: Thu, 04 Jun 2009 20:59:56 GMT
From: <sip:1001@10.10.199.250>;tag=447281731
Event: refer
Content-Length: 20
User-Agent: Cisco-CUCM7.1
To: sipp <sip:9193929980@10.10.200.179:5060>;tag=1
Contact: <sip:1001@10.10.199.250:5060>
Content-Type: message/sipfrag;version=2.0
Call-ID: 1-19864@10.10.200.179
Subscription-State: active;expires=60
Via: SIP/2.0/UDP 10.10.199.250:5060;branch=z9hG4bK891722ef56
CSeq: 101 NOTIFY
Max-Forwards: 70

SIP/2.0 100 Trying

[diagram]   Call-ID:[prev][next]
[27] NOTIFY sip:90574030000@10.10.200.179:5060 SIP/2.0
Date: Thu, 04 Jun 2009 21:00:02 GMT
From: <sip:1001@10.10.199.250>;tag=447281731
Event: refer
Content-Length: 16
User-Agent: Cisco-CUCM7.1
To: sipp <sip:9193929980@10.10.200.179:5060>;tag=1
Contact: <sip:1001@10.10.199.250:5060>
Content-Type: message/sipfrag;version=2.0
Call-ID: 1-19864@10.10.200.179
Subscription-State: terminated
Via: SIP/2.0/UDP 10.10.199.250:5060;branch=z9hG4bK8b508d0d4e
CSeq: 103 NOTIFY
Max-Forwards: 70

SIP/2.0 200 OK

[diagram]   Call-ID:[prev][next]
[28] NOTIFY sip:90574030000@10.10.200.179:5060 SIP/2.0
Date: Thu, 04 Jun 2009 20:59:59 GMT
From: <sip:1001@10.10.199.250>;tag=447281731
```

CISCO CONFIDENTIAL

```
Event: refer
Content-Length: 21
User-Agent: Cisco-CUCM7.1
To: sipp <sip:9193929980@10.10.200.179:5060>;tag=1
Contact: <sip:1001@10.10.199.250:5060>
Content-Type: message/sipfrag;version=2.0
Call-ID: 1-19864@10.10.200.179
Subscription-State: active;expires=57
Via: SIP/2.0/UDP 10.10.199.250:5060;branch=z9hG4bK8a5b22a5aa
CSeq: 102 NOTIFY
Max-Forwards: 70

SIP/2.0 180 Ringing

[diagram]   Call-ID:[prev][next]
[29] NOTIFY sip:90574030000@10.10.200.179:5060 SIP/2.0
Date: Thu, 04 Jun 2009 20:59:56 GMT
From: <sip:1001@10.10.199.250>;tag=447281731
Event: refer
Content-Length: 20
User-Agent: Cisco-CUCM7.1
To: sipp <sip:9193929980@10.10.200.179:5060>;tag=1
Contact: <sip:1001@10.10.199.250:5060>
Content-Type: message/sipfrag;version=2.0
Call-ID: 1-19864@10.10.200.179
Subscription-State: active;expires=60
Via: SIP/2.0/UDP 10.10.199.250:5060;branch=z9hG4bK891722ef56
CSeq: 101 NOTIFY
Max-Forwards: 70

SIP/2.0 100 Trying

[diagram]   Call-ID:[prev][next]
[30] NOTIFY sip:90574030000@10.10.200.179:5060 SIP/2.0
Date: Thu, 04 Jun 2009 21:00:02 GMT
From: <sip:1001@10.10.199.250>;tag=447281731
Event: refer
Content-Length: 16
User-Agent: Cisco-CUCM7.1
To: sipp <sip:9193929980@10.10.200.179:5060>;tag=1
Contact: <sip:1001@10.10.199.250:5060>
Content-Type: message/sipfrag;version=2.0
Call-ID: 1-19864@10.10.200.179
Subscription-State: terminated
Via: SIP/2.0/UDP 10.10.199.250:5060;branch=z9hG4bK8b508d0d4e
CSeq: 103 NOTIFY
Max-Forwards: 70

SIP/2.0 200 OK

[diagram]   Call-ID:[prev][next]
[31] NOTIFY sip:90574030000@10.10.200.179:5060 SIP/2.0
Date: Thu, 04 Jun 2009 20:59:59 GMT
From: <sip:1001@10.10.199.250>;tag=447281731
Event: refer
Content-Length: 21
User-Agent: Cisco-CUCM7.1
To: sipp <sip:9193929980@10.10.200.179:5060>;tag=1
Contact: <sip:1001@10.10.199.250:5060>
Content-Type: message/sipfrag;version=2.0
Call-ID: 1-19864@10.10.200.179
Subscription-State: active;expires=57
Via: SIP/2.0/UDP 10.10.199.250:5060;branch=z9hG4bK8a5b22a5aa
CSeq: 102 NOTIFY
Max-Forwards: 70

SIP/2.0 180 Ringing

[diagram]   Call-ID:[prev][next]
[32] NOTIFY sip:90574030000@10.10.200.179:5060 SIP/2.0
Date: Thu, 04 Jun 2009 20:59:56 GMT
From: <sip:1001@10.10.199.250>;tag=447281731
Event: refer
Content-Length: 20
User-Agent: Cisco-CUCM7.1
To: sipp <sip:9193929980@10.10.200.179:5060>;tag=1
Contact: <sip:1001@10.10.199.250:5060>
Content-Type: message/sipfrag;version=2.0
Call-ID: 1-19864@10.10.200.179
Subscription-State: active;expires=60
```

CISCO CONFIDENTIAL

```
Via: SIP/2.0/UDP 10.10.199.250:5060;branch=z9hG4bK891722ef56
CSeq: 101 NOTIFY
Max-Forwards: 70

SIP/2.0 100 Trying

[diagram]   Call-ID:[prev][next]
[33] NOTIFY sip:90574030000@10.10.200.179:5060 SIP/2.0
Date: Thu, 04 Jun 2009 21:00:02 GMT
From: <sip:1001@10.10.199.250>;tag=447281731
Event: refer
Content-Length: 16
User-Agent: Cisco-CUCM7.1
To: sipp <sip:9193929980@10.10.200.179:5060>;tag=1
Contact: <sip:1001@10.10.199.250:5060>
Content-Type: message/sipfrag;version=2.0
Call-ID: 1-19864@10.10.200.179
Subscription-State: terminated
Via: SIP/2.0/UDP 10.10.199.250:5060;branch=z9hG4bK8b508d0d4e
CSeq: 103 NOTIFY
Max-Forwards: 70

SIP/2.0 200 OK

[diagram]   Call-ID:[prev][next]
[34] NOTIFY sip:90574030000@10.10.200.179:5060 SIP/2.0
Date: Thu, 04 Jun 2009 20:59:59 GMT
From: <sip:1001@10.10.199.250>;tag=447281731
Event: refer
Content-Length: 21
User-Agent: Cisco-CUCM7.1
To: sipp <sip:9193929980@10.10.200.179:5060>;tag=1
Contact: <sip:1001@10.10.199.250:5060>
Content-Type: message/sipfrag;version=2.0
Call-ID: 1-19864@10.10.200.179
Subscription-State: active;expires=57
Via: SIP/2.0/UDP 10.10.199.250:5060;branch=z9hG4bK8a5b22a5aa
CSeq: 102 NOTIFY
Max-Forwards: 70

SIP/2.0 180 Ringing

[diagram]   Call-ID:[prev][next]
[35] NOTIFY sip:90574030000@10.10.200.179:5060 SIP/2.0
Date: Thu, 04 Jun 2009 21:00:02 GMT
From: <sip:1001@10.10.199.250>;tag=447281731
Event: refer
Content-Length: 16
User-Agent: Cisco-CUCM7.1
To: sipp <sip:9193929980@10.10.200.179:5060>;tag=1
Contact: <sip:1001@10.10.199.250:5060>
Content-Type: message/sipfrag;version=2.0
Call-ID: 1-19864@10.10.200.179
Subscription-State: terminated
Via: SIP/2.0/UDP 10.10.199.250:5060;branch=z9hG4bK8b508d0d4e
CSeq: 103 NOTIFY
Max-Forwards: 70

SIP/2.0 200 OK
```

CISCO CONFIDENTIAL

19.13 Basic Outgoing Call with Asserted-Identity & Privacy:id headers.

Title: Basic Outgoing Call with Asserted-Identity & Privacy:id headers.

Description:

Basic Unified CM to Unified CM SIP Trunk Call with Remote-Party-Id [] Asserted-Identity [v] and SIP Privacy=ID configuration

The following basic call flow illustrates the SIP messaging for an outgoing SIP Trunk call from a Unified CM1 to a remote Unified CM2.

The Unified CM1 sends an INVITE over the SIP Trunk for inviting Unified CM2 to the call.

The INVITE request carries an identity in Asserted-Identity header.
Based on SIP Privacy=ID configuration, there is a Privacy:id header sent resulting in restriction of both Display name & Number.

The From header in outgoing INVITE is accordingly changed to From: "Anonymous" <sip:anonymous@anonymous.invalid

Configuration:

Node = Unified CM1, IP = 10.10.199.250
Node = Unified CM2, IP = 10.10.199.251

Phone = A, Line = 1001, IP = 10.10.199.130, Model = SCCP
Phone = B, Line = 2002, IP = 10.10.199.179, Model = SCCP

SIP Trunk from Unified CM1 to Unified CM2 has
a) route pattern 2.XXXX
b) Has destination port configured to be 5060
c) Remote-Party-Id [] Asserted-Identity [v], Asserted-Type=Default, SIP Privacy=ID

Scenario:

Phone A DN 1001 calls Phone B DN 2002 over the SIP Trunk by dialing 22002
Phone B DN 2002 Alerts
Phone B answers the call
Phone A goes onHook
End of Scenario

CISCO CONFIDENTIAL

CISCO CONFIDENTIAL

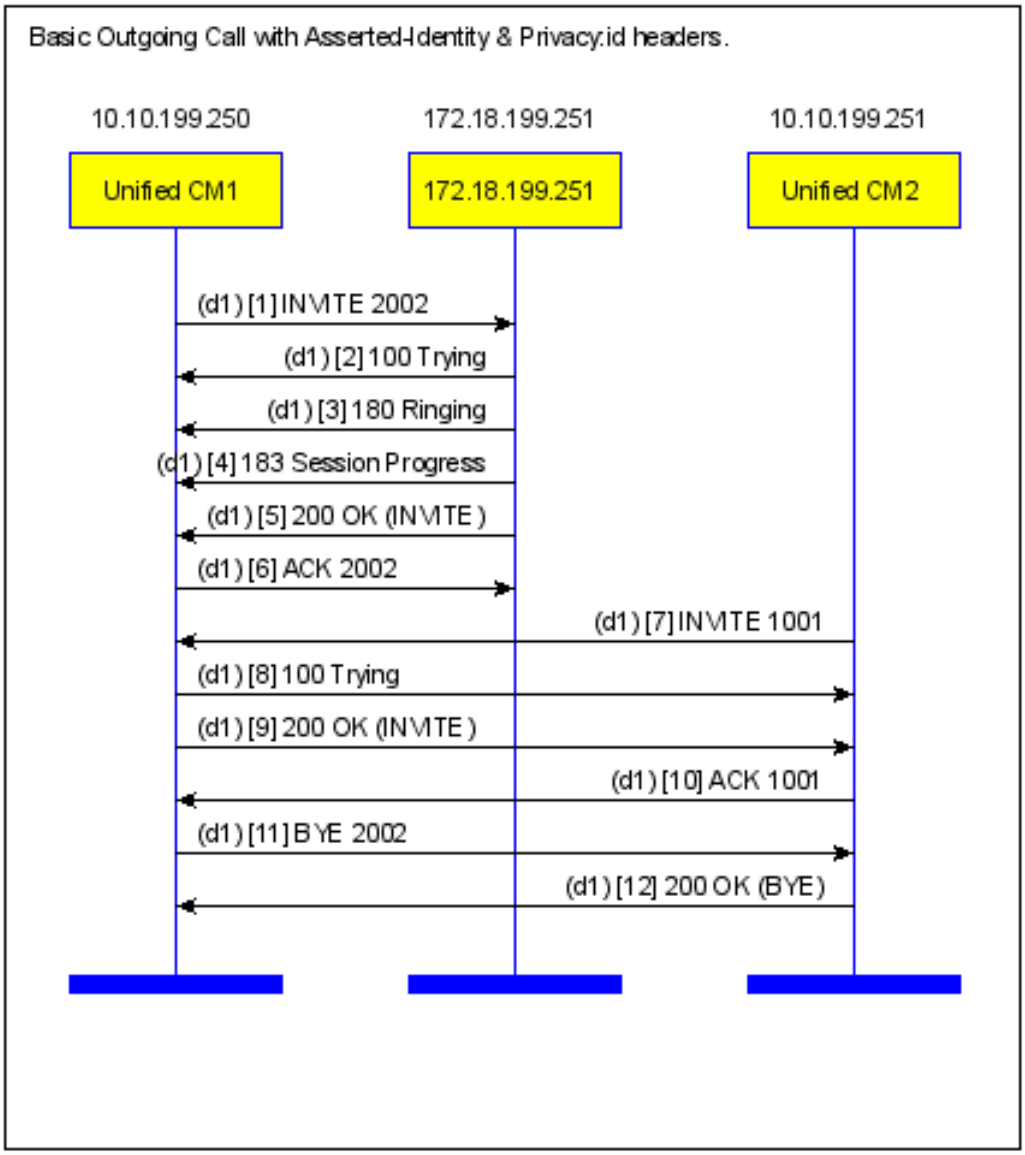

CISCO CONFIDENTIAL

[diagram] Call-ID:[prev][next]
[1] INVITE sip:2002@siptrunk17.cisco.com:5060 SIP/2.0
Date: Thu, 04 Jun 2009 21:08:15 GMT
Call-Info: <sip:10.10.199.250:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: "Anonymous" <sip:anonymous@anonymous.invalid>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763542
Allow-Events: presence, kpml
P-Asserted-Identity: "Alice, Connect" <sip:1001@10.10.199.250>
Supported: timer,resource-priority,replaces
Supported: Geolocation
Min-SE: 1800
Content-Length: 0
User-Agent: Cisco-CUCM7.1
Privacy: id
To: <sip:2002@siptrunk17.cisco.com>
Contact: <sip:1001@10.10.199.250:5060;transport=tcp>
Expires: 180
Call-ID: d0770f00-a28137bf-27-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK8f453ce298
CSeq: 101 INVITE
Session-Expires: 1800
Max-Forwards: 70

[diagram] Call-ID:[prev][next]
[2] SIP/2.0 100 Trying
Date: Thu, 04 Jun 2009 21:09:17 GMT
From: "Anonymous" <sip:anonymous@anonymous.invalid>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763542
Allow-Events: presence
Content-Length: 0
To: <sip:2002@siptrunk17.cisco.com>
Call-ID: d0770f00-a28137bf-27-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK8f453ce298
CSeq: 101 INVITE

[diagram] Call-ID:[prev][next]
[3] SIP/2.0 180 Ringing
Date: Thu, 04 Jun 2009 21:09:17 GMT
Call-Info: <sip:10.10.199.251:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: "Anonymous" <sip:anonymous@anonymous.invalid>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763542
Allow-Events: presence
P-Asserted-Identity: "Bob, Alert" <sip:2002@10.10.199.251>
Supported: Geolocation
Remote-Party-ID: "Bob, Alert" <sip:2002@10.10.199.251>;party=called;screen=yes;privacy=off
Content-Length: 0
To: <sip:2002@siptrunk17.cisco.com>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763454
Contact: <sip:2002@10.10.199.251:5060;transport=tcp>
Call-ID: d0770f00-a28137bf-27-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK8f453ce298
CSeq: 101 INVITE

[diagram] Call-ID:[prev][next]
[4] SIP/2.0 183 Session Progress
Date: Thu, 04 Jun 2009 21:09:17 GMT
Call-Info: <sip:10.10.199.251:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: "Anonymous" <sip:anonymous@anonymous.invalid>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763542
Allow-Events: presence, kpml
P-Asserted-Identity: "Bob, Alert" <sip:2002@10.10.199.251>
Supported: Geolocation
Remote-Party-ID: "Bob, Alert" <sip:2002@10.10.199.251>;party=called;screen=yes;privacy=off
Content-Length: 337
To: <sip:2002@siptrunk17.cisco.com>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763454
Contact: <sip:2002@10.10.199.251:5060;transport=tcp>
Content-Type: application/sdp
Call-ID: d0770f00-a28137bf-27-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK8f453ce298
CSeq: 101 INVITE

v=0
o=CiscoSystemsCCM-SIP 2000 1 IN IP4 10.10.199.251
s=SIP Call
c=IN IP4 10.10.199.179
t=0 0
m=audio 4000 RTP/AVP 9 0 8 18 101
a=rtpmap:9 G722/8000
a=ptime:20
a=rtpmap:0 PCMU/8000
a=ptime:20
a=rtpmap:8 PCMA/8000

CISCO CONFIDENTIAL

```
a=ptime:20
a=rtpmap:18 G729/8000
a=ptime:20
a=sendonly
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15

[diagram]   Call-ID:[prev][next]
[5] SIP/2.0 200 OK
Date: Thu, 04 Jun 2009 21:09:17 GMT
Call-Info: <sip:10.10.199.251:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: "Anonymous" <sip:anonymous@anonymous.invalid>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763542
Allow-Events: presence, kpml
P-Asserted-Identity: "Bob, Connect" <sip:2002@10.10.199.251>
Supported: replaces
Supported: Geolocation
Remote-Party-ID: "Bob, Connect" <sip:2002@10.10.199.251>;party=called;screen=yes;privacy=off
Content-Length: 337
Require:  timer
To: <sip:2002@siptrunk17.cisco.com>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763454
Contact: <sip:2002@10.10.199.251:5060;transport=tcp>
Content-Type: application/sdp
Call-ID: d0770f00-a28137bf-27-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK8f453ce298
CSeq: 101 INVITE
Session-Expires:  1800;refresher=uas

v=0
o=CiscoSystemsCCM-SIP 2000 1 IN IP4 10.10.199.251
s=SIP Call
c=IN IP4 10.10.199.179
t=0 0
m=audio 4000 RTP/AVP 9 0 8 18 101
a=rtpmap:9 G722/8000
a=ptime:20
a=rtpmap:0 PCMU/8000
a=ptime:20
a=rtpmap:8 PCMA/8000
a=ptime:20
a=rtpmap:18 G729/8000
a=ptime:20
a=sendonly
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15

[diagram]   Call-ID:[prev][next]
[6] ACK sip:2002@10.10.199.251:5060;transport=tcp SIP/2.0
Date: Thu, 04 Jun 2009 21:08:15 GMT
From: "Anonymous" <sip:anonymous@anonymous.invalid>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763542
Allow-Events: presence, kpml
Content-Length: 228
Privacy: id
To: <sip:2002@siptrunk17.cisco.com>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763454
Content-Type: application/sdp
Call-ID: d0770f00-a28137bf-27-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK906081e2a9
CSeq: 101 ACK
Max-Forwards: 70

v=0
o=CiscoSystemsCCM-SIP 2000 1 IN IP4 10.10.199.250
s=SIP Call
c=IN IP4 10.10.199.130
t=0 0
m=audio 16712 RTP/AVP 9 101
a=rtpmap:9 G722/8000
a=ptime:20
a=recvonly
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15

[diagram]   Call-ID:[prev][next]
[7] INVITE sip:1001@10.10.199.250:5060;transport=tcp SIP/2.0
Date: Thu, 04 Jun 2009 21:09:19 GMT
Call-Info: <sip:10.10.199.251:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:2002@siptrunk17.cisco.com>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763454
Allow-Events: presence, kpml
P-Asserted-Identity: "Bob, Connect" <sip:2002@10.10.199.251>
```

CISCO CONFIDENTIAL

```
Supported: timer,resource-priority,replaces
Min-SE:  1800
Remote-Party-ID: "Bob, Connect" <sip:2002@10.10.199.251>;party=calling;screen=yes;privacy=off
Content-Length: 216
User-Agent: Cisco-CUCM7.1
To: "Anonymous" <sip:anonymous@anonymous.invalid>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763542
Contact: <sip:2002@10.10.199.251:5060;transport=tcp>
Expires: 180
Content-Type: application/sdp
Call-ID: d0770f00-a28137bf-27-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bK833e6872fc
CSeq: 101 INVITE
Session-Expires:  1800;refresher=uac
Max-Forwards: 70

v=0
o=CiscoSystemsCCM-SIP 2000 2 IN IP4 10.10.199.251
s=SIP Call
c=IN IP4 10.10.199.179
t=0 0
m=audio 26500 RTP/AVP 9 101
a=rtpmap:9 G722/8000
a=ptime:20
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
```

[diagram] Call-ID:[prev][next]

[8] SIP/2.0 100 Trying

```
Date: Thu, 04 Jun 2009 21:08:17 GMT
From: <sip:2002@siptrunk17.cisco.com>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763454
Allow-Events: presence, kpml
Content-Length: 0
To: "Anonymous" <sip:anonymous@anonymous.invalid>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763542
Call-ID: d0770f00-a28137bf-27-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bK833e6872fc
CSeq: 101 INVITE
```

[diagram] Call-ID:[prev][next]

[9] SIP/2.0 200 OK

```
Date: Thu, 04 Jun 2009 21:08:17 GMT
Call-Info: <sip:10.10.199.250:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:2002@siptrunk17.cisco.com>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763454
Allow-Events: presence, kpml
P-Asserted-Identity: "Alice, Connect" <sip:1001@10.10.199.250>
Supported: replaces
Supported: Geolocation
Content-Length: 216
Require:  timer
Privacy: id
To: "Anonymous" <sip:anonymous@anonymous.invalid>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763542
Contact: <sip:1001@10.10.199.250:5060;transport=tcp>
Content-Type: application/sdp
Call-ID: d0770f00-a28137bf-27-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bK833e6872fc
CSeq: 101 INVITE
Session-Expires:  1800;refresher=uac

v=0
o=CiscoSystemsCCM-SIP 2000 2 IN IP4 10.10.199.250
s=SIP Call
c=IN IP4 10.10.199.130
t=0 0
m=audio 16712 RTP/AVP 9 101
a=rtpmap:9 G722/8000
a=ptime:20
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
```

[diagram] Call-ID:[prev][next]

[10] ACK sip:1001@10.10.199.250:5060;transport=tcp SIP/2.0

```
Date: Thu, 04 Jun 2009 21:09:19 GMT
From: <sip:2002@siptrunk17.cisco.com>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763454
Allow-Events: presence, kpml
Content-Length: 0
To: "Anonymous" <sip:anonymous@anonymous.invalid>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763542
Call-ID: d0770f00-a28137bf-27-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bK84147d3b32
CSeq: 101 ACK
Max-Forwards: 70
```

CISCO CONFIDENTIAL

[diagram] Call-ID:[prev][next]
[11] BYE sip:2002@10.10.199.251:5060;transport=tcp SIP/2.0
Date: Thu, 04 Jun 2009 21:08:17 GMT
From: "Anonymous" <sip:anonymous@anonymous.invalid>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763542
P-Asserted-Identity: "Alice, Connect" <sip:1001@10.10.199.250>
Content-Length: 0
User-Agent: Cisco-CUCM7.1
Privacy: id
To: <sip:2002@siptrunk17.cisco.com>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763454
Call-ID: d0770f00-a28137bf-27-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK912e68ee0f
CSeq: 102 BYE
Max-Forwards: 70

[diagram] Call-ID:[prev][next]
[12] SIP/2.0 200 OK
Date: Thu, 04 Jun 2009 21:09:24 GMT
From: "Anonymous" <sip:anonymous@anonymous.invalid>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763542
Content-Length: 0
To: <sip:2002@siptrunk17.cisco.com>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763454
Call-ID: d0770f00-a28137bf-27-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK912e68ee0f
CSeq: 102 BYE

CISCO CONFIDENTIAL

19.14 Basic Outgoing Call with an identity in Asserted-Identity header & Privacy: id;critical

Title: Basic Outgoing Call with an identity in Asserted-Identity header & Privacy: id;critical

Description:

Basic Unified CM to Unified CM SIP Trunk Call with Remote-Party-Id [] Asserted-Identity [v] and SIP Privacy=ID Critical configuration

The following basic call flow illustrates the SIP messaging for an outgoing SIP Trunk call from a Unified CM1 to a remote Unified CM2.

The Unified CM1 sends an INVITE over the SIP Trunk for inviting Unified CM2 to the call.

The INVITE request carries an identity in Asserted-Identity header.

Based on SIP Privacy=ID Critical configuration, there is a Privacy: id;critical header sent resulting in restriction of both Display name & Number.

The From header in ougoing INVITE is accordingly changed to From: "Anonymous" <sip:anonymous@anonymous.invalid

Also a Proxy-Require: privacy header is added.

Configuration:

Node = Unified CM1, IP = 10.10.199.250

Node = Unified CM2, IP = 10.10.199.251

Phone = A, Line = 1001, IP = 10.10.199.130, Model = SCCP

Phone = B, Line = 2002, IP = 10.10.199.179, Model = SCCP

SIP Trunk from Unified CM1 to Unified CM2 has

a) route pattern 2.XXXX

b) Has destination port configured to be 5060

c) Remote-Party-Id [] Asserted-Identity [v], Asserted-Type=Default, SIP Privacy=ID Critical

Scenario:

Phone A DN 1001 calls Phone B DN 2002 over the SIP Trunk by dialing 22002

Phone B answers the call

Phone A goes onHook

End of Scenario

CISCO CONFIDENTIAL

CISCO CONFIDENTIAL

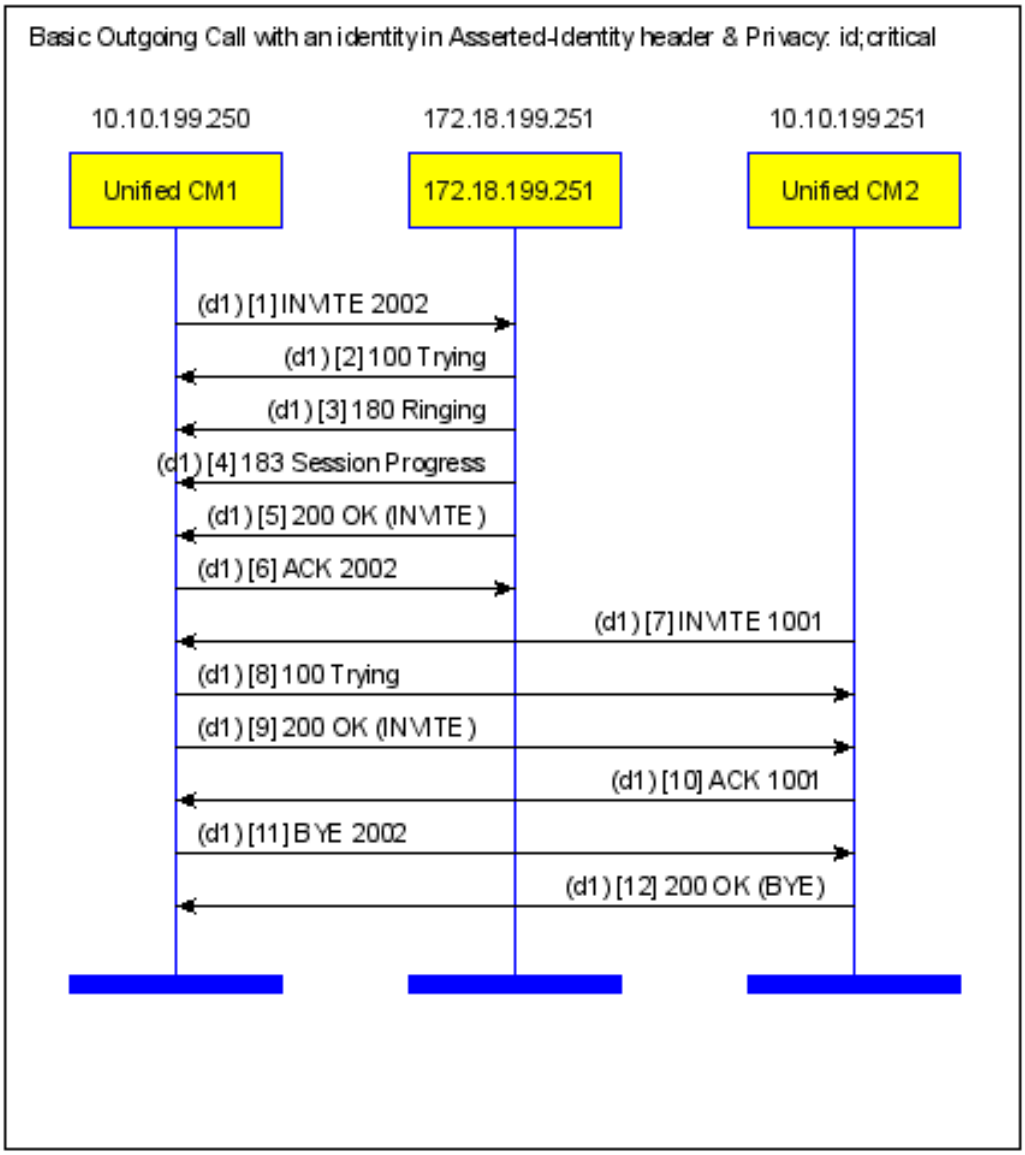

CISCO CONFIDENTIAL

[diagram] Call-ID:[prev][next]
[1] INVITE sip:2002@siptrunk17.cisco.com:5060 SIP/2.0
```
Date: Thu, 04 Jun 2009 21:05:04 GMT
Call-Info: <sip:10.10.199.250:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: "Anonymous" <sip:anonymous@anonymous.invalid>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763540
Allow-Events: presence, kpml
P-Asserted-Identity: "Alice, Connect" <sip:1001@10.10.199.250>
Supported: timer,resource-priority,replaces
Supported: Geolocation
Min-SE:  1800
Content-Length: 0
User-Agent: Cisco-CUCM7.1
Privacy: id;critical
To: <sip:2002@siptrunk17.cisco.com>
Contact: <sip:1001@10.10.199.250:5060;transport=tcp>
Expires: 180
Call-ID: 5e9ec580-a2813700-26-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK8c7a27e278
CSeq: 101 INVITE
Session-Expires:  1800
Proxy-Require: privacy
Max-Forwards: 70
```

[diagram] Call-ID:[prev][next]
[2] SIP/2.0 100 Trying
```
Date: Thu, 04 Jun 2009 21:06:06 GMT
From: "Anonymous" <sip:anonymous@anonymous.invalid>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763540
Allow-Events: presence
Content-Length: 0
To: <sip:2002@siptrunk17.cisco.com>
Call-ID: 5e9ec580-a2813700-26-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK8c7a27e278
CSeq: 101 INVITE
```

[diagram] Call-ID:[prev][next]
[3] SIP/2.0 180 Ringing
```
Date: Thu, 04 Jun 2009 21:06:06 GMT
Call-Info: <sip:10.10.199.251:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: "Anonymous" <sip:anonymous@anonymous.invalid>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763540
Allow-Events: presence
P-Asserted-Identity: "Bob, Alert" <sip:2002@10.10.199.251>
Supported: Geolocation
Remote-Party-ID: "Bob, Alert" <sip:2002@10.10.199.251>;party=called;screen=yes;privacy=off
Content-Length: 0
To: <sip:2002@siptrunk17.cisco.com>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763452
Contact: <sip:2002@10.10.199.251:5060;transport=tcp>
Call-ID: 5e9ec580-a2813700-26-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK8c7a27e278
CSeq: 101 INVITE
```

[diagram] Call-ID:[prev][next]
[4] SIP/2.0 183 Session Progress
```
Date: Thu, 04 Jun 2009 21:06:06 GMT
Call-Info: <sip:10.10.199.251:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: "Anonymous" <sip:anonymous@anonymous.invalid>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763540
Allow-Events: presence, kpml
P-Asserted-Identity: "Bob, Alert" <sip:2002@10.10.199.251>
Supported: Geolocation
Remote-Party-ID: "Bob, Alert" <sip:2002@10.10.199.251>;party=called;screen=yes;privacy=off
Content-Length: 337
To: <sip:2002@siptrunk17.cisco.com>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763452
Contact: <sip:2002@10.10.199.251:5060;transport=tcp>
Content-Type: application/sdp
Call-ID: 5e9ec580-a2813700-26-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK8c7a27e278
CSeq: 101 INVITE

v=0
o=CiscoSystemsCCM-SIP 2000 1 IN IP4 10.10.199.251
s=SIP Call
c=IN IP4 10.10.199.179
t=0 0
m=audio 4000 RTP/AVP 9 0 8 18 101
a=rtpmap:9 G722/8000
a=ptime:20
a=rtpmap:0 PCMU/8000
a=ptime:20
```

CISCO CONFIDENTIAL

```
a=rtpmap:8 PCMA/8000
a=ptime:20
a=rtpmap:18 G729/8000
a=ptime:20
a=sendonly
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
```

[diagram] Call-ID:[prev][next]

[5] SIP/2.0 200 OK

```
Date: Thu, 04 Jun 2009 21:06:06 GMT
Call-Info: <sip:10.10.199.251:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: "Anonymous" <sip:anonymous@anonymous.invalid>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763540
Allow-Events: presence, kpml
P-Asserted-Identity: "Bob, Connect" <sip:2002@10.10.199.251>
Supported: replaces
Supported: Geolocation
Remote-Party-ID: "Bob, Connect" <sip:2002@10.10.199.251>;party=called;screen=yes;privacy=off
Content-Length: 337
Require:  timer
To: <sip:2002@siptrunk17.cisco.com>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763452
Contact: <sip:2002@10.10.199.251:5060;transport=tcp>
Content-Type: application/sdp
Call-ID: 5e9ec580-a2813700-26-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK8c7a27e278
CSeq: 101 INVITE
Session-Expires:  1800;refresher=uas

v=0
o=CiscoSystemsCCM-SIP 2000 1 IN IP4 10.10.199.251
s=SIP Call
c=IN IP4 10.10.199.179
t=0 0
m=audio 4000 RTP/AVP 9 0 8 18 101
a=rtpmap:9 G722/8000
a=ptime:20
a=rtpmap:0 PCMU/8000
a=ptime:20
a=rtpmap:8 PCMA/8000
a=ptime:20
a=rtpmap:18 G729/8000
a=ptime:20
a=sendonly
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
```

[diagram] Call-ID:[prev][next]

[6] ACK sip:2002@10.10.199.251:5060;transport=tcp SIP/2.0

```
Date: Thu, 04 Jun 2009 21:05:04 GMT
From: "Anonymous" <sip:anonymous@anonymous.invalid>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763540
Allow-Events: presence, kpml
Content-Length: 228
Privacy: id;critical
To: <sip:2002@siptrunk17.cisco.com>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763452
Content-Type: application/sdp
Call-ID: 5e9ec580-a2813700-26-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK8d78546f0c
CSeq: 101 ACK
Proxy-Require: privacy
Max-Forwards: 70

v=0
o=CiscoSystemsCCM-SIP 2000 1 IN IP4 10.10.199.250
s=SIP Call
c=IN IP4 10.10.199.130
t=0 0
m=audio 30410 RTP/AVP 9 101
a=rtpmap:9 G722/8000
a=ptime:20
a=recvonly
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
```

[diagram] Call-ID:[prev][next]

[7] INVITE sip:1001@10.10.199.250:5060;transport=tcp SIP/2.0

```
Date: Thu, 04 Jun 2009 21:06:08 GMT
Call-Info: <sip:10.10.199.251:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:2002@siptrunk17.cisco.com>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763452
```

CISCO CONFIDENTIAL

```
Allow-Events: presence, kpml
P-Asserted-Identity: "Bob, Connect" <sip:2002@10.10.199.251>
Supported: timer,resource-priority,replaces
Min-SE:  1800
Remote-Party-ID: "Bob, Connect" <sip:2002@10.10.199.251>;party=calling;screen=yes;privacy=off
Content-Length: 216
User-Agent: Cisco-CUCM7.1
To: "Anonymous" <sip:anonymous@anonymous.invalid>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763540
Contact: <sip:2002@10.10.199.251:5060;transport=tcp>
Expires: 180
Content-Type: application/sdp
Call-ID: 5e9ec580-a2813700-26-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bK8183bea3f
CSeq: 101 INVITE
Session-Expires:  1800;refresher=uac
Max-Forwards: 70

v=0
o=CiscoSystemsCCM-SIP 2000 2 IN IP4 10.10.199.251
s=SIP Call
c=IN IP4 10.10.199.179
t=0 0
m=audio 23824 RTP/AVP 9 101
a=rtpmap:9 G722/8000
a=ptime:20
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15

[diagram]   Call-ID:[prev][next]
[8] SIP/2.0 100 Trying
Date: Thu, 04 Jun 2009 21:05:06 GMT
From: <sip:2002@siptrunk17.cisco.com>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763452
Allow-Events: presence, kpml
Content-Length: 0
To: "Anonymous" <sip:anonymous@anonymous.invalid>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763540
Call-ID: 5e9ec580-a2813700-26-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bK8183bea3f
CSeq: 101 INVITE

[diagram]   Call-ID:[prev][next]
[9] SIP/2.0 200 OK
Date: Thu, 04 Jun 2009 21:05:06 GMT
Call-Info: <sip:10.10.199.250:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:2002@siptrunk17.cisco.com>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763452
Allow-Events: presence, kpml
P-Asserted-Identity: "Alice, Connect" <sip:1001@10.10.199.250>
Supported: replaces
Supported: Geolocation
Content-Length: 216
Require:  timer
Privacy: id
To: "Anonymous" <sip:anonymous@anonymous.invalid>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763540
Contact: <sip:1001@10.10.199.250:5060;transport=tcp>
Content-Type: application/sdp
Call-ID: 5e9ec580-a2813700-26-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bK8183bea3f
CSeq: 101 INVITE
Session-Expires:  1800;refresher=uac

v=0
o=CiscoSystemsCCM-SIP 2000 2 IN IP4 10.10.199.250
s=SIP Call
c=IN IP4 10.10.199.130
t=0 0
m=audio 30410 RTP/AVP 9 101
a=rtpmap:9 G722/8000
a=ptime:20
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15

[diagram]   Call-ID:[prev][next]
[10] ACK sip:1001@10.10.199.250:5060;transport=tcp SIP/2.0
Date: Thu, 04 Jun 2009 21:06:08 GMT
From: <sip:2002@siptrunk17.cisco.com>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763452
Allow-Events: presence, kpml
Content-Length: 0
To: "Anonymous" <sip:anonymous@anonymous.invalid>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763540
Call-ID: 5e9ec580-a2813700-26-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bK8251537ebf
```

CISCO CONFIDENTIAL

```
CSeq: 101 ACK
Max-Forwards: 70

[diagram]   Call-ID:[prev][next]
[11] BYE sip:2002@10.10.199.251:5060;transport=tcp SIP/2.0
Date: Thu, 04 Jun 2009 21:05:06 GMT
From: "Anonymous" <sip:anonymous@anonymous.invalid>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763540
P-Asserted-Identity: "Alice, Connect" <sip:1001@10.10.199.250>
Content-Length: 0
User-Agent: Cisco-CUCM7.1
Privacy: id;critical
To: <sip:2002@siptrunk17.cisco.com>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763452
Call-ID: 5e9ec580-a2813700-26-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK8e3589b6ee
CSeq: 102 BYE
Proxy-Require: privacy
Max-Forwards: 70

[diagram]   Call-ID:[prev][next]
[12] SIP/2.0 200 OK
Date: Thu, 04 Jun 2009 21:06:14 GMT
From: "Anonymous" <sip:anonymous@anonymous.invalid>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763540
Content-Length: 0
To: <sip:2002@siptrunk17.cisco.com>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763452
Call-ID: 5e9ec580-a2813700-26-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK8e3589b6ee
CSeq: 102 BYE
```

CISCO CONFIDENTIAL

19.15 Basic Outgoing Call with identity in Asserted-Identity & Privacy:none

Title: Basic Outgoing Call with identity in Asserted-Identity & Privacy:none

Description:

Basic Unified CM to Unified CM SIP Trunk Call with Remote-Party-Id [] Asserted-Identity [v] and SIP Privacy=None configuration

The following basic call flow illustrates the SIP messaging for an outgoing SIP Trunk call from a Unified CM1 to a remote Unified CM2.

The Unified CM1 sends an INVITE over the SIP Trunk for inviting Unified CM2 to the call.

The INVITE request carries an identity in Asserted-Identity header.

Based on SIP Privacy=None configuration, there is a Privacy:none header sent

Configuration:

Node = Unified CM1, IP = 10.10.199.250

Node = Unified CM2, IP = 10.10.199.251

Phone = A, Line = 1001, IP = 10.10.199.130, Model = SCCP

Phone = B, Line = 2002, IP = 10.10.199.179, Model = SCCP

SIP Trunk from Unified CM1 & Unified CM2 has

a) route pattern 2.XXXX

b) Has destination port configured to be 5060

c) Remote-Party-Id [] Asserted-Identity [v], SIP Privacy= None, Asserted-Type=Default

Scenario:

Phone A DN 1001 calls Phone B DN 2002 over the SIP Trunk by dialing 22002

Phone B answers the call

Phone A goes onHook

End of Scenario

CISCO CONFIDENTIAL

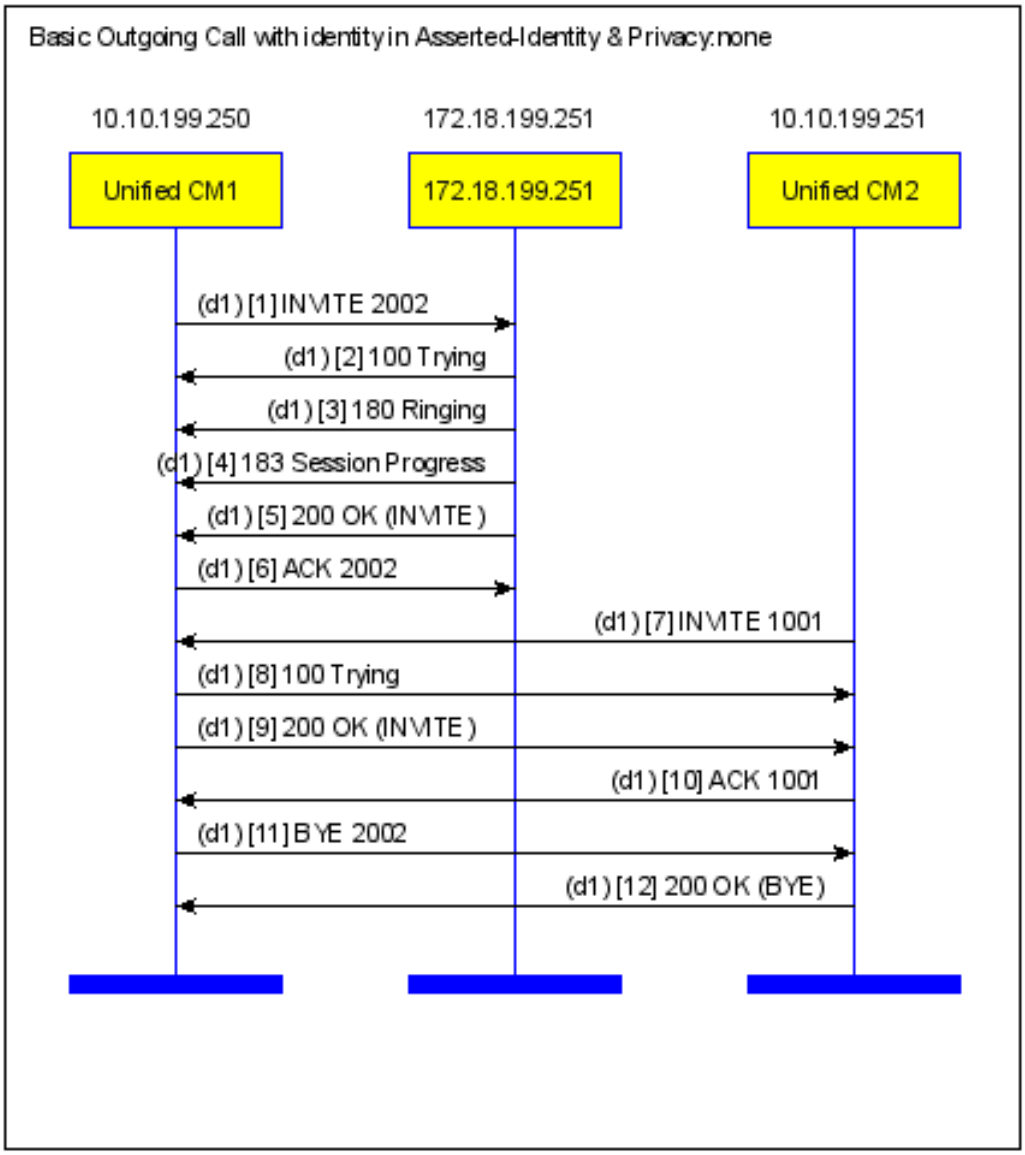

CISCO CONFIDENTIAL

[diagram] Call-ID:[prev][next]
[1] INVITE sip:2002@siptrunk17.cisco.com:5060 SIP/2.0
Date: Thu, 04 Jun 2009 21:10:57 GMT
Call-Info: <sip:10.10.199.250:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: "Alice, Connect" <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763544
Allow-Events: presence, kpml
P-Asserted-Identity: "Alice, Connect" <sip:1001@10.10.199.250>
Supported: timer,resource-priority,replaces
Supported: Geolocation
Min-SE: 1800
Content-Length: 0
User-Agent: Cisco-CUCM7.1
Privacy: none
To: <sip:2002@siptrunk17.cisco.com>
Contact: <sip:1001@10.10.199.250:5060;transport=tcp>
Expires: 180
Call-ID: 31064c00-a2813861-28-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK9260381b05
CSeq: 101 INVITE
Session-Expires: 1800
Max-Forwards: 70

[diagram] Call-ID:[prev][next]
[2] SIP/2.0 100 Trying
Date: Thu, 04 Jun 2009 21:11:59 GMT
From: "Alice, Connect" <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763544
Allow-Events: presence
Content-Length: 0
To: <sip:2002@siptrunk17.cisco.com>
Call-ID: 31064c00-a2813861-28-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK9260381b05
CSeq: 101 INVITE

[diagram] Call-ID:[prev][next]
[3] SIP/2.0 180 Ringing
Date: Thu, 04 Jun 2009 21:11:59 GMT
Call-Info: <sip:10.10.199.251:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: "Alice, Connect" <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763544
Allow-Events: presence
P-Asserted-Identity: "Bob, Alert" <sip:2002@10.10.199.251>
Supported: Geolocation
Remote-Party-ID: "Bob, Alert" <sip:2002@10.10.199.251>;party=called;screen=yes;privacy=off
Content-Length: 0
To: <sip:2002@siptrunk17.cisco.com>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763456
Contact: <sip:2002@10.10.199.251:5060;transport=tcp>
Call-ID: 31064c00-a2813861-28-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK9260381b05
CSeq: 101 INVITE

[diagram] Call-ID:[prev][next]
[4] SIP/2.0 183 Session Progress
Date: Thu, 04 Jun 2009 21:11:59 GMT
Call-Info: <sip:10.10.199.251:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: "Alice, Connect" <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763544
Allow-Events: presence, kpml
P-Asserted-Identity: "Bob, Alert" <sip:2002@10.10.199.251>
Supported: Geolocation
Remote-Party-ID: "Bob, Alert" <sip:2002@10.10.199.251>;party=called;screen=yes;privacy=off
Content-Length: 337
To: <sip:2002@siptrunk17.cisco.com>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763456
Contact: <sip:2002@10.10.199.251:5060;transport=tcp>
Content-Type: application/sdp
Call-ID: 31064c00-a2813861-28-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK9260381b05
CSeq: 101 INVITE

v=0
o=CiscoSystemsCCM-SIP 2000 1 IN IP4 10.10.199.251
s=SIP Call
c=IN IP4 10.10.199.179
t=0 0
m=audio 4000 RTP/AVP 9 0 8 18 101
a=rtpmap:9 G722/8000
a=ptime:20
a=rtpmap:0 PCMU/8000
a=ptime:20
a=rtpmap:8 PCMA/8000

CISCO CONFIDENTIAL

```
a=ptime:20
a=rtpmap:18 G729/8000
a=ptime:20
a=sendonly
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15

[diagram]   Call-ID:[prev][next]
[5] SIP/2.0 200 OK
Date: Thu, 04 Jun 2009 21:11:59 GMT
Call-Info: <sip:10.10.199.251:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: "Alice, Connect" <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763544
Allow-Events: presence, kpml
P-Asserted-Identity: "Bob, Connect" <sip:2002@10.10.199.251>
Supported: replaces
Supported: Geolocation
Remote-Party-ID: "Bob, Connect" <sip:2002@10.10.199.251>;party=called;screen=yes;privacy=off
Content-Length: 337
Require:  timer
To: <sip:2002@siptrunk17.cisco.com>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763456
Contact: <sip:2002@10.10.199.251:5060;transport=tcp>
Content-Type: application/sdp
Call-ID: 31064c00-a2813861-28-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK9260381b05
CSeq: 101 INVITE
Session-Expires:  1800;refresher=uas

v=0
o=CiscoSystemsCCM-SIP 2000 1 IN IP4 10.10.199.251
s=SIP Call
c=IN IP4 10.10.199.179
t=0 0
m=audio 4000 RTP/AVP 9 0 8 18 101
a=rtpmap:9 G722/8000
a=ptime:20
a=rtpmap:0 PCMU/8000
a=ptime:20
a=rtpmap:8 PCMA/8000
a=ptime:20
a=rtpmap:18 G729/8000
a=ptime:20
a=sendonly
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15

[diagram]   Call-ID:[prev][next]
[6] ACK sip:2002@10.10.199.251:5060;transport=tcp SIP/2.0
Date: Thu, 04 Jun 2009 21:10:57 GMT
From: "Alice, Connect" <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763544
Allow-Events: presence, kpml
Content-Length: 228
Privacy: none
To: <sip:2002@siptrunk17.cisco.com>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763456
Content-Type: application/sdp
Call-ID: 31064c00-a2813861-28-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK9318d7edee
CSeq: 101 ACK
Max-Forwards: 70

v=0
o=CiscoSystemsCCM-SIP 2000 1 IN IP4 10.10.199.250
s=SIP Call
c=IN IP4 10.10.199.130
t=0 0
m=audio 16648 RTP/AVP 9 101
a=rtpmap:9 G722/8000
a=ptime:20
a=recvonly
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15

[diagram]   Call-ID:[prev][next]
[7] INVITE sip:1001@10.10.199.250:5060;transport=tcp SIP/2.0
Date: Thu, 04 Jun 2009 21:12:02 GMT
Call-Info: <sip:10.10.199.251:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:2002@siptrunk17.cisco.com>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763456
Allow-Events: presence, kpml
P-Asserted-Identity: "Bob, Connect" <sip:2002@10.10.199.251>
```

CISCO CONFIDENTIAL

```
Supported: timer,resource-priority,replaces
Min-SE:  1800
Remote-Party-ID: "Bob, Connect" <sip:2002@10.10.199.251>;party=calling;screen=yes;privacy=off
Content-Length: 216
User-Agent: Cisco-CUCM7.1
To: "Alice, Connect" <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763544
Contact: <sip:2002@10.10.199.251:5060;transport=tcp>
Expires: 180
Content-Type: application/sdp
Call-ID: 31064c00-a2813861-28-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bK8555ae104a
CSeq: 101 INVITE
Session-Expires:  1800;refresher=uac
Max-Forwards: 70

v=0
o=CiscoSystemsCCM-SIP 2000 2 IN IP4 10.10.199.251
s=SIP Call
c=IN IP4 10.10.199.179
t=0 0
m=audio 26434 RTP/AVP 9 101
a=rtpmap:9 G722/8000
a=ptime:20
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
```

[diagram] Call-ID:[prev][next]

[8] SIP/2.0 100 Trying

```
Date: Thu, 04 Jun 2009 21:11:00 GMT
From: <sip:2002@siptrunk17.cisco.com>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763456
Allow-Events: presence, kpml
Content-Length: 0
To: "Alice, Connect" <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763544
Call-ID: 31064c00-a2813861-28-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bK8555ae104a
CSeq: 101 INVITE
```

[diagram] Call-ID:[prev][next]

[9] SIP/2.0 200 OK

```
Date: Thu, 04 Jun 2009 21:11:00 GMT
Call-Info: <sip:10.10.199.250:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:2002@siptrunk17.cisco.com>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763456
Allow-Events: presence, kpml
P-Asserted-Identity: "Alice, Connect" <sip:1001@10.10.199.250>
Supported: replaces
Supported: Geolocation
Content-Length: 216
Require:  timer
Privacy: none
To: "Alice, Connect" <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763544
Contact: <sip:1001@10.10.199.250:5060;transport=tcp>
Content-Type: application/sdp
Call-ID: 31064c00-a2813861-28-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bK8555ae104a
CSeq: 101 INVITE
Session-Expires:  1800;refresher=uac

v=0
o=CiscoSystemsCCM-SIP 2000 2 IN IP4 10.10.199.250
s=SIP Call
c=IN IP4 10.10.199.130
t=0 0
m=audio 16648 RTP/AVP 9 101
a=rtpmap:9 G722/8000
a=ptime:20
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
```

[diagram] Call-ID:[prev][next]

[10] ACK sip:1001@10.10.199.250:5060;transport=tcp SIP/2.0

```
Date: Thu, 04 Jun 2009 21:12:02 GMT
From: <sip:2002@siptrunk17.cisco.com>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763456
Allow-Events: presence, kpml
Content-Length: 0
To: "Alice, Connect" <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763544
Call-ID: 31064c00-a2813861-28-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bK862c1dd457
CSeq: 101 ACK
Max-Forwards: 70
```

CISCO CONFIDENTIAL

[diagram] Call-ID:[prev][next]

[11] BYE sip:2002@10.10.199.251:5060;transport=tcp SIP/2.0

```
Date: Thu, 04 Jun 2009 21:11:00 GMT
From: "Alice, Connect" <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763544
P-Asserted-Identity: "Alice, Connect" <sip:1001@10.10.199.250>
Content-Length: 0
User-Agent: Cisco-CUCM7.1
Privacy: none
To: <sip:2002@siptrunk17.cisco.com>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763456
Call-ID: 31064c00-a2813861-28-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK9430d51da6
CSeq: 102 BYE
Max-Forwards: 70
```

[diagram] Call-ID:[prev][next]

[12] SIP/2.0 200 OK

```
Date: Thu, 04 Jun 2009 21:12:10 GMT
From: "Alice, Connect" <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763544
Content-Length: 0
To: <sip:2002@siptrunk17.cisco.com>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-21763456
Call-ID: 31064c00-a2813861-28-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK9430d51da6
CSeq: 102 BYE
```

CISCO CONFIDENTIAL

20. MLPP

20.1 MLPP Basic Call

Title: MLPP Basic Call

Description:

The following basic call flow illustrates the SIP messaging when the MLPP feature is enabled on SIP trunk.

Cisco Unified CM1 is configured to have resource priority namespace network domains and resource priority namespace lists with prioritized order for validating inbound SIP trunk messages. SIP Trunk profile is associated with namespace list and namespace network domains are added to any MLPP translations or route patterns, used for outbound SIP trunk calls.

Cisco Unified CM1 sent out the initial INVITE.

Configuration:

Node = Unified CM1, IP = 10.10.198.115
Node = Unified CM2, IP = 10.10.198.119

Phone = A, Line = 3001, Model = SCCP
Phone = B, Line = 4001, Model = SCCP

Scenario:

Phone A DN 3001 makes a FlashOverride MLPP call to Phone B DN 4001 over the SIP Trunk
Phone B DN 4001 rings with Precedence Ringer and shows Precedence level bubbles on CallerID
Phone A DN 3001 gets Precedence Ringback
Phone B DN 4001 answers
Both talk for 5 seconds
Phone A DN 3001 goes onHook
End of Scenario

CISCO CONFIDENTIAL

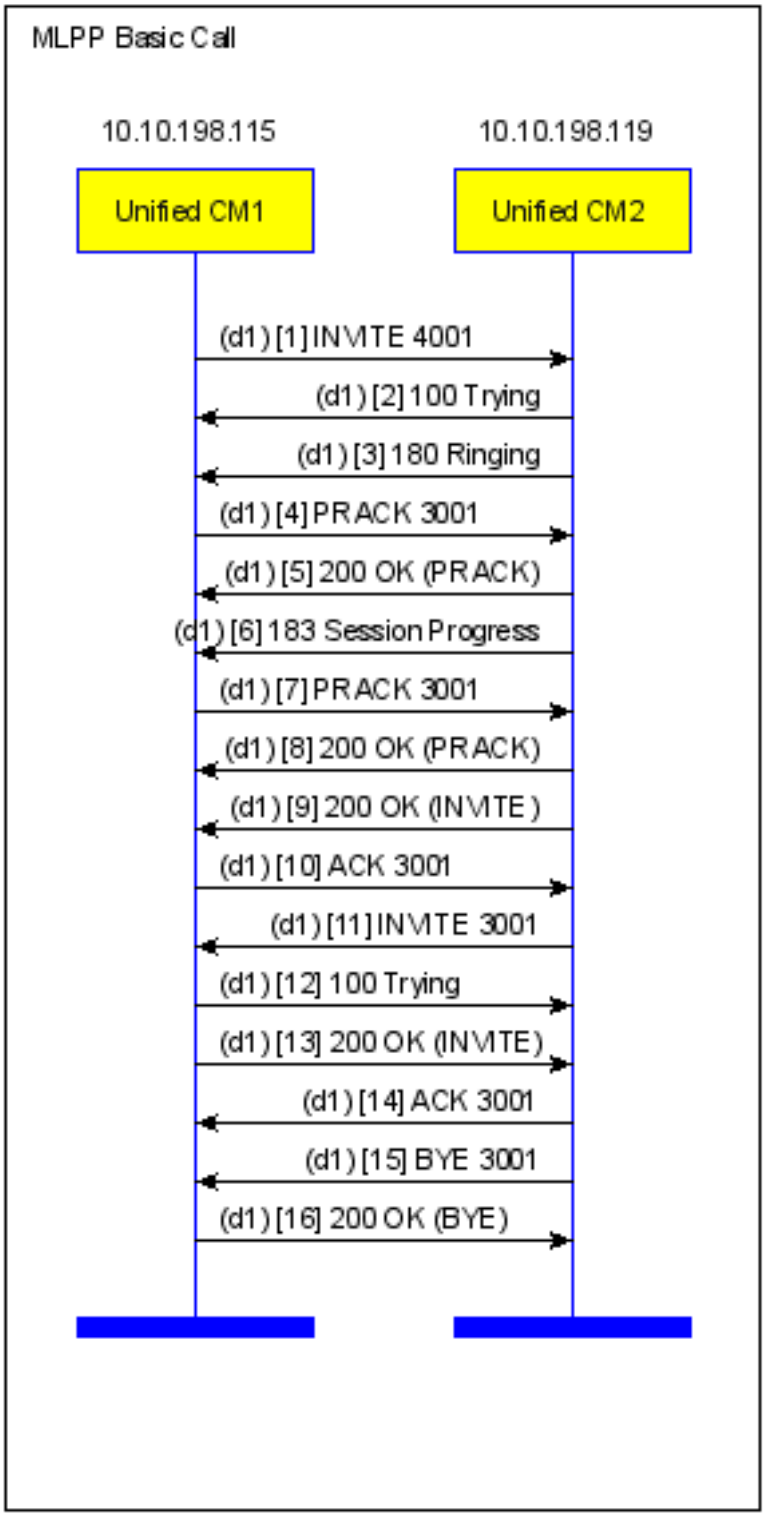

CISCO CONFIDENTIAL

[diagram] Call-ID:[prev][next]
[1] INVITE sip:4001@10.10.198.119:5060 SIP/2.0
Date: Fri, 25 Jul 2008 18:09:37 GMT
Call-Info: <sip:10.10.198.115:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:3001@10.10.198.115>;tag=ef18c435-bc4f-454b-b8e8-d747acdaf9c7-19421846
Allow-Events: presence, kpml
P-Asserted-Identity: <sip:3001@10.10.198.115>
Supported: 100rel,timer,resource-priority,replaces
Min-SE: 1800
Remote-Party-ID: <sip:3001@10.10.198.115>;party=calling;screen=yes;privacy=off
Content-Length: 0
User-Agent: Cisco-CUCM7.1
Require: resource-priority
To: <sip:4001@10.10.198.119>
Contact: <sip:3001@10.10.198.115:5060;transport=tcp>
Resource-Priority: dsn.priority
Expires: 180
Call-ID: d6548c00-88a116e1-1-73626201@10.10.198.115
Via: SIP/2.0/TCP 10.10.198.115:5060;branch=z9hG4bK04b055ac9
CSeq: 101 INVITE
Session-Expires: 1800
Max-Forwards: 70

[diagram] Call-ID:[prev][next]
[2] SIP/2.0 100 Trying
Date: Fri, 25 Jul 2008 17:54:49 GMT
From: <sip:3001@10.10.198.115>;tag=ef18c435-bc4f-454b-b8e8-d747acdaf9c7-19421846
Allow-Events: presence
Content-Length: 0
To: <sip:4001@10.10.198.119>
Call-ID: d6548c00-88a116e1-1-73626201@10.10.198.115
Via: SIP/2.0/TCP 10.10.198.115:5060;branch=z9hG4bK04b055ac9
CSeq: 101 INVITE

[diagram] Call-ID:[prev][next]
[3] SIP/2.0 180 Ringing
Date: Fri, 25 Jul 2008 17:54:49 GMT
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:3001@10.10.198.115>;tag=ef18c435-bc4f-454b-b8e8-d747acdaf9c7-19421846
Allow-Events: presence
P-Asserted-Identity: <sip:4001@10.10.198.119>
Remote-Party-ID: <sip:4001@10.10.198.119>;party=called;screen=yes;privacy=off
Content-Length: 0
Require: 100rel
To: <sip:4001@10.10.198.119>;tag=7e4f624f-bed2-48c9-ba75-80ace681d6b6-19418257
RSeq: 64861124
Contact: <sip:3001@10.10.198.119:5060;transport=tcp>
Call-ID: d6548c00-88a116e1-1-73626201@10.10.198.115
Via: SIP/2.0/TCP 10.10.198.115:5060;branch=z9hG4bK04b055ac9
CSeq: 101 INVITE

[diagram] Call-ID:[prev][next]
[4] PRACK sip:3001@10.10.198.119:5060;transport=tcp SIP/2.0
Date: Fri, 25 Jul 2008 18:09:37 GMT
From: <sip:3001@10.10.198.115>;tag=ef18c435-bc4f-454b-b8e8-d747acdaf9c7-19421846
RAck: 64861124 101 INVITE
Allow-Events: presence, kpml
Content-Length: 0
To: <sip:4001@10.10.198.119>;tag=7e4f624f-bed2-48c9-ba75-80ace681d6b6-19418257
Call-ID: d6548c00-88a116e1-1-73626201@10.10.198.115
Via: SIP/2.0/TCP 10.10.198.115:5060;branch=z9hG4bK1115fcdcd
CSeq: 102 PRACK
Max-Forwards: 70

[diagram] Call-ID:[prev][next]
[5] SIP/2.0 200 OK
Date: Fri, 25 Jul 2008 17:54:49 GMT
From: <sip:3001@10.10.198.115>;tag=ef18c435-bc4f-454b-b8e8-d747acdaf9c7-19421846
Content-Length: 0
To: <sip:4001@10.10.198.119>;tag=7e4f624f-bed2-48c9-ba75-80ace681d6b6-19418257
Call-ID: d6548c00-88a116e1-1-73626201@10.10.198.115
Via: SIP/2.0/TCP 10.10.198.115:5060;branch=z9hG4bK1115fcdcd
CSeq: 102 PRACK

[diagram] Call-ID:[prev][next]
[6] SIP/2.0 183 Session Progress
Date: Fri, 25 Jul 2008 17:54:49 GMT
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:3001@10.10.198.115>;tag=ef18c435-bc4f-454b-b8e8-d747acdaf9c7-19421846

CISCO CONFIDENTIAL

```
Allow-Events: presence, kpml
P-Asserted-Identity: <sip:4001@10.10.198.119>
Remote-Party-ID: <sip:4001@10.10.198.119>;party=called;screen=yes;privacy=off
Content-Length: 342
Require: 100rel
To: <sip:4001@10.10.198.119>;tag=7e4f624f-bed2-48c9-ba75-80ace681d6b6-19418257
RSeq: 64861125
Contact: <sip:3001@10.10.198.119:5060;transport=tcp>
Content-Type: application/sdp
Call-ID: d6548c00-88a116e1-1-73626201@10.10.198.115
Via: SIP/2.0/TCP 10.10.198.115:5060;branch=z9hG4bK04b055ac9
CSeq: 101 INVITE

v=0
o=CiscoSystemsCCM-SIP 2000 1 IN IP4 10.10.198.119
s=SIP Call
c=IN IP4 10.10.198.134
t=0 0
m=audio 4000 RTP/AVP 9 0 8 18 101
a=rtpmap:9 G722/8000
a=ptime:20
a=rtpmap:0 PCMU/8000
a=ptime:20
a=rtpmap:8 PCMA/8000
a=ptime:20
a=rtpmap:18 G729/8000
a=ptime:20
a=fmtp:0
a=sendonly
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
```

[diagram] Call-ID:[prev][next]

[7] PRACK sip:3001@10.10.198.119:5060;transport=tcp SIP/2.0

```
Date: Fri, 25 Jul 2008 18:09:37 GMT
From: <sip:3001@10.10.198.115>;tag=ef18c435-bc4f-454b-b8e8-d747acdaf9c7-19421846
RAck: 64861125 101 INVITE
Allow-Events: presence, kpml
Content-Length: 235
To: <sip:4001@10.10.198.119>;tag=7e4f624f-bed2-48c9-ba75-80ace681d6b6-19418257
Content-Type: application/sdp
Call-ID: d6548c00-88a116e1-1-73626201@10.10.198.115
Via: SIP/2.0/TCP 10.10.198.115:5060;branch=z9hG4bK23396876c
CSeq: 103 PRACK
Max-Forwards: 70

v=0
o=CiscoSystemsCCM-SIP 2000 1 IN IP4 10.10.198.115
s=SIP Call
c=IN IP4 10.10.198.133
t=0 0
m=audio 29220 RTP/AVP 18 101
a=rtpmap:18 G729/8000
a=ptime:20
a=fmtp:0
a=recvonly
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
```

[diagram] Call-ID:[prev][next]

[8] SIP/2.0 200 OK

```
Date: Fri, 25 Jul 2008 17:54:52 GMT
From: <sip:3001@10.10.198.115>;tag=ef18c435-bc4f-454b-b8e8-d747acdaf9c7-19421846
Content-Length: 0
To: <sip:4001@10.10.198.119>;tag=7e4f624f-bed2-48c9-ba75-80ace681d6b6-19418257
Call-ID: d6548c00-88a116e1-1-73626201@10.10.198.115
Via: SIP/2.0/TCP 10.10.198.115:5060;branch=z9hG4bK23396876c
CSeq: 103 PRACK
```

[diagram] Call-ID:[prev][next]

[9] SIP/2.0 200 OK

```
Date: Fri, 25 Jul 2008 17:54:52 GMT
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:3001@10.10.198.115>;tag=ef18c435-bc4f-454b-b8e8-d747acdaf9c7-19421846
Allow-Events: presence, kpml
P-Asserted-Identity: <sip:4001@10.10.198.119>
Supported: replaces
Remote-Party-ID: <sip:4001@10.10.198.119>;party=called;screen=yes;privacy=off
Content-Length: 342
Require:  timer
```

CISCO CONFIDENTIAL

```
To: <sip:4001@10.10.198.119>;tag=7e4f624f-bed2-48c9-ba75-80ace681d6b6-19418257
Contact: <sip:3001@10.10.198.119:5060;transport=tcp>
Content-Type: application/sdp
Call-ID: d6548c00-88a116e1-1-73626201@10.10.198.115
Via: SIP/2.0/TCP 10.10.198.115:5060;branch=z9hG4bK04b055ac9
CSeq: 101 INVITE
Session-Expires:  1800;refresher=uas

v=0
o=CiscoSystemsCCM-SIP 2000 1 IN IP4 10.10.198.119
s=SIP Call
c=IN IP4 10.10.198.134
t=0 0
m=audio 4000 RTP/AVP 9 0 8 18 101
a=rtpmap:9 G722/8000
a=ptime:20
a=rtpmap:0 PCMU/8000
a=ptime:20
a=rtpmap:8 PCMA/8000
a=ptime:20
a=rtpmap:18 G729/8000
a=ptime:20
a=fmtp:0
a=sendonly
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
```

[diagram] Call-ID:[prev][next]

```
[10] ACK sip:3001@10.10.198.119:5060;transport=tcp SIP/2.0
Date: Fri, 25 Jul 2008 18:09:37 GMT
From: <sip:3001@10.10.198.115>;tag=ef18c435-bc4f-454b-b8e8-d747acdaf9c7-19421846
Allow-Events: presence, kpml
Content-Length: 235
To: <sip:4001@10.10.198.119>;tag=7e4f624f-bed2-48c9-ba75-80ace681d6b6-19418257
Content-Type: application/sdp
Call-ID: d6548c00-88a116e1-1-73626201@10.10.198.115
Via: SIP/2.0/TCP 10.10.198.115:5060;branch=z9hG4bK37a772ee8
CSeq: 101 ACK
Max-Forwards: 70

v=0
o=CiscoSystemsCCM-SIP 2000 1 IN IP4 10.10.198.115
s=SIP Call
c=IN IP4 10.10.198.133
t=0 0
m=audio 29220 RTP/AVP 18 101
a=rtpmap:18 G729/8000
a=ptime:20
a=fmtp:0
a=recvonly
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
```

[diagram] Call-ID:[prev][next]

```
[11] INVITE sip:3001@10.10.198.115:5060;transport=tcp SIP/2.0
Date: Fri, 25 Jul 2008 17:54:52 GMT
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:4001@10.10.198.119>;tag=7e4f624f-bed2-48c9-ba75-80ace681d6b6-19418257
Allow-Events: presence, kpml
P-Asserted-Identity: <sip:4001@10.10.198.119>
Supported: 100rel,timer,resource-priority,replaces
Min-SE:  1800
Cisco-Guid: 3305799680-2292257641-1-2002936321
Remote-Party-ID: <sip:4001@10.10.198.119>;party=calling;screen=yes;privacy=off
Content-Length: 223
User-Agent: Cisco-CUCM7.1
To: <sip:3001@10.10.198.115>;tag=ef18c435-bc4f-454b-b8e8-d747acdaf9c7-19421846
Contact: <sip:4001@10.10.198.119:5060;transport=tcp>
Expires: 180
Content-Type: application/sdp
Call-ID: d6548c00-88a116e1-1-73626201@10.10.198.115
Via: SIP/2.0/TCP 10.10.198.119:5060;branch=z9hG4bK07ed4e3b9
CSeq: 101 INVITE
Session-Expires:  1800;refresher=uac
Max-Forwards: 70

v=0
o=CiscoSystemsCCM-SIP 2000 2 IN IP4 10.10.198.119
s=SIP Call
c=IN IP4 10.10.198.134
```

CISCO CONFIDENTIAL

```
t=0 0
m=audio 30022 RTP/AVP 18 101
a=rtpmap:18 G729/8000
a=ptime:20
a=fmtp:0
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15

[diagram]   Call-ID:[prev][next]
[12] SIP/2.0 100 Trying
Date: Fri, 25 Jul 2008 18:09:40 GMT
From: <sip:4001@10.10.198.119>;tag=7e4f624f-bed2-48c9-ba75-80ace681d6b6-19418257
Allow-Events: presence, kpml
Content-Length: 0
To: <sip:3001@10.10.198.115>;tag=ef18c435-bc4f-454b-b8e8-d747acdaf9c7-19421846
Call-ID: d6548c00-88a116e1-1-73626201@10.10.198.115
Via: SIP/2.0/TCP 10.10.198.119:5060;branch=z9hG4bK07ed4e3b9
CSeq: 101 INVITE

[diagram]   Call-ID:[prev][next]
[13] SIP/2.0 200 OK
Date: Fri, 25 Jul 2008 18:09:40 GMT
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:4001@10.10.198.119>;tag=7e4f624f-bed2-48c9-ba75-80ace681d6b6-19418257
Allow-Events: presence, kpml
P-Asserted-Identity: <sip:3001@10.10.198.115>
Supported: replaces
Remote-Party-ID: <sip:3001@10.10.198.115>;party=called;screen=yes;privacy=off
Content-Length: 223
Require:  timer
To: <sip:3001@10.10.198.115>;tag=ef18c435-bc4f-454b-b8e8-d747acdaf9c7-19421846
Contact: <sip:3001@10.10.198.115:5060;transport=tcp>
Content-Type: application/sdp
Call-ID: d6548c00-88a116e1-1-73626201@10.10.198.115
Via: SIP/2.0/TCP 10.10.198.119:5060;branch=z9hG4bK07ed4e3b9
CSeq: 101 INVITE
Session-Expires:  1800;refresher=uac

v=0
o=CiscoSystemsCCM-SIP 2000 2 IN IP4 10.10.198.115
s=SIP Call
c=IN IP4 10.10.198.133
t=0 0
m=audio 29220 RTP/AVP 18 101
a=rtpmap:18 G729/8000
a=ptime:20
a=fmtp:0
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15

[diagram]   Call-ID:[prev][next]
[14] ACK sip:3001@10.10.198.115:5060;transport=tcp SIP/2.0
Date: Fri, 25 Jul 2008 17:54:52 GMT
From: <sip:4001@10.10.198.119>;tag=7e4f624f-bed2-48c9-ba75-80ace681d6b6-19418257
Allow-Events: presence, kpml
Content-Length: 0
To: <sip:3001@10.10.198.115>;tag=ef18c435-bc4f-454b-b8e8-d747acdaf9c7-19421846
Call-ID: d6548c00-88a116e1-1-73626201@10.10.198.115
Via: SIP/2.0/TCP 10.10.198.119:5060;branch=z9hG4bK133de229e
CSeq: 101 ACK
Max-Forwards: 70

[diagram]   Call-ID:[prev][next]
[15] BYE sip:3001@10.10.198.115:5060;transport=tcp SIP/2.0
Date: Fri, 25 Jul 2008 17:54:52 GMT
From: <sip:4001@10.10.198.119>;tag=7e4f624f-bed2-48c9-ba75-80ace681d6b6-19418257
Content-Length: 0
User-Agent: Cisco-CUCM7.1
To: <sip:3001@10.10.198.115>;tag=ef18c435-bc4f-454b-b8e8-d747acdaf9c7-19421846
Call-ID: d6548c00-88a116e1-1-73626201@10.10.198.115
Via: SIP/2.0/TCP 10.10.198.119:5060;branch=z9hG4bK2d2b3c10
CSeq: 102 BYE
Max-Forwards: 70

[diagram]   Call-ID:[prev][next]
[16] SIP/2.0 200 OK
Date: Fri, 25 Jul 2008 18:09:44 GMT
From: <sip:4001@10.10.198.119>;tag=7e4f624f-bed2-48c9-ba75-80ace681d6b6-19418257
Content-Length: 0
To: <sip:3001@10.10.198.115>;tag=ef18c435-bc4f-454b-b8e8-d747acdaf9c7-19421846
```

CISCO CONFIDENTIAL

```
Call-ID: d6548c00-88a116e1-1-73626201@10.10.198.115
Via: SIP/2.0/TCP 10.10.198.119:5060;branch=z9hG4bK2d2b3c10
CSeq: 102 BYE
```

CISCO CONFIDENTIAL

21. V.150.1

21.1 Basic Call with V.150.1 virtual codec

Title: Basic Call with V.150.1 virtual codec

Description:
The following basic call flow illustrates the SIP messaging when the virtual codecs are enabled on gateway
and how these capabilities are included in SDP.

Cisco Unified CM1 sent out the initial INVITE.
Note: The IP-STE phonetype (SCCP Secure IP Phone) also supports the virtual codecs required for V.150.1.

Configuration:
Node = Unified CM1, IP = 10.10.10.42
Node = Unified CM3, IP = 10.10.10.122

Phone = A, Line = 1101, IP = 10.10.10.41, Model = SCCP (Analog)
Phone = B, Line = 3101, IP = 10.10.10.121, Model = SCCP (Analog)

Phone A registers on Gateway CM1 to Unified CM1 with certain virtual codecs.
Phone B registers on Gateway CM3 to Unified CM3 with certain virtual codecs.

Scenario:
Phone A DN 1101 calls Phone B DN 3101 over the SIP Trunk
Phone B DN 3101 Answers
Phone A DN 1101 goes onHook
End of Scenario

CISCO CONFIDENTIAL

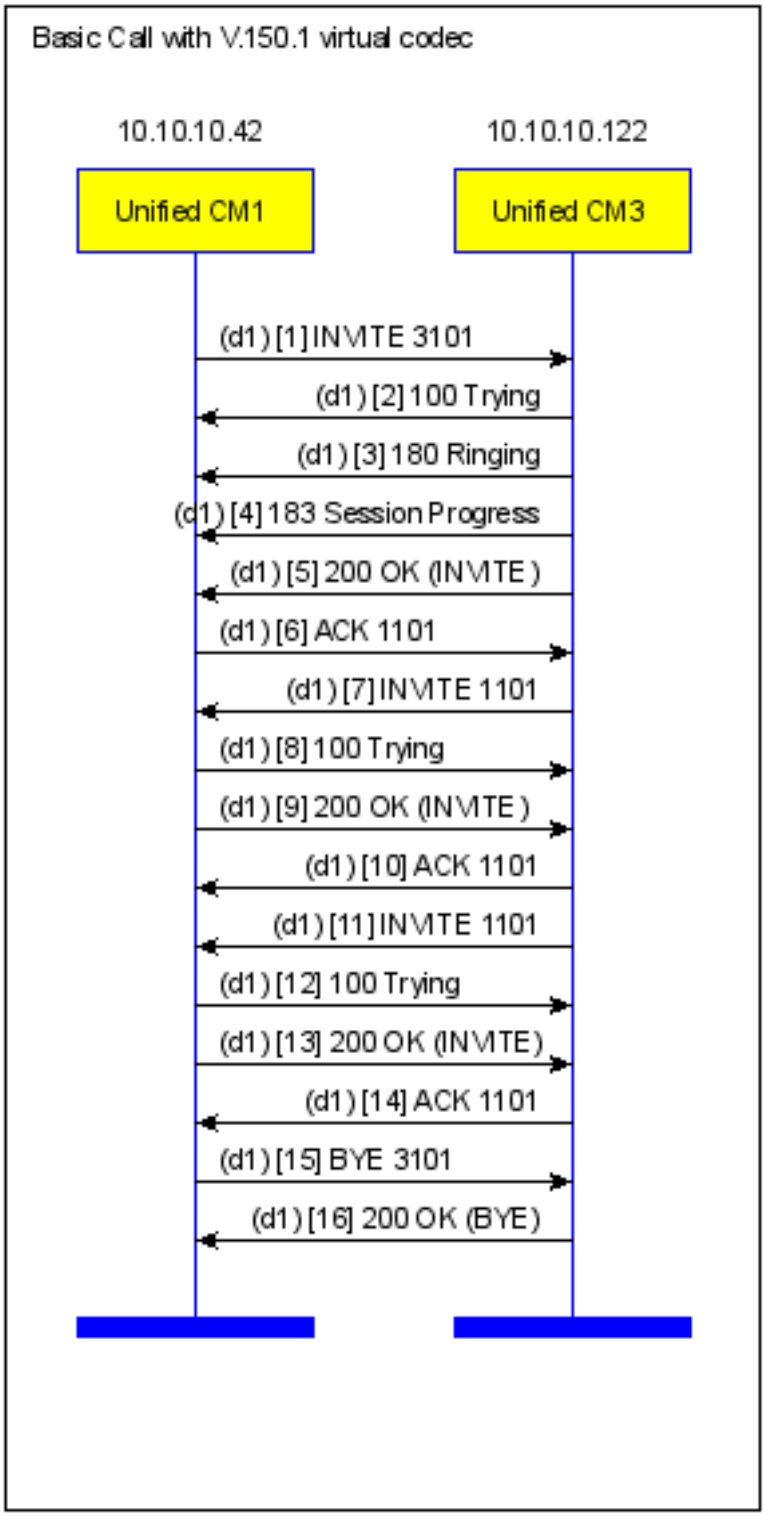

CISCO CONFIDENTIAL

[diagram] Call-ID:[prev][next]
[1] INVITE sip:3101@10.10.10.122:5060 SIP/2.0
Date: Fri, 01 Aug 2008 00:03:31 GMT
Call-Info: <sip:10.10.10.42:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:1101@10.10.10.42>;tag=7eaa2e52-1306-4957-a9b9-c07fff28e973-21576784
Allow-Events: presence, kpml
P-Asserted-Identity: <sip:1101@10.10.10.42>
Supported: timer,resource-priority,replaces
Min-SE: 1800
Remote-Party-ID: <sip:1101@10.10.10.42>;party=calling;screen=yes;privacy=off
Content-Length: 0
User-Agent: Cisco-CUCM7.1
Require: resource-priority
To: <sip:3101@10.10.10.122>
Contact: <sip:1101@10.10.10.42:5060;transport=tcp>
Resource-Priority: dsn.priority
Expires: 180
Call-ID: 45425100-892152d3-2-2a0a0a0a@10.10.10.42
Via: SIP/2.0/TCP 10.10.10.42:5060;branch=z9hG4bK12602ed7d
CSeq: 101 INVITE
Session-Expires: 1800
Max-Forwards: 70

[diagram] Call-ID:[prev][next]
[2] SIP/2.0 100 Trying
Date: Tue, 22 Jul 2008 12:17:17 GMT
From: <sip:1101@10.10.10.42>;tag=7eaa2e52-1306-4957-a9b9-c07fff28e973-21576784
Allow-Events: presence
Content-Length: 0
To: <sip:3101@10.10.10.122>
Call-ID: 45425100-892152d3-2-2a0a0a0a@10.10.10.42
Via: SIP/2.0/TCP 10.10.10.42:5060;branch=z9hG4bK12602ed7d
CSeq: 101 INVITE

[diagram] Call-ID:[prev][next]
[3] SIP/2.0 180 Ringing
Date: Tue, 22 Jul 2008 12:17:17 GMT
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:1101@10.10.10.42>;tag=7eaa2e52-1306-4957-a9b9-c07fff28e973-21576784
Allow-Events: presence
P-Asserted-Identity: <sip:3101@10.10.10.122>
Remote-Party-ID: <sip:3101@10.10.10.122>;party=called;screen=yes;privacy=off
Content-Length: 0
To: <sip:3101@10.10.10.122>;tag=a7464a9a-c4a4-4983-9e68-99639f28f3cc-18297983
Contact: <sip:1101@10.10.10.122:5060;transport=tcp>
Call-ID: 45425100-892152d3-2-2a0a0a0a@10.10.10.42
Via: SIP/2.0/TCP 10.10.10.42:5060;branch=z9hG4bK12602ed7d
CSeq: 101 INVITE

[diagram] Call-ID:[prev][next]
[4] SIP/2.0 183 Session Progress
Date: Tue, 22 Jul 2008 12:17:17 GMT
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:1101@10.10.10.42>;tag=7eaa2e52-1306-4957-a9b9-c07fff28e973-21576784
Allow-Events: presence, kpml
P-Asserted-Identity: <sip:3101@10.10.10.122>
Remote-Party-ID: <sip:3101@10.10.10.122>;party=called;screen=yes;privacy=off
Content-Length: 440
To: <sip:3101@10.10.10.122>;tag=a7464a9a-c4a4-4983-9e68-99639f28f3cc-18297983
Contact: <sip:1101@10.10.10.122:5060;transport=tcp>
Content-Type: application/sdp
Call-ID: 45425100-892152d3-2-2a0a0a0a@10.10.10.42
Via: SIP/2.0/TCP 10.10.10.42:5060;branch=z9hG4bK12602ed7d
CSeq: 101 INVITE

v=0
o=CiscoSystemsCCM-SIP 2000 1 IN IP4 10.10.10.122
s=SIP Call
c=IN IP4 10.10.10.121
t=0 0
m=audio 4000 RTP/AVP 0 8 18 118 100 101
a=rtpmap:0 PCMU/8000
a=ptime:20
a=rtpmap:8 PCMA/8000
a=ptime:20
a=rtpmap:18 G729/8000
a=ptime:20
a=fmtp:0
a=rtpmap:118 v150fw/8000

CISCO CONFIDENTIAL

```
a=sqn:0
a=cdsc: 1 audio udpsprt 120
a=cpar: a=sprtmap:120 v150mr/8000
a=rtpmap:100 X-NSE/8000
a=sendonly
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
```

[diagram] Call-ID:[prev][next]

[5] SIP/2.0 200 OK

```
Date: Tue, 22 Jul 2008 12:17:17 GMT
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:1101@10.10.10.42>;tag=7eaa2e52-1306-4957-a9b9-c07fff28e973-21576784
Allow-Events: presence, kpml
P-Asserted-Identity: <sip:3101@10.10.10.122>
Supported: replaces
Remote-Party-ID: <sip:3101@10.10.10.122>;party=called;screen=yes;privacy=off
Content-Length: 440
Require:  timer
To: <sip:3101@10.10.10.122>;tag=a7464a9a-c4a4-4983-9e68-99639f28f3cc-18297983
Contact: <sip:1101@10.10.10.122:5060;transport=tcp>
Content-Type: application/sdp
Call-ID: 45425100-892152d3-2-2a0a0a0a@10.10.10.42
Via: SIP/2.0/TCP 10.10.10.42:5060;branch=z9hG4bK12602ed7d
CSeq: 101 INVITE
Session-Expires:  1800;refresher=uas

v=0
o=CiscoSystemsCCM-SIP 2000 1 IN IP4 10.10.10.122
s=SIP Call
c=IN IP4 10.10.10.121
t=0 0
m=audio 4000 RTP/AVP 0 8 18 118 100 101
a=rtpmap:0 PCMU/8000
a=ptime:20
a=rtpmap:8 PCMA/8000
a=ptime:20
a=rtpmap:18 G729/8000
a=ptime:20
a=fmtp:0
a=rtpmap:118 v150fw/8000
a=sqn:0
a=cdsc: 1 audio udpsprt 120
a=cpar: a=sprtmap:120 v150mr/8000
a=rtpmap:100 X-NSE/8000
a=sendonly
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
```

[diagram] Call-ID:[prev][next]

[6] ACK sip:1101@10.10.10.122:5060;transport=tcp SIP/2.0

```
Date: Fri, 01 Aug 2008 00:03:31 GMT
From: <sip:1101@10.10.10.42>;tag=7eaa2e52-1306-4957-a9b9-c07fff28e973-21576784
Allow-Events: presence, kpml
Content-Length: 251
To: <sip:3101@10.10.10.122>;tag=a7464a9a-c4a4-4983-9e68-99639f28f3cc-18297983
Content-Type: application/sdp
Call-ID: 45425100-892152d3-2-2a0a0a0a@10.10.10.42
Via: SIP/2.0/TCP 10.10.10.42:5060;branch=z9hG4bK377195beb
CSeq: 101 ACK
Max-Forwards: 70

v=0
o=CiscoSystemsCCM-SIP 2000 1 IN IP4 10.10.10.42
s=SIP Call
c=IN IP4 10.10.10.41
t=0 0
m=audio 19042 RTP/AVP 0 100 101
a=rtpmap:0 PCMU/8000
a=ptime:20
a=rtpmap:100 X-NSE/8000
a=recvonly
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
```

[diagram] Call-ID:[prev][next]

[7] INVITE sip:1101@10.10.10.42:5060;transport=tcp SIP/2.0

```
Date: Tue, 22 Jul 2008 12:17:20 GMT
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:3101@10.10.10.122>;tag=a7464a9a-c4a4-4983-9e68-99639f28f3cc-18297983
```

CISCO CONFIDENTIAL

```
Allow-Events: presence, kpml
P-Asserted-Identity: <sip:3101@10.10.10.122>
Supported: timer,resource-priority,replaces
Min-SE:  1800
Cisco-Guid: 514542080-2287062989-2-2047478282
Remote-Party-ID: <sip:3101@10.10.10.122>;party=calling;screen=yes;privacy=off
Content-Length: 252
User-Agent: Cisco-CUCM7.1
To: <sip:1101@10.10.10.42>;tag=7eaa2e52-1306-4957-a9b9-c07fff28e973-21576784
Contact: <sip:3101@10.10.10.122:5060;transport=tcp>
Expires: 180
Content-Type: application/sdp
Call-ID: 45425100-892152d3-2-2a0a0a0a@10.10.10.42
Via: SIP/2.0/TCP 10.10.10.122:5060;branch=z9hG4bK122a382eb
CSeq: 102 INVITE
Session-Expires:  1800;refresher=uac
Max-Forwards: 70

v=0
o=CiscoSystemsCCM-SIP 2000 2 IN IP4 10.10.10.122
s=SIP Call
c=IN IP4 10.10.10.121
t=0 0
m=audio 4000 RTP/AVP 0 100 101
a=rtpmap:0 PCMU/8000
a=ptime:20
a=rtpmap:100 X-NSE/8000
a=sendonly
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15

[diagram]   Call-ID:[prev][next]
[8] SIP/2.0 100 Trying
Date: Fri, 01 Aug 2008 00:03:34 GMT
From: <sip:3101@10.10.10.122>;tag=a7464a9a-c4a4-4983-9e68-99639f28f3cc-18297983
Allow-Events: presence, kpml
Content-Length: 0
To: <sip:1101@10.10.10.42>;tag=7eaa2e52-1306-4957-a9b9-c07fff28e973-21576784
Call-ID: 45425100-892152d3-2-2a0a0a0a@10.10.10.42
Via: SIP/2.0/TCP 10.10.10.122:5060;branch=z9hG4bK122a382eb
CSeq: 102 INVITE

[diagram]   Call-ID:[prev][next]
[9] SIP/2.0 200 OK
Date: Fri, 01 Aug 2008 00:03:34 GMT
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:3101@10.10.10.122>;tag=a7464a9a-c4a4-4983-9e68-99639f28f3cc-18297983
Allow-Events: presence, kpml
P-Asserted-Identity: <sip:1101@10.10.10.42>
Supported: replaces
Remote-Party-ID: <sip:1101@10.10.10.42>;party=called;screen=yes;privacy=off
Content-Length: 251
Require:  timer
To: <sip:1101@10.10.10.42>;tag=7eaa2e52-1306-4957-a9b9-c07fff28e973-21576784
Contact: <sip:1101@10.10.10.42:5060;transport=tcp>
Content-Type: application/sdp
Call-ID: 45425100-892152d3-2-2a0a0a0a@10.10.10.42
Via: SIP/2.0/TCP 10.10.10.122:5060;branch=z9hG4bK122a382eb
CSeq: 102 INVITE
Session-Expires:  1800;refresher=uac

v=0
o=CiscoSystemsCCM-SIP 2000 2 IN IP4 10.10.10.42
s=SIP Call
c=IN IP4 10.10.10.41
t=0 0
m=audio 19042 RTP/AVP 0 100 101
a=rtpmap:0 PCMU/8000
a=ptime:20
a=rtpmap:100 X-NSE/8000
a=recvonly
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15

[diagram]   Call-ID:[prev][next]
[10] ACK sip:1101@10.10.10.42:5060;transport=tcp SIP/2.0
Date: Tue, 22 Jul 2008 12:17:20 GMT
From: <sip:3101@10.10.10.122>;tag=a7464a9a-c4a4-4983-9e68-99639f28f3cc-18297983
Allow-Events: presence, kpml
Content-Length: 0
```

CISCO CONFIDENTIAL

```
To: <sip:1101@10.10.10.42>;tag=7eaa2e52-1306-4957-a9b9-c07fff28e973-21576784
Call-ID: 45425100-892152d3-2-2a0a0a0a@10.10.10.42
Via: SIP/2.0/TCP 10.10.10.122:5060;branch=z9hG4bK2595e7c92
CSeq: 102 ACK
Max-Forwards: 70
```

[diagram] Call-ID:[prev][next]

[11] INVITE sip:1101@10.10.10.42:5060;transport=tcp SIP/2.0

```
Date: Tue, 22 Jul 2008 12:17:20 GMT
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:3101@10.10.10.122>;tag=a7464a9a-c4a4-4983-9e68-99639f28f3cc-18297983
Allow-Events: presence, kpml
P-Asserted-Identity: <sip:3101@10.10.10.122>
Supported: timer,resource-priority,replaces
Min-SE:  1800
Cisco-Guid: 514542080-2287062989-2-2047478282
Remote-Party-ID: <sip:3101@10.10.10.122>;party=calling;screen=yes;privacy=off
Content-Length: 241
User-Agent: Cisco-CUCM7.1
To: <sip:1101@10.10.10.42>;tag=7eaa2e52-1306-4957-a9b9-c07fff28e973-21576784
Contact: <sip:3101@10.10.10.122:5060;transport=tcp>
Expires: 180
Content-Type: application/sdp
Call-ID: 45425100-892152d3-2-2a0a0a0a@10.10.10.42
Via: SIP/2.0/TCP 10.10.10.122:5060;branch=z9hG4bK41463c0c6
CSeq: 104 INVITE
Session-Expires:  1800;refresher=uac
Max-Forwards: 70

v=0
o=CiscoSystemsCCM-SIP 2000 3 IN IP4 10.10.10.122
s=SIP Call
c=IN IP4 10.10.10.121
t=0 0
m=audio 18420 RTP/AVP 0 100 101
a=rtpmap:0 PCMU/8000
a=ptime:20
a=rtpmap:100 X-NSE/8000
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
```

[diagram] Call-ID:[prev][next]

[12] SIP/2.0 100 Trying

```
Date: Fri, 01 Aug 2008 00:03:34 GMT
From: <sip:3101@10.10.10.122>;tag=a7464a9a-c4a4-4983-9e68-99639f28f3cc-18297983
Allow-Events: presence, kpml
Content-Length: 0
To: <sip:1101@10.10.10.42>;tag=7eaa2e52-1306-4957-a9b9-c07fff28e973-21576784
Call-ID: 45425100-892152d3-2-2a0a0a0a@10.10.10.42
Via: SIP/2.0/TCP 10.10.10.122:5060;branch=z9hG4bK41463c0c6
CSeq: 104 INVITE
```

[diagram] Call-ID:[prev][next]

[13] SIP/2.0 200 OK

```
Date: Fri, 01 Aug 2008 00:03:34 GMT
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:3101@10.10.10.122>;tag=a7464a9a-c4a4-4983-9e68-99639f28f3cc-18297983
Allow-Events: presence, kpml
P-Asserted-Identity: <sip:1101@10.10.10.42>
Supported: replaces
Remote-Party-ID: <sip:1101@10.10.10.42>;party=called;screen=yes;privacy=off
Content-Length: 239
Require:  timer
To: <sip:1101@10.10.10.42>;tag=7eaa2e52-1306-4957-a9b9-c07fff28e973-21576784
Contact: <sip:1101@10.10.10.42:5060;transport=tcp>
Content-Type: application/sdp
Call-ID: 45425100-892152d3-2-2a0a0a0a@10.10.10.42
Via: SIP/2.0/TCP 10.10.10.122:5060;branch=z9hG4bK41463c0c6
CSeq: 104 INVITE
Session-Expires:  1800;refresher=uac

v=0
o=CiscoSystemsCCM-SIP 2000 3 IN IP4 10.10.10.42
s=SIP Call
c=IN IP4 10.10.10.41
t=0 0
m=audio 19042 RTP/AVP 0 100 101
a=rtpmap:0 PCMU/8000
a=ptime:20
a=rtpmap:100 X-NSE/8000
```

CISCO CONFIDENTIAL

```
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15

[diagram]   Call-ID:[prev][next]
[14] ACK sip:1101@10.10.10.42:5060;transport=tcp SIP/2.0
Date: Tue, 22 Jul 2008 12:17:20 GMT
From: <sip:3101@10.10.10.122>;tag=a7464a9a-c4a4-4983-9e68-99639f28f3cc-18297983
Allow-Events: presence, kpml
Content-Length: 0
To: <sip:1101@10.10.10.42>;tag=7eaa2e52-1306-4957-a9b9-c07fff28e973-21576784
Call-ID: 45425100-892152d3-2-2a0a0a0a@10.10.10.42
Via: SIP/2.0/TCP 10.10.10.122:5060;branch=z9hG4bK52d8631eb
CSeq: 104 ACK
Max-Forwards: 70

[diagram]   Call-ID:[prev][next]
[15] BYE sip:3101@10.10.10.122:5060;transport=tcp SIP/2.0
Date: Fri, 01 Aug 2008 00:03:34 GMT
From: <sip:1101@10.10.10.42>;tag=7eaa2e52-1306-4957-a9b9-c07fff28e973-21576784
P-Asserted-Identity: <sip:1101@10.10.10.42>
Content-Length: 0
User-Agent: Cisco-CUCM7.1
To: <sip:3101@10.10.10.122>;tag=a7464a9a-c4a4-4983-9e68-99639f28f3cc-18297983
Call-ID: 45425100-892152d3-2-2a0a0a0a@10.10.10.42
Via: SIP/2.0/TCP 10.10.10.42:5060;branch=z9hG4bK5142e396e
CSeq: 104 BYE
Max-Forwards: 70

[diagram]   Call-ID:[prev][next]
[16] SIP/2.0 200 OK
Date: Tue, 22 Jul 2008 12:17:25 GMT
From: <sip:1101@10.10.10.42>;tag=7eaa2e52-1306-4957-a9b9-c07fff28e973-21576784
Content-Length: 0
To: <sip:3101@10.10.10.122>;tag=a7464a9a-c4a4-4983-9e68-99639f28f3cc-18297983
Call-ID: 45425100-892152d3-2-2a0a0a0a@10.10.10.42
Via: SIP/2.0/TCP 10.10.10.42:5060;branch=z9hG4bK5142e396e
CSeq: 104 BYE
```

CISCO CONFIDENTIAL

22. T38Fax-interop-with-MSExchange

22.1 T38 Interop with MS Exchange

Title: T38 Interop with MS Exchange

Description:
The following basic callflow illustrates the SIP messaging over a SIP Trunk when a fax call is initiated.

Fax Machine A first tries to setup a audio call with Fax Machine B which is connected to a Microsoft Exchange Server and then call is switched to T.38 facsimile while faxing the data over.

Note: After switching to T.38 facsimile call, Cisco Call Manager does not allow the call to get downgraded to audio only call.

Configuration:
Node = Unified CM1, IP = 10.10.199.250
Node = RemoteUA1, IP = 10.10.200.179
Node = RemoteUA2, IP = 10.10.200.227

Fax = A, DN = 2020
Fax = B, DN = 9999

SIP Trunk between RemoteUA1 & Unified CM1 has route pattern 6.XXXX
SIP Trunk between Unified CM2 & RemoteUA2 has
a) route pattern 7.XXXX
b) SIP Profile has "Outgoing T.38 INVITE include audio mline" checked.

Scenario:
Fax A DN 2020 calls Fax B DN 9999 over the SIP Trunk by dialing 79999
Fax B DN 9999 Answers
Fax A DN 2020 goes onHook
End of Scenario

CISCO CONFIDENTIAL

CISCO CONFIDENTIAL

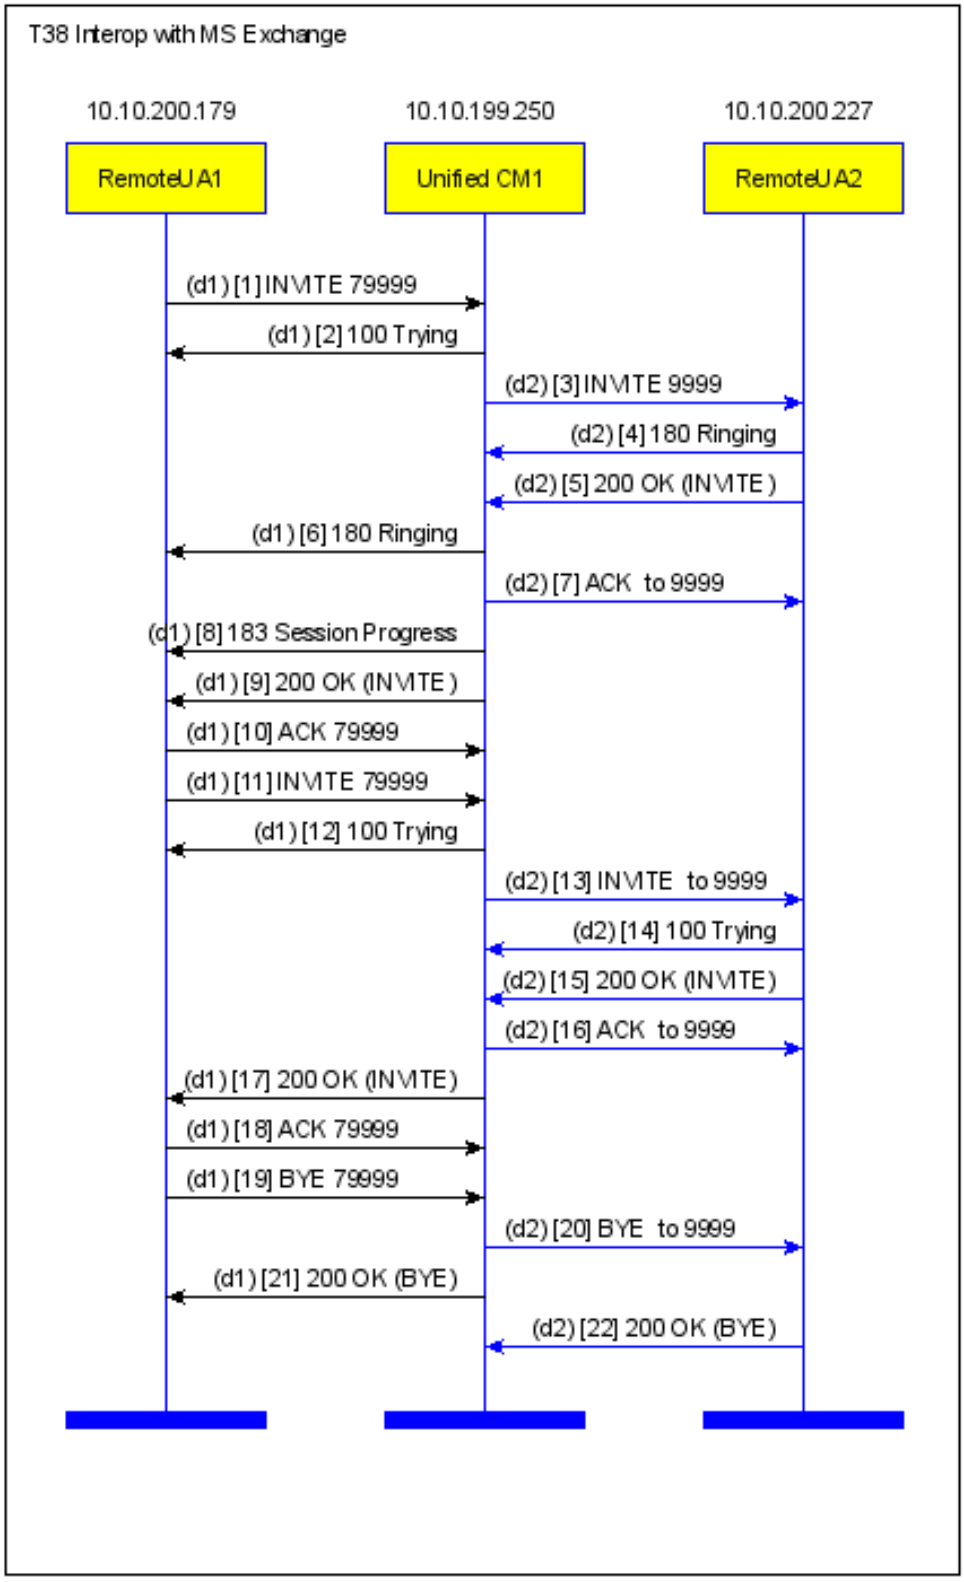

CISCO CONFIDENTIAL

```
[diagram]   Call-ID:[prev][next]
[1] INVITE sip:79999@10.10.199.250:5060 SIP/2.0
Via: SIP/2.0/UDP 10.10.200.179:5060
From: 2020 <sip:2020@10.10.200.179:5060>;tag=1
To: sut <sip:79999@10.10.199.250:5060>
Call-ID: 1-30966@10.10.200.179
CSeq: 1 INVITE
Contact: sip:2020@10.10.200.179:5060
Max-Forwards: 70
Subject: Performance Test
Content-Type: application/sdp
Content-Length:  140

v=0
o=user1 53655765 2353687637 IN IP4 10.10.200.179
s=-
c=IN IP4 10.10.200.179
t=0 0
m=audio 10000 RTP/AVP 0
a=rtpmap:0 PCMU/8000

[diagram]   Call-ID:[prev][next]
[2] SIP/2.0 100 Trying
Date: Mon, 08 Jun 2009 15:39:34 GMT
From: 2020 <sip:2020@10.10.200.179:5060>;tag=1
Allow-Events: presence
Content-Length: 0
To: sut <sip:79999@10.10.199.250:5060>
Call-ID: 1-30966@10.10.200.179
Via: SIP/2.0/UDP 10.10.200.179:5060
CSeq: 1 INVITE

[diagram]   Call-ID:[prev][next]
[3] INVITE sip:9999@10.10.200.227:5060 SIP/2.0
Date: Mon, 08 Jun 2009 15:39:34 GMT
Call-Info: <sip:10.10.199.250:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: "2020 " <sip:2020@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763677
Allow-Events: presence, kpml
P-Asserted-Identity: "2020 " <sip:2020@10.10.199.250>
Supported: timer,resource-priority,replaces
Supported: Geolocation
Min-SE:  1800
Remote-Party-ID: "2020 " <sip:2020@10.10.199.250>;party=calling;screen=yes;privacy=off
Content-Length: 0
User-Agent: Cisco-CUCM7.1
To: <sip:9999@10.10.200.227>
Contact: <sip:2020@10.10.199.250:5060;transport=tcp>
Expires: 180
Call-ID: 8f7c4480-a2d130b6-4d-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK17a7d53aa98
CSeq: 101 INVITE
Session-Expires:  1800
Max-Forwards: 69

[diagram]   Call-ID:[prev][next]
[4] SIP/2.0 180 Ringing
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK17a7d53aa98
From: "2020 " <sip:2020@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763677
To: <sip:9999@10.10.200.227>;tag=1
Call-ID: 8f7c4480-a2d130b6-4d-fac712ac@10.10.199.250
CSeq: 101 INVITE
Contact: <sip:10.10.200.227:5060;transport=TCP>
Content-Length: 0

[diagram]   Call-ID:[prev][next]
[5] SIP/2.0 200 OK
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK17a7d53aa98
From: "2020 " <sip:2020@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763677
To: <sip:9999@10.10.200.227>;tag=1
Call-ID: 8f7c4480-a2d130b6-4d-fac712ac@10.10.199.250
CSeq: 101 INVITE
Contact: <sip:10.10.200.227:5060;transport=TCP>
Content-Type: application/sdp
Content-Length:  140

v=0
o=user1 53655765 2353687637 IN IP4 10.10.200.227
s=-
t=0 0
```

CISCO CONFIDENTIAL

```
c=IN IP4 10.10.200.227
m=audio 10000 RTP/AVP 0
a=rtpmap:0 PCMU/8000
```

[diagram] Call-ID:[prev][next]

[6] SIP/2.0 180 Ringing

```
Date: Mon, 08 Jun 2009 15:39:34 GMT
Call-Info: <sip:10.10.199.250:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: 2020 <sip:2020@10.10.200.179:5060>;tag=1
Allow-Events: presence
P-Asserted-Identity: <sip:9999@10.10.199.250>
Supported: Geolocation
Remote-Party-ID: <sip:9999@10.10.199.250>;party=called;screen=yes;privacy=off
Content-Length: 0
To: sut <sip:79999@10.10.199.250:5060>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763676
Contact: <sip:79999@10.10.199.250:5060>
Call-ID: 1-30966@10.10.200.179
Via: SIP/2.0/UDP 10.10.200.179:5060
CSeq: 1 INVITE
```

[diagram] Call-ID:[prev][next]

[7] ACK sip:10.10.200.227:5060;transport=TCP SIP/2.0

```
Date: Mon, 08 Jun 2009 15:39:34 GMT
From: "2020 " <sip:2020@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763677
Allow-Events: presence, kpml
Content-Length: 160
To: <sip:9999@10.10.200.227>;tag=1
Content-Type: application/sdp
Call-ID: 8f7c4480-a2d130b6-4d-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK17b4550505c
CSeq: 101 ACK
Max-Forwards: 70

v=0
o=CiscoSystemsCCM-SIP 2000 1 IN IP4 10.10.199.250
s=SIP Call
c=IN IP4 10.10.200.179
t=0 0
m=audio 10000 RTP/AVP 0
a=rtpmap:0 PCMU/8000
a=ptime:20
```

[diagram] Call-ID:[prev][next]

[8] SIP/2.0 183 Session Progress

```
Date: Mon, 08 Jun 2009 15:39:34 GMT
Call-Info: <sip:10.10.199.250:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: 2020 <sip:2020@10.10.200.179:5060>;tag=1
Allow-Events: presence, kpml
P-Asserted-Identity: <sip:9999@10.10.199.250>
Supported: Geolocation
Remote-Party-ID: <sip:9999@10.10.199.250>;party=called;screen=yes;privacy=off
Content-Length: 160
To: sut <sip:79999@10.10.199.250:5060>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763676
Contact: <sip:79999@10.10.199.250:5060>
Content-Type: application/sdp
Call-ID: 1-30966@10.10.200.179
Via: SIP/2.0/UDP 10.10.200.179:5060
CSeq: 1 INVITE

v=0
o=CiscoSystemsCCM-SIP 2000 1 IN IP4 10.10.199.250
s=SIP Call
c=IN IP4 10.10.200.227
t=0 0
m=audio 10000 RTP/AVP 0
a=rtpmap:0 PCMU/8000
a=ptime:20
```

[diagram] Call-ID:[prev][next]

[9] SIP/2.0 200 OK

```
Date: Mon, 08 Jun 2009 15:39:34 GMT
Call-Info: <sip:10.10.199.250:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: 2020 <sip:2020@10.10.200.179:5060>;tag=1
Allow-Events: presence, kpml
Supported: replaces
Supported: Geolocation
Remote-Party-ID: <sip:9999@10.10.199.250>;party=called;screen=no;privacy=off
```

CISCO CONFIDENTIAL

```
Content-Length: 160
To: sut <sip:79999@10.10.199.250:5060>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763676
Contact: <sip:79999@10.10.199.250:5060>
Content-Type: application/sdp
Call-ID: 1-30966@10.10.200.179
Via: SIP/2.0/UDP 10.10.200.179:5060
CSeq: 1 INVITE
P-Preferred-Identity: <sip:9999@10.10.199.250>

v=0
o=CiscoSystemsCCM-SIP 2000 1 IN IP4 10.10.199.250
s=SIP Call
c=IN IP4 10.10.200.227
t=0 0
m=audio 10000 RTP/AVP 0
a=rtpmap:0 PCMU/8000
a=ptime:20

[diagram]   Call-ID:[prev][next]
[10] ACK sip:79999@10.10.199.250:5060 SIP/2.0
Via: SIP/2.0/UDP 10.10.200.179:5060
From: 2020 <sip:2020@10.10.200.179:5060>;tag=1
To: sut <sip:79999@10.10.199.250:5060>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763676
Call-ID: 1-30966@10.10.200.179
CSeq: 1 ACK
Contact: sip:2020@10.10.200.179:5060
Max-Forwards: 70
Subject: Performance Test
Content-Length: 0

[diagram]   Call-ID:[prev][next]
[11] INVITE sip:79999@10.10.199.250:5060 SIP/2.0
Via: SIP/2.0/UDP 10.10.200.179:5060
From: 2020 <sip:2020@10.10.200.179:5060>;tag=1
To: sut <sip:79999@10.10.199.250:5060>
Call-ID: 1-30966@10.10.200.179
CSeq: 1 INVITE
Contact: sip:2020@10.10.200.179:5060
Max-Forwards: 70
Subject: T.38 fax Test
Content-Type: application/sdp
Content-Length:  401

v=0
o=user1 53655765 2353687637 IN IP4 10.10.200.179
s=-
c=IN IP4 10.10.200.179
t=0 0
m=audio 0  RTP/AVP 0
a=rtpmap:0 PCMU/8000
m=image 17678 udptl t38
a=T38FaxVersion:0
a=T38MaxBitRate:14400
a=T38FaxFillBitRemoval:0
a=T38FaxTranscodingMMR:0
a=T38FaxTranscodingJBIG:0
a=T38FaxRateManagement:transferredTCF
a=T38FaxUdpEC:t38UDPRedundancy
a=T38FaxMaxBuffer:200
a=T38FaxMaxDatagram:72

[diagram]   Call-ID:[prev][next]
[12] SIP/2.0 100 Trying
Date: Mon, 08 Jun 2009 15:39:40 GMT
From: 2020 <sip:2020@10.10.200.179:5060>;tag=1
Allow-Events: presence, kpml
Content-Length: 0
To: sut <sip:79999@10.10.199.250:5060>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763676
Call-ID: 1-30966@10.10.200.179
Via: SIP/2.0/UDP 10.10.200.179:5060
CSeq: 1 INVITE

[diagram]   Call-ID:[prev][next]
[13] INVITE sip:10.10.200.227:5060;transport=TCP SIP/2.0
Date: Mon, 08 Jun 2009 15:39:40 GMT
Call-Info: <sip:10.10.199.250:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: "2020 " <sip:2020@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763677
Allow-Events: presence, kpml
P-Asserted-Identity: "2020 " <sip:2020@10.10.199.250>
```

CISCO CONFIDENTIAL

```
Supported: timer,resource-priority,replaces
Min-SE:  1800
Remote-Party-ID: "2020 " <sip:2020@10.10.199.250>;party=calling;screen=yes;privacy=off
Content-Length: 420
User-Agent: Cisco-CUCM7.1
To: <sip:9999@10.10.200.227>;tag=1
Contact: <sip:2020@10.10.199.250:5060;transport=tcp>
Expires: 180
Content-Type: application/sdp
Call-ID: 8f7c4480-a2d130b6-4d-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK17c44c2509b
CSeq: 102 INVITE
Max-Forwards: 70

v=0
o=CiscoSystemsCCM-SIP 2000 2 IN IP4 10.10.199.250
s=SIP Call
c=IN IP4 10.10.200.179
t=0 0
m=audio 0 RTP/AVP 0
a=rtpmap:0 PCMU/8000
a=ptime:20
m=image 17678 udptl t38
a=T38FaxVersion:0
a=T38MaxBitRate:14400
a=T38FaxFillBitRemoval:0
a=T38FaxTranscodingMMR:0
a=T38FaxTranscodingJBIG:0
a=T38FaxRateManagement:transferredTCF
a=T38FaxUdpEC:t38UDPRedundancy
a=T38FaxMaxBuffer:200
a=T38FaxMaxDatagram:72

[diagram]   Call-ID:[prev][next]
[14] SIP/2.0 100 Trying
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK17c44c2509b
From: "2020 " <sip:2020@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763677
To: <sip:9999@10.10.200.227>;tag=1;tag=1
Call-ID: 8f7c4480-a2d130b6-4d-fac712ac@10.10.199.250
CSeq: 102 INVITE
Contact: <sip:10.10.200.227:5060;transport=TCP>
Content-Length: 0

[diagram]   Call-ID:[prev][next]
[15] SIP/2.0 200 OK
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK17c44c2509b
From: "2020 " <sip:2020@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763677
To: <sip:9999@10.10.200.227>;tag=1;tag=1
Call-ID: 8f7c4480-a2d130b6-4d-fac712ac@10.10.199.250
CSeq: 102 INVITE
Contact: <sip:10.10.200.227:5060;transport=TCP>
Content-Type: application/sdp
Content-Length:  150

v=0
o=user1 53655765 2353687637 IN IP4 10.10.200.227
s=SIP Call
c=IN IP4 10.10.200.227
t=0 0
m=image 10000 udptl t38
c=IN IP4 10.10.200.227

[diagram]   Call-ID:[prev][next]
[16] ACK sip:10.10.200.227:5060;transport=TCP SIP/2.0
Date: Mon, 08 Jun 2009 15:39:40 GMT
From: "2020 " <sip:2020@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763677
Allow-Events: presence, kpml
Content-Length: 0
To: <sip:9999@10.10.200.227>;tag=1;tag=1
Call-ID: 8f7c4480-a2d130b6-4d-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK17d66e09cc0
CSeq: 102 ACK
Max-Forwards: 70

[diagram]   Call-ID:[prev][next]
[17] SIP/2.0 200 OK
Date: Mon, 08 Jun 2009 15:39:40 GMT
Call-Info: <sip:10.10.199.250:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: 2020 <sip:2020@10.10.200.179:5060>;tag=1
```

CISCO CONFIDENTIAL

```
Allow-Events: presence, kpml
Supported: replaces
Supported: Geolocation
Remote-Party-ID: <sip:9999@10.10.199.250>;party=called;screen=no;privacy=off
Content-Length: 283
To: sut <sip:79999@10.10.199.250:5060>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763676
Contact: <sip:79999@10.10.199.250:5060>
Content-Type: application/sdp
Call-ID: 1-30966@10.10.200.179
Via: SIP/2.0/UDP 10.10.200.179:5060
CSeq: 1 INVITE
P-Preferred-Identity: <sip:9999@10.10.199.250>

v=0
o=CiscoSystemsCCM-SIP 2000 2 IN IP4 10.10.199.250
s=SIP Call
c=IN IP4 10.10.200.227
t=0 0
m=audio 0 RTP/AVP 0
a=rtpmap:0 PCMU/8000
a=ptime:20
m=image 10000 udptl t38
a=T38MaxBitRate:14400
a=T38FaxFillBitRemoval:0
a=T38FaxTranscodingMMR:0
a=T38FaxTranscodingJBIG:0

[diagram]   Call-ID:[prev][next]
[18] ACK sip:79999@10.10.199.250:5060 SIP/2.0
Via: SIP/2.0/UDP 10.10.200.179:5060
From: 2020 <sip:2020@10.10.200.179:5060>;tag=1
To: sut <sip:79999@10.10.199.250:5060>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763676
Call-ID: 1-30966@10.10.200.179
CSeq: 1 ACK
Contact: sip:2020@10.10.200.179:5060
Max-Forwards: 70
Subject: T38 Fax Test
Content-Length: 0

[diagram]   Call-ID:[prev][next]
[19] BYE sip:79999@10.10.199.250:5060 SIP/2.0
Via: SIP/2.0/UDP 10.10.200.179:5060
From: 2020 <sip:2020@10.10.200.179:5060>;tag=1
To: sut <sip:79999@10.10.199.250:5060>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763676
Call-ID: 1-30966@10.10.200.179
CSeq: 2 BYE
Contact: sip:2020@10.10.200.179:5060
Max-Forwards: 70
Subject: Performance Test
Content-Length: 0

[diagram]   Call-ID:[prev][next]
[20] BYE sip:10.10.200.227:5060;transport=TCP SIP/2.0
Date: Mon, 08 Jun 2009 15:39:40 GMT
From: "2020 " <sip:2020@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763677
P-Asserted-Identity: "2020 " <sip:2020@10.10.199.250>
Content-Length: 0
User-Agent: Cisco-CUCM7.1
To: <sip:9999@10.10.200.227>;tag=1;tag=1
Call-ID: 8f7c4480-a2d130b6-4d-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK17e6209bbea
CSeq: 103 BYE
Max-Forwards: 70

[diagram]   Call-ID:[prev][next]
[21] SIP/2.0 200 OK
Date: Mon, 08 Jun 2009 15:39:45 GMT
From: 2020 <sip:2020@10.10.200.179:5060>;tag=1
Content-Length: 0
To: sut <sip:79999@10.10.199.250:5060>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763676
Call-ID: 1-30966@10.10.200.179
Via: SIP/2.0/UDP 10.10.200.179:5060
CSeq: 2 BYE

[diagram]   Call-ID:[prev][next]
[22] SIP/2.0 200 OK
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK17e6209bbea
From: "2020 " <sip:2020@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-21763677
To: <sip:9999@10.10.200.227>;tag=1;tag=1
Call-ID: 8f7c4480-a2d130b6-4d-fac712ac@10.10.199.250
```

CISCO CONFIDENTIAL

```
CSeq: 103 BYE
Contact: <sip:10.10.200.227:5060;transport=TCP>
Content-Length: 0
```

CISCO CONFIDENTIAL

23. MMoH

23.1 Basic Hold-resume Call via an SIP ICT with MMOH enabled

Title: Basic Hold-resume Call via an SIP ICT with MMOH enabled

Description:

The following call flow illustrates the SIP messaging that takes place between two Cisco Unified CMs via an inter cluster SIP trunk which has MMOH (Multicast Music On Hold) feature enabled.

Cisco IP PhoneA registered to Cisco Unified CM1 calls Cisco IP PhoneB which is registered to Cisco Unified CM2.

Cisco Unified CM2 PhoneB initiated the "hold" and then resumed the call.

Configuration:

Node = Unified CM1, IP = 10.10.199.250
Node = Unified CM2, IP = 10.10.199.251

Phone = A, Line = 1001, IP = 10.10.199.130, Model = SCCP
Phone = B, Line = 2001, IP = 10.10.199.171, Model = SIP TNP

Mmoh configuration steps:
1. configure a SIPICT trunk between two UCM clusters.
2. go to Media Resources -> Music On Hold Audio Source. Select MOH Audio Stream Number. Select "Allow Multicasting" and save.
3. go to Media Resources -> Fixed MoH Audio Source. Select "Allow Multicasting" and save.
4. go to Media Resources -> Music on Hold Server. Click the MoH server that is going to be used for MMoH.
Select "Enable Multicast Audio Sources on this MoH server". Save and reset.
5. Create a new MRG. Select "Use Multicast for MoH Audio". Move the MoH server in step 3 into this MRG.
6. Create a new MRGL. Move the MRG in step 4 into this MRGL.
7. Assign the MRGL to SIPICT trunk.

SIP Trunk between Unified CM1 & Unified CM2 has route pattern 2.XXXX

CISCO CONFIDENTIAL

Scenario:

Phone A DN 1001 calls Phone B DN 2001 over the SIP Trunk by dialing 22001
Phone B DN 2001 Answers
Phone B DN 1001 presses hold softkey
Phone A DN 2001 hears music on hold (MOH)
Duration short
Phone B DN 1001 presses resume softkey
Phone A DN 1001 and Phone B DN 2001 have two-way speech
Phone A DN 1001 goes onHook
End of Scenario

CISCO CONFIDENTIAL

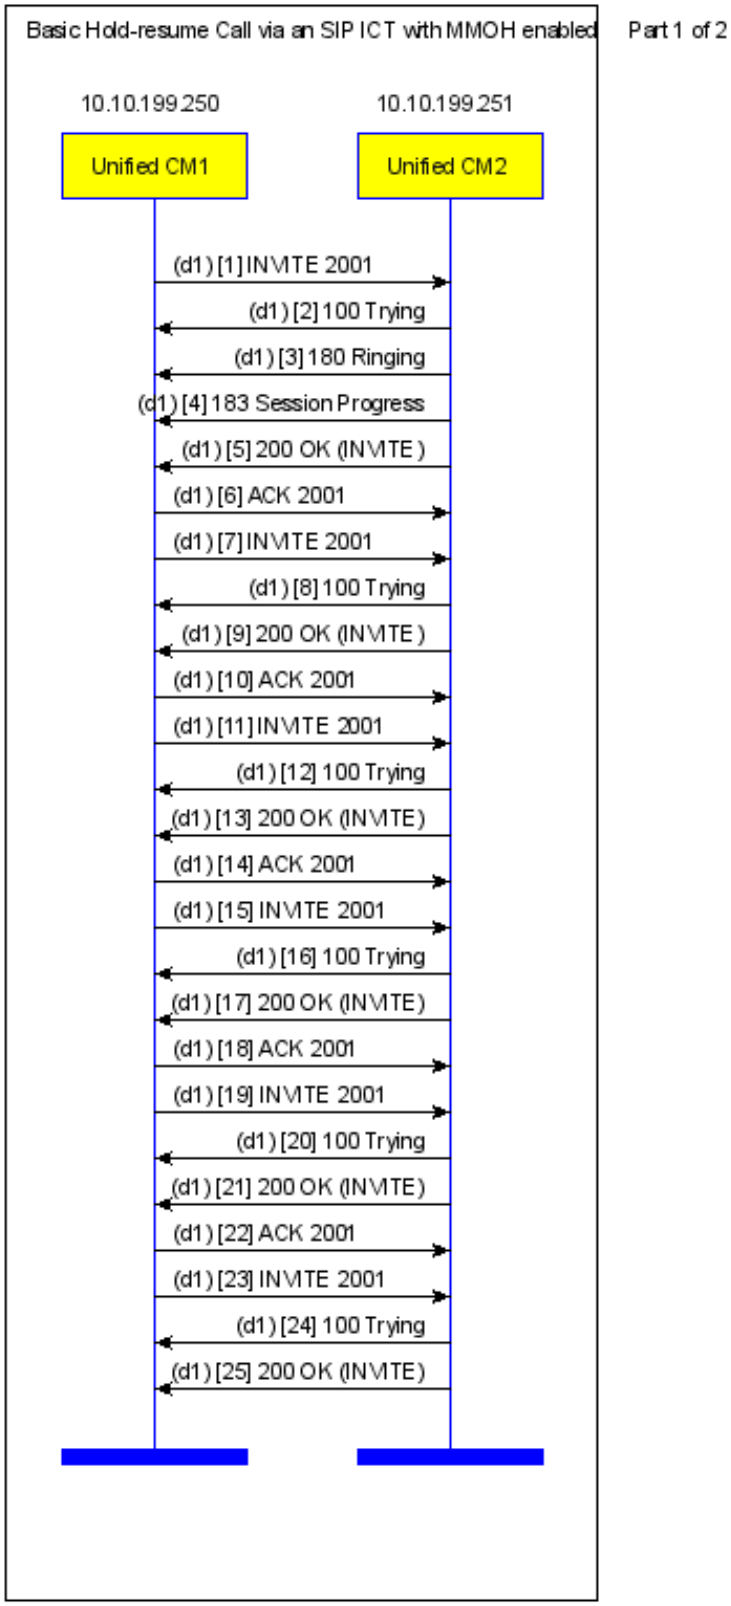

CISCO CONFIDENTIAL

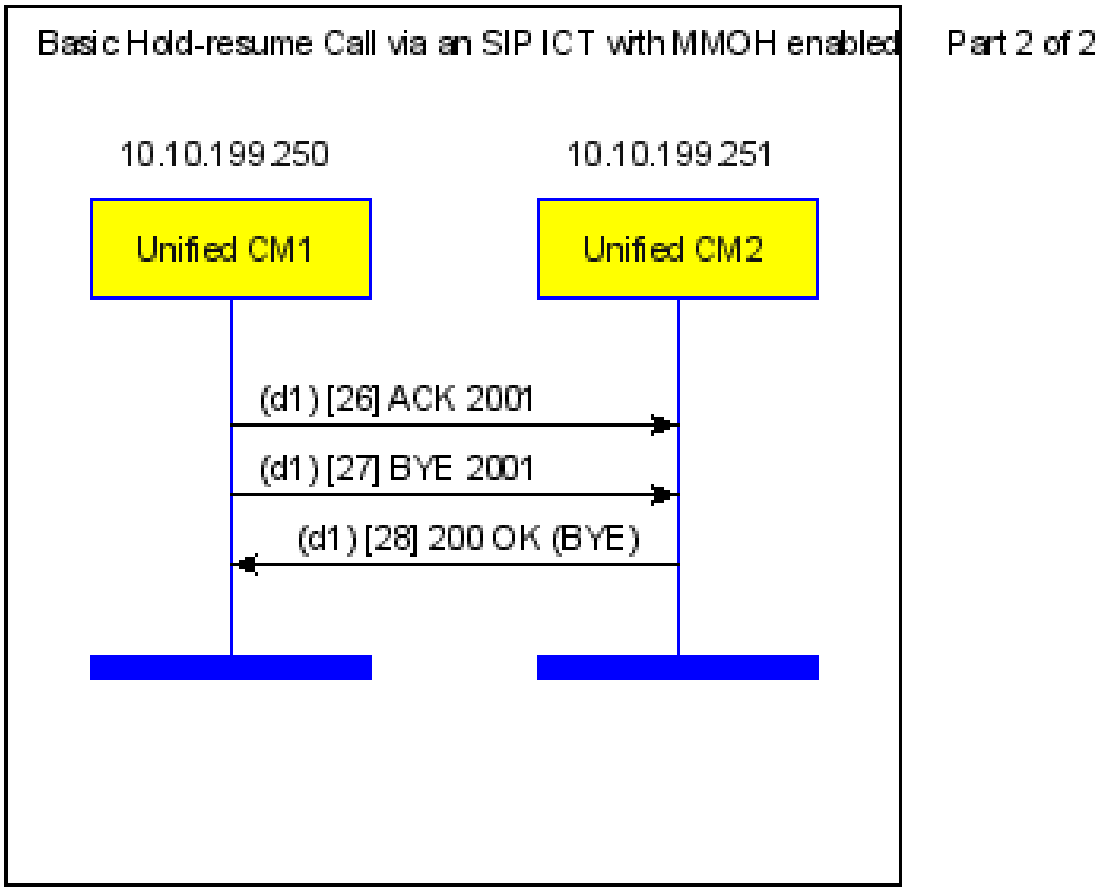

CISCO CONFIDENTIAL

[diagram] Call-ID:[prev][next]
[1] INVITE sip:2001@10.10.199.251:5060 SIP/2.0
Date: Tue, 30 Sep 2008 20:46:41 GMT
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY, PUBLISH
From: <sip:1001@10.10.199.250>;tag=4f442ca1-f40f-4451-b4ee-b5003b007ae8-25807203
Allow-Events: presence
Supported: timer,replaces
Min-SE: 1800
Remote-Party-ID: <sip:1001@10.10.199.250>;party=calling;screen=yes;privacy=off
Content-Length: 0
User-Agent: Cisco-CUCM7.1
To: <sip:2001@10.10.199.251>
Contact: <sip:1001@10.10.199.250:5060;transport=tcp>
Expires: 180
Call-ID: e1261400-8e219031-4b-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK23699f460c
CSeq: 101 INVITE
Session-Expires: 1800
Max-Forwards: 70

[diagram] Call-ID:[prev][next]
[2] SIP/2.0 100 Trying
Date: Tue, 30 Sep 2008 20:47:59 GMT
From: <sip:1001@10.10.199.250>;tag=4f442ca1-f40f-4451-b4ee-b5003b007ae8-25807203
Allow-Events: presence
Content-Length: 0
To: <sip:2001@10.10.199.251>
Call-ID: e1261400-8e219031-4b-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK23699f460c
CSeq: 101 INVITE

[diagram] Call-ID:[prev][next]
[3] SIP/2.0 180 Ringing
Date: Tue, 30 Sep 2008 20:47:59 GMT
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY, PUBLISH
From: <sip:1001@10.10.199.250>;tag=4f442ca1-f40f-4451-b4ee-b5003b007ae8-25807203
Allow-Events: presence
Remote-Party-ID: <sip:2001@10.10.199.251>;party=called;screen=yes;privacy=off
Content-Length: 0
To: <sip:2001@10.10.199.251>;tag=1db10cf2-da9e-4aa2-b392-2d7fa9df684a-25541725
Contact: <sip:2001@10.10.199.251:5060;transport=tcp>
Call-ID: e1261400-8e219031-4b-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK23699f460c
CSeq: 101 INVITE

[diagram] Call-ID:[prev][next]
[4] SIP/2.0 183 Session Progress
Date: Tue, 30 Sep 2008 20:47:59 GMT
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY, PUBLISH
From: <sip:1001@10.10.199.250>;tag=4f442ca1-f40f-4451-b4ee-b5003b007ae8-25807203
Allow-Events: presence
Remote-Party-ID: <sip:2001@10.10.199.251>;party=called;screen=yes;privacy=off
Content-Length: 347
To: <sip:2001@10.10.199.251>;tag=1db10cf2-da9e-4aa2-b392-2d7fa9df684a-25541725
Contact: <sip:2001@10.10.199.251:5060;transport=tcp>
Content-Type: application/sdp
Call-ID: e1261400-8e219031-4b-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK23699f460c
CSeq: 101 INVITE

v=0
o=CiscoSystemsCCM-SIP 2000 1 IN IP4 10.10.199.251
s=SIP Call
c=IN IP4 10.10.199.171
t=0 0
m=audio 27584 RTP/AVP 9 0 8 18 101
a=rtpmap:9 G722/8000
a=ptime:20
a=rtpmap:0 PCMU/8000
a=ptime:20
a=rtpmap:8 PCMA/8000
a=ptime:20
a=rtpmap:18 G729/8000
a=ptime:20
a=fmtp:18 annexb=no
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15

[diagram] Call-ID:[prev][next]
[5] SIP/2.0 200 OK

CISCO CONFIDENTIAL

```
Date: Tue, 30 Sep 2008 20:47:59 GMT
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY, PUBLISH
From: <sip:1001@10.10.199.250>;tag=4f442ca1-f40f-4451-b4ee-b5003b007ae8-25807203
Allow-Events: presence
Supported: replaces
Remote-Party-ID: <sip:2001@10.10.199.251>;party=called;screen=yes;privacy=off
Content-Length: 347
Require:  timer
To: <sip:2001@10.10.199.251>;tag=1db10cf2-da9e-4aa2-b392-2d7fa9df684a-25541725
Contact: <sip:2001@10.10.199.251:5060;transport=tcp>
Content-Type: application/sdp
Call-ID: e1261400-8e219031-4b-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK23699f460c
CSeq: 101 INVITE
Session-Expires:  1800;refresher=uas

v=0
o=CiscoSystemsCCM-SIP 2000 1 IN IP4 10.10.199.251
s=SIP Call
c=IN IP4 10.10.199.171
t=0 0
m=audio 27584 RTP/AVP 9 0 8 18 101
a=rtpmap:9 G722/8000
a=ptime:20
a=rtpmap:0 PCMU/8000
a=ptime:20
a=rtpmap:8 PCMA/8000
a=ptime:20
a=rtpmap:18 G729/8000
a=ptime:20
a=fmtp:18 annexb=no
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
```

[diagram] Call-ID:[prev][next]

[6] ACK sip:2001@10.10.199.251:5060;transport=tcp SIP/2.0

```
Date: Tue, 30 Sep 2008 20:46:41 GMT
From: <sip:1001@10.10.199.250>;tag=4f442ca1-f40f-4451-b4ee-b5003b007ae8-25807203
Allow-Events: presence
Content-Length: 216
To: <sip:2001@10.10.199.251>;tag=1db10cf2-da9e-4aa2-b392-2d7fa9df684a-25541725
Content-Type: application/sdp
Call-ID: e1261400-8e219031-4b-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK24404d5ee7
CSeq: 101 ACK
Max-Forwards: 70

v=0
o=CiscoSystemsCCM-SIP 2000 1 IN IP4 10.10.199.250
s=SIP Call
c=IN IP4 10.10.199.130
t=0 0
m=audio 27848 RTP/AVP 9 101
a=rtpmap:9 G722/8000
a=ptime:20
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
```

[diagram] Call-ID:[prev][next]

[7] INVITE sip:2001@10.10.199.251:5060;transport=tcp SIP/2.0

```
Date: Tue, 30 Sep 2008 20:46:52 GMT
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY, PUBLISH
From: <sip:1001@10.10.199.250>;tag=4f442ca1-f40f-4451-b4ee-b5003b007ae8-25807203
Allow-Events: presence
Supported: timer,replaces
Min-SE:  1800
Remote-Party-ID: <sip:1001@10.10.199.250>;party=calling;screen=yes;privacy=off
Content-Length: 221
User-Agent: Cisco-CUCM7.1
To: <sip:2001@10.10.199.251>;tag=1db10cf2-da9e-4aa2-b392-2d7fa9df684a-25541725
Contact: <sip:1001@10.10.199.250:5060;transport=tcp>
Expires: 180
Content-Type: application/sdp
Call-ID: e1261400-8e219031-4b-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK25239303c8
CSeq: 102 INVITE
Session-Expires:  1800;refresher=uas
Max-Forwards: 70

v=0
```

CISCO CONFIDENTIAL

```
o=CiscoSystemsCCM-SIP 2000 2 IN IP4 10.10.199.250
s=SIP Call
c=IN IP4 0.0.0.0
t=0 0
m=audio 27848 RTP/AVP 9 101
a=rtpmap:9 G722/8000
a=ptime:20
a=inactive
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
```

[diagram] Call-ID:[prev][next]

[8] SIP/2.0 100 Trying

```
Date: Tue, 30 Sep 2008 20:48:09 GMT
From: <sip:1001@10.10.199.250>;tag=4f442ca1-f40f-4451-b4ee-b5003b007ae8-25807203
Allow-Events: presence
Content-Length: 0
To: <sip:2001@10.10.199.251>;tag=1db10cf2-da9e-4aa2-b392-2d7fa9df684a-25541725
Call-ID: e1261400-8e219031-4b-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK25239303c8
CSeq: 102 INVITE
```

[diagram] Call-ID:[prev][next]

[9] SIP/2.0 200 OK

```
Date: Tue, 30 Sep 2008 20:48:09 GMT
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY, PUBLISH
From: <sip:1001@10.10.199.250>;tag=4f442ca1-f40f-4451-b4ee-b5003b007ae8-25807203
Allow-Events: presence
Supported: replaces
Remote-Party-ID: <sip:2001@10.10.199.251>;party=called;screen=yes;privacy=off
Content-Length: 228
Require:  timer
To: <sip:2001@10.10.199.251>;tag=1db10cf2-da9e-4aa2-b392-2d7fa9df684a-25541725
Contact: <sip:2001@10.10.199.251:5060;transport=tcp>
Content-Type: application/sdp
Call-ID: e1261400-8e219031-4b-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK25239303c8
CSeq: 102 INVITE
Session-Expires:  1800;refresher=uas

v=0
o=CiscoSystemsCCM-SIP 2000 2 IN IP4 10.10.199.251
s=SIP Call
c=IN IP4 10.10.199.171
t=0 0
m=audio 27584 RTP/AVP 9 101
a=rtpmap:9 G722/8000
a=ptime:20
a=inactive
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
```

[diagram] Call-ID:[prev][next]

[10] ACK sip:2001@10.10.199.251:5060;transport=tcp SIP/2.0

```
Date: Tue, 30 Sep 2008 20:46:52 GMT
From: <sip:1001@10.10.199.250>;tag=4f442ca1-f40f-4451-b4ee-b5003b007ae8-25807203
Allow-Events: presence
Content-Length: 0
To: <sip:2001@10.10.199.251>;tag=1db10cf2-da9e-4aa2-b392-2d7fa9df684a-25541725
Call-ID: e1261400-8e219031-4b-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK265fc4fd99
CSeq: 102 ACK
Max-Forwards: 70
```

[diagram] Call-ID:[prev][next]

[11] INVITE sip:2001@10.10.199.251:5060;transport=tcp SIP/2.0

```
Date: Tue, 30 Sep 2008 20:46:52 GMT
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY, PUBLISH
From: <sip:1001@10.10.199.250>;tag=4f442ca1-f40f-4451-b4ee-b5003b007ae8-25807203
Allow-Events: presence
Supported: timer,replaces
Min-SE:  1800
Remote-Party-ID: <sip:1001@10.10.199.250>;party=calling;screen=yes;privacy=off
Content-Length: 0
User-Agent: Cisco-CUCM7.1
To: <sip:2001@10.10.199.251>;tag=1db10cf2-da9e-4aa2-b392-2d7fa9df684a-25541725
Contact: <sip:1001@10.10.199.250:5060;transport=tcp>
Expires: 180
Call-ID: e1261400-8e219031-4b-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK2779f6b23a
```

CISCO CONFIDENTIAL

```
CSeq: 103 INVITE
Session-Expires:  1800;refresher=uas
Max-Forwards: 70

[diagram]   Call-ID:[prev][next]
[12] SIP/2.0 100 Trying
Date: Tue, 30 Sep 2008 20:48:09 GMT
From: <sip:1001@10.10.199.250>;tag=4f442ca1-f40f-4451-b4ee-b5003b007ae8-25807203
Allow-Events: presence
Content-Length: 0
To: <sip:2001@10.10.199.251>;tag=1db10cf2-da9e-4aa2-b392-2d7fa9df684a-25541725
Call-ID: e1261400-8e219031-4b-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK2779f6b23a
CSeq: 103 INVITE

[diagram]   Call-ID:[prev][next]
[13] SIP/2.0 200 OK
Date: Tue, 30 Sep 2008 20:48:09 GMT
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY, PUBLISH
From: <sip:1001@10.10.199.250>;tag=4f442ca1-f40f-4451-b4ee-b5003b007ae8-25807203
Allow-Events: presence
Supported: replaces
Remote-Party-ID: <sip:2001@10.10.199.251>;party=called;screen=yes;privacy=off
Content-Length: 347
Require:  timer
To: <sip:2001@10.10.199.251>;tag=1db10cf2-da9e-4aa2-b392-2d7fa9df684a-25541725
Contact: <sip:2001@10.10.199.251:5060;transport=tcp>
Content-Type: application/sdp
Call-ID: e1261400-8e219031-4b-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK2779f6b23a
CSeq: 103 INVITE
Session-Expires:  1800;refresher=uas

v=0
o=CiscoSystemsCCM-SIP 2000 3 IN IP4 10.10.199.251
s=SIP Call
c=IN IP4 10.10.199.171
t=0 0
m=audio 27584 RTP/AVP 9 0 8 18 101
a=rtpmap:9 G722/8000
a=ptime:20
a=rtpmap:0 PCMU/8000
a=ptime:20
a=rtpmap:8 PCMA/8000
a=ptime:20
a=rtpmap:18 G729/8000
a=ptime:20
a=fmtp:18 annexb=no
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15

[diagram]   Call-ID:[prev][next]
[14] ACK sip:2001@10.10.199.251:5060;transport=tcp SIP/2.0
Date: Tue, 30 Sep 2008 20:46:52 GMT
From: <sip:1001@10.10.199.250>;tag=4f442ca1-f40f-4451-b4ee-b5003b007ae8-25807203
Allow-Events: presence
Content-Length: 354
To: <sip:2001@10.10.199.251>;tag=1db10cf2-da9e-4aa2-b392-2d7fa9df684a-25541725
Content-Type: application/sdp
Call-ID: e1261400-8e219031-4b-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK28249fcdb4
CSeq: 103 ACK
Max-Forwards: 70

v=0
o=CiscoSystemsCCM-SIP 2000 3 IN IP4 10.10.199.250
s=SIP Call
c=IN IP4 239.1.1.1
t=0 0
m=audio 16392 RTP/AVP 9 0 8 18 101
a=rtpmap:9 G722/8000
a=ptime:20
a=rtpmap:0 PCMU/8000
a=ptime:20
a=rtpmap:8 PCMA/8000
a=ptime:20
a=rtpmap:18 G729/8000
a=ptime:20
a=fmtp:18 annexb=no
a=inactive
```

CISCO CONFIDENTIAL

```
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15

[diagram]   Call-ID:[prev][next]
[15] INVITE sip:2001@10.10.199.251:5060;transport=tcp SIP/2.0
Date: Tue, 30 Sep 2008 20:46:52 GMT
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY, PUBLISH
From: <sip:1001@10.10.199.250>;tag=4f442ca1-f40f-4451-b4ee-b5003b007ae8-25807203
Allow-Events: presence
Supported: timer,replaces
Min-SE:  1800
Remote-Party-ID: <sip:1001@10.10.199.250>;party=calling;screen=yes;privacy=off
Content-Length: 167
User-Agent: Cisco-CUCM7.1
To: <sip:2001@10.10.199.251>;tag=1db10cf2-da9e-4aa2-b392-2d7fa9df684a-25541725
Contact: <sip:1001@10.10.199.250:5060;transport=tcp>
Expires: 180
Content-Type: application/sdp
Call-ID: e1261400-8e219031-4b-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK292e16a397
CSeq: 104 INVITE
Session-Expires:  1800;refresher=uas
Max-Forwards: 70

v=0
o=CiscoSystemsCCM-SIP 2000 4 IN IP4 10.10.199.250
s=SIP Call
c=IN IP4 239.1.1.1
t=0 0
m=audio 16392 RTP/AVP 0
a=rtpmap:0 PCMU/8000
a=ptime:80
a=recvonly

[diagram]   Call-ID:[prev][next]
[16] SIP/2.0 100 Trying
Date: Tue, 30 Sep 2008 20:48:09 GMT
From: <sip:1001@10.10.199.250>;tag=4f442ca1-f40f-4451-b4ee-b5003b007ae8-25807203
Allow-Events: presence
Content-Length: 0
To: <sip:2001@10.10.199.251>;tag=1db10cf2-da9e-4aa2-b392-2d7fa9df684a-25541725
Call-ID: e1261400-8e219031-4b-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK292e16a397
CSeq: 104 INVITE

[diagram]   Call-ID:[prev][next]
[17] SIP/2.0 200 OK
Date: Tue, 30 Sep 2008 20:48:09 GMT
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY, PUBLISH
From: <sip:1001@10.10.199.250>;tag=4f442ca1-f40f-4451-b4ee-b5003b007ae8-25807203
Allow-Events: presence
Supported: replaces
Remote-Party-ID: <sip:2001@10.10.199.251>;party=called;screen=yes;privacy=off
Content-Length: 223
Require:  timer
To: <sip:2001@10.10.199.251>;tag=1db10cf2-da9e-4aa2-b392-2d7fa9df684a-25541725
Contact: <sip:2001@10.10.199.251:5060;transport=tcp>
Content-Type: application/sdp
Call-ID: e1261400-8e219031-4b-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK292e16a397
CSeq: 104 INVITE
Session-Expires:  1800;refresher=uas

v=0
o=CiscoSystemsCCM-SIP 2000 4 IN IP4 10.10.199.251
s=SIP Call
c=IN IP4 239.1.1.1
t=0 0
m=audio 16392 RTP/AVP 0 101
a=rtpmap:0 PCMU/8000
a=ptime:20
a=inactive
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15

[diagram]   Call-ID:[prev][next]
[18] ACK sip:2001@10.10.199.251:5060;transport=tcp SIP/2.0
Date: Tue, 30 Sep 2008 20:46:52 GMT
From: <sip:1001@10.10.199.250>;tag=4f442ca1-f40f-4451-b4ee-b5003b007ae8-25807203
Allow-Events: presence
```

CISCO CONFIDENTIAL

```
Content-Length: 0
To: <sip:2001@10.10.199.251>;tag=1db10cf2-da9e-4aa2-b392-2d7fa9df684a-25541725
Call-ID: e1261400-8e219031-4b-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK2a194eeb6
CSeq: 104 ACK
Max-Forwards: 70
```

[diagram] Call-ID:[prev][next]

[19] INVITE sip:2001@10.10.199.251:5060;transport=tcp SIP/2.0

```
Date: Tue, 30 Sep 2008 20:47:04 GMT
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY, PUBLISH
From: <sip:1001@10.10.199.250>;tag=4f442ca1-f40f-4451-b4ee-b5003b007ae8-25807203
Allow-Events: presence
Supported: timer,replaces
Min-SE:  1800
Remote-Party-ID: <sip:1001@10.10.199.250>;party=calling;screen=yes;privacy=off
Content-Length: 165
User-Agent: Cisco-CUCM7.1
To: <sip:2001@10.10.199.251>;tag=1db10cf2-da9e-4aa2-b392-2d7fa9df684a-25541725
Contact: <sip:1001@10.10.199.250:5060;transport=tcp>
Expires: 180
Content-Type: application/sdp
Call-ID: e1261400-8e219031-4b-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK2b137c6522
CSeq: 105 INVITE
Session-Expires:  1800;refresher=uas
Max-Forwards: 70

v=0
o=CiscoSystemsCCM-SIP 2000 5 IN IP4 10.10.199.250
s=SIP Call
c=IN IP4 0.0.0.0
t=0 0
m=audio 16392 RTP/AVP 0
a=rtpmap:0 PCMU/8000
a=ptime:80
a=inactive
```

[diagram] Call-ID:[prev][next]

[20] SIP/2.0 100 Trying

```
Date: Tue, 30 Sep 2008 20:48:21 GMT
From: <sip:1001@10.10.199.250>;tag=4f442ca1-f40f-4451-b4ee-b5003b007ae8-25807203
Allow-Events: presence
Content-Length: 0
To: <sip:2001@10.10.199.251>;tag=1db10cf2-da9e-4aa2-b392-2d7fa9df684a-25541725
Call-ID: e1261400-8e219031-4b-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK2b137c6522
CSeq: 105 INVITE
```

[diagram] Call-ID:[prev][next]

[21] SIP/2.0 200 OK

```
Date: Tue, 30 Sep 2008 20:48:21 GMT
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY, PUBLISH
From: <sip:1001@10.10.199.250>;tag=4f442ca1-f40f-4451-b4ee-b5003b007ae8-25807203
Allow-Events: presence
Supported: replaces
Remote-Party-ID: <sip:2001@10.10.199.251>;party=called;screen=yes;privacy=off
Content-Length: 228
Require:  timer
To: <sip:2001@10.10.199.251>;tag=1db10cf2-da9e-4aa2-b392-2d7fa9df684a-25541725
Contact: <sip:2001@10.10.199.251:5060;transport=tcp>
Content-Type: application/sdp
Call-ID: e1261400-8e219031-4b-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK2b137c6522
CSeq: 105 INVITE
Session-Expires:  1800;refresher=uas

v=0
o=CiscoSystemsCCM-SIP 2000 5 IN IP4 10.10.199.251
s=SIP Call
c=IN IP4 10.10.199.171
t=0 0
m=audio 27584 RTP/AVP 0 101
a=rtpmap:0 PCMU/8000
a=ptime:20
a=inactive
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
```

CISCO CONFIDENTIAL

[diagram] Call-ID:[prev][next]
[22] ACK sip:2001@10.10.199.251:5060;transport=tcp SIP/2.0
Date: Tue, 30 Sep 2008 20:47:04 GMT
From: <sip:1001@10.10.199.250>;tag=4f442ca1-f40f-4451-b4ee-b5003b007ae8-25807203
Allow-Events: presence
Content-Length: 0
To: <sip:2001@10.10.199.251>;tag=1db10cf2-da9e-4aa2-b392-2d7fa9df684a-25541725
Call-ID: e1261400-8e219031-4b-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK2c268cddd3
CSeq: 105 ACK
Max-Forwards: 70

[diagram] Call-ID:[prev][next]
[23] INVITE sip:2001@10.10.199.251:5060;transport=tcp SIP/2.0
Date: Tue, 30 Sep 2008 20:47:04 GMT
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY, PUBLISH
From: <sip:1001@10.10.199.250>;tag=4f442ca1-f40f-4451-b4ee-b5003b007ae8-25807203
Allow-Events: presence
Supported: timer,replaces
Min-SE: 1800
Remote-Party-ID: <sip:1001@10.10.199.250>;party=calling;screen=yes;privacy=off
Content-Length: 0
User-Agent: Cisco-CUCM7.1
To: <sip:2001@10.10.199.251>;tag=1db10cf2-da9e-4aa2-b392-2d7fa9df684a-25541725
Contact: <sip:1001@10.10.199.250:5060;transport=tcp>
Expires: 180
Call-ID: e1261400-8e219031-4b-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK2d1798cd4b
CSeq: 106 INVITE
Session-Expires: 1800;refresher=uas
Max-Forwards: 70

[diagram] Call-ID:[prev][next]
[24] SIP/2.0 100 Trying
Date: Tue, 30 Sep 2008 20:48:22 GMT
From: <sip:1001@10.10.199.250>;tag=4f442ca1-f40f-4451-b4ee-b5003b007ae8-25807203
Allow-Events: presence
Content-Length: 0
To: <sip:2001@10.10.199.251>;tag=1db10cf2-da9e-4aa2-b392-2d7fa9df684a-25541725
Call-ID: e1261400-8e219031-4b-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK2d1798cd4b
CSeq: 106 INVITE

[diagram] Call-ID:[prev][next]
[25] SIP/2.0 200 OK
Date: Tue, 30 Sep 2008 20:48:22 GMT
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY, PUBLISH
From: <sip:1001@10.10.199.250>;tag=4f442ca1-f40f-4451-b4ee-b5003b007ae8-25807203
Allow-Events: presence
Supported: replaces
Remote-Party-ID: <sip:2001@10.10.199.251>;party=called;screen=yes;privacy=off
Content-Length: 347
Require: timer
To: <sip:2001@10.10.199.251>;tag=1db10cf2-da9e-4aa2-b392-2d7fa9df684a-25541725
Contact: <sip:2001@10.10.199.251:5060;transport=tcp>
Content-Type: application/sdp
Call-ID: e1261400-8e219031-4b-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK2d1798cd4b
CSeq: 106 INVITE
Session-Expires: 1800;refresher=uas

v=0
o=CiscoSystemsCCM-SIP 2000 6 IN IP4 10.10.199.251
s=SIP Call
c=IN IP4 10.10.199.171
t=0 0
m=audio 27584 RTP/AVP 9 0 8 18 101
a=rtpmap:9 G722/8000
a=ptime:20
a=rtpmap:0 PCMU/8000
a=ptime:20
a=rtpmap:8 PCMA/8000
a=ptime:20
a=rtpmap:18 G729/8000
a=ptime:20
a=fmtp:18 annexb=no
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15

CISCO CONFIDENTIAL

[diagram] Call-ID:[prev][next]
[26] ACK sip:2001@10.10.199.251:5060;transport=tcp SIP/2.0
Date: Tue, 30 Sep 2008 20:47:04 GMT
From: <sip:1001@10.10.199.250>;tag=4f442ca1-f40f-4451-b4ee-b5003b007ae8-25807203
Allow-Events: presence
Content-Length: 216
To: <sip:2001@10.10.199.251>;tag=1db10cf2-da9e-4aa2-b392-2d7fa9df684a-25541725
Content-Type: application/sdp
Call-ID: e1261400-8e219031-4b-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK2e7b54b359
CSeq: 106 ACK
Max-Forwards: 70

v=0
o=CiscoSystemsCCM-SIP 2000 6 IN IP4 10.10.199.250
s=SIP Call
c=IN IP4 10.10.199.130
t=0 0
m=audio 29840 RTP/AVP 9 101
a=rtpmap:9 G722/8000
a=ptime:20
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15

[diagram] Call-ID:[prev][next]
[27] BYE sip:2001@10.10.199.251:5060;transport=tcp SIP/2.0
Date: Tue, 30 Sep 2008 20:47:04 GMT
From: <sip:1001@10.10.199.250>;tag=4f442ca1-f40f-4451-b4ee-b5003b007ae8-25807203
Content-Length: 0
User-Agent: Cisco-CUCM7.1
To: <sip:2001@10.10.199.251>;tag=1db10cf2-da9e-4aa2-b392-2d7fa9df684a-25541725
Call-ID: e1261400-8e219031-4b-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK2f3d6aa7ec
CSeq: 107 BYE
Max-Forwards: 70

[diagram] Call-ID:[prev][next]
[28] SIP/2.0 200 OK
Date: Tue, 30 Sep 2008 20:48:33 GMT
From: <sip:1001@10.10.199.250>;tag=4f442ca1-f40f-4451-b4ee-b5003b007ae8-25807203
Content-Length: 0
To: <sip:2001@10.10.199.251>;tag=1db10cf2-da9e-4aa2-b392-2d7fa9df684a-25541725
Call-ID: e1261400-8e219031-4b-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK2f3d6aa7ec
CSeq: 107 BYE

CISCO CONFIDENTIAL

24. IPv6

24.1 Outbound Delayed media call using Dual Mode SIP Trunk with signaling preference IPv4

Title: Outbound Delayed media call using Dual Mode SIP Trunk with signaling preference IPv4

Description:

This flow shows a basic delayed media call from an IPv4 only SCCP Phone to a IPv4 only SIP Phone via a Dual Mode SIP Trunk with signaling preference set to IPv4. The call is setup using IPv4 for signaling, and IPv4 for media.

Configuration:

Node = Unified CM1, IP = 10.10.199.250
Node = Unified CM2, IP = 10.10.199.251

Phone = A, Line = 1001, IP = 10.10.199.130, Model = IPv4 SCCP
Phone = B, Line = 2001, IP = 10.10.199.171, Model = IPv4 SIP TNP

SIP Trunk between Unified CM1 & Unified CM2 has
a) route pattern 2.XXXX
b) The common device configuration associated to the trunk has
IP Addressing Mode set to IPv4 & IPv6, and the IP Addressing Mode for Signaling set to IPv4

Phone A, Phone B are configured with a common device configuration with IP Addressing Mode set to IPv4 so that they behave in IPv4 only mode.

Scenario:

Phone A DN 1001 calls Phone B DN 2001 over the SIP Trunk by dialing 22001
Phone B DN 2001 Answers
Phone A DN 1001 goes onHook
End of Scenario

CISCO CONFIDENTIAL

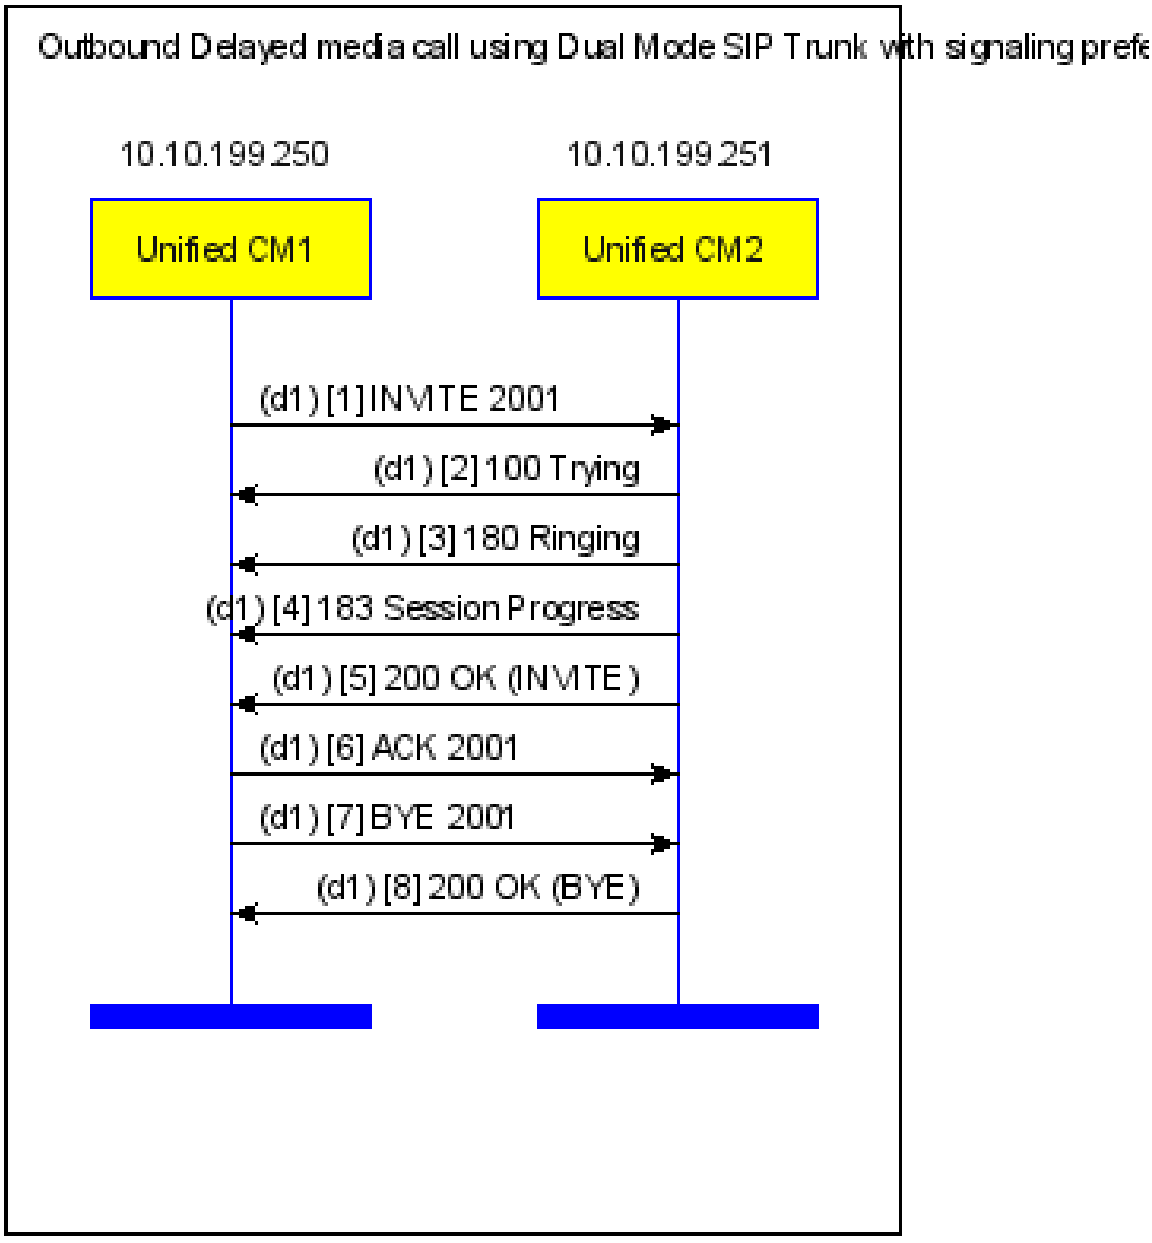

CISCO CONFIDENTIAL

```
[diagram]   Call-ID:[prev][next]
[1] INVITE sip:2001@10.10.199.251:5060 SIP/2.0
Date: Mon, 15 Jun 2009 19:21:58 GMT
Call-Info: <sip:10.10.199.250:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-31091052
Allow-Events: presence, kpml
P-Asserted-Identity: <sip:1001@10.10.199.250>
Supported: timer,resource-priority,replaces
Supported: Geolocation
Min-SE:  1800
Remote-Party-ID: <sip:1001@10.10.199.250>;party=calling;screen=yes;privacy=off
Content-Length: 0
User-Agent: Cisco-CUCM7.1
To: <sip:2001@10.10.199.251>
Contact: <sip:1001@10.10.199.250:5060;transport=tcp>
Expires: 180
Call-ID: ca055480-a3619f56-9-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bKc256ecca9
CSeq: 101 INVITE
Session-Expires:  1800
Max-Forwards: 70

[diagram]   Call-ID:[prev][next]
[2] SIP/2.0 100 Trying
Date: Mon, 15 Jun 2009 19:23:28 GMT
From: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-31091052
Allow-Events: presence
Content-Length: 0
To: <sip:2001@10.10.199.251>
Call-ID: ca055480-a3619f56-9-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bKc256ecca9
CSeq: 101 INVITE

[diagram]   Call-ID:[prev][next]
[3] SIP/2.0 180 Ringing
Date: Mon, 15 Jun 2009 19:23:28 GMT
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-31091052
Allow-Events: presence
P-Asserted-Identity: <sip:2001@10.10.199.251>
Supported: Geolocation
Remote-Party-ID: <sip:2001@10.10.199.251>;party=called;screen=yes;privacy=off
Content-Length: 0
To: <sip:2001@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-31091571
Contact: <sip:2001@10.10.199.251:5060;transport=tcp>
Call-ID: ca055480-a3619f56-9-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bKc256ecca9
CSeq: 101 INVITE

[diagram]   Call-ID:[prev][next]
[4] SIP/2.0 183 Session Progress
Date: Mon, 15 Jun 2009 19:23:28 GMT
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-31091052
Allow-Events: presence
P-Asserted-Identity: <sip:2001@10.10.199.251>
Supported: Geolocation
Remote-Party-ID: <sip:2001@10.10.199.251>;party=called;screen=yes;privacy=off
Content-Length: 347
To: <sip:2001@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-31091571
Contact: <sip:2001@10.10.199.251:5060;transport=tcp>
Content-Type: application/sdp
Call-ID: ca055480-a3619f56-9-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bKc256ecca9
CSeq: 101 INVITE

v=0
o=CiscoSystemsCCM-SIP 2000 1 IN IP4 10.10.199.251
s=SIP Call
c=IN IP4 10.10.199.171
t=0 0
m=audio 18458 RTP/AVP 9 0 8 18 101
a=rtpmap:9 G722/8000
a=ptime:20
a=rtpmap:0 PCMU/8000
a=ptime:20
a=rtpmap:8 PCMA/8000
a=ptime:20
a=rtpmap:18 G729/8000
```

CISCO CONFIDENTIAL

```
a=ptime:20
a=fmtp:18 annexb=no
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15

[diagram]   Call-ID:[prev][next]
[5] SIP/2.0 200 OK
Date: Mon, 15 Jun 2009 19:23:28 GMT
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-31091052
Allow-Events: presence
P-Asserted-Identity: <sip:2001@10.10.199.251>
Supported: replaces
Supported: Geolocation
Remote-Party-ID: <sip:2001@10.10.199.251>;party=called;screen=yes;privacy=off
Content-Length: 347
Require:  timer
To: <sip:2001@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-31091571
Contact: <sip:2001@10.10.199.251:5060;transport=tcp>
Content-Type: application/sdp
Call-ID: ca055480-a3619f56-9-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bKc256ecca9
CSeq: 101 INVITE
Session-Expires:  1800;refresher=uas

v=0
o=CiscoSystemsCCM-SIP 2000 1 IN IP4 10.10.199.251
s=SIP Call
c=IN IP4 10.10.199.171
t=0 0
m=audio 18458 RTP/AVP 9 0 8 18 101
a=rtpmap:9 G722/8000
a=ptime:20
a=rtpmap:0 PCMU/8000
a=ptime:20
a=rtpmap:8 PCMA/8000
a=ptime:20
a=rtpmap:18 G729/8000
a=ptime:20
a=fmtp:18 annexb=no
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15

[diagram]   Call-ID:[prev][next]
[6] ACK sip:2001@10.10.199.251:5060;transport=tcp SIP/2.0
Date: Mon, 15 Jun 2009 19:21:58 GMT
From: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-31091052
Allow-Events: presence, kpml
Content-Length: 216
To: <sip:2001@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-31091571
Content-Type: application/sdp
Call-ID: ca055480-a3619f56-9-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bKd4ef56d21
CSeq: 101 ACK
Max-Forwards: 70

v=0
o=CiscoSystemsCCM-SIP 2000 1 IN IP4 10.10.199.250
s=SIP Call
c=IN IP4 10.10.199.130
t=0 0
m=audio 17038 RTP/AVP 9 101
a=rtpmap:9 G722/8000
a=ptime:20
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15

[diagram]   Call-ID:[prev][next]
[7] BYE sip:2001@10.10.199.251:5060;transport=tcp SIP/2.0
Date: Mon, 15 Jun 2009 19:21:58 GMT
From: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-31091052
P-Asserted-Identity: <sip:1001@10.10.199.250>
Content-Length: 0
User-Agent: Cisco-CUCM7.1
To: <sip:2001@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-31091571
Call-ID: ca055480-a3619f56-9-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bKeb3ecd1
CSeq: 102 BYE
Max-Forwards: 70
```

CISCO CONFIDENTIAL

[diagram] Call-ID:[prev][next]
[8] SIP/2.0 200 OK
Date: Mon, 15 Jun 2009 19:23:36 GMT
From: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-31091052
Content-Length: 0
To: <sip:2001@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-31091571
Call-ID: ca055480-a3619f56-9-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bKeb3ecd1
CSeq: 102 BYE

24.2 Outbound Delayed media call using Dual Mode SIP Trunk with signaling preference IPv6

Title: Outbound Delayed media call using Dual Mode SIP Trunk with signaling preference IPv6

Description:

This flow shows a basic delayed media call from an IPv6 only SCCP Phone to a IPv6 only SCCP

Phone via a Dual Mode SIP Trunk with signaling preference set to IPv6. The

call is setup using IPv6 for signaling, and IPv6 for media.

Configuration:

Node = Unified CM1, IP = 2001:db8:c18:1:20e:7fff:fef0:8af7

Node = Unified CM2, IP = 2001:db8:c18:1:214:c2ff:fec0:b4d7

Phone = A, Line = 1003, IP = 10.10.199.130, Model = IPv6 SCCP

Phone = B, Line = 2002, IP = 10.10.199.171, Model = IPv6 SCCP

SIP Trunk between Unified CM1 & Unified CM2 has

a) route pattern 2.XXXX

b) The common device configuration associated to the trunk has

IP Addressing Mode set to IPv4 & IPv6, and the IP Addressing Mode for Signaling set to IPv6

Phone A, Phone B are configured with a common device configuration with

IP Addressing Mode set to IPv6 so that they behave in IPv6 only mode.

Scenario:

Phone A DN 1003 calls Phone B DN 2002 over the SIP Trunk by dialing 22002

Phone B DN 2002 Answers

Phone A DN 1003 goes onHook

End of Scenario

CISCO CONFIDENTIAL

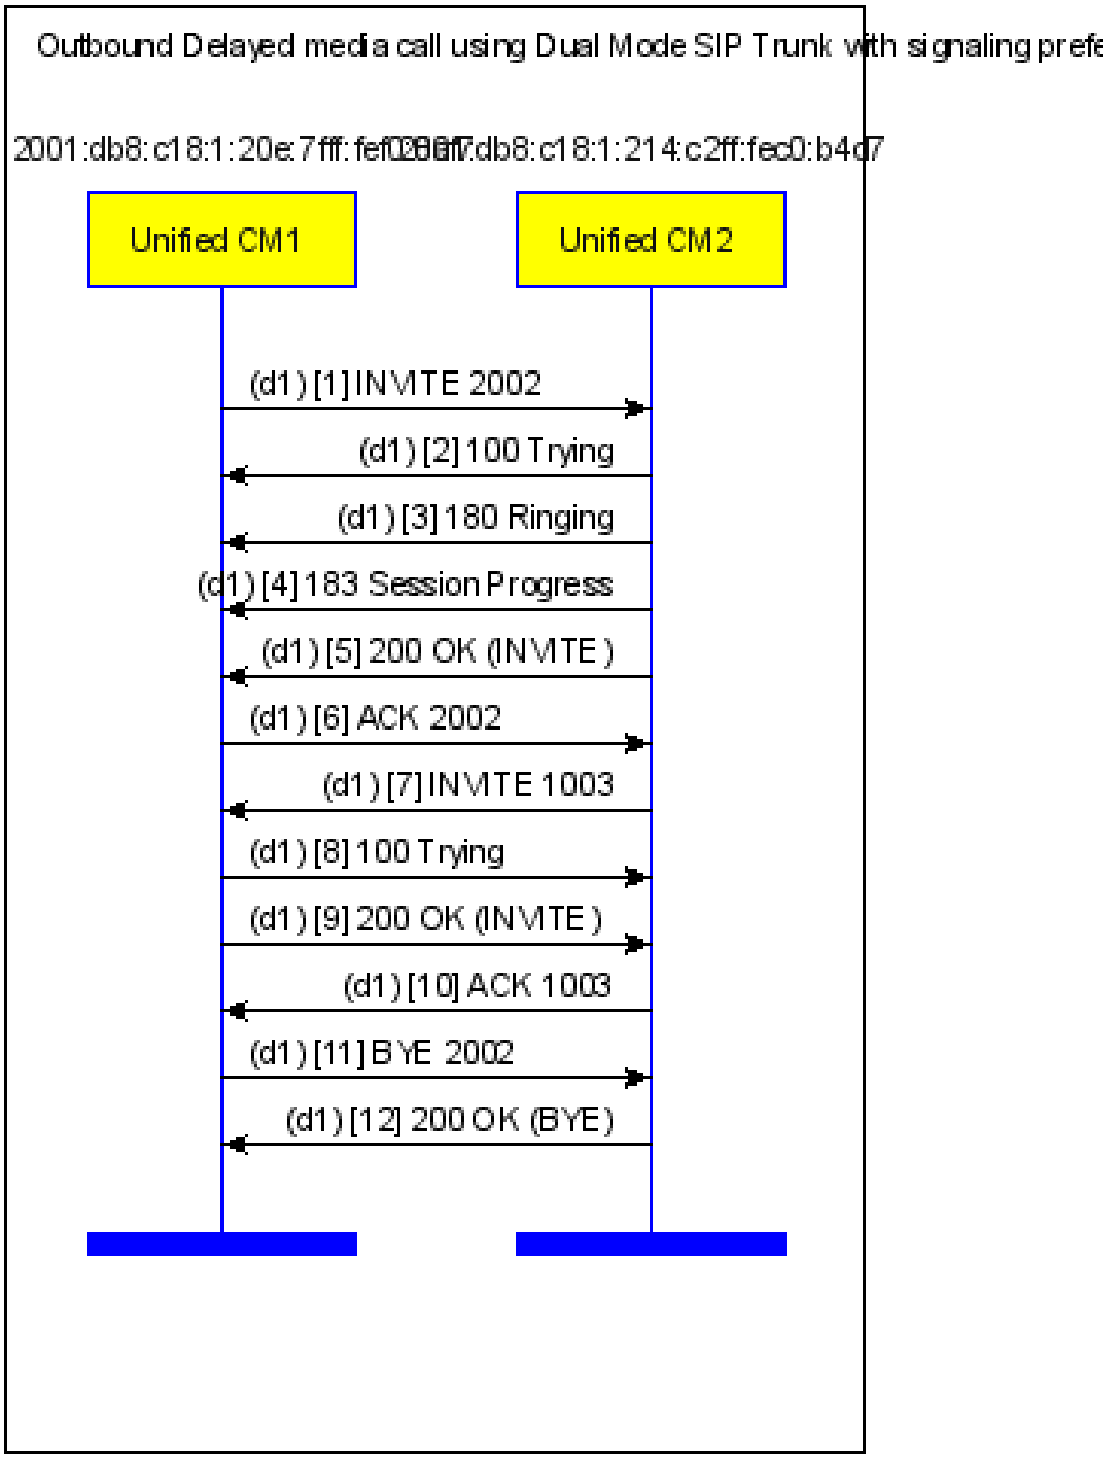

CISCO CONFIDENTIAL

[diagram] Call-ID:[prev][next]
[1] INVITE sip:2002@[2001:db8:c18:1:214:c2ff:fec0:b4d7]:5060 SIP/2.0
Date: Mon, 15 Jun 2009 19:27:57 GMT
Call-Info: <sip:[2001:db8:c18:1:20e:7fff:fef0:8af7]:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:1003@[2001:db8:c18:1:20e:7fff:fef0:8af7]>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-31091054
Allow-Events: presence, kpml
P-Asserted-Identity: <sip:1003@[2001:db8:c18:1:20e:7fff:fef0:8af7]>
Supported: timer,resource-priority,replaces
Supported: Geolocation
Min-SE: 1800
Remote-Party-ID: <sip:1003@[2001:db8:c18:1:20e:7fff:fef0:8af7]>;party=calling;screen=yes;privacy=off
Content-Length: 0
User-Agent: Cisco-CUCM7.1
To: <sip:2002@[2001:db8:c18:1:214:c2ff:fec0:b4d7]>
Contact: <sip:1003@[2001:db8:c18:1:20e:7fff:fef0:8af7]:5060;transport=tcp>
Expires: 180
Call-ID: a0006200-a361a0bd-b-fac712ac@2001:db8:c18:1:20e:7fff:fef0:8af7
Via: SIP/2.0/TCP [2001:db8:c18:1:20e:7fff:fef0:8af7]:5060;branch=z9hG4bK107907f12c
CSeq: 101 INVITE
Session-Expires: 1800
Max-Forwards: 70

[diagram] Call-ID:[prev][next]
[2] SIP/2.0 100 Trying
Date: Mon, 15 Jun 2009 19:29:27 GMT
From: <sip:1003@[2001:db8:c18:1:20e:7fff:fef0:8af7]>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-31091054
Allow-Events: presence
Content-Length: 0
To: <sip:2002@[2001:db8:c18:1:214:c2ff:fec0:b4d7]>
Call-ID: a0006200-a361a0bd-b-fac712ac@2001:db8:c18:1:20e:7fff:fef0:8af7
Via: SIP/2.0/TCP [2001:db8:c18:1:20e:7fff:fef0:8af7]:5060;branch=z9hG4bK107907f12c
CSeq: 101 INVITE

[diagram] Call-ID:[prev][next]
[3] SIP/2.0 180 Ringing
Date: Mon, 15 Jun 2009 19:29:27 GMT
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:1003@[2001:db8:c18:1:20e:7fff:fef0:8af7]>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-31091054
Allow-Events: presence
P-Asserted-Identity: <sip:2002@[2001:db8:c18:1:214:c2ff:fec0:b4d7]>
Supported: Geolocation
Remote-Party-ID: <sip:2002@[2001:db8:c18:1:214:c2ff:fec0:b4d7]>;party=called;screen=yes;privacy=off
Content-Length: 0
To: <sip:2002@[2001:db8:c18:1:214:c2ff:fec0:b4d7]>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-31091573
Contact: <sip:2002@[2001:db8:c18:1:214:c2ff:fec0:b4d7]:5060;transport=tcp>
Call-ID: a0006200-a361a0bd-b-fac712ac@2001:db8:c18:1:20e:7fff:fef0:8af7
Via: SIP/2.0/TCP [2001:db8:c18:1:20e:7fff:fef0:8af7]:5060;branch=z9hG4bK107907f12c
CSeq: 101 INVITE

[diagram] Call-ID:[prev][next]
[4] SIP/2.0 183 Session Progress
Date: Mon, 15 Jun 2009 19:29:27 GMT
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:1003@[2001:db8:c18:1:20e:7fff:fef0:8af7]>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-31091054
Allow-Events: presence
P-Asserted-Identity: <sip:2002@[2001:db8:c18:1:214:c2ff:fec0:b4d7]>
Supported: Geolocation
Remote-Party-ID: <sip:2002@[2001:db8:c18:1:214:c2ff:fec0:b4d7]>;party=called;screen=yes;privacy=off
Content-Length: 375
To: <sip:2002@[2001:db8:c18:1:214:c2ff:fec0:b4d7]>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-31091573
Contact: <sip:2002@[2001:db8:c18:1:214:c2ff:fec0:b4d7]:5060;transport=tcp>
Content-Type: application/sdp
Call-ID: a0006200-a361a0bd-b-fac712ac@2001:db8:c18:1:20e:7fff:fef0:8af7
Via: SIP/2.0/TCP [2001:db8:c18:1:20e:7fff:fef0:8af7]:5060;branch=z9hG4bK107907f12c
CSeq: 101 INVITE

v=0
o=CiscoSystemsCCM-SIP 2000 1 IN IP6 2001:db8:c18:1:214:c2ff:fec0:b4d7
s=SIP Call
c=IN IP6 2001:db8:c18:1:21c:58ff:fef0:70df
t=0 0
m=audio 4000 RTP/AVP 9 0 8 18 101
a=rtpmap:9 G722/8000
a=ptime:20
a=rtpmap:0 PCMU/8000
a=ptime:20
a=rtpmap:8 PCMA/8000
a=ptime:20
a=rtpmap:18 G729/8000

CISCO CONFIDENTIAL

```
a=ptime:20
a=sendonly
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
```

[diagram] Call-ID:[prev][next]

[5] SIP/2.0 200 OK

```
Date: Mon, 15 Jun 2009 19:29:27 GMT
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:1003@[2001:db8:c18:1:20e:7fff:fef0:8af7]>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-31091054
Allow-Events: presence
P-Asserted-Identity: <sip:2002@[2001:db8:c18:1:214:c2ff:fec0:b4d7]>
Supported: replaces
Supported: Geolocation
Remote-Party-ID: <sip:2002@[2001:db8:c18:1:214:c2ff:fec0:b4d7]>;party=called;screen=yes;privacy=off
Content-Length: 375
Require:  timer
To: <sip:2002@[2001:db8:c18:1:214:c2ff:fec0:b4d7]>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-31091573
Contact: <sip:2002@[2001:db8:c18:1:214:c2ff:fec0:b4d7]:5060;transport=tcp>
Content-Type: application/sdp
Call-ID: a0006200-a361a0bd-b-fac712ac@2001:db8:c18:1:20e:7fff:fef0:8af7
Via: SIP/2.0/TCP [2001:db8:c18:1:20e:7fff:fef0:8af7]:5060;branch=z9hG4bK107907f12c
CSeq: 101 INVITE
Session-Expires:  1800;refresher=uas

v=0
o=CiscoSystemsCCM-SIP 2000 1 IN IP6 2001:db8:c18:1:214:c2ff:fec0:b4d7
s=SIP Call
c=IN IP6 2001:db8:c18:1:21c:58ff:fef0:70df
t=0 0
m=audio 4000 RTP/AVP 9 0 8 18 101
a=rtpmap:9 G722/8000
a=ptime:20
a=rtpmap:0 PCMU/8000
a=ptime:20
a=rtpmap:8 PCMA/8000
a=ptime:20
a=rtpmap:18 G729/8000
a=ptime:20
a=sendonly
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
```

[diagram] Call-ID:[prev][next]

[6] ACK sip:2002@[2001:db8:c18:1:214:c2ff:fec0:b4d7]:5060;transport=tcp SIP/2.0

```
Date: Mon, 15 Jun 2009 19:27:57 GMT
From: <sip:1003@[2001:db8:c18:1:20e:7fff:fef0:8af7]>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-31091054
Allow-Events: presence, kpml
Content-Length: 266
To: <sip:2002@[2001:db8:c18:1:214:c2ff:fec0:b4d7]>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-31091573
Content-Type: application/sdp
Call-ID: a0006200-a361a0bd-b-fac712ac@2001:db8:c18:1:20e:7fff:fef0:8af7
Via: SIP/2.0/TCP [2001:db8:c18:1:20e:7fff:fef0:8af7]:5060;branch=z9hG4bK112fc33e0c
CSeq: 101 ACK
Max-Forwards: 70

v=0
o=CiscoSystemsCCM-SIP 2000 1 IN IP6 2001:db8:c18:1:20e:7fff:fef0:8af7
s=SIP Call
c=IN IP6 2001:db8:c18:1:21d:a2ff:fe1a:731c
t=0 0
m=audio 32328 RTP/AVP 9 101
a=rtpmap:9 G722/8000
a=ptime:20
a=recvonly
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
```

[diagram] Call-ID:[prev][next]

[7] INVITE sip:1003@[2001:db8:c18:1:20e:7fff:fef0:8af7]:5060;transport=tcp SIP/2.0

```
Date: Mon, 15 Jun 2009 19:29:33 GMT
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:2002@[2001:db8:c18:1:214:c2ff:fec0:b4d7]>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-31091573
Allow-Events: presence
P-Asserted-Identity: <sip:2002@[2001:db8:c18:1:214:c2ff:fec0:b4d7]>
Supported: timer,resource-priority,replaces
Min-SE:  1800
Remote-Party-ID: <sip:2002@[2001:db8:c18:1:214:c2ff:fec0:b4d7]>;party=calling;screen=yes;privacy=off
Content-Length: 254
User-Agent: Cisco-CUCM7.1
```

CISCO CONFIDENTIAL

```
To: <sip:1003@[2001:db8:c18:1:20e:7fff:fef0:8af7]>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-31091054
Contact: <sip:2002@[2001:db8:c18:1:214:c2ff:fec0:b4d7]:5060;transport=tcp>
Expires: 180
Content-Type: application/sdp
Call-ID: a0006200-a361a0bd-b-fac712ac@2001:db8:c18:1:20e:7fff:fef0:8af7
Via: SIP/2.0/TCP [2001:db8:c18:1:214:c2ff:fec0:b4d7]:5060;branch=z9hG4bKc5bdedc7a
CSeq: 101 INVITE
Session-Expires:  1800;refresher=uac
Max-Forwards: 70

v=0
o=CiscoSystemsCCM-SIP 2000 2 IN IP6 2001:db8:c18:1:214:c2ff:fec0:b4d7
s=SIP Call
c=IN IP6 2001:db8:c18:1:21c:58ff:fef0:70df
t=0 0
m=audio 30134 RTP/AVP 9 101
a=rtpmap:9 G722/8000
a=ptime:20
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15

[diagram]   Call-ID:[prev][next]
[8] SIP/2.0 100 Trying
Date: Mon, 15 Jun 2009 19:28:02 GMT
From: <sip:2002@[2001:db8:c18:1:214:c2ff:fec0:b4d7]>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-31091573
Allow-Events: presence, kpml
Content-Length: 0
To: <sip:1003@[2001:db8:c18:1:20e:7fff:fef0:8af7]>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-31091054
Call-ID: a0006200-a361a0bd-b-fac712ac@2001:db8:c18:1:20e:7fff:fef0:8af7
Via: SIP/2.0/TCP [2001:db8:c18:1:214:c2ff:fec0:b4d7]:5060;branch=z9hG4bKc5bdedc7a
CSeq: 101 INVITE

[diagram]   Call-ID:[prev][next]
[9] SIP/2.0 200 OK
Date: Mon, 15 Jun 2009 19:28:02 GMT
Call-Info: <sip:[2001:db8:c18:1:20e:7fff:fef0:8af7]:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:2002@[2001:db8:c18:1:214:c2ff:fec0:b4d7]>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-31091573
Allow-Events: presence, kpml
P-Asserted-Identity: <sip:1003@[2001:db8:c18:1:20e:7fff:fef0:8af7]>
Supported: replaces
Supported: Geolocation
Remote-Party-ID: <sip:1003@[2001:db8:c18:1:20e:7fff:fef0:8af7]>;party=called;screen=yes;privacy=off
Content-Length: 254
Require:  timer
To: <sip:1003@[2001:db8:c18:1:20e:7fff:fef0:8af7]>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-31091054
Contact: <sip:1003@[2001:db8:c18:1:20e:7fff:fef0:8af7]:5060;transport=tcp>
Content-Type: application/sdp
Call-ID: a0006200-a361a0bd-b-fac712ac@2001:db8:c18:1:20e:7fff:fef0:8af7
Via: SIP/2.0/TCP [2001:db8:c18:1:214:c2ff:fec0:b4d7]:5060;branch=z9hG4bKc5bdedc7a
CSeq: 101 INVITE
Session-Expires:  1800;refresher=uac

v=0
o=CiscoSystemsCCM-SIP 2000 2 IN IP6 2001:db8:c18:1:20e:7fff:fef0:8af7
s=SIP Call
c=IN IP6 2001:db8:c18:1:21d:a2ff:fe1a:731c
t=0 0
m=audio 32328 RTP/AVP 9 101
a=rtpmap:9 G722/8000
a=ptime:20
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15

[diagram]   Call-ID:[prev][next]
[10] ACK sip:1003@[2001:db8:c18:1:20e:7fff:fef0:8af7]:5060;transport=tcp SIP/2.0
Date: Mon, 15 Jun 2009 19:29:33 GMT
From: <sip:2002@[2001:db8:c18:1:214:c2ff:fec0:b4d7]>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-31091573
Allow-Events: presence
Content-Length: 0
To: <sip:1003@[2001:db8:c18:1:20e:7fff:fef0:8af7]>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-31091054
Call-ID: a0006200-a361a0bd-b-fac712ac@2001:db8:c18:1:20e:7fff:fef0:8af7
Via: SIP/2.0/TCP [2001:db8:c18:1:214:c2ff:fec0:b4d7]:5060;branch=z9hG4bKd7d926082
CSeq: 101 ACK
Max-Forwards: 70

[diagram]   Call-ID:[prev][next]
[11] BYE sip:2002@[2001:db8:c18:1:214:c2ff:fec0:b4d7]:5060;transport=tcp SIP/2.0
Date: Mon, 15 Jun 2009 19:28:02 GMT
From: <sip:1003@[2001:db8:c18:1:20e:7fff:fef0:8af7]>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-31091054
```

CISCO CONFIDENTIAL

```
P-Asserted-Identity: <sip:1003@[2001:db8:c18:1:20e:7fff:fef0:8af7]>
Content-Length: 0
User-Agent: Cisco-CUCM7.1
To: <sip:2002@[2001:db8:c18:1:214:c2ff:fec0:b4d7]>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-31091573
Call-ID: a0006200-a361a0bd-b-fac712ac@2001:db8:c18:1:20e:7fff:fef0:8af7
Via: SIP/2.0/TCP [2001:db8:c18:1:20e:7fff:fef0:8af7]:5060;branch=z9hG4bK123ae68ae6
CSeq: 102 BYE
Max-Forwards: 70

[diagram]   Call-ID:[prev][next]
[12] SIP/2.0 200 OK
Date: Mon, 15 Jun 2009 19:29:37 GMT
From: <sip:1003@[2001:db8:c18:1:20e:7fff:fef0:8af7]>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-31091054
Content-Length: 0
To: <sip:2002@[2001:db8:c18:1:214:c2ff:fec0:b4d7]>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-31091573
Call-ID: a0006200-a361a0bd-b-fac712ac@2001:db8:c18:1:20e:7fff:fef0:8af7
Via: SIP/2.0/TCP [2001:db8:c18:1:20e:7fff:fef0:8af7]:5060;branch=z9hG4bK123ae68ae6
CSeq: 102 BYE
```

24.3 Outbound Delayed media call using Dual Mode SIP Trunk with signaling preference IPv6, media IPv4

Title: Outbound Delayed media call using Dual Mode SIP Trunk with signaling preference IPv6, media IPv4

Description:

This flow shows a basic delayed media call from an IPv4 only SCCP Phone to a IPv4 only SIP Phone via a Dual Mode SIP Trunk with signaling preference set to IPv6. The call is setup using IPv6 for signaling, and IPv4 for media.

Configuration:

Node = Unified CM1, IP = 2001:db8:c18:1:20e:7fff:fef0:8af7
Node = Unified CM2, IP = 2001:db8:c18:1:214:c2ff:fec0:b4d7

Phone = A, Line = 1001, IP = 10.10.199.130, Model = IPv4 SCCP
Phone = B, Line = 2001, IP = 10.10.199.171, Model = IPv4 SIP TNP

SIP Trunk between Unified CM1 & Unified CM2 has
a) route pattern 2.XXXX
b) The common device configuration associated to the trunk has
IP Addressing Mode set to IPv4 & IPv6, and the IP Addressing Mode for Signaling set to IPv6

Phone A, Phone B are configured with a common device configuration with IP Addressing Mode set to IPv4 so that they behave in IPv4 only mode.

Scenario:

Phone A DN 1001 calls Phone B DN 2001 over the SIP Trunk by dialing 22001
Phone B DN 2001 Answers
Phone A DN 1001 goes onHook
End of Scenario

CISCO CONFIDENTIAL

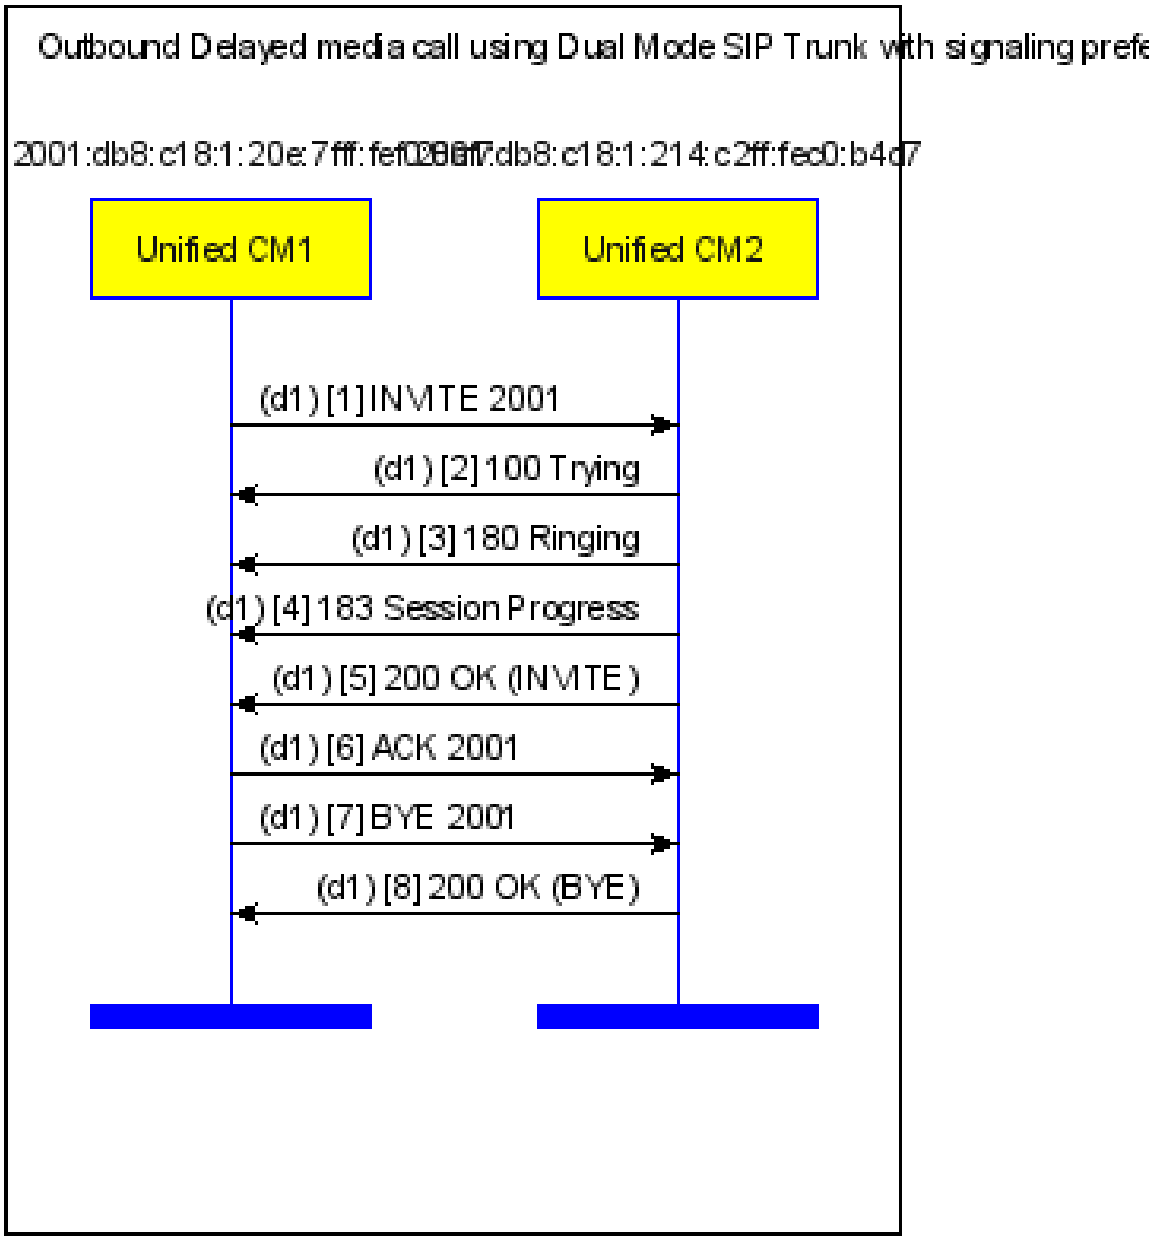

CISCO CONFIDENTIAL

```
[diagram]   Call-ID:[prev][next]
[1] INVITE sip:2001@[2001:db8:c18:1:214:c2ff:fec0:b4d7]:5060 SIP/2.0
Date: Mon, 15 Jun 2009 19:30:58 GMT
Call-Info: <sip:[2001:db8:c18:1:20e:7fff:fef0:8af7]:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:1001@[2001:db8:c18:1:20e:7fff:fef0:8af7]>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-31091056
Allow-Events: presence, kpml
P-Asserted-Identity: <sip:1001@[2001:db8:c18:1:20e:7fff:fef0:8af7]>
Supported: timer,resource-priority,replaces
Supported: Geolocation
Min-SE:  1800
Remote-Party-ID: <sip:1001@[2001:db8:c18:1:20e:7fff:fef0:8af7]>;party=calling;screen=yes;privacy=off
Content-Length: 0
User-Agent: Cisco-CUCM7.1
To: <sip:2001@[2001:db8:c18:1:214:c2ff:fec0:b4d7]>
Contact: <sip:1001@[2001:db8:c18:1:20e:7fff:fef0:8af7]:5060;transport=tcp>
Expires: 180
Call-ID: be2ca80-a361a172-c-fac712ac@2001:db8:c18:1:20e:7fff:fef0:8af7
Via: SIP/2.0/TCP [2001:db8:c18:1:20e:7fff:fef0:8af7]:5060;branch=z9hG4bK1337e11c6d
CSeq: 101 INVITE
Session-Expires:  1800
Max-Forwards: 70

[diagram]   Call-ID:[prev][next]
[2] SIP/2.0 100 Trying
Date: Mon, 15 Jun 2009 19:32:28 GMT
From: <sip:1001@[2001:db8:c18:1:20e:7fff:fef0:8af7]>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-31091056
Allow-Events: presence
Content-Length: 0
To: <sip:2001@[2001:db8:c18:1:214:c2ff:fec0:b4d7]>
Call-ID: be2ca80-a361a172-c-fac712ac@2001:db8:c18:1:20e:7fff:fef0:8af7
Via: SIP/2.0/TCP [2001:db8:c18:1:20e:7fff:fef0:8af7]:5060;branch=z9hG4bK1337e11c6d
CSeq: 101 INVITE

[diagram]   Call-ID:[prev][next]
[3] SIP/2.0 180 Ringing
Date: Mon, 15 Jun 2009 19:32:28 GMT
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:1001@[2001:db8:c18:1:20e:7fff:fef0:8af7]>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-31091056
Allow-Events: presence
P-Asserted-Identity: <sip:2001@[2001:db8:c18:1:214:c2ff:fec0:b4d7]>
Supported: Geolocation
Remote-Party-ID: <sip:2001@[2001:db8:c18:1:214:c2ff:fec0:b4d7]>;party=called;screen=yes;privacy=off
Content-Length: 0
To: <sip:2001@[2001:db8:c18:1:214:c2ff:fec0:b4d7]>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-31091575
Contact: <sip:2001@[2001:db8:c18:1:214:c2ff:fec0:b4d7]:5060;transport=tcp>
Call-ID: be2ca80-a361a172-c-fac712ac@2001:db8:c18:1:20e:7fff:fef0:8af7
Via: SIP/2.0/TCP [2001:db8:c18:1:20e:7fff:fef0:8af7]:5060;branch=z9hG4bK1337e11c6d
CSeq: 101 INVITE

[diagram]   Call-ID:[prev][next]
[4] SIP/2.0 183 Session Progress
Date: Mon, 15 Jun 2009 19:32:28 GMT
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:1001@[2001:db8:c18:1:20e:7fff:fef0:8af7]>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-31091056
Allow-Events: presence
P-Asserted-Identity: <sip:2001@[2001:db8:c18:1:214:c2ff:fec0:b4d7]>
Supported: Geolocation
Remote-Party-ID: <sip:2001@[2001:db8:c18:1:214:c2ff:fec0:b4d7]>;party=called;screen=yes;privacy=off
Content-Length: 347
To: <sip:2001@[2001:db8:c18:1:214:c2ff:fec0:b4d7]>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-31091575
Contact: <sip:2001@[2001:db8:c18:1:214:c2ff:fec0:b4d7]:5060;transport=tcp>
Content-Type: application/sdp
Call-ID: be2ca80-a361a172-c-fac712ac@2001:db8:c18:1:20e:7fff:fef0:8af7
Via: SIP/2.0/TCP [2001:db8:c18:1:20e:7fff:fef0:8af7]:5060;branch=z9hG4bK1337e11c6d
CSeq: 101 INVITE

v=0
o=CiscoSystemsCCM-SIP 2000 1 IN IP4 10.10.199.251
s=SIP Call
c=IN IP4 10.10.199.171
t=0 0
m=audio 21492 RTP/AVP 9 0 8 18 101
a=rtpmap:9 G722/8000
a=ptime:20
a=rtpmap:0 PCMU/8000
a=ptime:20
a=rtpmap:8 PCMA/8000
a=ptime:20
a=rtpmap:18 G729/8000
```

CISCO CONFIDENTIAL

```
a=ptime:20
a=fmtp:18 annexb=no
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15

[diagram]   Call-ID:[prev][next]
[5] SIP/2.0 200 OK
Date: Mon, 15 Jun 2009 19:32:28 GMT
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:1001@[2001:db8:c18:1:20e:7fff:fef0:8af7]>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-31091056
Allow-Events: presence
P-Asserted-Identity: <sip:2001@[2001:db8:c18:1:214:c2ff:fec0:b4d7]>
Supported: replaces
Supported: Geolocation
Remote-Party-ID: <sip:2001@[2001:db8:c18:1:214:c2ff:fec0:b4d7]>;party=called;screen=yes;privacy=off
Content-Length: 347
Require:  timer
To: <sip:2001@[2001:db8:c18:1:214:c2ff:fec0:b4d7]>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-31091575
Contact: <sip:2001@[2001:db8:c18:1:214:c2ff:fec0:b4d7]:5060;transport=tcp>
Content-Type: application/sdp
Call-ID: be2ca80-a361a172-c-fac712ac@2001:db8:c18:1:20e:7fff:fef0:8af7
Via: SIP/2.0/TCP [2001:db8:c18:1:20e:7fff:fef0:8af7]:5060;branch=z9hG4bK1337e11c6d
CSeq: 101 INVITE
Session-Expires:  1800;refresher=uas

v=0
o=CiscoSystemsCCM-SIP 2000 1 IN IP4 10.10.199.251
s=SIP Call
c=IN IP4 10.10.199.171
t=0 0
m=audio 21492 RTP/AVP 9 0 8 18 101
a=rtpmap:9 G722/8000
a=ptime:20
a=rtpmap:0 PCMU/8000
a=ptime:20
a=rtpmap:8 PCMA/8000
a=ptime:20
a=rtpmap:18 G729/8000
a=ptime:20
a=fmtp:18 annexb=no
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15

[diagram]   Call-ID:[prev][next]
[6] ACK sip:2001@[2001:db8:c18:1:214:c2ff:fec0:b4d7]:5060;transport=tcp SIP/2.0
Date: Mon, 15 Jun 2009 19:30:58 GMT
From: <sip:1001@[2001:db8:c18:1:20e:7fff:fef0:8af7]>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-31091056
Allow-Events: presence, kpml
Content-Length: 216
To: <sip:2001@[2001:db8:c18:1:214:c2ff:fec0:b4d7]>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-31091575
Content-Type: application/sdp
Call-ID: be2ca80-a361a172-c-fac712ac@2001:db8:c18:1:20e:7fff:fef0:8af7
Via: SIP/2.0/TCP [2001:db8:c18:1:20e:7fff:fef0:8af7]:5060;branch=z9hG4bK145d6290b7
CSeq: 101 ACK
Max-Forwards: 70

v=0
o=CiscoSystemsCCM-SIP 2000 1 IN IP4 10.10.199.250
s=SIP Call
c=IN IP4 10.10.199.130
t=0 0
m=audio 21876 RTP/AVP 9 101
a=rtpmap:9 G722/8000
a=ptime:20
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15

[diagram]   Call-ID:[prev][next]
[7] BYE sip:2001@[2001:db8:c18:1:214:c2ff:fec0:b4d7]:5060;transport=tcp SIP/2.0
Date: Mon, 15 Jun 2009 19:30:58 GMT
From: <sip:1001@[2001:db8:c18:1:20e:7fff:fef0:8af7]>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-31091056
P-Asserted-Identity: <sip:1001@[2001:db8:c18:1:20e:7fff:fef0:8af7]>
Content-Length: 0
User-Agent: Cisco-CUCM7.1
To: <sip:2001@[2001:db8:c18:1:214:c2ff:fec0:b4d7]>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-31091575
Call-ID: be2ca80-a361a172-c-fac712ac@2001:db8:c18:1:20e:7fff:fef0:8af7
Via: SIP/2.0/TCP [2001:db8:c18:1:20e:7fff:fef0:8af7]:5060;branch=z9hG4bK153d896ad3
CSeq: 102 BYE
Max-Forwards: 70
```

CISCO CONFIDENTIAL

[diagram] Call-ID:[prev][next]
[8] SIP/2.0 200 OK
Date: Mon, 15 Jun 2009 19:32:37 GMT
From: <sip:1001@[2001:db8:c18:1:20e:7fff:fef0:8af7]>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-31091056
Content-Length: 0
To: <sip:2001@[2001:db8:c18:1:214:c2ff:fec0:b4d7]>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-31091575
Call-ID: be2ca80-a361a172-c-fac712ac@2001:db8:c18:1:20e:7fff:fef0:8af7
Via: SIP/2.0/TCP [2001:db8:c18:1:20e:7fff:fef0:8af7]:5060;branch=z9hG4bK153d896ad3
CSeq: 102 BYE

24.4 Inbound Delayed media call using IPv6 only SIP Trunk

Title: Inbound Delayed media call using IPv6 only SIP Trunk

Description:
This flow shows a basic delayed media call from an IPv6 only SCCP Phone to a IPv4 only SCCP
Phone via a IPv6 only SIP Trunk. The call is setup using IPv6 for signaling, and IPv6 for media.
A dual stack MTP that supports conversion between IPv4 and IPv6 will be allocated on Unified CM1

Configuration:
Node = Unified CM1, IP = 2001:db8:c18:1:20e:7fff:fef0:8af7
Node = Unified CM2, IP = 2001:db8:c18:1:214:c2ff:fec0:b4d7

Phone = A, Line = 1001, IP = 10.10.199.130, Model = IPv4 SCCP
Phone = B, Line = 2002, IP = 10.10.199.171, Model = IPv6 SCCP

SIP Trunk between Unified CM1 & Unified CM2 has
a) route pattern 2.XXXX
b) The common device configuration associated to the trunk has
IP Addressing Mode set to IPv6

Phone A is configured with a common device configuration with
IP Addressing Mode set to IPv4 so that it behaves in IPv4 only mode.

Phone B is configured with a common device configuration with
IP Addressing Mode set to IPv6 so that it behaves in IPv6 only mode.

Configure a Dual Stack MTP that supports IPv4/IPv6 conversion on Unified CM1

Scenario:
Phone B DN 2002 calls Phone A DN 1001 over the SIP Trunk by dialing 11001
Phone A DN 1001 Answers
Phone A DN 1001 goes onHook
End of Scenario

CISCO CONFIDENTIAL

CISCO CONFIDENTIAL

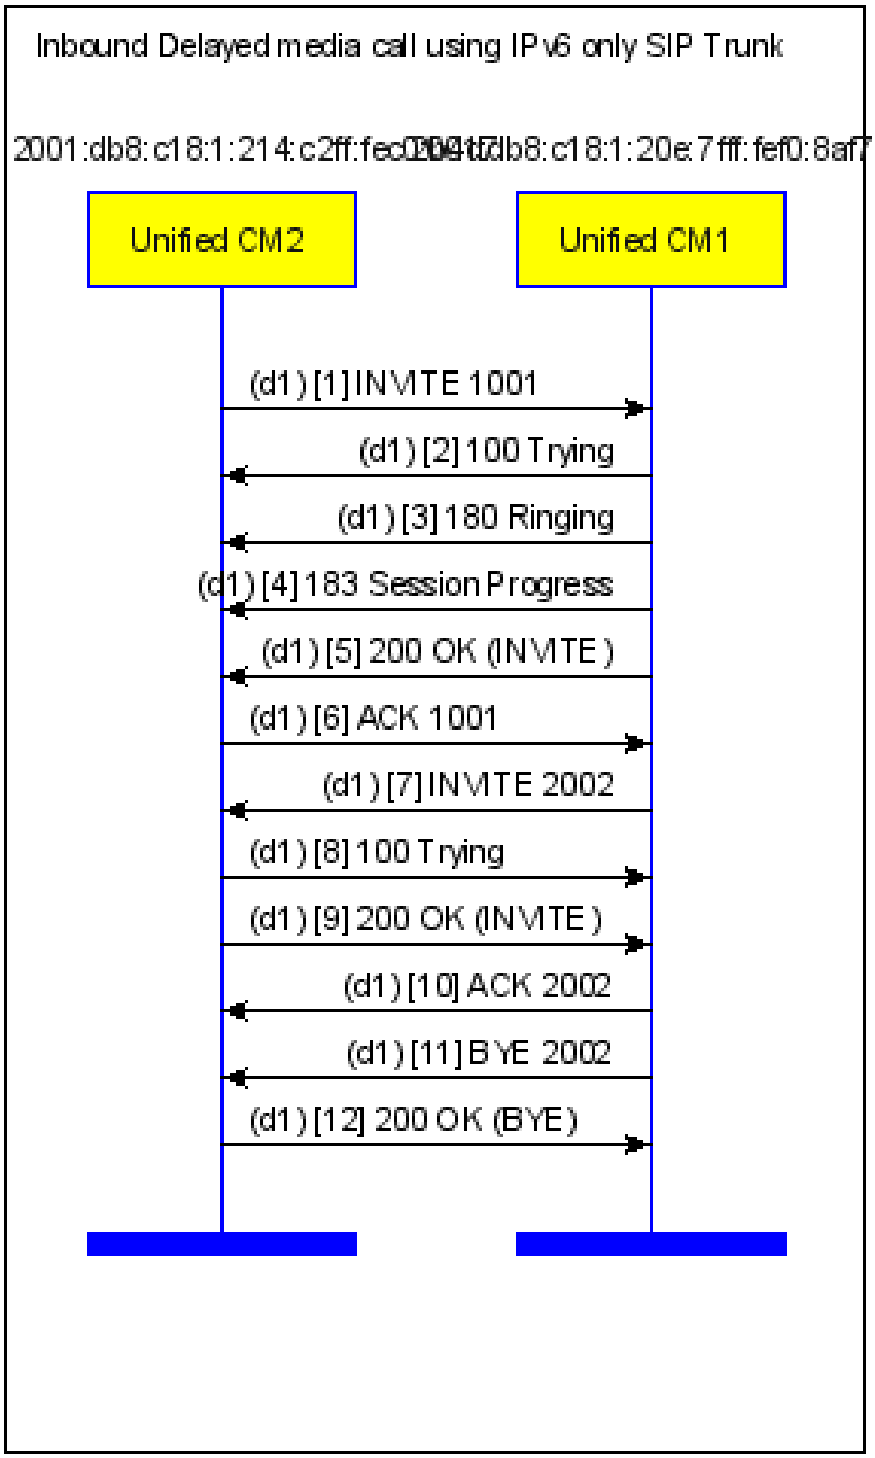

CISCO CONFIDENTIAL

[diagram] Call-ID:[prev][next]
[1] INVITE sip:1001@[2001:db8:c18:1:20e:7fff:fef0:8af7]:5060 SIP/2.0
Date: Mon, 22 Jun 2009 18:55:58 GMT
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:2002@[2001:db8:c18:1:214:c2ff:fec0:b4d7]>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-33491054
Allow-Events: presence
P-Asserted-Identity: <sip:2002@[2001:db8:c18:1:214:c2ff:fec0:b4d7]>
Supported: timer,resource-priority,replaces
Supported: X-cisco-srtp-fallback
Supported: Geolocation
Min-SE: 1800
Remote-Party-ID: <sip:2002@[2001:db8:c18:1:214:c2ff:fec0:b4d7]>;party=calling;screen=yes;privacy=off
Content-Length: 0
User-Agent: Cisco-CUCM7.1
To: <sip:1001@[2001:db8:c18:1:20e:7fff:fef0:8af7]>
Contact: <sip:2002@[2001:db8:c18:1:214:c2ff:fec0:b4d7]:5060;transport=tcp>
Expires: 180
Call-ID: 51147880-a3f1d3be-6-fbc712ac@2001:db8:c18:1:214:c2ff:fec0:b4d7
Via: SIP/2.0/TCP [2001:db8:c18:1:214:c2ff:fec0:b4d7]:5060;branch=z9hG4bK7299dcbcc
CSeq: 101 INVITE
Session-Expires: 1800
Max-Forwards: 70

[diagram] Call-ID:[prev][next]
[2] SIP/2.0 100 Trying
Date: Mon, 22 Jun 2009 18:54:09 GMT
From: <sip:2002@[2001:db8:c18:1:214:c2ff:fec0:b4d7]>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-33491054
Allow-Events: presence
Content-Length: 0
To: <sip:1001@[2001:db8:c18:1:20e:7fff:fef0:8af7]>
Call-ID: 51147880-a3f1d3be-6-fbc712ac@2001:db8:c18:1:214:c2ff:fec0:b4d7
Via: SIP/2.0/TCP [2001:db8:c18:1:214:c2ff:fec0:b4d7]:5060;branch=z9hG4bK7299dcbcc
CSeq: 101 INVITE

[diagram] Call-ID:[prev][next]
[3] SIP/2.0 180 Ringing
Date: Mon, 22 Jun 2009 18:54:09 GMT
Call-Info: <sip:[2001:db8:c18:1:20e:7fff:fef0:8af7]:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:2002@[2001:db8:c18:1:214:c2ff:fec0:b4d7]>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-33491054
Allow-Events: presence
P-Asserted-Identity: <sip:1001@[2001:db8:c18:1:20e:7fff:fef0:8af7]>
Supported: X-cisco-srtp-fallback
Supported: Geolocation
Remote-Party-ID: <sip:1001@[2001:db8:c18:1:20e:7fff:fef0:8af7]>;party=called;screen=yes;privacy=off
Content-Length: 0
To: <sip:1001@[2001:db8:c18:1:20e:7fff:fef0:8af7]>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-33501578
Contact: <sip:1001@[2001:db8:c18:1:20e:7fff:fef0:8af7]:5060;transport=tcp>
Call-ID: 51147880-a3f1d3be-6-fbc712ac@2001:db8:c18:1:214:c2ff:fec0:b4d7
Via: SIP/2.0/TCP [2001:db8:c18:1:214:c2ff:fec0:b4d7]:5060;branch=z9hG4bK7299dcbcc
CSeq: 101 INVITE

[diagram] Call-ID:[prev][next]
[4] SIP/2.0 183 Session Progress
Date: Mon, 22 Jun 2009 18:54:09 GMT
Call-Info: <sip:[2001:db8:c18:1:20e:7fff:fef0:8af7]:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:2002@[2001:db8:c18:1:214:c2ff:fec0:b4d7]>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-33491054
Allow-Events: presence, kpml
P-Asserted-Identity: <sip:1001@[2001:db8:c18:1:20e:7fff:fef0:8af7]>
Supported: X-cisco-srtp-fallback
Supported: Geolocation
Remote-Party-ID: <sip:1001@[2001:db8:c18:1:20e:7fff:fef0:8af7]>;party=called;screen=yes;privacy=off
Content-Length: 265
To: <sip:1001@[2001:db8:c18:1:20e:7fff:fef0:8af7]>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-33501578
Contact: <sip:1001@[2001:db8:c18:1:20e:7fff:fef0:8af7]:5060;transport=tcp>
Content-Type: application/sdp
Call-ID: 51147880-a3f1d3be-6-fbc712ac@2001:db8:c18:1:214:c2ff:fec0:b4d7
Via: SIP/2.0/TCP [2001:db8:c18:1:214:c2ff:fec0:b4d7]:5060;branch=z9hG4bK7299dcbcc
CSeq: 101 INVITE

v=0
o=CiscoSystemsCCM-SIP 2000 1 IN IP6 2001:db8:c18:1:20e:7fff:fef0:8af7
s=SIP Call
c=IN IP6 2001:db8:c18:1:21f:9eff:fe57:8920
t=0 0
m=audio 4000 RTP/AVP 0 101
a=rtpmap:0 PCMU/8000
a=ptime:20
a=sendonly

CISCO CONFIDENTIAL

```
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15

[diagram]   Call-ID:[prev][next]
[5] SIP/2.0 200 OK
Date: Mon, 22 Jun 2009 18:54:09 GMT
Call-Info: <sip:[2001:db8:c18:1:20e:7fff:fef0:8af7]:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:2002@[2001:db8:c18:1:214:c2ff:fec0:b4d7]>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-33491054
Allow-Events: presence, kpml
P-Asserted-Identity: <sip:1001@[2001:db8:c18:1:20e:7fff:fef0:8af7]>
Supported: replaces
Supported: X-cisco-srtp-fallback
Supported: Geolocation
Remote-Party-ID: <sip:1001@[2001:db8:c18:1:20e:7fff:fef0:8af7]>;party=called;screen=yes;privacy=off
Content-Length: 265
Require:  timer
To: <sip:1001@[2001:db8:c18:1:20e:7fff:fef0:8af7]>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-33501578
Contact: <sip:1001@[2001:db8:c18:1:20e:7fff:fef0:8af7]:5060;transport=tcp>
Content-Type: application/sdp
Call-ID: 51147880-a3f1d3be-6-fbc712ac@2001:db8:c18:1:214:c2ff:fec0:b4d7
Via: SIP/2.0/TCP [2001:db8:c18:1:214:c2ff:fec0:b4d7]:5060;branch=z9hG4bK7299dcbcc
CSeq: 101 INVITE
Session-Expires:  1800;refresher=uas

v=0
o=CiscoSystemsCCM-SIP 2000 1 IN IP6 2001:db8:c18:1:20e:7fff:fef0:8af7
s=SIP Call
c=IN IP6 2001:db8:c18:1:21f:9eff:fe57:8920
t=0 0
m=audio 4000 RTP/AVP 0 101
a=rtpmap:0 PCMU/8000
a=ptime:20
a=sendonly
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15

[diagram]   Call-ID:[prev][next]
[6] ACK sip:1001@[2001:db8:c18:1:20e:7fff:fef0:8af7]:5060;transport=tcp SIP/2.0
Date: Mon, 22 Jun 2009 18:55:58 GMT
From: <sip:2002@[2001:db8:c18:1:214:c2ff:fec0:b4d7]>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-33491054
Allow-Events: presence
Content-Length: 266
To: <sip:1001@[2001:db8:c18:1:20e:7fff:fef0:8af7]>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-33501578
Content-Type: application/sdp
Call-ID: 51147880-a3f1d3be-6-fbc712ac@2001:db8:c18:1:214:c2ff:fec0:b4d7
Via: SIP/2.0/TCP [2001:db8:c18:1:214:c2ff:fec0:b4d7]:5060;branch=z9hG4bK829b73ca
CSeq: 101 ACK
Max-Forwards: 70

v=0
o=CiscoSystemsCCM-SIP 2000 1 IN IP6 2001:db8:c18:1:214:c2ff:fec0:b4d7
s=SIP Call
c=IN IP6 2001:db8:c18:1:21c:58ff:fef0:70df
t=0 0
m=audio 18238 RTP/AVP 0 101
a=rtpmap:0 PCMU/8000
a=ptime:20
a=recvonly
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15

[diagram]   Call-ID:[prev][next]
[7] INVITE sip:2002@[2001:db8:c18:1:214:c2ff:fec0:b4d7]:5060;transport=tcp SIP/2.0
Date: Mon, 22 Jun 2009 18:54:11 GMT
Call-Info: <sip:[2001:db8:c18:1:20e:7fff:fef0:8af7]:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:1001@[2001:db8:c18:1:20e:7fff:fef0:8af7]>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-33501578
Allow-Events: presence, kpml
P-Asserted-Identity: <sip:1001@[2001:db8:c18:1:20e:7fff:fef0:8af7]>
Supported: timer,resource-priority,replaces
Min-SE:  1800
Remote-Party-ID: <sip:1001@[2001:db8:c18:1:20e:7fff:fef0:8af7]>;party=calling;screen=yes;privacy=off
Content-Length: 254
User-Agent: Cisco-CUCM7.1
To: <sip:2002@[2001:db8:c18:1:214:c2ff:fec0:b4d7]>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-33491054
Contact: <sip:1001@[2001:db8:c18:1:20e:7fff:fef0:8af7]:5060;transport=tcp>
Expires: 180
Content-Type: application/sdp
Call-ID: 51147880-a3f1d3be-6-fbc712ac@2001:db8:c18:1:214:c2ff:fec0:b4d7
```

CISCO CONFIDENTIAL

```
Via: SIP/2.0/TCP [2001:db8:c18:1:20e:7fff:fef0:8af7]:5060;branch=z9hG4bKe5bac1f67
CSeq: 101 INVITE
Session-Expires:  1800;refresher=uac
Max-Forwards: 70

v=0
o=CiscoSystemsCCM-SIP 2000 2 IN IP6 2001:db8:c18:1:20e:7fff:fef0:8af7
s=SIP Call
c=IN IP6 2001:db8:c18:1:21f:9eff:fe57:8920
t=0 0
m=audio 16704 RTP/AVP 0 101
a=rtpmap:0 PCMU/8000
a=ptime:20
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
```

[diagram] Call-ID:[prev][next]

[8] SIP/2.0 100 Trying

```
Date: Mon, 22 Jun 2009 18:55:59 GMT
From: <sip:1001@[2001:db8:c18:1:20e:7fff:fef0:8af7]>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-33501578
Allow-Events: presence
Content-Length: 0
To: <sip:2002@[2001:db8:c18:1:214:c2ff:fec0:b4d7]>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-33491054
Call-ID: 51147880-a3f1d3be-6-fbc712ac@2001:db8:c18:1:214:c2ff:fec0:b4d7
Via: SIP/2.0/TCP [2001:db8:c18:1:20e:7fff:fef0:8af7]:5060;branch=z9hG4bKe5bac1f67
CSeq: 101 INVITE
```

[diagram] Call-ID:[prev][next]

[9] SIP/2.0 200 OK

```
Date: Mon, 22 Jun 2009 18:55:59 GMT
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:1001@[2001:db8:c18:1:20e:7fff:fef0:8af7]>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-33501578
Allow-Events: presence
P-Asserted-Identity: <sip:2002@[2001:db8:c18:1:214:c2ff:fec0:b4d7]>
Supported: replaces
Supported: X-cisco-srtp-fallback
Supported: Geolocation
Remote-Party-ID: <sip:2002@[2001:db8:c18:1:214:c2ff:fec0:b4d7]>;party=called;screen=yes;privacy=off
Content-Length: 254
Require:  timer
To: <sip:2002@[2001:db8:c18:1:214:c2ff:fec0:b4d7]>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-33491054
Contact: <sip:2002@[2001:db8:c18:1:214:c2ff:fec0:b4d7]:5060;transport=tcp>
Content-Type: application/sdp
Call-ID: 51147880-a3f1d3be-6-fbc712ac@2001:db8:c18:1:214:c2ff:fec0:b4d7
Via: SIP/2.0/TCP [2001:db8:c18:1:20e:7fff:fef0:8af7]:5060;branch=z9hG4bKe5bac1f67
CSeq: 101 INVITE
Session-Expires:  1800;refresher=uac

v=0
o=CiscoSystemsCCM-SIP 2000 2 IN IP6 2001:db8:c18:1:214:c2ff:fec0:b4d7
s=SIP Call
c=IN IP6 2001:db8:c18:1:21c:58ff:fef0:70df
t=0 0
m=audio 18238 RTP/AVP 0 101
a=rtpmap:0 PCMU/8000
a=ptime:20
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
```

[diagram] Call-ID:[prev][next]

[10] ACK sip:2002@[2001:db8:c18:1:214:c2ff:fec0:b4d7]:5060;transport=tcp SIP/2.0

```
Date: Mon, 22 Jun 2009 18:54:11 GMT
From: <sip:1001@[2001:db8:c18:1:20e:7fff:fef0:8af7]>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-33501578
Allow-Events: presence, kpml
Content-Length: 0
To: <sip:2002@[2001:db8:c18:1:214:c2ff:fec0:b4d7]>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-33491054
Call-ID: 51147880-a3f1d3be-6-fbc712ac@2001:db8:c18:1:214:c2ff:fec0:b4d7
Via: SIP/2.0/TCP [2001:db8:c18:1:20e:7fff:fef0:8af7]:5060;branch=z9hG4bKf3180e179
CSeq: 101 ACK
Max-Forwards: 70
```

[diagram] Call-ID:[prev][next]

[11] BYE sip:2002@[2001:db8:c18:1:214:c2ff:fec0:b4d7]:5060;transport=tcp SIP/2.0

```
Date: Mon, 22 Jun 2009 18:54:11 GMT
From: <sip:1001@[2001:db8:c18:1:20e:7fff:fef0:8af7]>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-33501578
Content-Length: 0
User-Agent: Cisco-CUCM7.1
To: <sip:2002@[2001:db8:c18:1:214:c2ff:fec0:b4d7]>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-33491054
Call-ID: 51147880-a3f1d3be-6-fbc712ac@2001:db8:c18:1:214:c2ff:fec0:b4d7
Via: SIP/2.0/TCP [2001:db8:c18:1:20e:7fff:fef0:8af7]:5060;branch=z9hG4bK1023dbcae2
```

CISCO CONFIDENTIAL

```
CSeq: 102 BYE
Max-Forwards: 70

[diagram]   Call-ID:[prev][next]
[12] SIP/2.0 200 OK
Date: Mon, 22 Jun 2009 18:56:03 GMT
From: <sip:1001@[2001:db8:c18:1:20e:7fff:fef0:8af7]>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-33501578
Content-Length: 0
To: <sip:2002@[2001:db8:c18:1:214:c2ff:fec0:b4d7]>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-33491054
Call-ID: 51147880-a3f1d3be-6-fbc712ac@2001:db8:c18:1:214:c2ff:fec0:b4d7
Via: SIP/2.0/TCP [2001:db8:c18:1:20e:7fff:fef0:8af7]:5060;branch=z9hG4bK1023dbcae2
CSeq: 102 BYE
```

CISCO CONFIDENTIAL

24.5 Outbound early offer call using IPv6 only SIP Trunk

Title: Outbound early offer call using IPv6 only SIP Trunk

Description:

This flow shows a basic early offer call from an IPv6 only SCCP Phone to a IPv4 only SIP Phone via a IPv6 only SIP Trunk. The call is setup using IPv6 for signaling, and IPv6 for media.

A dual stack MTP that support IPv6 will be allocated for sending SDP in the INVITE on unified CM1.

A dual stack MTP that supports conversion between IPv4 and IPv6 will be allocated on Unified CM2

Configuration:

Node = Unified CM1, IP = 2001:db8:c18:1:20e:7fff:fef0:8af7

Node = Unified CM2, IP = 2001:db8:c18:1:214:c2ff:fec0:b4d7

Phone = A, Line = 1003, IP = 10.10.199.66, Model = IPv6 SCCP

Phone = B, Line = 2001, IP = 10.10.199.171, Model = IPv4 SIP TNP

SIP Trunk between Unified CM1 & Unified CM2 has

a) route pattern 2.XXXX

b) The common device configuration associated to the trunk has

IP Addressing Mode set to IPv6

Phone A is configured with a common device configuration with

IP Addressing Mode set to IPv6 so that it behaves in IPv6 only mode.

Phone B is configured with a common device configuration with

IP Addressing Mode set to IPv4 so that it behaves in IPv4 only mode.

Configure a Dual Stack MTP that supports IPv4/IPv6 conversion on Unified

CM1 and CM2

Scenario:

Phone A DN 1003 calls Phone B DN 2001 over the SIP Trunk by dialing 22001

Phone B DN 2001 Answers

Phone A DN 1003 goes onHook

End of Scenario

CISCO CONFIDENTIAL

CISCO CONFIDENTIAL

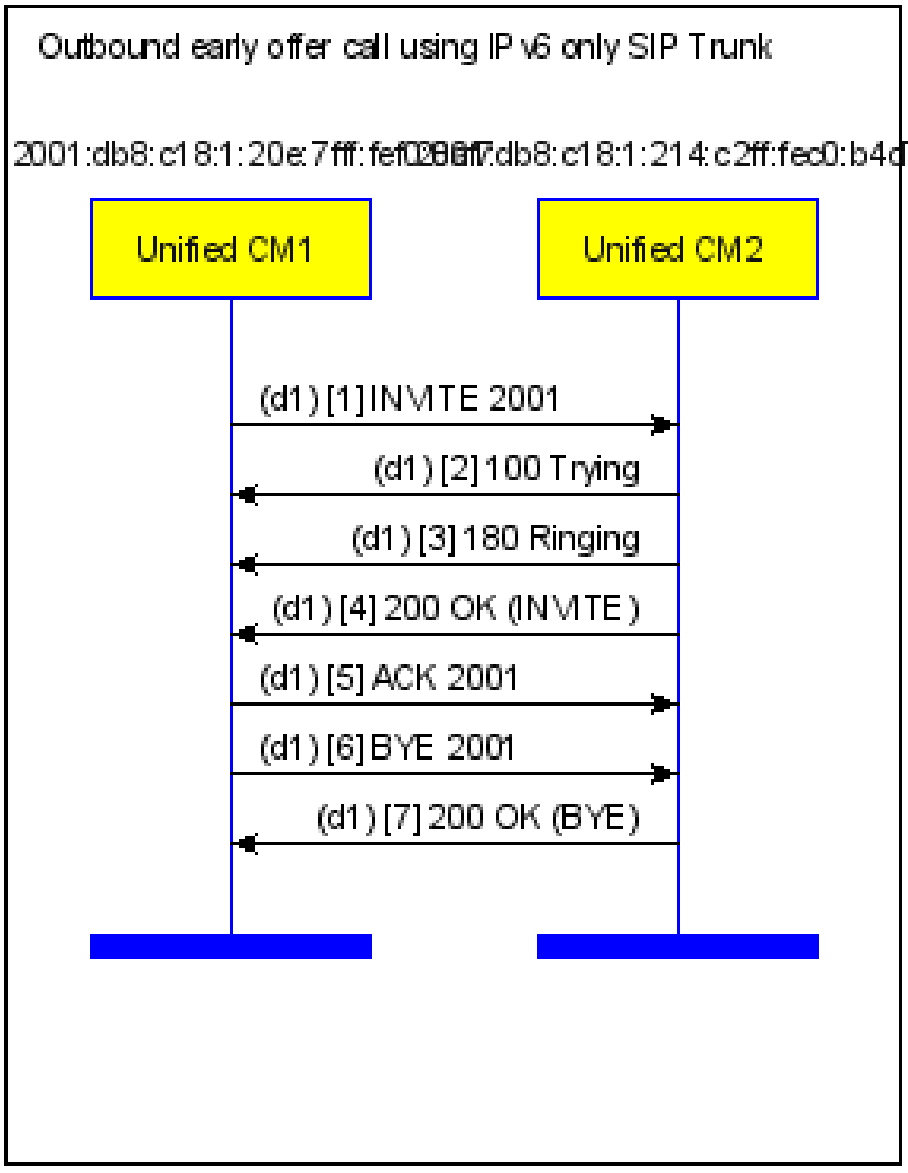

CISCO CONFIDENTIAL

[diagram] Call-ID:[prev][next]
[1] INVITE sip:2001@[2001:db8:c18:1:214:c2ff:fec0:b4d7]:5060 SIP/2.0
Date: Mon, 22 Jun 2009 19:13:33 GMT
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:1003@[2001:db8:c18:1:20e:7fff:fef0:8af7]>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-33501591
Allow-Events: presence
P-Asserted-Identity: <sip:1003@[2001:db8:c18:1:20e:7fff:fef0:8af7]>
Supported: timer,resource-priority,replaces
Supported: X-cisco-srtp-fallback
Supported: Geolocation
Min-SE: 1800
Remote-Party-ID: <sip:1003@[2001:db8:c18:1:20e:7fff:fef0:8af7]>;party=calling;screen=yes;privacy=off
Content-Length: 254
User-Agent: Cisco-CUCM7.1
To: <sip:2001@[2001:db8:c18:1:214:c2ff:fec0:b4d7]>
Contact: <sip:1003@[2001:db8:c18:1:20e:7fff:fef0:8af7]:5060;transport=tcp>
Expires: 180
Content-Type: application/sdp
Call-ID: c5e8b200-a3f1d7dd-c-fac712ac@2001:db8:c18:1:20e:7fff:fef0:8af7
Via: SIP/2.0/TCP [2001:db8:c18:1:20e:7fff:fef0:8af7]:5060;branch=z9hG4bK2312aa1096
CSeq: 101 INVITE
Session-Expires: 1800
Max-Forwards: 70

v=0
o=CiscoSystemsCCM-SIP 2000 1 IN IP6 2001:db8:c18:1:20e:7fff:fef0:8af7
s=SIP Call
c=IN IP6 2001:db8:c18:1:21f:9eff:fe57:8920
t=0 0
m=audio 18202 RTP/AVP 0 101
a=rtpmap:0 PCMU/8000
a=ptime:20
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15

[diagram] Call-ID:[prev][next]
[2] SIP/2.0 100 Trying
Date: Mon, 22 Jun 2009 19:15:22 GMT
From: <sip:1003@[2001:db8:c18:1:20e:7fff:fef0:8af7]>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-33501591
Allow-Events: presence
Content-Length: 0
To: <sip:2001@[2001:db8:c18:1:214:c2ff:fec0:b4d7]>
Call-ID: c5e8b200-a3f1d7dd-c-fac712ac@2001:db8:c18:1:20e:7fff:fef0:8af7
Via: SIP/2.0/TCP [2001:db8:c18:1:20e:7fff:fef0:8af7]:5060;branch=z9hG4bK2312aa1096
CSeq: 101 INVITE

[diagram] Call-ID:[prev][next]
[3] SIP/2.0 180 Ringing
Date: Mon, 22 Jun 2009 19:15:22 GMT
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:1003@[2001:db8:c18:1:20e:7fff:fef0:8af7]>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-33501591
Allow-Events: presence
P-Asserted-Identity: <sip:2001@[2001:db8:c18:1:214:c2ff:fec0:b4d7]>
Supported: X-cisco-srtp-fallback
Supported: Geolocation
Remote-Party-ID: <sip:2001@[2001:db8:c18:1:214:c2ff:fec0:b4d7]>;party=called;screen=yes;privacy=off
Content-Length: 0
To: <sip:2001@[2001:db8:c18:1:214:c2ff:fec0:b4d7]>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-33491064
Contact: <sip:2001@[2001:db8:c18:1:214:c2ff:fec0:b4d7]:5060;transport=tcp>
Call-ID: c5e8b200-a3f1d7dd-c-fac712ac@2001:db8:c18:1:20e:7fff:fef0:8af7
Via: SIP/2.0/TCP [2001:db8:c18:1:20e:7fff:fef0:8af7]:5060;branch=z9hG4bK2312aa1096
CSeq: 101 INVITE

[diagram] Call-ID:[prev][next]
[4] SIP/2.0 200 OK
Date: Mon, 22 Jun 2009 19:15:22 GMT
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:1003@[2001:db8:c18:1:20e:7fff:fef0:8af7]>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-33501591
Allow-Events: presence
P-Asserted-Identity: <sip:2001@[2001:db8:c18:1:214:c2ff:fec0:b4d7]>
Supported: replaces
Supported: X-cisco-srtp-fallback
Supported: Geolocation
Remote-Party-ID: <sip:2001@[2001:db8:c18:1:214:c2ff:fec0:b4d7]>;party=called;screen=yes;privacy=off
Content-Length: 254
Require: timer
To: <sip:2001@[2001:db8:c18:1:214:c2ff:fec0:b4d7]>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-33491064
Contact: <sip:2001@[2001:db8:c18:1:214:c2ff:fec0:b4d7]:5060;transport=tcp>
Content-Type: application/sdp
Call-ID: c5e8b200-a3f1d7dd-c-fac712ac@2001:db8:c18:1:20e:7fff:fef0:8af7

CISCO CONFIDENTIAL

```
Via: SIP/2.0/TCP [2001:db8:c18:1:20e:7fff:fef0:8af7]:5060;branch=z9hG4bK2312aa1096
CSeq: 101 INVITE
Session-Expires:  1800;refresher=uas

v=0
o=CiscoSystemsCCM-SIP 2000 1 IN IP6 2001:db8:c18:1:214:c2ff:fec0:b4d7
s=SIP Call
c=IN IP6 2001:db8:c18:1:21f:9eff:fe57:8920
t=0 0
m=audio 19554 RTP/AVP 0 101
a=rtpmap:0 PCMU/8000
a=ptime:20
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
```

[diagram] Call-ID:[prev][next]

[5] ACK sip:2001@[2001:db8:c18:1:214:c2ff:fec0:b4d7]:5060;transport=tcp SIP/2.0

```
Date: Mon, 22 Jun 2009 19:13:33 GMT
From: <sip:1003@[2001:db8:c18:1:20e:7fff:fef0:8af7]>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-33501591
Allow-Events: presence
Content-Length: 0
To: <sip:2001@[2001:db8:c18:1:214:c2ff:fec0:b4d7]>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-33491064
Call-ID: c5e8b200-a3f1d7dd-c-fac712ac@2001:db8:c18:1:20e:7fff:fef0:8af7
Via: SIP/2.0/TCP [2001:db8:c18:1:20e:7fff:fef0:8af7]:5060;branch=z9hG4bK24f368bfe
CSeq: 101 ACK
Max-Forwards: 70
```

[diagram] Call-ID:[prev][next]

[6] BYE sip:2001@[2001:db8:c18:1:214:c2ff:fec0:b4d7]:5060;transport=tcp SIP/2.0

```
Date: Mon, 22 Jun 2009 19:13:33 GMT
From: <sip:1003@[2001:db8:c18:1:20e:7fff:fef0:8af7]>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-33501591
P-Asserted-Identity: <sip:1003@[2001:db8:c18:1:20e:7fff:fef0:8af7]>
Content-Length: 0
User-Agent: Cisco-CUCM7.1
To: <sip:2001@[2001:db8:c18:1:214:c2ff:fec0:b4d7]>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-33491064
Call-ID: c5e8b200-a3f1d7dd-c-fac712ac@2001:db8:c18:1:20e:7fff:fef0:8af7
Via: SIP/2.0/TCP [2001:db8:c18:1:20e:7fff:fef0:8af7]:5060;branch=z9hG4bK25356957b0
CSeq: 102 BYE
Max-Forwards: 70
```

[diagram] Call-ID:[prev][next]

[7] SIP/2.0 200 OK

```
Date: Mon, 22 Jun 2009 19:15:29 GMT
From: <sip:1003@[2001:db8:c18:1:20e:7fff:fef0:8af7]>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-33501591
Content-Length: 0
To: <sip:2001@[2001:db8:c18:1:214:c2ff:fec0:b4d7]>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-33491064
Call-ID: c5e8b200-a3f1d7dd-c-fac712ac@2001:db8:c18:1:20e:7fff:fef0:8af7
Via: SIP/2.0/TCP [2001:db8:c18:1:20e:7fff:fef0:8af7]:5060;branch=z9hG4bK25356957b0
CSeq: 102 BYE
```

24.6 Outbound delayed offer call using ANAT over Dual Mode SIP Trunk with

Title: Outbound delayed offer call using ANAT over Dual Mode SIP Trunk with Signaling preference set to IPv4

Description:

This flow shows a delayed offer call from a IPv4_IPv6 SCCP Phone (Media preference IPv4) to a IPv4_IPv6 SCCP Phone via a Dual Mode SIP Trunk with ANAT enabled.

Since ANAT is enabled, CM2, will offer both IPv4 and IPv6 in the Offer, and since the media preference is IPv4 for the originating phone, IPv4 will be used for media.

The call is setup using IPv4 for signaling, and IPv4 for media.

Configuration:

Node = Unified CM1, IP = 10.10.199.250
Node = Unified CM2, IP = 10.10.199.251

Phone = A, Line = 1001, IP = 10.10.199.130, Model = IPv4_IPv6 SCCP
Phone = B, Line = 2002, IP = 10.10.199.171, Model = IPv4_IPv6 SCCP

SIP Trunk between Unified CM1 & Unified CM2 has
a) route pattern 2.XXXX
b) The common device configuration associated to the trunk has IP Addressing Mode set to IPv4 & IPv6, IP Addressing Mode Signaling Preference is set to IPv4
c) SIP Trunk has a SIP Profile associated with the "Enable ANAT" checkbox checked

Phone A, Phone B are configured with a common device configuration with IP Addressing Mode set to IPv4_IPv6 so that they behave in dual mode.

Enterprise parameter, IP Address Mode preference for Media is set to IPv4

Scenario:

Phone A DN 1001 calls Phone B DN 2002 over the SIP Trunk by dialing 22002
Phone B DN 2002 Answers

CISCO CONFIDENTIAL

Phone A DN 1001 goes onHook

End of Scenario

CISCO CONFIDENTIAL

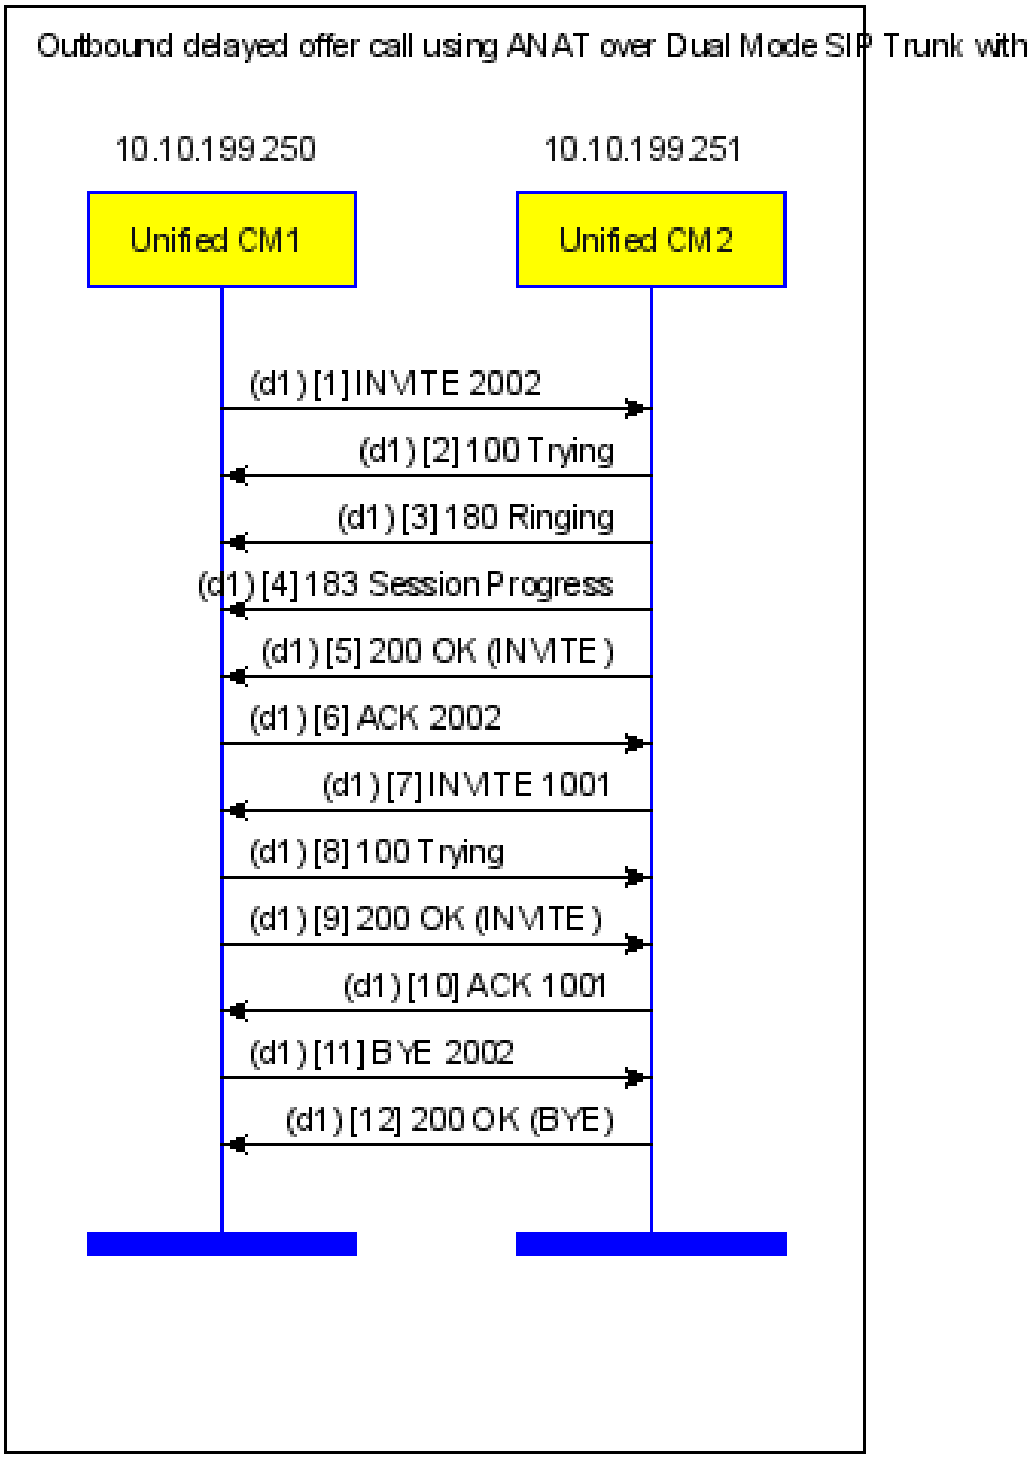

CISCO CONFIDENTIAL

[diagram] Call-ID:[prev][next]
[1] INVITE sip:2002@10.10.199.251:5060 SIP/2.0
Date: Tue, 16 Jun 2009 15:11:28 GMT
Call-Info: <sip:10.10.199.250:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-31236755
Allow-Events: presence, kpml
P-Asserted-Identity: <sip:1001@10.10.199.250>
Supported: timer,resource-priority,replaces,sdp-anat
Supported: Geolocation
Min-SE: 1800
Remote-Party-ID: <sip:1001@10.10.199.250>;party=calling;screen=yes;privacy=off
Content-Length: 0
User-Agent: Cisco-CUCM7.1
To: <sip:2002@10.10.199.251>
Contact: <sip:1001@10.10.199.250:5060;transport=tcp>
Expires: 180
Call-ID: f5db1580-a371b620-5-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bKa15addcc2
CSeq: 101 INVITE
Session-Expires: 1800
Max-Forwards: 70

[diagram] Call-ID:[prev][next]
[2] SIP/2.0 100 Trying
Date: Tue, 16 Jun 2009 15:13:01 GMT
From: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-31236755
Allow-Events: presence
Content-Length: 0
To: <sip:2002@10.10.199.251>
Call-ID: f5db1580-a371b620-5-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bKa15addcc2
CSeq: 101 INVITE

[diagram] Call-ID:[prev][next]
[3] SIP/2.0 180 Ringing
Date: Tue, 16 Jun 2009 15:13:01 GMT
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-31236755
Allow-Events: presence
P-Asserted-Identity: <sip:2002@10.10.199.251>
Supported: Geolocation
Remote-Party-ID: <sip:2002@10.10.199.251>;party=called;screen=yes;privacy=off
Content-Length: 0
To: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-31091607
Contact: <sip:2002@10.10.199.251:5060;transport=tcp>
Call-ID: f5db1580-a371b620-5-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bKa15addcc2
CSeq: 101 INVITE

[diagram] Call-ID:[prev][next]
[4] SIP/2.0 183 Session Progress
Date: Tue, 16 Jun 2009 15:13:01 GMT
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-31236755
Allow-Events: presence
P-Asserted-Identity: <sip:2002@10.10.199.251>
Supported: Geolocation
Remote-Party-ID: <sip:2002@10.10.199.251>;party=called;screen=yes;privacy=off
Content-Length: 653
Require: sdp-anat
To: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-31091607
Contact: <sip:2002@10.10.199.251:5060;transport=tcp>
Content-Type: application/sdp
Call-ID: f5db1580-a371b620-5-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bKa15addcc2
CSeq: 101 INVITE

v=0
o=CiscoSystemsCCM-SIP 2000 1 IN IP4 10.10.199.251
s=SIP Call
t=0 0
a=group:ANAT 1 2
m=audio 4000 RTP/AVP 9 0 8 18 101
c=IN IP4 10.10.199.179
a=rtpmap:9 G722/8000
a=ptime:20
a=rtpmap:0 PCMU/8000
a=ptime:20
a=rtpmap:8 PCMA/8000

CISCO CONFIDENTIAL

```
a=ptime:20
a=rtpmap:18 G729/8000
a=ptime:20
a=sendonly
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
a=mid:1
m=audio 4000 RTP/AVP 9 0 8 18 101
c=IN IP6 2001:db8:c18:1:21c:58ff:fef0:70df
a=rtpmap:9 G722/8000
a=ptime:20
a=rtpmap:0 PCMU/8000
a=ptime:20
a=rtpmap:8 PCMA/8000
a=ptime:20
a=rtpmap:18 G729/8000
a=ptime:20
a=sendonly
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
a=mid:2
```

[diagram] Call-ID:[prev][next]

[5] SIP/2.0 200 OK

```
Date: Tue, 16 Jun 2009 15:13:01 GMT
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-31236755
Allow-Events: presence
P-Asserted-Identity: <sip:2002@10.10.199.251>
Supported: replaces
Supported: Geolocation
Remote-Party-ID: <sip:2002@10.10.199.251>;party=called;screen=yes;privacy=off
Content-Length: 653
Require: sdp-anat
Require:  timer
To: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-31091607
Contact: <sip:2002@10.10.199.251:5060;transport=tcp>
Content-Type: application/sdp
Call-ID: f5db1580-a371b620-5-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bKa15addcc2
CSeq: 101 INVITE
Session-Expires:  1800;refresher=uas

v=0
o=CiscoSystemsCCM-SIP 2000 1 IN IP4 10.10.199.251
s=SIP Call
t=0 0
a=group:ANAT 1 2
m=audio 4000 RTP/AVP 9 0 8 18 101
c=IN IP4 10.10.199.179
a=rtpmap:9 G722/8000
a=ptime:20
a=rtpmap:0 PCMU/8000
a=ptime:20
a=rtpmap:8 PCMA/8000
a=ptime:20
a=rtpmap:18 G729/8000
a=ptime:20
a=sendonly
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
a=mid:1
m=audio 4000 RTP/AVP 9 0 8 18 101
c=IN IP6 2001:db8:c18:1:21c:58ff:fef0:70df
a=rtpmap:9 G722/8000
a=ptime:20
a=rtpmap:0 PCMU/8000
a=ptime:20
a=rtpmap:8 PCMA/8000
a=ptime:20
a=rtpmap:18 G729/8000
a=ptime:20
a=sendonly
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
a=mid:2
```

[diagram] Call-ID:[prev][next]

[6] ACK sip:2002@10.10.199.251:5060;transport=tcp SIP/2.0

```
Date: Tue, 16 Jun 2009 15:11:28 GMT
```

CISCO CONFIDENTIAL

```
From: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-31236755
Allow-Events: presence, kpml
Content-Length: 539
To: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-31091607
Content-Type: application/sdp
Call-ID: f5db1580-a371b620-5-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bKb2d84113a
CSeq: 101 ACK
Max-Forwards: 70

v=0
o=CiscoSystemsCCM-SIP 2000 1 IN IP4 10.10.199.250
s=SIP Call
t=0 0
a=group:ANAT 1
m=audio 22584 RTP/AVP 9 101
c=IN IP4 10.10.199.130
a=rtpmap:9 G722/8000
a=ptime:20
a=recvonly
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
a=mid:1
m=audio 0 RTP/AVP 9 0 8 18 101
c=IN IP6 2001:db8:c18:1:21c:58ff:fef0:70df
a=rtpmap:9 G722/8000
a=ptime:20
a=rtpmap:0 PCMU/8000
a=ptime:20
a=rtpmap:8 PCMA/8000
a=ptime:20
a=rtpmap:18 G729/8000
a=ptime:20
a=sendonly
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
a=mid:2
```

[diagram] Call-ID:[prev][next]

[7] INVITE sip:1001@10.10.199.250:5060;transport=tcp SIP/2.0

```
Date: Tue, 16 Jun 2009 15:13:04 GMT
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-31091607
Allow-Events: presence
P-Asserted-Identity: <sip:2002@10.10.199.251>
Supported: timer,resource-priority,replaces
Min-SE:  1800
Remote-Party-ID: <sip:2002@10.10.199.251>;party=calling;screen=yes;privacy=off
Content-Length: 237
Require: sdp-anat
User-Agent: Cisco-CUCM7.1
To: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-31236755
Contact: <sip:2002@10.10.199.251:5060;transport=tcp>
Expires: 180
Content-Type: application/sdp
Call-ID: f5db1580-a371b620-5-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bK5d3c4f6415
CSeq: 101 INVITE
Session-Expires:  1800;refresher=uac
Max-Forwards: 70

v=0
o=CiscoSystemsCCM-SIP 2000 2 IN IP4 10.10.199.251
s=SIP Call
c=IN IP4 10.10.199.179
t=0 0
m=audio 17836 RTP/AVP 9 101
a=rtpmap:9 G722/8000
a=ptime:20
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
m=audio 0 RTP/AVP 9
```

[diagram] Call-ID:[prev][next]

[8] SIP/2.0 100 Trying

```
Date: Tue, 16 Jun 2009 15:11:32 GMT
From: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-31091607
Allow-Events: presence, kpml
Content-Length: 0
To: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-31236755
```

CISCO CONFIDENTIAL

```
Call-ID: f5db1580-a371b620-5-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bK5d3c4f6415
CSeq: 101 INVITE
```

[diagram] Call-ID:[prev][next]

[9] SIP/2.0 200 OK

```
Date: Tue, 16 Jun 2009 15:11:32 GMT
Call-Info: <sip:10.10.199.250:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-31091607
Allow-Events: presence, kpml
P-Asserted-Identity: <sip:1001@10.10.199.250>
Supported: replaces
Supported: sdp-anat
Supported: Geolocation
Remote-Party-ID: <sip:1001@10.10.199.250>;party=called;screen=yes;privacy=off
Content-Length: 237
Require:  timer
To: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-31236755
Contact: <sip:1001@10.10.199.250:5060;transport=tcp>
Content-Type: application/sdp
Call-ID: f5db1580-a371b620-5-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bK5d3c4f6415
CSeq: 101 INVITE
Session-Expires:  1800;refresher=uac

v=0
o=CiscoSystemsCCM-SIP 2000 2 IN IP4 10.10.199.250
s=SIP Call
c=IN IP4 10.10.199.130
t=0 0
m=audio 22584 RTP/AVP 9 101
a=rtpmap:9 G722/8000
a=ptime:20
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
m=audio 0 RTP/AVP 9
```

[diagram] Call-ID:[prev][next]

[10] ACK sip:1001@10.10.199.250:5060;transport=tcp SIP/2.0

```
Date: Tue, 16 Jun 2009 15:13:04 GMT
From: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-31091607
Allow-Events: presence
Content-Length: 0
To: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-31236755
Call-ID: f5db1580-a371b620-5-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bK5e4dbe8b94
CSeq: 101 ACK
Max-Forwards: 70
```

[diagram] Call-ID:[prev][next]

[11] BYE sip:2002@10.10.199.251:5060;transport=tcp SIP/2.0

```
Date: Tue, 16 Jun 2009 15:11:32 GMT
From: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-31236755
P-Asserted-Identity: <sip:1001@10.10.199.250>
Content-Length: 0
User-Agent: Cisco-CUCM7.1
To: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-31091607
Call-ID: f5db1580-a371b620-5-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bKc2d432a77
CSeq: 102 BYE
Max-Forwards: 70
```

[diagram] Call-ID:[prev][next]

[12] SIP/2.0 200 OK

```
Date: Tue, 16 Jun 2009 15:13:09 GMT
From: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-31236755
Content-Length: 0
To: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-31091607
Call-ID: f5db1580-a371b620-5-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bKc2d432a77
CSeq: 102 BYE
```

CISCO CONFIDENTIAL

24.7 Outbound delayed offer call using ANAT over Dual Mode SIP Trunk with

Title: Outbound delayed offer call using ANAT over Dual Mode SIP Trunk with Signaling preference set to IPv4, terminating phone IPv6 only

Description:

This flow shows a delayed offer call from a IPv4_IPv6 SCCP Phone to a IPv6 SCCP Phone via a Dual Mode SIP Trunk with ANAT enabled.

Eventhough ANAT is enabled, since the sdp-anat tag is received in the SUPPORTED header, CM2 will only offer IPv6 SDP from its endpoint, and the call will be setup using IPv4 signaling and IPv6 media.

Configuration:

Node = Unified CM1, IP = 10.10.199.250
Node = Unified CM2, IP = 10.10.199.251

Phone = A, Line = 1001, IP = 10.10.199.130, Model = IPv4_IPv6 SCCP
Phone = B, Line = 2002, IP = 10.10.199.171, Model = IPv6 only SCCP

SIP Trunk between Unified CM1 & Unified CM2 has
a) route pattern 2.XXXX
b) The common device configuration associated to the trunk has
IP Addressing Mode set to IPv4 & IPv6, IP Addressing Mode Signaling Preference is set to IPv4
c) SIP Trunk has a SIP Profile associated with the "Enable ANAT" checkbox checked

Phone A is configured with a common device configuration with IP Addressing Mode set to IPv4_IPv6 so that it behaves in IPv4_IPv6 mode.

Phone B is configured with a common device configuration with IP Addressing Mode set to IPv6 so that it behaves in IPv6 only mode.

Scenario:

Phone A DN 1001 calls Phone B DN 2002 over the SIP Trunk by dialing 22002
Phone B DN 2002 Answers
Phone A DN 1001 goes onHook
End of Scenario

CISCO CONFIDENTIAL

CISCO CONFIDENTIAL

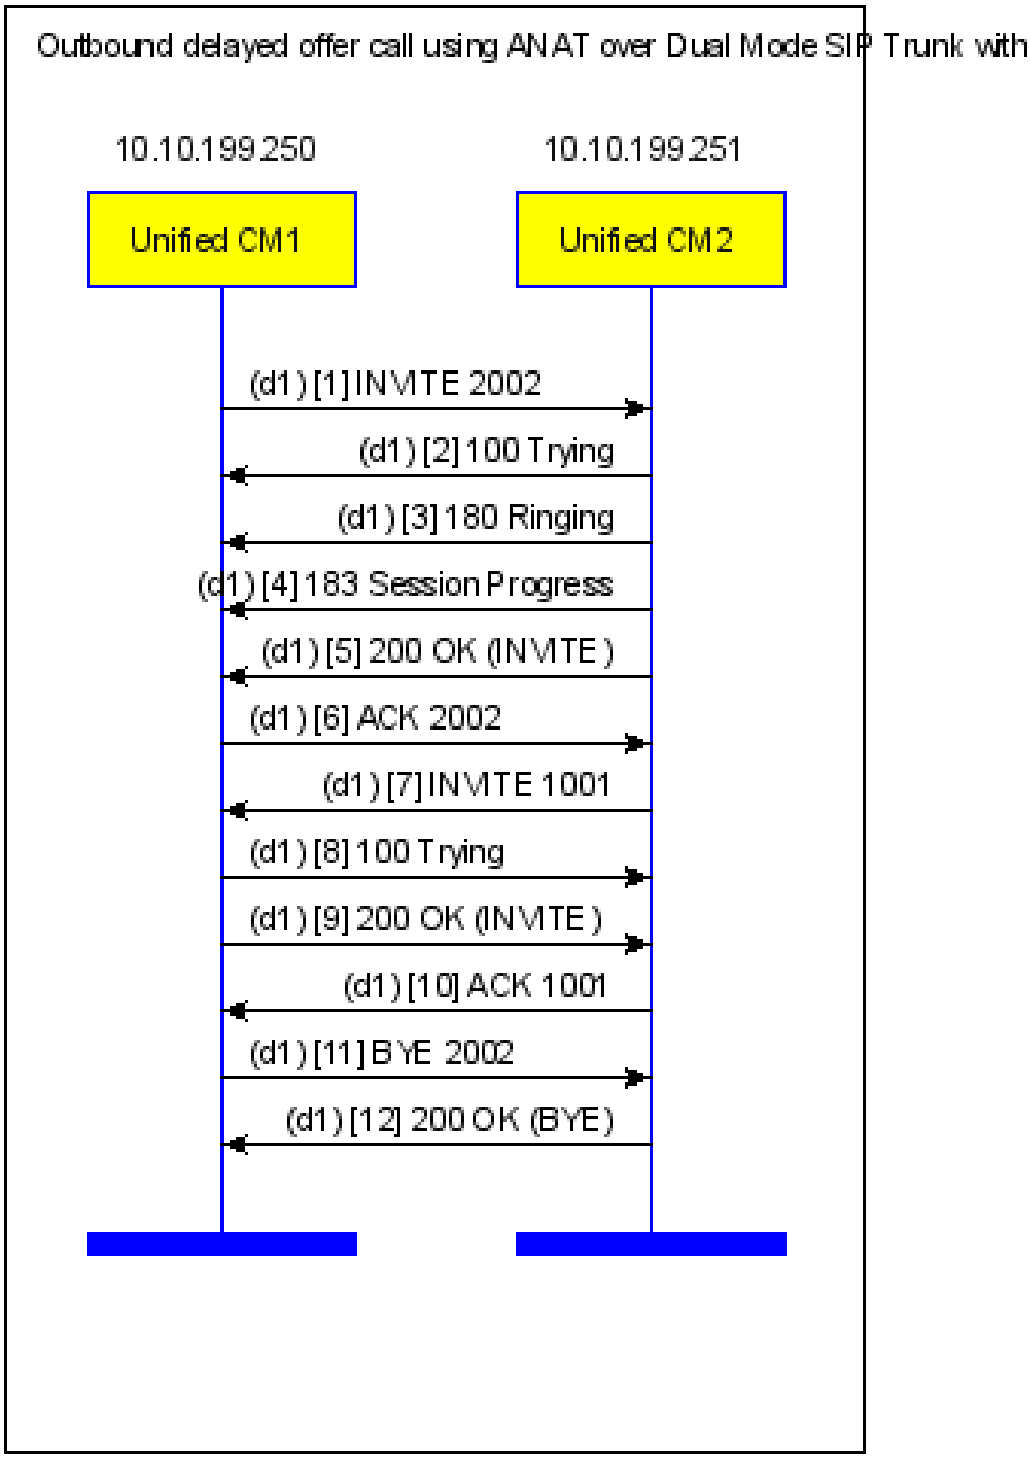

CISCO CONFIDENTIAL

```
[diagram]   Call-ID:[prev][next]
[1] INVITE sip:2002@10.10.199.251:5060 SIP/2.0
Date: Tue, 16 Jun 2009 15:22:27 GMT
Call-Info: <sip:10.10.199.250:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-31236757
Allow-Events: presence, kpml
P-Asserted-Identity: <sip:1001@10.10.199.250>
Supported: timer,resource-priority,replaces,sdp-anat
Supported: Geolocation
Min-SE:  1800
Remote-Party-ID: <sip:1001@10.10.199.250>;party=calling;screen=yes;privacy=off
Content-Length: 0
User-Agent: Cisco-CUCM7.1
To: <sip:2002@10.10.199.251>
Contact: <sip:1001@10.10.199.250:5060;transport=tcp>
Expires: 180
Call-ID: 7ea68100-a371b8b3-6-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bKd26088905
CSeq: 101 INVITE
Session-Expires:  1800
Max-Forwards: 70

[diagram]   Call-ID:[prev][next]
[2] SIP/2.0 100 Trying
Date: Tue, 16 Jun 2009 15:24:00 GMT
From: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-31236757
Allow-Events: presence
Content-Length: 0
To: <sip:2002@10.10.199.251>
Call-ID: 7ea68100-a371b8b3-6-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bKd26088905
CSeq: 101 INVITE

[diagram]   Call-ID:[prev][next]
[3] SIP/2.0 180 Ringing
Date: Tue, 16 Jun 2009 15:24:00 GMT
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-31236757
Allow-Events: presence
P-Asserted-Identity: <sip:2002@10.10.199.251>
Supported: Geolocation
Remote-Party-ID: <sip:2002@10.10.199.251>;party=called;screen=yes;privacy=off
Content-Length: 0
To: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-31091609
Contact: <sip:2002@10.10.199.251:5060;transport=tcp>
Call-ID: 7ea68100-a371b8b3-6-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bKd26088905
CSeq: 101 INVITE

[diagram]   Call-ID:[prev][next]
[4] SIP/2.0 183 Session Progress
Date: Tue, 16 Jun 2009 15:24:00 GMT
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-31236757
Allow-Events: presence
P-Asserted-Identity: <sip:2002@10.10.199.251>
Supported: sdp-anat
Supported: Geolocation
Remote-Party-ID: <sip:2002@10.10.199.251>;party=called;screen=yes;privacy=off
Content-Length: 384
To: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-31091609
Contact: <sip:2002@10.10.199.251:5060;transport=tcp>
Content-Type: application/sdp
Call-ID: 7ea68100-a371b8b3-6-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bKd26088905
CSeq: 101 INVITE

v=0
o=CiscoSystemsCCM-SIP 2000 1 IN IP6 2001:db8:c18:1:214:c2ff:fec0:b4d7
s=SIP Call
c=IN IP6 2001:db8:c18:1:21c:58ff:fef0:70df
t=0 0
m=audio 4000 RTP/AVP 9 0 8 18 101
a=rtpmap:9 G722/8000
a=ptime:20
a=rtpmap:0 PCMU/8000
a=ptime:20
a=rtpmap:8 PCMA/8000
a=ptime:20
```

CISCO CONFIDENTIAL

```
a=rtpmap:18 G729/8000
a=ptime:20
a=sendonly
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
a=mid:1

[diagram]   Call-ID:[prev][next]
[5] SIP/2.0 200 OK
Date: Tue, 16 Jun 2009 15:24:00 GMT
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-31236757
Allow-Events: presence
P-Asserted-Identity: <sip:2002@10.10.199.251>
Supported: replaces
Supported: sdp-anat
Supported: Geolocation
Remote-Party-ID: <sip:2002@10.10.199.251>;party=called;screen=yes;privacy=off
Content-Length: 384
Require:  timer
To: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-31091609
Contact: <sip:2002@10.10.199.251:5060;transport=tcp>
Content-Type: application/sdp
Call-ID: 7ea68100-a371b8b3-6-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bKd26088905
CSeq: 101 INVITE
Session-Expires:  1800;refresher=uas

v=0
o=CiscoSystemsCCM-SIP 2000 1 IN IP6 2001:db8:c18:1:214:c2ff:fec0:b4d7
s=SIP Call
c=IN IP6 2001:db8:c18:1:21c:58ff:fef0:70df
t=0 0
m=audio 4000 RTP/AVP 9 0 8 18 101
a=rtpmap:9 G722/8000
a=ptime:20
a=rtpmap:0 PCMU/8000
a=ptime:20
a=rtpmap:8 PCMA/8000
a=ptime:20
a=rtpmap:18 G729/8000
a=ptime:20
a=sendonly
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
a=mid:1

[diagram]   Call-ID:[prev][next]
[6] ACK sip:2002@10.10.199.251:5060;transport=tcp SIP/2.0
Date: Tue, 16 Jun 2009 15:22:27 GMT
From: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-31236757
Allow-Events: presence, kpml
Content-Length: 266
To: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-31091609
Content-Type: application/sdp
Call-ID: 7ea68100-a371b8b3-6-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bKe255e9773
CSeq: 101 ACK
Max-Forwards: 70

v=0
o=CiscoSystemsCCM-SIP 2000 1 IN IP6 2001:db8:c18:1:20e:7fff:fef0:8af7
s=SIP Call
c=IN IP6 2001:db8:c18:1:21d:45ff:feb5:e4f3
t=0 0
m=audio 22932 RTP/AVP 9 101
a=rtpmap:9 G722/8000
a=ptime:20
a=recvonly
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15

[diagram]   Call-ID:[prev][next]
[7] INVITE sip:1001@10.10.199.250:5060;transport=tcp SIP/2.0
Date: Tue, 16 Jun 2009 15:24:03 GMT
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-31091609
Allow-Events: presence
P-Asserted-Identity: <sip:2002@10.10.199.251>
Supported: timer,resource-priority,replaces,sdp-anat
```

CISCO CONFIDENTIAL

```
Min-SE:  1800
Remote-Party-ID: <sip:2002@10.10.199.251>;party=calling;screen=yes;privacy=off
Content-Length: 254
User-Agent: Cisco-CUCM7.1
To: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-31236757
Contact: <sip:2002@10.10.199.251:5060;transport=tcp>
Expires: 180
Content-Type: application/sdp
Call-ID: 7ea68100-a371b8b3-6-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bK5f70b2aae3
CSeq: 101 INVITE
Session-Expires:  1800;refresher=uac
Max-Forwards: 70

v=0
o=CiscoSystemsCCM-SIP 2000 2 IN IP6 2001:db8:c18:1:214:c2ff:fec0:b4d7
s=SIP Call
c=IN IP6 2001:db8:c18:1:21c:58ff:fef0:70df
t=0 0
m=audio 18656 RTP/AVP 9 101
a=rtpmap:9 G722/8000
a=ptime:20
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
```

[diagram] Call-ID:[prev][next]

[8] SIP/2.0 100 Trying

```
Date: Tue, 16 Jun 2009 15:22:30 GMT
From: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-31091609
Allow-Events: presence, kpml
Content-Length: 0
To: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-31236757
Call-ID: 7ea68100-a371b8b3-6-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bK5f70b2aae3
CSeq: 101 INVITE
```

[diagram] Call-ID:[prev][next]

[9] SIP/2.0 200 OK

```
Date: Tue, 16 Jun 2009 15:22:30 GMT
Call-Info: <sip:10.10.199.250:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-31091609
Allow-Events: presence, kpml
P-Asserted-Identity: <sip:1001@10.10.199.250>
Supported: replaces
Supported: sdp-anat
Supported: Geolocation
Remote-Party-ID: <sip:1001@10.10.199.250>;party=called;screen=yes;privacy=off
Content-Length: 254
Require:  timer
To: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-31236757
Contact: <sip:1001@10.10.199.250:5060;transport=tcp>
Content-Type: application/sdp
Call-ID: 7ea68100-a371b8b3-6-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bK5f70b2aae3
CSeq: 101 INVITE
Session-Expires:  1800;refresher=uac

v=0
o=CiscoSystemsCCM-SIP 2000 2 IN IP6 2001:db8:c18:1:20e:7fff:fef0:8af7
s=SIP Call
c=IN IP6 2001:db8:c18:1:21d:45ff:feb5:e4f3
t=0 0
m=audio 22932 RTP/AVP 9 101
a=rtpmap:9 G722/8000
a=ptime:20
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
```

[diagram] Call-ID:[prev][next]

[10] ACK sip:1001@10.10.199.250:5060;transport=tcp SIP/2.0

```
Date: Tue, 16 Jun 2009 15:24:03 GMT
From: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-31091609
Allow-Events: presence
Content-Length: 0
To: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-31236757
Call-ID: 7ea68100-a371b8b3-6-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bK60bed2f26
CSeq: 101 ACK
Max-Forwards: 70
```

CISCO CONFIDENTIAL

```
[diagram]   Call-ID:[prev][next]
[11] BYE sip:2002@10.10.199.251:5060;transport=tcp SIP/2.0
Date: Tue, 16 Jun 2009 15:22:30 GMT
From: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-31236757
P-Asserted-Identity: <sip:1001@10.10.199.250>
Content-Length: 0
User-Agent: Cisco-CUCM7.1
To: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-31091609
Call-ID: 7ea68100-a371b8b3-6-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bKf464863bd
CSeq: 102 BYE
Max-Forwards: 70

[diagram]   Call-ID:[prev][next]
[12] SIP/2.0 200 OK
Date: Tue, 16 Jun 2009 15:24:08 GMT
From: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-31236757
Content-Length: 0
To: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-31091609
Call-ID: 7ea68100-a371b8b3-6-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bKf464863bd
CSeq: 102 BYE
```

CISCO CONFIDENTIAL

24.8 Outbound early offer call using ANAT over Dual Mode SIP Trunk with

Title: Outbound early offer call using ANAT over Dual Mode SIP Trunk with Signaling preference set to IPv4

Description:

This flow shows a early offer call from a IPv4_IPv6 SCCP Phone to a IPv6 SCCP Phone via a Dual Mode SIP Trunk with ANAT enabled.

Since ANAT is enabled, CM1 will allocate MTP, and offer both IPv4 and IPv6 in the ANAT SDP, CM2 will pick IPv6, since the endpoint only supports IPv6, and the call will be setup using IPv4 for signaling and IPv6 for media

Configuration:

Node = Unified CM1, IP = 10.10.199.250
Node = Unified CM2, IP = 10.10.199.251

Phone = A, Line = 1001, IP = 10.10.199.130, Model = IPv4_IPv6 SCCP
Phone = B, Line = 2002, IP = 10.10.199.171, Model = IPv6 only SCCP

SIP Trunk between Unified CM1 & Unified CM2 has
a) route pattern 2.XXXX
b) The common device configuration associated to the trunk has
IP Addressing Mode set to IPv4 & IPv6, IP Addressing Mode Signaling Preference is set to IPv4
c) SIP Trunk has a SIP Profile associated with the "Enable ANAT" checkbox checked
d) SIP Trunk has "Media Termination Point Required" Checkbox checked

Phone A is configured with a common device configuration with IP Addressing Mode set to IPv4_IPv6 so that it behaves in IPv4_IPv6 mode.

Phone B is configured with a common device configuration with IP Addressing Mode set to IPv6 so that it behaves in IPv6 only mode.

Configure a Dual Stack MTP that supports IPv4/IPv6 conversion on Unified CM1

Scenario:

CISCO CONFIDENTIAL

Phone A DN 1001 calls Phone B DN 2002 over the SIP Trunk by dialing 22002

Phone B DN 2002 Answers

Phone A DN 1001 goes onHook

End of Scenario

CISCO CONFIDENTIAL

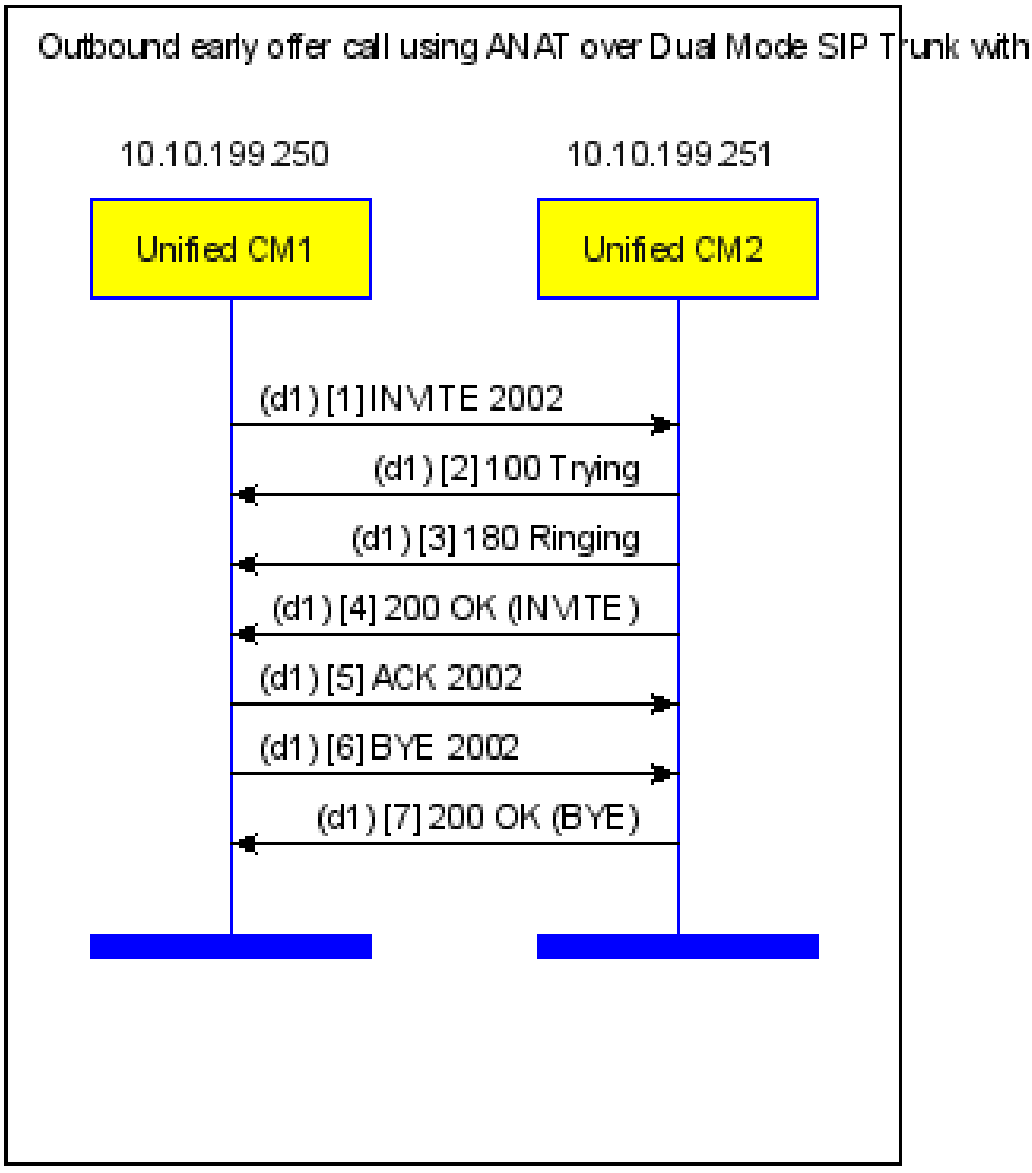

CISCO CONFIDENTIAL

```
[diagram]   Call-ID:[prev][next]
[1] INVITE sip:2002@10.10.199.251:5060 SIP/2.0
Date: Tue, 16 Jun 2009 15:30:34 GMT
Call-Info: <sip:10.10.199.250:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-31236759
Allow-Events: presence, kpml
P-Asserted-Identity: <sip:1001@10.10.199.250>
Supported: timer,resource-priority,replaces
Supported: Geolocation
Min-SE:  1800
Remote-Party-ID: <sip:1001@10.10.199.250>;party=calling;screen=yes;privacy=off
Content-Length: 411
Require: sdp-anat
User-Agent: Cisco-CUCM7.1
To: <sip:2002@10.10.199.251>
Contact: <sip:1001@10.10.199.250:5060;transport=tcp>
Expires: 180
Content-Type: application/sdp
Call-ID: a0ecce80-a371ba9a-7-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK10455d1b04
CSeq: 101 INVITE
Session-Expires:  1800
Max-Forwards: 70

v=0
o=CiscoSystemsCCM-SIP 2000 1 IN IP4 10.10.199.250
s=SIP Call
t=0 0
a=group:ANAT 1 2
m=audio 18822 RTP/AVP 0 101
c=IN IP4 10.10.199.164
a=rtpmap:0 PCMU/8000
a=ptime:20
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
a=mid:1
m=audio 17572 RTP/AVP 0 101
c=IN IP6 2001:db8:c18:1:21f:9eff:fe57:8920
a=rtpmap:0 PCMU/8000
a=ptime:20
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
a=mid:2

[diagram]   Call-ID:[prev][next]
[2] SIP/2.0 100 Trying
Date: Tue, 16 Jun 2009 15:32:07 GMT
From: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-31236759
Allow-Events: presence
Content-Length: 0
To: <sip:2002@10.10.199.251>
Call-ID: a0ecce80-a371ba9a-7-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK10455d1b04
CSeq: 101 INVITE

[diagram]   Call-ID:[prev][next]
[3] SIP/2.0 180 Ringing
Date: Tue, 16 Jun 2009 15:32:07 GMT
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-31236759
Allow-Events: presence
P-Asserted-Identity: <sip:2002@10.10.199.251>
Supported: Geolocation
Remote-Party-ID: <sip:2002@10.10.199.251>;party=called;screen=yes;privacy=off
Content-Length: 0
To: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-31091611
Contact: <sip:2002@10.10.199.251:5060;transport=tcp>
Call-ID: a0ecce80-a371ba9a-7-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK10455d1b04
CSeq: 101 INVITE

[diagram]   Call-ID:[prev][next]
[4] SIP/2.0 200 OK
Date: Tue, 16 Jun 2009 15:32:07 GMT
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-31236759
Allow-Events: presence
P-Asserted-Identity: <sip:2002@10.10.199.251>
Supported: replaces
```

CISCO CONFIDENTIAL

```
Supported: Geolocation
Remote-Party-ID: <sip:2002@10.10.199.251>;party=called;screen=yes;privacy=off
Content-Length: 405
Require: sdp-anat
Require:  timer
To: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-31091611
Contact: <sip:2002@10.10.199.251:5060;transport=tcp>
Content-Type: application/sdp
Call-ID: a0ecce80-a371ba9a-7-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK10455d1b04
CSeq: 101 INVITE
Session-Expires:  1800;refresher=uas

v=0
o=CiscoSystemsCCM-SIP 2000 1 IN IP4 10.10.199.251
s=SIP Call
t=0 0
a=group:ANAT 2
m=audio 0 RTP/AVP 0 101
c=IN IP4 10.10.199.164
a=rtpmap:0 PCMU/8000
a=ptime:20
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
a=mid:1
m=audio 18146 RTP/AVP 0 101
c=IN IP6 2001:db8:c18:1:21c:58ff:fef0:70df
a=rtpmap:0 PCMU/8000
a=ptime:20
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
a=mid:2

[diagram]   Call-ID:[prev][next]
[5] ACK sip:2002@10.10.199.251:5060;transport=tcp SIP/2.0
Date: Tue, 16 Jun 2009 15:30:34 GMT
From: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-31236759
Allow-Events: presence, kpml
Content-Length: 0
To: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-31091611
Call-ID: a0ecce80-a371ba9a-7-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK1113f01b75
CSeq: 101 ACK
Max-Forwards: 70

[diagram]   Call-ID:[prev][next]
[6] BYE sip:2002@10.10.199.251:5060;transport=tcp SIP/2.0
Date: Tue, 16 Jun 2009 15:30:34 GMT
From: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-31236759
P-Asserted-Identity: <sip:1001@10.10.199.250>
Content-Length: 0
User-Agent: Cisco-CUCM7.1
To: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-31091611
Call-ID: a0ecce80-a371ba9a-7-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK1251e66cfe
CSeq: 102 BYE
Max-Forwards: 70

[diagram]   Call-ID:[prev][next]
[7] SIP/2.0 200 OK
Date: Tue, 16 Jun 2009 15:32:14 GMT
From: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-31236759
Content-Length: 0
To: <sip:2002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-31091611
Call-ID: a0ecce80-a371ba9a-7-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK1251e66cfe
CSeq: 102 BYE
```

CISCO CONFIDENTIAL

24.9 Outbound IPv4 call to an IPv6 trunk results in a 503

Title: Outbound IPv4 call to an IPv6 trunk results in a 503

Description:

This flow shows an IPv4 call destined to an IPv6 only SIP Trunk will result in a call failure.

Configuration:

Node = Unified CM1, IP = 10.10.199.250
Node = Unified CM2, IP = 10.10.199.251

Phone = A, Line = 1001, IP = 10.10.199.130, Model = IPv4 SCCP
Phone = B, Line = 2001, IP = 10.10.199.171, Model = IPv4 SIP TNP

SIP Trunk on Unified CM1 pointing to CM2
a) route pattern 2.XXXX
b) The common device configuration associated to the trunk has
IP Addressing Mode set to IPv4

SIP Trunk on Unified CM2 pointing to CM1
a) route pattern 2.XXXX
b) The common device configuration associated to the trunk has
IP Addressing Mode set to IPv6

Phone A, Phone B are configured with a common device configuration with
IP Addressing Mode set to IPv4 so that they behave in IPv4 only mode.

Configure a dual mode SIP Trunk on both Unified CM1 and CM2, pointing to
an another CM, so that CUCM is listening on both IPv4 and IPv6 interface

Scenario:

Phone A DN 1001 calls Phone B DN 2001 over the SIP Trunk by dialing 22001
Phone A hears reorder tone
End of Scenario

CISCO CONFIDENTIAL

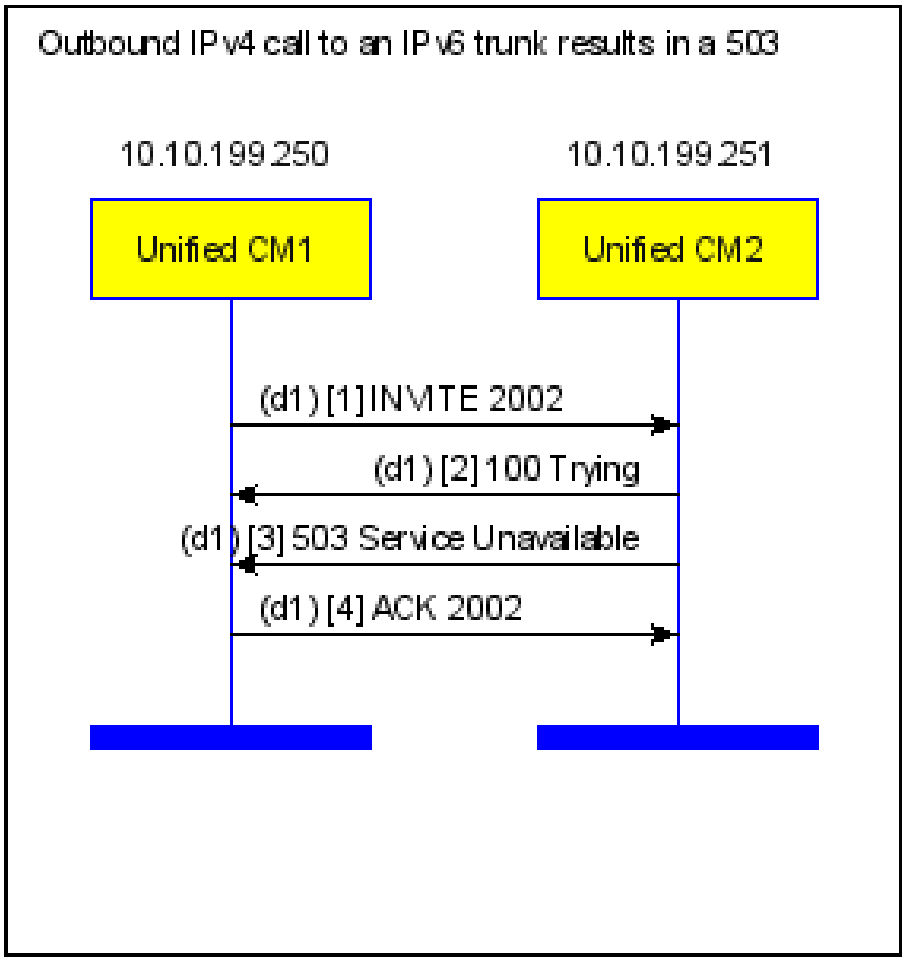

CISCO CONFIDENTIAL

```
[diagram]   Call-ID:[prev][next]
[1] INVITE sip:2002@10.10.199.251:5060 SIP/2.0
Date: Tue, 16 Jun 2009 16:14:32 GMT
Call-Info: <sip:10.10.199.250:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-31236765
Allow-Events: presence, kpml
P-Asserted-Identity: <sip:1001@10.10.199.250>
Supported: timer,resource-priority,replaces,sdp-anat
Supported: Geolocation
Min-SE:  1800
Remote-Party-ID: <sip:1001@10.10.199.250>;party=calling;screen=yes;privacy=off
Content-Length: 0
User-Agent: Cisco-CUCM7.1
To: <sip:2002@10.10.199.251>
Contact: <sip:1001@10.10.199.250:5060;transport=tcp>
Expires: 180
Call-ID: c54ba980-a371c4e8-9-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK1467cd1813
CSeq: 101 INVITE
Session-Expires:  1800
Max-Forwards: 70

[diagram]   Call-ID:[prev][next]
[2] SIP/2.0 100 Trying
Date: Tue, 16 Jun 2009 16:16:04 GMT
From: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-31236765
Allow-Events: presence
Content-Length: 0
To: <sip:2002@10.10.199.251>
Call-ID: c54ba980-a371c4e8-9-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK1467cd1813
CSeq: 101 INVITE

[diagram]   Call-ID:[prev][next]
[3] SIP/2.0 503 Service Unavailable
Date: Tue, 16 Jun 2009 16:16:04 GMT
Warning: 399 "Unable to find a device handler for the request received on port 5060 from 10.10.199.250"
From: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-31236765
Allow-Events: presence
Content-Length: 0
To: <sip:2002@10.10.199.251>;tag=984878989
Call-ID: c54ba980-a371c4e8-9-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK1467cd1813
CSeq: 101 INVITE

[diagram]   Call-ID:[prev][next]
[4] ACK sip:2002@10.10.199.251:5060 SIP/2.0
Date: Tue, 16 Jun 2009 16:14:32 GMT
From: <sip:1001@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-31236765
Allow-Events: presence, kpml
Content-Length: 0
To: <sip:2002@10.10.199.251>;tag=984878989
Call-ID: c54ba980-a371c4e8-9-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bK1467cd1813
CSeq: 101 ACK
Max-Forwards: 70
```

CISCO CONFIDENTIAL

24.10 Outbound IPv6 call to an IPv4 trunk results in a 503

Title: Outbound IPv6 call to an IPv4 trunk results in a 503

Description:

This flow shows an IPv6 call destined to an IPv4 only SIP Trunk will result in a call failure.

Configuration:

Node = Unified CM1, IP = 2001:db8:c18:1:20e:7fff:fef0:8af7
Node = Unified CM2, IP = 2001:db8:c18:1:214:c2ff:fec0:b4d7

Phone = A, Line = 1001, IP = 10.10.199.130, Model = IPv4 SCCP
Phone = B, Line = 2001, IP = 10.10.199.171, Model = IPv4 SIP TNP

SIP Trunk on Unified CM1 pointing to CM2
a) route pattern 2.XXXX
b) The common device configuration associated to the trunk has
IP Addressing Mode set to IPv6

SIP Trunk on Unified CM2 pointing to CM1
a) route pattern 2.XXXX
b) The common device configuration associated to the trunk has
IP Addressing Mode set to IPv4

Phone A, Phone B are configured with a common device configuration with
IP Addressing Mode set to IPv4 so that they behave in IPv4 only mode.

Configure a dual mode SIP Trunk on both Unified CM1 and CM2, pointing to
an another CM, so that CUCM is listening on both IPv4 and IPv6 interface

Scenario:

Phone A DN 1001 calls Phone B DN 2001 over the SIP Trunk by dialing 22001
Phone A hears reorder tone
End of Scenario

CISCO CONFIDENTIAL

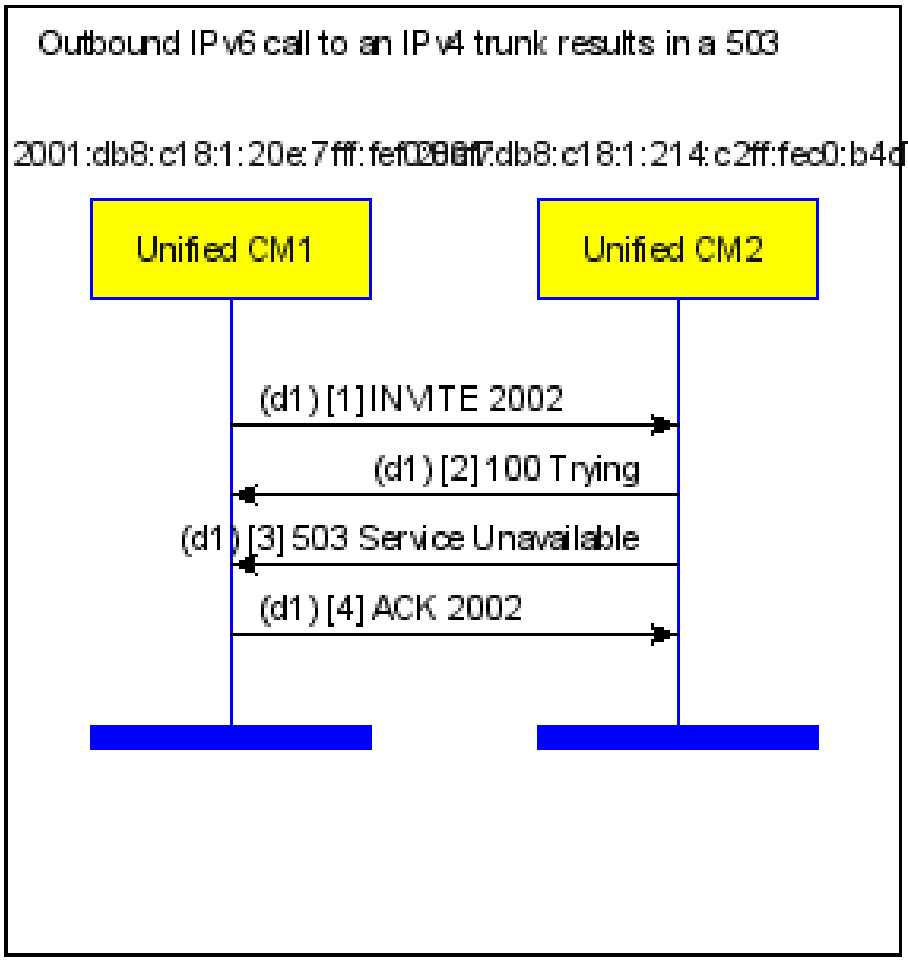

CISCO CONFIDENTIAL

```
[diagram]   Call-ID:[prev][next]
[1] INVITE sip:2002@[2001:db8:c18:1:214:c2ff:fec0:b4d7]:5060 SIP/2.0
Date: Tue, 16 Jun 2009 16:16:32 GMT
Call-Info: <sip:[2001:db8:c18:1:20e:7fff:fef0:8af7]:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:1001@[2001:db8:c18:1:20e:7fff:fef0:8af7]>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-31236767
Allow-Events: presence, kpml
P-Asserted-Identity: <sip:1001@[2001:db8:c18:1:20e:7fff:fef0:8af7]>
Supported: timer,resource-priority,replaces,sdp-anat
Supported: Geolocation
Min-SE:  1800
Remote-Party-ID: <sip:1001@[2001:db8:c18:1:20e:7fff:fef0:8af7]>;party=calling;screen=yes;privacy=off
Content-Length: 0
User-Agent: Cisco-CUCM7.1
To: <sip:2002@[2001:db8:c18:1:214:c2ff:fec0:b4d7]>
Contact: <sip:1001@[2001:db8:c18:1:20e:7fff:fef0:8af7]:5060;transport=tcp>
Expires: 180
Call-ID: cd23580-a371c560-a-fac712ac@2001:db8:c18:1:20e:7fff:fef0:8af7
Via: SIP/2.0/TCP [2001:db8:c18:1:20e:7fff:fef0:8af7]:5060;branch=z9hG4bK154c3c2009
CSeq: 101 INVITE
Session-Expires:  1800
Max-Forwards: 70

[diagram]   Call-ID:[prev][next]
[2] SIP/2.0 100 Trying
Date: Tue, 16 Jun 2009 16:18:04 GMT
From: <sip:1001@[2001:db8:c18:1:20e:7fff:fef0:8af7]>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-31236767
Allow-Events: presence
Content-Length: 0
To: <sip:2002@[2001:db8:c18:1:214:c2ff:fec0:b4d7]>
Call-ID: cd23580-a371c560-a-fac712ac@2001:db8:c18:1:20e:7fff:fef0:8af7
Via: SIP/2.0/TCP [2001:db8:c18:1:20e:7fff:fef0:8af7]:5060;branch=z9hG4bK154c3c2009
CSeq: 101 INVITE

[diagram]   Call-ID:[prev][next]
[3] SIP/2.0 503 Service Unavailable
Date: Tue, 16 Jun 2009 16:18:04 GMT
Warning: 399 "Unable to find a device handler for the request received on port 5060 from
2001:db8:c18:1:20e:7fff:fef0:8af7"
From: <sip:1001@[2001:db8:c18:1:20e:7fff:fef0:8af7]>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-31236767
Allow-Events: presence
Content-Length: 0
To: <sip:2002@[2001:db8:c18:1:214:c2ff:fec0:b4d7]>;tag=830217139
Call-ID: cd23580-a371c560-a-fac712ac@2001:db8:c18:1:20e:7fff:fef0:8af7
Via: SIP/2.0/TCP [2001:db8:c18:1:20e:7fff:fef0:8af7]:5060;branch=z9hG4bK154c3c2009
CSeq: 101 INVITE

[diagram]   Call-ID:[prev][next]
[4] ACK sip:2002@[2001:db8:c18:1:214:c2ff:fec0:b4d7]:5060 SIP/2.0
Date: Tue, 16 Jun 2009 16:16:32 GMT
From: <sip:1001@[2001:db8:c18:1:20e:7fff:fef0:8af7]>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-31236767
Allow-Events: presence, kpml
Content-Length: 0
To: <sip:2002@[2001:db8:c18:1:214:c2ff:fec0:b4d7]>;tag=830217139
Call-ID: cd23580-a371c560-a-fac712ac@2001:db8:c18:1:20e:7fff:fef0:8af7
Via: SIP/2.0/TCP [2001:db8:c18:1:20e:7fff:fef0:8af7]:5060;branch=z9hG4bK154c3c2009
CSeq: 101 ACK
Max-Forwards: 70
```

25. CallingPartyTransformations

25.1 Define number of digits to be prefixed, stripped for Unknown Number Type on Service Parameter page

Title: Define number of digits to be prefixed, stripped for Unknown Number Type on Service Parameter page

Description:

The following call flow illustrates the SIP messaging that takes place between two Cisco Unified CMs via an inter cluster SIP trunk, and between the UAS side SIP trunk and the terminating side SIP phone.

Cisco IP PhoneB registered to Cisco Unified CM2 calls Cisco IP PhoneA which is registered to Cisco Unified CM1.

Configuration:

Node = Unified CM1, IP = 10.10.199.250
Node = Unified CM2, IP = 10.10.199.251

Phone = A, Line = 1002, IP = 10.10.199.238, Model = SIP TNP
Phone = B, Line = 2002, IP = 10.10.199.179, Model = SCCP

SIP Trunk between Unified CM2 & Unified CM1 has route pattern 1.XXXX
SIP Trunk between Unified CM1 & Unified CM2 has route pattern 2.XXXX

Calling party transformation configuration steps:

1. CCM1 configuration:
   1) Service Parameter for Incoming Calling Party Unknown Number Prefix - SIP: +919392:2
   2) Trunk Device Page - Incoming Calling Party Unknown Number Prefix: default
   3) Trunk Device Page - Incoming Calling Party Unknown Digits to Strip: empty
   4) Default Device Pool Page - Incoming Calling Party Unknown Number Prefix: default
   5) Default Device Pool Page - Incoming Calling Party Unknown Digits to Strip: empty

2. CCM2 configuration:
   1) Prefix Digits (Outgoing Calls): 00

CISCO CONFIDENTIAL

2) Calling Party Number Type: Unknown
3) Calling Party Numbering Plan: Unknown
4) Discard Predot

Scenario:

Phone B DN 2002 calls Phone A DN 1002 over the SIP Trunk by dialing 11002
Phone A DN 1002 Answers
Duration short
Phone A DN 1002 goes onHook
End of Scenario

CISCO CONFIDENTIAL

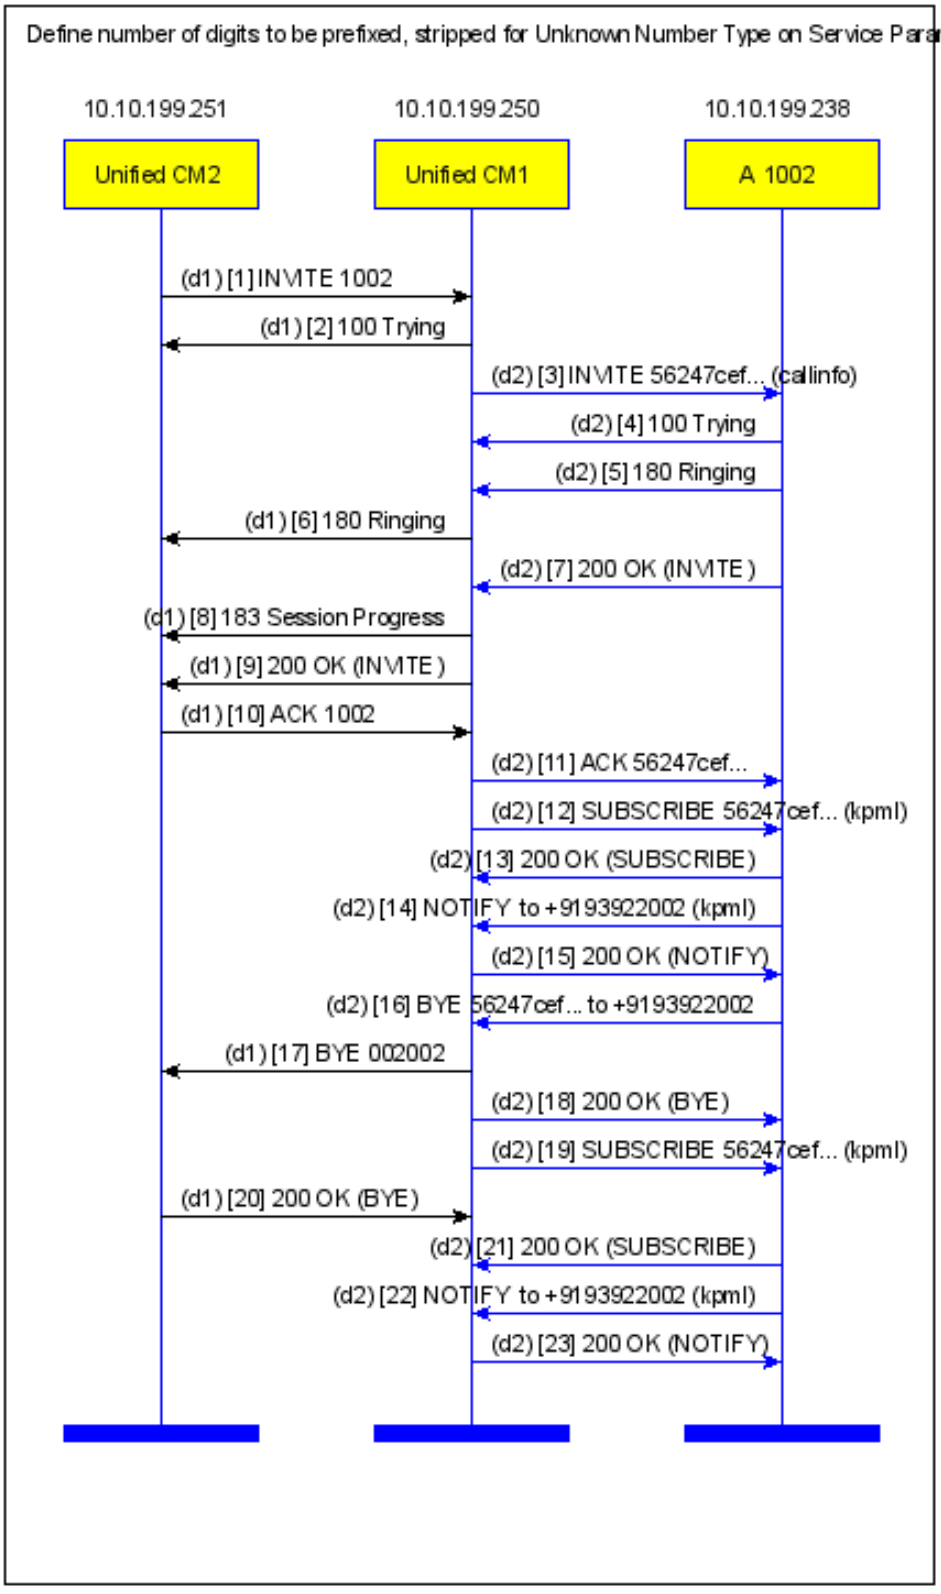

CISCO CONFIDENTIAL

[diagram] Call-ID:[prev][next]
[1] INVITE sip:1002@10.10.199.250:5060 SIP/2.0
Date: Wed, 17 Jun 2009 19:24:41 GMT
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:002002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-31091654
Allow-Events: presence
P-Asserted-Identity: <sip:002002@10.10.199.251>
Supported: timer,resource-priority,replaces
Supported: Geolocation
Min-SE: 1800
Remote-Party-ID: <sip:002002@10.10.199.251>;party=calling;screen=yes;privacy=off
Content-Length: 0
User-Agent: Cisco-CUCM7.1
To: <sip:1002@10.10.199.250>
Contact: <sip:002002@10.10.199.251:5060;transport=tcp>
Expires: 180
Call-ID: 8000a800-a39142f9-31-fbc712ac@10.10.199.251
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bKc539763cf2
CSeq: 101 INVITE
Session-Expires: 1800
Max-Forwards: 70

[diagram] Call-ID:[prev][next]
[2] SIP/2.0 100 Trying
Date: Wed, 17 Jun 2009 19:23:06 GMT
From: <sip:002002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-31091654
Allow-Events: presence
Content-Length: 0
To: <sip:1002@10.10.199.250>
Call-ID: 8000a800-a39142f9-31-fbc712ac@10.10.199.251
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bKc539763cf2
CSeq: 101 INVITE

[diagram] Call-ID:[prev][next]
[3] INVITE sip:56247cef-6c2b-ad4c-54db-0514adea553a@10.10.199.238:40283;transport=tcp SIP/2.0
Date: Wed, 17 Jun 2009 19:23:06 GMT
Call-Info: <urn:x-cisco-remotecc:callinfo>; security= NotAuthenticated; orientation= from; gci= 1-10034;
call-instance= 1
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:+9193922002@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-31411500
Allow-Events: presence
Supported: timer,resource-priority,replaces
Min-SE: 1800
Remote-Party-ID: <sip:+9193922002@10.10.199.250;x-cisco-callback-
number=+9193922002>;party=calling;screen=yes;privacy=off
Content-Length: 0
User-Agent: Cisco-CUCM7.1
To: <sip:56247cef-6c2b-ad4c-54db-0514adea553a@10.10.199.238>
Contact: <sip:56247cef-6c2b-ad4c-54db-0514adea553a@10.10.199.250:5060;transport=tcp>
Expires: 180
Call-ID: 4760ce80-a391429a-2f-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bKd1106ce43f
CSeq: 101 INVITE
Send-Info: conference
Max-Forwards: 69
Alert-Info: <file://Bellcore-dr2/>

[diagram] Call-ID:[prev][next]
[4] SIP/2.0 100 Trying
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bKd1106ce43f
From: <sip:+9193922002@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-31411500
To: <sip:56247cef-6c2b-ad4c-54db-0514adea553a@10.10.199.238>
Call-ID: 4760ce80-a391429a-2f-fac712ac@10.10.199.250
Date: Wed, 17 Jun 2009 19:23:05 GMT
CSeq: 101 INVITE
Server: Cisco-CP7970G/8.5.2
Contact: <sip:56247cef-6c2b-ad4c-54db-0514adea553a@10.10.199.238:40283;transport=tcp>
Allow: ACK,BYE,CANCEL,INVITE,NOTIFY,OPTIONS,REFER,REGISTER,UPDATE,SUBSCRIBE
Allow-Events: kpml,dialog
Content-Length: 0

[diagram] Call-ID:[prev][next]
[5] SIP/2.0 180 Ringing
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bKd1106ce43f
From: <sip:+9193922002@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-31411500
To: <sip:56247cef-6c2b-ad4c-54db-0514adea553a@10.10.199.238>;tag=001d45e8aa3d1221a9725acd-73b5143b
Call-ID: 4760ce80-a391429a-2f-fac712ac@10.10.199.250
Date: Wed, 17 Jun 2009 19:23:05 GMT
CSeq: 101 INVITE
Server: Cisco-CP7970G/8.5.2

CISCO CONFIDENTIAL

```
Contact: <sip:56247cef-6c2b-ad4c-54db-0514adea553a@10.10.199.238:40283;transport=tcp>
Allow: ACK,BYE,CANCEL,INVITE,NOTIFY,OPTIONS,REFER,REGISTER,UPDATE,SUBSCRIBE
Remote-Party-ID: "1002" <sip:1002@10.10.199.250>;party=called;id-type=subscriber;privacy=off;screen=yes
Allow-Events: kpml,dialog
Content-Length: 0
```

[diagram] Call-ID:[prev][next]

[6] SIP/2.0 180 Ringing

```
Date: Wed, 17 Jun 2009 19:23:06 GMT
Call-Info: <sip:10.10.199.250:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:002002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-31091654
Allow-Events: presence
P-Asserted-Identity: <sip:1002@10.10.199.250>
Supported: Geolocation
Remote-Party-ID: <sip:1002@10.10.199.250>;party=called;screen=yes;privacy=off
Content-Length: 0
To: <sip:1002@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-31411499
Contact: <sip:1002@10.10.199.250:5060;transport=tcp>
Call-ID: 8000a800-a39142f9-31-fbc712ac@10.10.199.251
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bKc539763cf2
CSeq: 101 INVITE
```

[diagram] Call-ID:[prev][next]

[7] SIP/2.0 200 OK

```
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bKd1106ce43f
From: <sip:+9193922002@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-31411500
To: <sip:56247cef-6c2b-ad4c-54db-0514adea553a@10.10.199.238>;tag=001d45e8aa3d1221a9725acd-73b5143b
Call-ID: 4760ce80-a391429a-2f-fac712ac@10.10.199.250
Date: Wed, 17 Jun 2009 19:23:06 GMT
CSeq: 101 INVITE
Server: Cisco-CP7970G/8.5.2
Contact: <sip:56247cef-6c2b-ad4c-54db-0514adea553a@10.10.199.238:40283;transport=tcp>
Allow: ACK,BYE,CANCEL,INVITE,NOTIFY,OPTIONS,REFER,REGISTER,UPDATE,SUBSCRIBE
Remote-Party-ID: "1002" <sip:1002@10.10.199.250>;party=called;id-type=subscriber;privacy=off;screen=yes
Allow-Events: kpml,dialog
Content-Length: 304
Content-Type: application/sdp
Content-Disposition: session;handling=optional

v=0
o=Cisco-SIPUA 17797 0 IN IP4 10.10.199.238
s=SIP Call
t=0 0
m=audio 17442 RTP/AVP 0 8 18 9 101
c=IN IP4 10.10.199.238
a=rtpmap:0 PCMU/8000
a=rtpmap:8 PCMA/8000
a=rtpmap:18 G729/8000
a=fmtp:18 annexb=no
a=rtpmap:9 G722/8000
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
a=sendrecv
```

[diagram] Call-ID:[prev][next]

[8] SIP/2.0 183 Session Progress

```
Date: Wed, 17 Jun 2009 19:23:06 GMT
Call-Info: <sip:10.10.199.250:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:002002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-31091654
Allow-Events: presence, kpml
P-Asserted-Identity: <sip:1002@10.10.199.250>
Supported: Geolocation
Remote-Party-ID: <sip:1002@10.10.199.250>;party=called;screen=yes;privacy=off
Content-Length: 347
To: <sip:1002@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-31411499
Contact: <sip:1002@10.10.199.250:5060;transport=tcp>
Content-Type: application/sdp
Call-ID: 8000a800-a39142f9-31-fbc712ac@10.10.199.251
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bKc539763cf2
CSeq: 101 INVITE

v=0
o=CiscoSystemsCCM-SIP 2000 1 IN IP4 10.10.199.250
s=SIP Call
c=IN IP4 10.10.199.238
t=0 0
m=audio 17442 RTP/AVP 9 0 8 18 101
a=rtpmap:9 G722/8000
```

CISCO CONFIDENTIAL

```
a=ptime:20
a=rtpmap:0 PCMU/8000
a=ptime:20
a=rtpmap:8 PCMA/8000
a=ptime:20
a=rtpmap:18 G729/8000
a=ptime:20
a=fmtp:18 annexb=no
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
```

[diagram] Call-ID:[prev][next]

[9] SIP/2.0 200 OK

```
Date: Wed, 17 Jun 2009 19:23:06 GMT
Call-Info: <sip:10.10.199.250:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:002002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-31091654
Allow-Events: presence, kpml
P-Asserted-Identity: <sip:1002@10.10.199.250>
Supported: replaces
Supported: Geolocation
Remote-Party-ID: <sip:1002@10.10.199.250>;party=called;screen=yes;privacy=off
Content-Length: 347
Require:  timer
To: <sip:1002@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-31411499
Contact: <sip:1002@10.10.199.250:5060;transport=tcp>
Content-Type: application/sdp
Call-ID: 8000a800-a39142f9-31-fbc712ac@10.10.199.251
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bKc539763cf2
CSeq: 101 INVITE
Session-Expires:  1800;refresher=uas

v=0
o=CiscoSystemsCCM-SIP 2000 1 IN IP4 10.10.199.250
s=SIP Call
c=IN IP4 10.10.199.238
t=0 0
m=audio 17442 RTP/AVP 9 0 8 18 101
a=rtpmap:9 G722/8000
a=ptime:20
a=rtpmap:0 PCMU/8000
a=ptime:20
a=rtpmap:8 PCMA/8000
a=ptime:20
a=rtpmap:18 G729/8000
a=ptime:20
a=fmtp:18 annexb=no
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
```

[diagram] Call-ID:[prev][next]

[10] ACK sip:1002@10.10.199.250:5060;transport=tcp SIP/2.0

```
Date: Wed, 17 Jun 2009 19:24:41 GMT
From: <sip:002002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-31091654
Allow-Events: presence
Content-Length: 216
To: <sip:1002@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-31411499
Content-Type: application/sdp
Call-ID: 8000a800-a39142f9-31-fbc712ac@10.10.199.251
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bKc618fbadfd
CSeq: 101 ACK
Max-Forwards: 70

v=0
o=CiscoSystemsCCM-SIP 2000 1 IN IP4 10.10.199.251
s=SIP Call
c=IN IP4 10.10.199.179
t=0 0
m=audio 20382 RTP/AVP 9 101
a=rtpmap:9 G722/8000
a=ptime:20
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
```

[diagram] Call-ID:[prev][next]

[11] ACK sip:56247cef-6c2b-ad4c-54db-0514adea553a@10.10.199.238:40283;transport=tcp SIP/2.0

```
Date: Wed, 17 Jun 2009 19:23:06 GMT
From: <sip:+9193922002@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-31411500
Allow-Events: presence
Content-Length: 216
```

CISCO CONFIDENTIAL

```
To: <sip:56247cef-6c2b-ad4c-54db-0514adea553a@10.10.199.238>;tag=001d45e8aa3d1221a9725acd-73b5143b
Content-Type: application/sdp
Call-ID: 4760ce80-a391429a-2f-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bKd21adb4376
CSeq: 101 ACK
Max-Forwards: 70

v=0
o=CiscoSystemsCCM-SIP 2000 1 IN IP4 10.10.199.250
s=SIP Call
c=IN IP4 10.10.199.179
t=0 0
m=audio 20382 RTP/AVP 9 101
a=rtpmap:9 G722/8000
a=ptime:20
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
```

[diagram] Call-ID:[prev][next]

[12] SUBSCRIBE sip:56247cef-6c2b-ad4c-54db-0514adea553a@10.10.199.238:40283;transport=tcp SIP/2.0

```
Date: Wed, 17 Jun 2009 19:23:07 GMT
From: <sip:+9193922002@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-31411500
Event: kpml
Content-Length: 370
User-Agent: Cisco-CUCM7.1
To: <sip:56247cef-6c2b-ad4c-54db-0514adea553a@10.10.199.238>;tag=001d45e8aa3d1221a9725acd-73b5143b
Contact: <sip:10.10.199.250:5060;transport=tcp>
Expires: 7200
Content-Type: application/kpml-request+xml
Call-ID: 4760ce80-a391429a-2f-fac712ac@10.10.199.250
Accept: application/kpml-response+xml
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bKd31bd5c1eb
CSeq: 102 SUBSCRIBE
Max-Forwards: 70

<?xml version="1.0" encoding="UTF-8" ?>
<kpml-request xmlns="urn:ietf:params:xml:ns:kpml-request" xmlns:xsi="http://www.w3.org/2001/XMLSchema-
instance" xsi:schemaLocation="urn:ietf:params:xml:ns:kpml-request kpml-request.xsd" version="1.0">

  <pattern interdigittimer="7260000" persist="persist">
    <regex tag="dtmf">[x*#ABCD]</regex>
  </pattern>

</kpml-request>
```

[diagram] Call-ID:[prev][next]

[13] SIP/2.0 200 OK

```
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bKd31bd5c1eb
From: <sip:+9193922002@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-31411500
To: <sip:56247cef-6c2b-ad4c-54db-0514adea553a@10.10.199.238>;tag=001d45e8aa3d1221a9725acd-73b5143b
Call-ID: 4760ce80-a391429a-2f-fac712ac@10.10.199.250
Date: Wed, 17 Jun 2009 19:23:07 GMT
CSeq: 102 SUBSCRIBE
Server: Cisco-CP7970G/8.5.2
Contact: <sip:56247cef-6c2b-ad4c-54db-0514adea553a@10.10.199.238:40283;transport=TCP>
Expires: 7200
Content-Length: 0
```

[diagram] Call-ID:[prev][next]

[14] NOTIFY sip:10.10.199.250:5060 SIP/2.0

```
Via: SIP/2.0/TCP 10.10.199.238:40283;branch=z9hG4bK5e5b6a91
To: <sip:+9193922002@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-31411500
From: <sip:56247cef-6c2b-ad4c-54db-0514adea553a@10.10.199.238>;tag=001d45e8aa3d1221a9725acd-73b5143b
Call-ID: 4760ce80-a391429a-2f-fac712ac@10.10.199.250
Date: Wed, 17 Jun 2009 19:23:07 GMT
CSeq: 101 NOTIFY
Event: kpml
Subscription-State: active; expires=7200
Max-Forwards: 70
Contact: <sip:56247cef-6c2b-ad4c-54db-0514adea553a@10.10.199.238:40283;transport=TCP>
Allow: ACK,BYE,CANCEL,INVITE,NOTIFY,OPTIONS,REFER,REGISTER,UPDATE,SUBSCRIBE
Content-Length: 0
```

[diagram] Call-ID:[prev][next]

[15] SIP/2.0 200 OK

```
Date: Wed, 17 Jun 2009 19:23:07 GMT
From: <sip:56247cef-6c2b-ad4c-54db-0514adea553a@10.10.199.238>;tag=001d45e8aa3d1221a9725acd-73b5143b
Content-Length: 0
To: <sip:+9193922002@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-31411500
Call-ID: 4760ce80-a391429a-2f-fac712ac@10.10.199.250
```

CISCO CONFIDENTIAL

```
Via: SIP/2.0/TCP 10.10.199.238:40283;branch=z9hG4bK5e5b6a91
CSeq: 101 NOTIFY

[diagram]   Call-ID:[prev][next]
[16] BYE sip:56247cef-6c2b-ad4c-54db-0514adea553a@10.10.199.250:5060;transport=tcp SIP/2.0
Via: SIP/2.0/TCP 10.10.199.238:40283;branch=z9hG4bKfd1ddd63
From: <sip:56247cef-6c2b-ad4c-54db-0514adea553a@10.10.199.238>;tag=001d45e8aa3d1221a9725acd-73b5143b
To: <sip:+9193922002@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-31411500
Call-ID: 4760ce80-a391429a-2f-fac712ac@10.10.199.250
Max-Forwards: 70
Date: Wed, 17 Jun 2009 19:23:12 GMT
CSeq: 102 BYE
User-Agent: Cisco-CP7970G/8.5.2
Content-Length: 0

[diagram]   Call-ID:[prev][next]
[17] BYE sip:002002@10.10.199.251:5060;transport=tcp SIP/2.0
Date: Wed, 17 Jun 2009 19:23:07 GMT
From: <sip:1002@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-31411499
Content-Length: 0
User-Agent: Cisco-CUCM7.1
To: <sip:002002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-31091654
Call-ID: 8000a800-a39142f9-31-fbc712ac@10.10.199.251
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bKd44bb10e7b
CSeq: 101 BYE
Max-Forwards: 70

[diagram]   Call-ID:[prev][next]
[18] SIP/2.0 200 OK
Date: Wed, 17 Jun 2009 19:23:12 GMT
From: <sip:56247cef-6c2b-ad4c-54db-0514adea553a@10.10.199.238>;tag=001d45e8aa3d1221a9725acd-73b5143b
Content-Length: 0
To: <sip:+9193922002@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-31411500
Call-ID: 4760ce80-a391429a-2f-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.238:40283;branch=z9hG4bKfd1ddd63
CSeq: 102 BYE

[diagram]   Call-ID:[prev][next]
[19] SUBSCRIBE sip:56247cef-6c2b-ad4c-54db-0514adea553a@10.10.199.238:40283;transport=TCP SIP/2.0
Date: Wed, 17 Jun 2009 19:23:12 GMT
From: <sip:+9193922002@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-31411500
Event: kpml
Content-Length: 0
User-Agent: Cisco-CUCM7.1
To: <sip:56247cef-6c2b-ad4c-54db-0514adea553a@10.10.199.238>;tag=001d45e8aa3d1221a9725acd-73b5143b
Contact: <sip:10.10.199.250:5060;transport=tcp>
Expires: 0
Call-ID: 4760ce80-a391429a-2f-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bKd557bc7aab
CSeq: 103 SUBSCRIBE
Max-Forwards: 70

[diagram]   Call-ID:[prev][next]
[20] SIP/2.0 200 OK
Date: Wed, 17 Jun 2009 19:24:48 GMT
From: <sip:1002@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-31411499
Content-Length: 0
To: <sip:002002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-31091654
Call-ID: 8000a800-a39142f9-31-fbc712ac@10.10.199.251
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bKd44bb10e7b
CSeq: 101 BYE

[diagram]   Call-ID:[prev][next]
[21] SIP/2.0 200 OK
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bKd557bc7aab
From: <sip:+9193922002@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-31411500
To: <sip:56247cef-6c2b-ad4c-54db-0514adea553a@10.10.199.238>;tag=001d45e8aa3d1221a9725acd-73b5143b
Call-ID: 4760ce80-a391429a-2f-fac712ac@10.10.199.250
Date: Wed, 17 Jun 2009 19:23:12 GMT
CSeq: 103 SUBSCRIBE
Server: Cisco-CP7970G/8.5.2
Contact: <sip:56247cef-6c2b-ad4c-54db-0514adea553a@10.10.199.238:40283;transport=TCP>
Expires: 0
Content-Length: 0

[diagram]   Call-ID:[prev][next]
[22] NOTIFY sip:10.10.199.250:5060 SIP/2.0
Via: SIP/2.0/TCP 10.10.199.238:40283;branch=z9hG4bK852afdf5
To: <sip:+9193922002@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-31411500
From: <sip:56247cef-6c2b-ad4c-54db-0514adea553a@10.10.199.238>;tag=001d45e8aa3d1221a9725acd-73b5143b
```

CISCO CONFIDENTIAL

```
Call-ID: 4760ce80-a391429a-2f-fac712ac@10.10.199.250
Date: Wed, 17 Jun 2009 19:23:12 GMT
CSeq: 103 NOTIFY
Event: kpml
Subscription-State: terminated; reason=timeout
Max-Forwards: 70
Contact: <sip:56247cef-6c2b-ad4c-54db-0514adea553a@10.10.199.238:40283;transport=TCP>
Allow: ACK,BYE,CANCEL,INVITE,NOTIFY,OPTIONS,REFER,REGISTER,UPDATE,SUBSCRIBE
Content-Length: 214
Content-Type: application/kpml-response+xml
Content-Disposition: session;handling=required

<?xml version="1.0" encoding="UTF-8"?>
<kpml-response xmlns="urn:ietf:params:xml:ns:kpml-response" version="1.0" code="487" text="Subscription Exp"
suppressed="false" forced_flush="false" digits="" tag="dtmf"/>

[diagram]   Call-ID:[prev][next]
[23] SIP/2.0 200 OK
Date: Wed, 17 Jun 2009 19:23:12 GMT
From: <sip:56247cef-6c2b-ad4c-54db-0514adea553a@10.10.199.238>;tag=001d45e8aa3d1221a9725acd-73b5143b
Content-Length: 0
To: <sip:+9193922002@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-31411500
Call-ID: 4760ce80-a391429a-2f-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.238:40283;branch=z9hG4bK852afdf5
CSeq: 103 NOTIFY
```

CISCO CONFIDENTIAL

25.2 Define number of digits to be prefixed, stripped for Unknown Number Type on trunk device page

Title: Define number of digits to be prefixed, stripped for Unknown Number Type on trunk device page

Description:

The following call flow illustrates the SIP messaging that takes place between two Cisco Unified CMs via an inter cluster SIP trunk, and between the UAS side SIP trunk and the terminating side SIP phone.

Cisco IP PhoneB registered to Cisco Unified CM2 calls Cisco IP PhoneA which is registered to Cisco Unified CM1.

Configuration:

Node = Unified CM1, IP = 10.10.199.250
Node = Unified CM2, IP = 10.10.199.251

Phone = A, Line = 1002, IP = 10.10.199.238, Model = SIP TNP
Phone = B, Line = 2002, IP = 10.10.199.179, Model = SCCP

SIP Trunk between Unified CM2 & Unified CM1 has route pattern 1.XXXX
SIP Trunk between Unified CM1 & Unified CM2 has route pattern 2.XXXX

Calling party transformation configuration steps:

1. CCM1 configuration:
   1) Service Parameter for Incoming Calling Party Unknown Number Prefix - SIP: +919392:1
   2) Trunk Device Page - Incoming Calling Party Unknown Number Prefix: +919391
   3) Trunk Device Page - Incoming Calling Party Unknown Digits to Strip: 2
   4) Default Device Pool Page - Incoming Calling Party Unknown Number Prefix: default
   5) Default Device Pool Page - Incoming Calling Party Unknown Digits to Strip: empty

2. CCM2 configuration:
   1) Prefix Digits (Outgoing Calls): 00
   2) Calling Party Number Type: Unknown

CISCO CONFIDENTIAL

3) Calling Party Numbering Plan: Unknown
4) Discard Predot

Scenario:

Phone B DN 2002 calls Phone A DN 1002 over the SIP Trunk by dialing 11002
Phone A DN 1002 Answers
Duration short
Phone A DN 1002 goes onHook
End of Scenario

CISCO CONFIDENTIAL

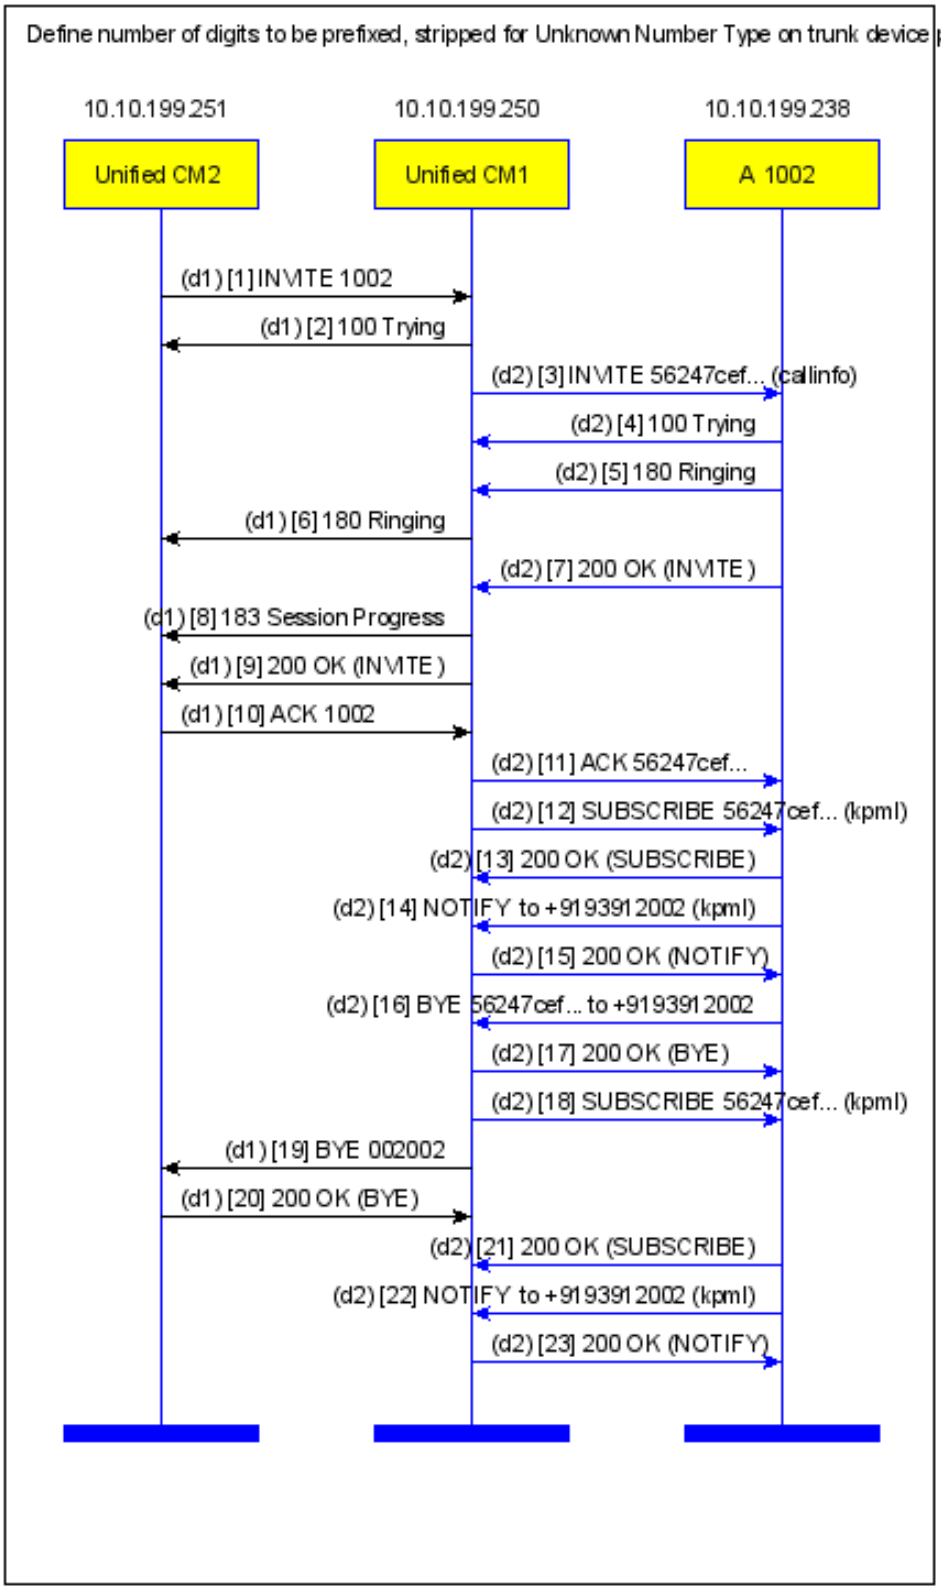

CISCO CONFIDENTIAL

[diagram] Call-ID:[prev][next]
[1] INVITE sip:1002@10.10.199.250:5060 SIP/2.0
Date: Wed, 17 Jun 2009 19:31:16 GMT
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:002002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-31091656
Allow-Events: presence
P-Asserted-Identity: <sip:002002@10.10.199.251>
Supported: timer,resource-priority,replaces
Supported: Geolocation
Min-SE: 1800
Remote-Party-ID: <sip:002002@10.10.199.251>;party=calling;screen=yes;privacy=off
Content-Length: 0
User-Agent: Cisco-CUCM7.1
To: <sip:1002@10.10.199.250>
Contact: <sip:002002@10.10.199.251:5060;transport=tcp>
Expires: 180
Call-ID: 6b70df80-a3914484-32-fbc712ac@10.10.199.251
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bKc7fb59ed7
CSeq: 101 INVITE
Session-Expires: 1800
Max-Forwards: 70

[diagram] Call-ID:[prev][next]
[2] SIP/2.0 100 Trying
Date: Wed, 17 Jun 2009 19:29:40 GMT
From: <sip:002002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-31091656
Allow-Events: presence
Content-Length: 0
To: <sip:1002@10.10.199.250>
Call-ID: 6b70df80-a3914484-32-fbc712ac@10.10.199.251
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bKc7fb59ed7
CSeq: 101 INVITE

[diagram] Call-ID:[prev][next]
[3] INVITE sip:56247cef-6c2b-ad4c-54db-0514adea553a@10.10.199.238:40283;transport=tcp SIP/2.0
Date: Wed, 17 Jun 2009 19:29:40 GMT
Call-Info: <urn:x-cisco-remotecc:callinfo>; security= NotAuthenticated; orientation= from; gci= 1-10035;
call-instance= 1
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:+9193912002@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-31411502
Allow-Events: presence
Supported: timer,resource-priority,replaces
Min-SE: 1800
Remote-Party-ID: <sip:+9193912002@10.10.199.250;x-cisco-callback-
number=+9193912002>;party=calling;screen=yes;privacy=off
Content-Length: 0
User-Agent: Cisco-CUCM7.1
To: <sip:56247cef-6c2b-ad4c-54db-0514adea553a@10.10.199.238>
Contact: <sip:56247cef-6c2b-ad4c-54db-0514adea553a@10.10.199.250:5060;transport=tcp>
Expires: 180
Call-ID: 32386f80-a3914424-30-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bKd61435dc2c
CSeq: 101 INVITE
Send-Info: conference
Max-Forwards: 69
Alert-Info: <file://Bellcore-dr2/>

[diagram] Call-ID:[prev][next]
[4] SIP/2.0 100 Trying
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bKd61435dc2c
From: <sip:+9193912002@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-31411502
To: <sip:56247cef-6c2b-ad4c-54db-0514adea553a@10.10.199.238>
Call-ID: 32386f80-a3914424-30-fac712ac@10.10.199.250
Date: Wed, 17 Jun 2009 19:29:40 GMT
CSeq: 101 INVITE
Server: Cisco-CP7970G/8.5.2
Contact: <sip:56247cef-6c2b-ad4c-54db-0514adea553a@10.10.199.238:40283;transport=tcp>
Allow: ACK,BYE,CANCEL,INVITE,NOTIFY,OPTIONS,REFER,REGISTER,UPDATE,SUBSCRIBE
Allow-Events: kpml,dialog
Content-Length: 0

[diagram] Call-ID:[prev][next]
[5] SIP/2.0 180 Ringing
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bKd61435dc2c
From: <sip:+9193912002@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-31411502
To: <sip:56247cef-6c2b-ad4c-54db-0514adea553a@10.10.199.238>;tag=001d45e8aa3d1225d0e5cb88-149bd483
Call-ID: 32386f80-a3914424-30-fac712ac@10.10.199.250
Date: Wed, 17 Jun 2009 19:29:40 GMT
CSeq: 101 INVITE
Server: Cisco-CP7970G/8.5.2

CISCO CONFIDENTIAL

```
Contact: <sip:56247cef-6c2b-ad4c-54db-0514adea553a@10.10.199.238:40283;transport=tcp>
Allow: ACK,BYE,CANCEL,INVITE,NOTIFY,OPTIONS,REFER,REGISTER,UPDATE,SUBSCRIBE
Remote-Party-ID: "1002" <sip:1002@10.10.199.250>;party=called;id-type=subscriber;privacy=off;screen=yes
Allow-Events: kpml,dialog
Content-Length: 0
```

[diagram] Call-ID:[prev][next]

[6] SIP/2.0 180 Ringing

```
Date: Wed, 17 Jun 2009 19:29:40 GMT
Call-Info: <sip:10.10.199.250:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:002002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-31091656
Allow-Events: presence
P-Asserted-Identity: <sip:1002@10.10.199.250>
Supported: Geolocation
Remote-Party-ID: <sip:1002@10.10.199.250>;party=called;screen=yes;privacy=off
Content-Length: 0
To: <sip:1002@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-31411501
Contact: <sip:1002@10.10.199.250:5060;transport=tcp>
Call-ID: 6b70df80-a3914484-32-fbc712ac@10.10.199.251
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bKc7fb59ed7
CSeq: 101 INVITE
```

[diagram] Call-ID:[prev][next]

[7] SIP/2.0 200 OK

```
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bKd61435dc2c
From: <sip:+9193912002@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-31411502
To: <sip:56247cef-6c2b-ad4c-54db-0514adea553a@10.10.199.238>;tag=001d45e8aa3d1225d0e5cb88-149bd483
Call-ID: 32386f80-a3914424-30-fac712ac@10.10.199.250
Date: Wed, 17 Jun 2009 19:29:41 GMT
CSeq: 101 INVITE
Server: Cisco-CP7970G/8.5.2
Contact: <sip:56247cef-6c2b-ad4c-54db-0514adea553a@10.10.199.238:40283;transport=tcp>
Allow: ACK,BYE,CANCEL,INVITE,NOTIFY,OPTIONS,REFER,REGISTER,UPDATE,SUBSCRIBE
Remote-Party-ID: "1002" <sip:1002@10.10.199.250>;party=called;id-type=subscriber;privacy=off;screen=yes
Allow-Events: kpml,dialog
Content-Length: 303
Content-Type: application/sdp
Content-Disposition: session;handling=optional

v=0
o=Cisco-SIPUA 1931 0 IN IP4 10.10.199.238
s=SIP Call
t=0 0
m=audio 20594 RTP/AVP 0 8 18 9 101
c=IN IP4 10.10.199.238
a=rtpmap:0 PCMU/8000
a=rtpmap:8 PCMA/8000
a=rtpmap:18 G729/8000
a=fmtp:18 annexb=no
a=rtpmap:9 G722/8000
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
a=sendrecv
```

[diagram] Call-ID:[prev][next]

[8] SIP/2.0 183 Session Progress

```
Date: Wed, 17 Jun 2009 19:29:40 GMT
Call-Info: <sip:10.10.199.250:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:002002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-31091656
Allow-Events: presence, kpml
P-Asserted-Identity: <sip:1002@10.10.199.250>
Supported: Geolocation
Remote-Party-ID: <sip:1002@10.10.199.250>;party=called;screen=yes;privacy=off
Content-Length: 347
To: <sip:1002@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-31411501
Contact: <sip:1002@10.10.199.250:5060;transport=tcp>
Content-Type: application/sdp
Call-ID: 6b70df80-a3914484-32-fbc712ac@10.10.199.251
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bKc7fb59ed7
CSeq: 101 INVITE

v=0
o=CiscoSystemsCCM-SIP 2000 1 IN IP4 10.10.199.250
s=SIP Call
c=IN IP4 10.10.199.238
t=0 0
m=audio 20594 RTP/AVP 9 0 8 18 101
a=rtpmap:9 G722/8000
```

CISCO CONFIDENTIAL

```
a=ptime:20
a=rtpmap:0 PCMU/8000
a=ptime:20
a=rtpmap:8 PCMA/8000
a=ptime:20
a=rtpmap:18 G729/8000
a=ptime:20
a=fmtp:18 annexb=no
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
```

[diagram] Call-ID:[prev][next]

[9] SIP/2.0 200 OK

```
Date: Wed, 17 Jun 2009 19:29:40 GMT
Call-Info: <sip:10.10.199.250:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:002002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-31091656
Allow-Events: presence, kpml
P-Asserted-Identity: <sip:1002@10.10.199.250>
Supported: replaces
Supported: Geolocation
Remote-Party-ID: <sip:1002@10.10.199.250>;party=called;screen=yes;privacy=off
Content-Length: 347
Require:  timer
To: <sip:1002@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-31411501
Contact: <sip:1002@10.10.199.250:5060;transport=tcp>
Content-Type: application/sdp
Call-ID: 6b70df80-a3914484-32-fbc712ac@10.10.199.251
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bKc7fb59ed7
CSeq: 101 INVITE
Session-Expires:  1800;refresher=uas

v=0
o=CiscoSystemsCCM-SIP 2000 1 IN IP4 10.10.199.250
s=SIP Call
c=IN IP4 10.10.199.238
t=0 0
m=audio 20594 RTP/AVP 9 0 8 18 101
a=rtpmap:9 G722/8000
a=ptime:20
a=rtpmap:0 PCMU/8000
a=ptime:20
a=rtpmap:8 PCMA/8000
a=ptime:20
a=rtpmap:18 G729/8000
a=ptime:20
a=fmtp:18 annexb=no
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
```

[diagram] Call-ID:[prev][next]

[10] ACK sip:1002@10.10.199.250:5060;transport=tcp SIP/2.0

```
Date: Wed, 17 Jun 2009 19:31:16 GMT
From: <sip:002002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-31091656
Allow-Events: presence
Content-Length: 216
To: <sip:1002@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-31411501
Content-Type: application/sdp
Call-ID: 6b70df80-a3914484-32-fbc712ac@10.10.199.251
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bKc81d824053
CSeq: 101 ACK
Max-Forwards: 70

v=0
o=CiscoSystemsCCM-SIP 2000 1 IN IP4 10.10.199.251
s=SIP Call
c=IN IP4 10.10.199.179
t=0 0
m=audio 27084 RTP/AVP 9 101
a=rtpmap:9 G722/8000
a=ptime:20
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
```

[diagram] Call-ID:[prev][next]

[11] ACK sip:56247cef-6c2b-ad4c-54db-0514adea553a@10.10.199.238:40283;transport=tcp SIP/2.0

```
Date: Wed, 17 Jun 2009 19:29:40 GMT
From: <sip:+9193912002@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-31411502
Allow-Events: presence
Content-Length: 216
```

CISCO CONFIDENTIAL

```
To: <sip:56247cef-6c2b-ad4c-54db-0514adea553a@10.10.199.238>;tag=001d45e8aa3d1225d0e5cb88-149bd483
Content-Type: application/sdp
Call-ID: 32386f80-a3914424-30-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bKd742b2172f
CSeq: 101 ACK
Max-Forwards: 70

v=0
o=CiscoSystemsCCM-SIP 2000 1 IN IP4 10.10.199.250
s=SIP Call
c=IN IP4 10.10.199.179
t=0 0
m=audio 27084 RTP/AVP 9 101
a=rtpmap:9 G722/8000
a=ptime:20
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
```

[diagram] Call-ID:[prev][next]

[12] SUBSCRIBE sip:56247cef-6c2b-ad4c-54db-0514adea553a@10.10.199.238:40283;transport=tcp SIP/2.0

```
Date: Wed, 17 Jun 2009 19:29:42 GMT
From: <sip:+9193912002@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-31411502
Event: kpml
Content-Length: 370
User-Agent: Cisco-CUCM7.1
To: <sip:56247cef-6c2b-ad4c-54db-0514adea553a@10.10.199.238>;tag=001d45e8aa3d1225d0e5cb88-149bd483
Contact: <sip:10.10.199.250:5060;transport=tcp>
Expires: 7200
Content-Type: application/kpml-request+xml
Call-ID: 32386f80-a3914424-30-fac712ac@10.10.199.250
Accept: application/kpml-response+xml
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bKd82636b7fa
CSeq: 102 SUBSCRIBE
Max-Forwards: 70

<?xml version="1.0" encoding="UTF-8" ?>
<kpml-request xmlns="urn:ietf:params:xml:ns:kpml-request" xmlns:xsi="http://www.w3.org/2001/XMLSchema-
instance" xsi:schemaLocation="urn:ietf:params:xml:ns:kpml-request kpml-request.xsd" version="1.0">

  <pattern interdigittimer="7260000" persist="persist">
    <regex tag="dtmf">[x*#ABCD]</regex>
  </pattern>

</kpml-request>
```

[diagram] Call-ID:[prev][next]

[13] SIP/2.0 200 OK

```
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bKd82636b7fa
From: <sip:+9193912002@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-31411502
To: <sip:56247cef-6c2b-ad4c-54db-0514adea553a@10.10.199.238>;tag=001d45e8aa3d1225d0e5cb88-149bd483
Call-ID: 32386f80-a3914424-30-fac712ac@10.10.199.250
Date: Wed, 17 Jun 2009 19:29:41 GMT
CSeq: 102 SUBSCRIBE
Server: Cisco-CP7970G/8.5.2
Contact: <sip:56247cef-6c2b-ad4c-54db-0514adea553a@10.10.199.238:40283;transport=TCP>
Expires: 7200
Content-Length: 0
```

[diagram] Call-ID:[prev][next]

[14] NOTIFY sip:10.10.199.250:5060 SIP/2.0

```
Via: SIP/2.0/TCP 10.10.199.238:40283;branch=z9hG4bK91b696a6
To: <sip:+9193912002@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-31411502
From: <sip:56247cef-6c2b-ad4c-54db-0514adea553a@10.10.199.238>;tag=001d45e8aa3d1225d0e5cb88-149bd483
Call-ID: 32386f80-a3914424-30-fac712ac@10.10.199.250
Date: Wed, 17 Jun 2009 19:29:41 GMT
CSeq: 101 NOTIFY
Event: kpml
Subscription-State: active; expires=7200
Max-Forwards: 70
Contact: <sip:56247cef-6c2b-ad4c-54db-0514adea553a@10.10.199.238:40283;transport=TCP>
Allow: ACK,BYE,CANCEL,INVITE,NOTIFY,OPTIONS,REFER,REGISTER,UPDATE,SUBSCRIBE
Content-Length: 0
```

[diagram] Call-ID:[prev][next]

[15] SIP/2.0 200 OK

```
Date: Wed, 17 Jun 2009 19:29:42 GMT
From: <sip:56247cef-6c2b-ad4c-54db-0514adea553a@10.10.199.238>;tag=001d45e8aa3d1225d0e5cb88-149bd483
Content-Length: 0
To: <sip:+9193912002@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-31411502
Call-ID: 32386f80-a3914424-30-fac712ac@10.10.199.250
```

CISCO CONFIDENTIAL

```
Via: SIP/2.0/TCP 10.10.199.238:40283;branch=z9hG4bK91b696a6
CSeq: 101 NOTIFY

[diagram]   Call-ID:[prev][next]
[16] BYE sip:56247cef-6c2b-ad4c-54db-0514adea553a@10.10.199.250:5060;transport=tcp SIP/2.0
Via: SIP/2.0/TCP 10.10.199.238:40283;branch=z9hG4bK6615a428
From: <sip:56247cef-6c2b-ad4c-54db-0514adea553a@10.10.199.238>;tag=001d45e8aa3d1225d0e5cb88-149bd483
To: <sip:+9193912002@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-31411502
Call-ID: 32386f80-a3914424-30-fac712ac@10.10.199.250
Max-Forwards: 70
Date: Wed, 17 Jun 2009 19:29:45 GMT
CSeq: 102 BYE
User-Agent: Cisco-CP7970G/8.5.2
Content-Length: 0

[diagram]   Call-ID:[prev][next]
[17] SIP/2.0 200 OK
Date: Wed, 17 Jun 2009 19:29:45 GMT
From: <sip:56247cef-6c2b-ad4c-54db-0514adea553a@10.10.199.238>;tag=001d45e8aa3d1225d0e5cb88-149bd483
Content-Length: 0
To: <sip:+9193912002@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-31411502
Call-ID: 32386f80-a3914424-30-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.238:40283;branch=z9hG4bK6615a428
CSeq: 102 BYE

[diagram]   Call-ID:[prev][next]
[18] SUBSCRIBE sip:56247cef-6c2b-ad4c-54db-0514adea553a@10.10.199.238:40283;transport=TCP SIP/2.0
Date: Wed, 17 Jun 2009 19:29:45 GMT
From: <sip:+9193912002@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-31411502
Event: kpml
Content-Length: 0
User-Agent: Cisco-CUCM7.1
To: <sip:56247cef-6c2b-ad4c-54db-0514adea553a@10.10.199.238>;tag=001d45e8aa3d1225d0e5cb88-149bd483
Contact: <sip:10.10.199.250:5060;transport=tcp>
Expires: 0
Call-ID: 32386f80-a3914424-30-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bKda47dafb39
CSeq: 103 SUBSCRIBE
Max-Forwards: 70

[diagram]   Call-ID:[prev][next]
[19] BYE sip:002002@10.10.199.251:5060;transport=tcp SIP/2.0
Date: Wed, 17 Jun 2009 19:29:42 GMT
From: <sip:1002@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-31411501
Content-Length: 0
User-Agent: Cisco-CUCM7.1
To: <sip:002002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-31091656
Call-ID: 6b70df80-a3914484-32-fbc712ac@10.10.199.251
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bKd9281d02d3
CSeq: 101 BYE
Max-Forwards: 70

[diagram]   Call-ID:[prev][next]
[20] SIP/2.0 200 OK
Date: Wed, 17 Jun 2009 19:31:21 GMT
From: <sip:1002@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-31411501
Content-Length: 0
To: <sip:002002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-31091656
Call-ID: 6b70df80-a3914484-32-fbc712ac@10.10.199.251
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bKd9281d02d3
CSeq: 101 BYE

[diagram]   Call-ID:[prev][next]
[21] SIP/2.0 200 OK
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bKda47dafb39
From: <sip:+9193912002@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-31411502
To: <sip:56247cef-6c2b-ad4c-54db-0514adea553a@10.10.199.238>;tag=001d45e8aa3d1225d0e5cb88-149bd483
Call-ID: 32386f80-a3914424-30-fac712ac@10.10.199.250
Date: Wed, 17 Jun 2009 19:29:45 GMT
CSeq: 103 SUBSCRIBE
Server: Cisco-CP7970G/8.5.2
Contact: <sip:56247cef-6c2b-ad4c-54db-0514adea553a@10.10.199.238:40283;transport=TCP>
Expires: 0
Content-Length: 0

[diagram]   Call-ID:[prev][next]
[22] NOTIFY sip:10.10.199.250:5060 SIP/2.0
Via: SIP/2.0/TCP 10.10.199.238:40283;branch=z9hG4bK1f36098e
To: <sip:+9193912002@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-31411502
From: <sip:56247cef-6c2b-ad4c-54db-0514adea553a@10.10.199.238>;tag=001d45e8aa3d1225d0e5cb88-149bd483
```

CISCO CONFIDENTIAL

```
Call-ID: 32386f80-a3914424-30-fac712ac@10.10.199.250
Date: Wed, 17 Jun 2009 19:29:45 GMT
CSeq: 103 NOTIFY
Event: kpml
Subscription-State: terminated; reason=timeout
Max-Forwards: 70
Contact: <sip:56247cef-6c2b-ad4c-54db-0514adea553a@10.10.199.238:40283;transport=TCP>
Allow: ACK,BYE,CANCEL,INVITE,NOTIFY,OPTIONS,REFER,REGISTER,UPDATE,SUBSCRIBE
Content-Length: 214
Content-Type: application/kpml-response+xml
Content-Disposition: session;handling=required

<?xml version="1.0" encoding="UTF-8"?>
<kpml-response xmlns="urn:ietf:params:xml:ns:kpml-response" version="1.0" code="487" text="Subscription Exp"
suppressed="false" forced_flush="false" digits="" tag="dtmf"/>

[diagram]   Call-ID:[prev][next]
[23] SIP/2.0 200 OK
Date: Wed, 17 Jun 2009 19:29:45 GMT
From: <sip:56247cef-6c2b-ad4c-54db-0514adea553a@10.10.199.238>;tag=001d45e8aa3d1225d0e5cb88-149bd483
Content-Length: 0
To: <sip:+9193912002@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-31411502
Call-ID: 32386f80-a3914424-30-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.238:40283;branch=z9hG4bK1f36098e
CSeq: 103 NOTIFY
```

25.3 Define Calling Party Transformation CSS for Unknown Number on Trunk Device Page

Title: Define Calling Party Transformation CSS for Unknown Number on Trunk Device Page

Description:

The following call flow illustrates the SIP messaging that takes place between two Cisco Unified CMs via an inter cluster SIP trunk, and between the UAS side SIP trunk and the terminating side SIP phone.

Cisco IP PhoneB registered to Cisco Unified CM2 calls Cisco IP PhoneA which is registered to Cisco Unified CM1.

Configuration:

Node = Unified CM1, IP = 10.10.199.250
Node = Unified CM2, IP = 10.10.199.251

Phone = A, Line = 1002, IP = 10.10.199.238, Model = SIP TNP
Phone = B, Line = 2002, IP = 10.10.199.179, Model = SCCP

SIP Trunk between Unified CM2 & Unified CM1 has route pattern 1.XXXX
SIP Trunk between Unified CM1 & Unified CM2 has route pattern 2.XXXX

Calling party transformation configuration steps:

1. CCM1 configuration:
   1) Configure a CSS rtpCSS1 with partition rtpp1
   2) Configure a Calling Party Transformation with
      Pattern = 00XXXX
      Partition = rtpp1
      Calling Party Tranformation Mask - 47XX
      Prefix Digits +919392
   3) Trunk Device Page - Incoming Calling Party Transformation CSS for Unknown Number: rtpCSS1
   4) Service Parameter for Incoming Calling Party Unknown Number Prefix - SIP: empty
   5) Trunk Device Page - Incoming Calling Party Unknown Number Prefix: default
   6) Trunk Device Page - Incoming Calling Party Unknown Digits to Strip: empty
   7) Default Device Pool Page - Incoming Calling Party Unknown Number Prefix: default

CISCO CONFIDENTIAL

8) Default Device Pool Page - Incoming Calling Party Unknown Digits to Strip: empty

2. CCM2 configuration:

1) Prefix Digits (Outgoing Calls): 00
2) Calling Party Number Type: Unknown
3) Calling Party Numbering Plan: Unknown
4) Discard Predot

Scenario:

Phone B DN 2002 calls Phone A DN 1002 over the SIP Trunk by dialing 11002
Phone A DN 1002 Answers
Duration short
Phone A DN 1002 goes onHook
End of Scenario

CISCO CONFIDENTIAL

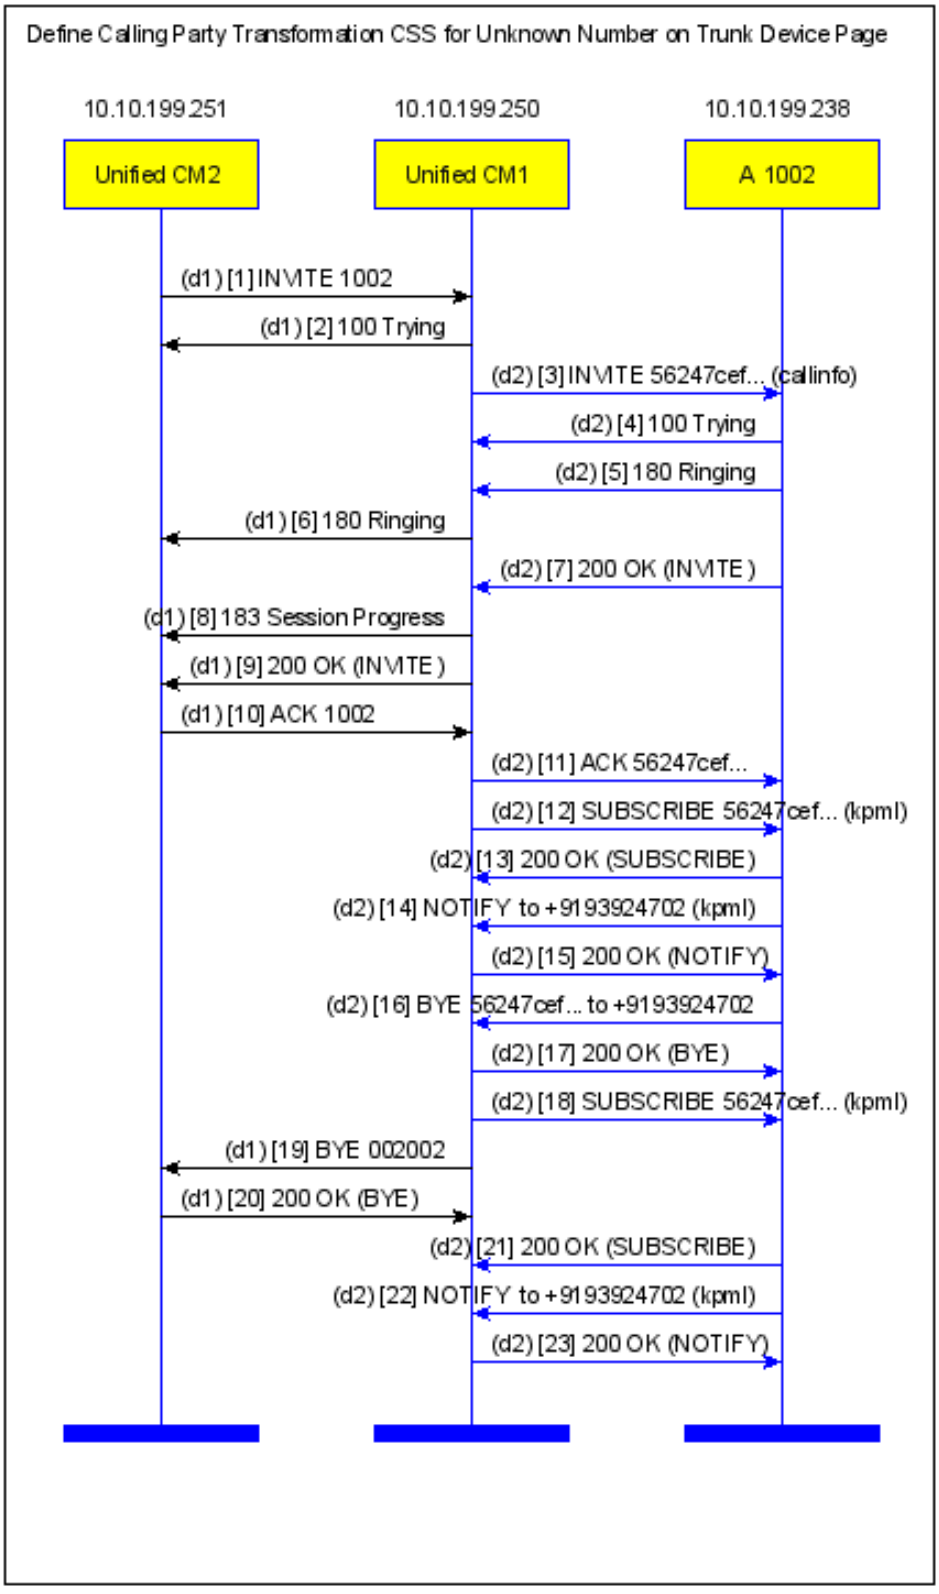

CISCO CONFIDENTIAL

[diagram] Call-ID:[prev][next]
[1] INVITE sip:1002@10.10.199.250:5060 SIP/2.0
Date: Wed, 17 Jun 2009 19:41:20 GMT
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:002002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-31091658
Allow-Events: presence
P-Asserted-Identity: <sip:002002@10.10.199.251>
Supported: timer,resource-priority,replaces
Supported: Geolocation
Min-SE: 1800
Remote-Party-ID: <sip:002002@10.10.199.251>;party=calling;screen=yes;privacy=off
Content-Length: 0
User-Agent: Cisco-CUCM7.1
To: <sip:1002@10.10.199.250>
Contact: <sip:002002@10.10.199.251:5060;transport=tcp>
Expires: 180
Call-ID: d373f580-a39146e0-33-fbc712ac@10.10.199.251
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bKc92eb49e92
CSeq: 101 INVITE
Session-Expires: 1800
Max-Forwards: 70

[diagram] Call-ID:[prev][next]
[2] SIP/2.0 100 Trying
Date: Wed, 17 Jun 2009 19:39:44 GMT
From: <sip:002002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-31091658
Allow-Events: presence
Content-Length: 0
To: <sip:1002@10.10.199.250>
Call-ID: d373f580-a39146e0-33-fbc712ac@10.10.199.251
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bKc92eb49e92
CSeq: 101 INVITE

[diagram] Call-ID:[prev][next]
[3] INVITE sip:56247cef-6c2b-ad4c-54db-0514adea553a@10.10.199.238:40283;transport=tcp SIP/2.0
Date: Wed, 17 Jun 2009 19:39:44 GMT
Call-Info: <urn:x-cisco-remotecc:callinfo>; security= NotAuthenticated; orientation= from; gci= 1-10036;
call-instance= 1
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:+9193924702@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-31411504
Allow-Events: presence
Supported: timer,resource-priority,replaces
Min-SE: 1800
Remote-Party-ID: <sip:+9193924702@10.10.199.250;x-cisco-callback-
number=+9193924702>;party=calling;screen=yes;privacy=off
Content-Length: 0
User-Agent: Cisco-CUCM7.1
To: <sip:56247cef-6c2b-ad4c-54db-0514adea553a@10.10.199.238>
Contact: <sip:56247cef-6c2b-ad4c-54db-0514adea553a@10.10.199.250:5060;transport=tcp>
Expires: 180
Call-ID: 9a3b8580-a3914680-31-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bKdb238dce71
CSeq: 101 INVITE
Send-Info: conference
Max-Forwards: 69
Alert-Info: <file://Bellcore-dr2/>

[diagram] Call-ID:[prev][next]
[4] SIP/2.0 100 Trying
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bKdb238dce71
From: <sip:+9193924702@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-31411504
To: <sip:56247cef-6c2b-ad4c-54db-0514adea553a@10.10.199.238>
Call-ID: 9a3b8580-a3914680-31-fac712ac@10.10.199.250
Date: Wed, 17 Jun 2009 19:39:44 GMT
CSeq: 101 INVITE
Server: Cisco-CP7970G/8.5.2
Contact: <sip:56247cef-6c2b-ad4c-54db-0514adea553a@10.10.199.238:40283;transport=tcp>
Allow: ACK,BYE,CANCEL,INVITE,NOTIFY,OPTIONS,REFER,REGISTER,UPDATE,SUBSCRIBE
Allow-Events: kpml,dialog
Content-Length: 0

[diagram] Call-ID:[prev][next]
[5] SIP/2.0 180 Ringing
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bKdb238dce71
From: <sip:+9193924702@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-31411504
To: <sip:56247cef-6c2b-ad4c-54db-0514adea553a@10.10.199.238>;tag=001d45e8aa3d122b72294434-4bda89c7
Call-ID: 9a3b8580-a3914680-31-fac712ac@10.10.199.250
Date: Wed, 17 Jun 2009 19:39:44 GMT
CSeq: 101 INVITE
Server: Cisco-CP7970G/8.5.2

CISCO CONFIDENTIAL

```
Contact: <sip:56247cef-6c2b-ad4c-54db-0514adea553a@10.10.199.238:40283;transport=tcp>
Allow: ACK,BYE,CANCEL,INVITE,NOTIFY,OPTIONS,REFER,REGISTER,UPDATE,SUBSCRIBE
Remote-Party-ID: "1002" <sip:1002@10.10.199.250>;party=called;id-type=subscriber;privacy=off;screen=yes
Allow-Events: kpml,dialog
Content-Length: 0
```

[diagram] Call-ID:[prev][next]

[6] SIP/2.0 180 Ringing

```
Date: Wed, 17 Jun 2009 19:39:44 GMT
Call-Info: <sip:10.10.199.250:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:002002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-31091658
Allow-Events: presence
P-Asserted-Identity: <sip:1002@10.10.199.250>
Supported: Geolocation
Remote-Party-ID: <sip:1002@10.10.199.250>;party=called;screen=yes;privacy=off
Content-Length: 0
To: <sip:1002@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-31411503
Contact: <sip:1002@10.10.199.250:5060;transport=tcp>
Call-ID: d373f580-a39146e0-33-fbc712ac@10.10.199.251
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bKc92eb49e92
CSeq: 101 INVITE
```

[diagram] Call-ID:[prev][next]

[7] SIP/2.0 200 OK

```
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bKdb238dce71
From: <sip:+9193924702@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-31411504
To: <sip:56247cef-6c2b-ad4c-54db-0514adea553a@10.10.199.238>;tag=001d45e8aa3d122b72294434-4bda89c7
Call-ID: 9a3b8580-a3914680-31-fac712ac@10.10.199.250
Date: Wed, 17 Jun 2009 19:39:45 GMT
CSeq: 101 INVITE
Server: Cisco-CP7970G/8.5.2
Contact: <sip:56247cef-6c2b-ad4c-54db-0514adea553a@10.10.199.238:40283;transport=tcp>
Allow: ACK,BYE,CANCEL,INVITE,NOTIFY,OPTIONS,REFER,REGISTER,UPDATE,SUBSCRIBE
Remote-Party-ID: "1002" <sip:1002@10.10.199.250>;party=called;id-type=subscriber;privacy=off;screen=yes
Allow-Events: kpml,dialog
Content-Length: 304
Content-Type: application/sdp
Content-Disposition: session;handling=optional

v=0
o=Cisco-SIPUA 22197 0 IN IP4 10.10.199.238
s=SIP Call
t=0 0
m=audio 22494 RTP/AVP 0 8 18 9 101
c=IN IP4 10.10.199.238
a=rtpmap:0 PCMU/8000
a=rtpmap:8 PCMA/8000
a=rtpmap:18 G729/8000
a=fmtp:18 annexb=no
a=rtpmap:9 G722/8000
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
a=sendrecv
```

[diagram] Call-ID:[prev][next]

[8] SIP/2.0 183 Session Progress

```
Date: Wed, 17 Jun 2009 19:39:44 GMT
Call-Info: <sip:10.10.199.250:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:002002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-31091658
Allow-Events: presence, kpml
P-Asserted-Identity: <sip:1002@10.10.199.250>
Supported: Geolocation
Remote-Party-ID: <sip:1002@10.10.199.250>;party=called;screen=yes;privacy=off
Content-Length: 347
To: <sip:1002@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-31411503
Contact: <sip:1002@10.10.199.250:5060;transport=tcp>
Content-Type: application/sdp
Call-ID: d373f580-a39146e0-33-fbc712ac@10.10.199.251
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bKc92eb49e92
CSeq: 101 INVITE

v=0
o=CiscoSystemsCCM-SIP 2000 1 IN IP4 10.10.199.250
s=SIP Call
c=IN IP4 10.10.199.238
t=0 0
m=audio 22494 RTP/AVP 9 0 8 18 101
a=rtpmap:9 G722/8000
```

CISCO CONFIDENTIAL

```
a=ptime:20
a=rtpmap:0 PCMU/8000
a=ptime:20
a=rtpmap:8 PCMA/8000
a=ptime:20
a=rtpmap:18 G729/8000
a=ptime:20
a=fmtp:18 annexb=no
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
```

[diagram] Call-ID:[prev][next]

[9] SIP/2.0 200 OK

```
Date: Wed, 17 Jun 2009 19:39:44 GMT
Call-Info: <sip:10.10.199.250:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:002002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-31091658
Allow-Events: presence, kpml
P-Asserted-Identity: <sip:1002@10.10.199.250>
Supported: replaces
Supported: Geolocation
Remote-Party-ID: <sip:1002@10.10.199.250>;party=called;screen=yes;privacy=off
Content-Length: 347
Require:  timer
To: <sip:1002@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-31411503
Contact: <sip:1002@10.10.199.250:5060;transport=tcp>
Content-Type: application/sdp
Call-ID: d373f580-a39146e0-33-fbc712ac@10.10.199.251
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bKc92eb49e92
CSeq: 101 INVITE
Session-Expires:  1800;refresher=uas

v=0
o=CiscoSystemsCCM-SIP 2000 1 IN IP4 10.10.199.250
s=SIP Call
c=IN IP4 10.10.199.238
t=0 0
m=audio 22494 RTP/AVP 9 0 8 18 101
a=rtpmap:9 G722/8000
a=ptime:20
a=rtpmap:0 PCMU/8000
a=ptime:20
a=rtpmap:8 PCMA/8000
a=ptime:20
a=rtpmap:18 G729/8000
a=ptime:20
a=fmtp:18 annexb=no
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
```

[diagram] Call-ID:[prev][next]

[10] ACK sip:1002@10.10.199.250:5060;transport=tcp SIP/2.0

```
Date: Wed, 17 Jun 2009 19:41:20 GMT
From: <sip:002002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-31091658
Allow-Events: presence
Content-Length: 216
To: <sip:1002@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-31411503
Content-Type: application/sdp
Call-ID: d373f580-a39146e0-33-fbc712ac@10.10.199.251
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bKca960c3ae
CSeq: 101 ACK
Max-Forwards: 70

v=0
o=CiscoSystemsCCM-SIP 2000 1 IN IP4 10.10.199.251
s=SIP Call
c=IN IP4 10.10.199.179
t=0 0
m=audio 21922 RTP/AVP 9 101
a=rtpmap:9 G722/8000
a=ptime:20
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
```

[diagram] Call-ID:[prev][next]

[11] ACK sip:56247cef-6c2b-ad4c-54db-0514adea553a@10.10.199.238:40283;transport=tcp SIP/2.0

```
Date: Wed, 17 Jun 2009 19:39:44 GMT
From: <sip:+9193924702@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-31411504
Allow-Events: presence
Content-Length: 216
```

CISCO CONFIDENTIAL

```
To: <sip:56247cef-6c2b-ad4c-54db-0514adea553a@10.10.199.238>;tag=001d45e8aa3d122b72294434-4bda89c7
Content-Type: application/sdp
Call-ID: 9a3b8580-a3914680-31-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bKdc43beb393
CSeq: 101 ACK
Max-Forwards: 70

v=0
o=CiscoSystemsCCM-SIP 2000 1 IN IP4 10.10.199.250
s=SIP Call
c=IN IP4 10.10.199.179
t=0 0
m=audio 21922 RTP/AVP 9 101
a=rtpmap:9 G722/8000
a=ptime:20
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
```

[diagram] Call-ID:[prev][next]

[12] SUBSCRIBE sip:56247cef-6c2b-ad4c-54db-0514adea553a@10.10.199.238:40283;transport=tcp SIP/2.0

```
Date: Wed, 17 Jun 2009 19:39:45 GMT
From: <sip:+9193924702@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-31411504
Event: kpml
Content-Length: 370
User-Agent: Cisco-CUCM7.1
To: <sip:56247cef-6c2b-ad4c-54db-0514adea553a@10.10.199.238>;tag=001d45e8aa3d122b72294434-4bda89c7
Contact: <sip:10.10.199.250:5060;transport=tcp>
Expires: 7200
Content-Type: application/kpml-request+xml
Call-ID: 9a3b8580-a3914680-31-fac712ac@10.10.199.250
Accept: application/kpml-response+xml
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bKdd36205e6e
CSeq: 102 SUBSCRIBE
Max-Forwards: 70

<?xml version="1.0" encoding="UTF-8" ?>
<kpml-request xmlns="urn:ietf:params:xml:ns:kpml-request" xmlns:xsi="http://www.w3.org/2001/XMLSchema-
instance" xsi:schemaLocation="urn:ietf:params:xml:ns:kpml-request kpml-request.xsd" version="1.0">

  <pattern interdigittimer="7260000" persist="persist">
    <regex tag="dtmf">[x*#ABCD]</regex>
  </pattern>

</kpml-request>
```

[diagram] Call-ID:[prev][next]

[13] SIP/2.0 200 OK

```
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bKdd36205e6e
From: <sip:+9193924702@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-31411504
To: <sip:56247cef-6c2b-ad4c-54db-0514adea553a@10.10.199.238>;tag=001d45e8aa3d122b72294434-4bda89c7
Call-ID: 9a3b8580-a3914680-31-fac712ac@10.10.199.250
Date: Wed, 17 Jun 2009 19:39:45 GMT
CSeq: 102 SUBSCRIBE
Server: Cisco-CP7970G/8.5.2
Contact: <sip:56247cef-6c2b-ad4c-54db-0514adea553a@10.10.199.238:40283;transport=TCP>
Expires: 7200
Content-Length: 0
```

[diagram] Call-ID:[prev][next]

[14] NOTIFY sip:10.10.199.250:5060 SIP/2.0

```
Via: SIP/2.0/TCP 10.10.199.238:40283;branch=z9hG4bKef31b8d2
To: <sip:+9193924702@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-31411504
From: <sip:56247cef-6c2b-ad4c-54db-0514adea553a@10.10.199.238>;tag=001d45e8aa3d122b72294434-4bda89c7
Call-ID: 9a3b8580-a3914680-31-fac712ac@10.10.199.250
Date: Wed, 17 Jun 2009 19:39:45 GMT
CSeq: 101 NOTIFY
Event: kpml
Subscription-State: active; expires=7200
Max-Forwards: 70
Contact: <sip:56247cef-6c2b-ad4c-54db-0514adea553a@10.10.199.238:40283;transport=TCP>
Allow: ACK,BYE,CANCEL,INVITE,NOTIFY,OPTIONS,REFER,REGISTER,UPDATE,SUBSCRIBE
Content-Length: 0
```

[diagram] Call-ID:[prev][next]

[15] SIP/2.0 200 OK

```
Date: Wed, 17 Jun 2009 19:39:46 GMT
From: <sip:56247cef-6c2b-ad4c-54db-0514adea553a@10.10.199.238>;tag=001d45e8aa3d122b72294434-4bda89c7
Content-Length: 0
To: <sip:+9193924702@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-31411504
Call-ID: 9a3b8580-a3914680-31-fac712ac@10.10.199.250
```

```
Via: SIP/2.0/TCP 10.10.199.238:40283;branch=z9hG4bKef31b8d2
CSeq: 101 NOTIFY

[diagram]   Call-ID:[prev][next]
[16] BYE sip:56247cef-6c2b-ad4c-54db-0514adea553a@10.10.199.250:5060;transport=tcp SIP/2.0
Via: SIP/2.0/TCP 10.10.199.238:40283;branch=z9hG4bK3b0d5bab
From: <sip:56247cef-6c2b-ad4c-54db-0514adea553a@10.10.199.238>;tag=001d45e8aa3d122b72294434-4bda89c7
To: <sip:+9193924702@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-31411504
Call-ID: 9a3b8580-a3914680-31-fac712ac@10.10.199.250
Max-Forwards: 70
Date: Wed, 17 Jun 2009 19:39:52 GMT
CSeq: 102 BYE
User-Agent: Cisco-CP7970G/8.5.2
Content-Length: 0

[diagram]   Call-ID:[prev][next]
[17] SIP/2.0 200 OK
Date: Wed, 17 Jun 2009 19:39:53 GMT
From: <sip:56247cef-6c2b-ad4c-54db-0514adea553a@10.10.199.238>;tag=001d45e8aa3d122b72294434-4bda89c7
Content-Length: 0
To: <sip:+9193924702@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-31411504
Call-ID: 9a3b8580-a3914680-31-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.238:40283;branch=z9hG4bK3b0d5bab
CSeq: 102 BYE

[diagram]   Call-ID:[prev][next]
[18] SUBSCRIBE sip:56247cef-6c2b-ad4c-54db-0514adea553a@10.10.199.238:40283;transport=TCP SIP/2.0
Date: Wed, 17 Jun 2009 19:39:53 GMT
From: <sip:+9193924702@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-31411504
Event: kpml
Content-Length: 0
User-Agent: Cisco-CUCM7.1
To: <sip:56247cef-6c2b-ad4c-54db-0514adea553a@10.10.199.238>;tag=001d45e8aa3d122b72294434-4bda89c7
Contact: <sip:10.10.199.250:5060;transport=tcp>
Expires: 0
Call-ID: 9a3b8580-a3914680-31-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bKdf3732bbc6
CSeq: 103 SUBSCRIBE
Max-Forwards: 70

[diagram]   Call-ID:[prev][next]
[19] BYE sip:002002@10.10.199.251:5060;transport=tcp SIP/2.0
Date: Wed, 17 Jun 2009 19:39:45 GMT
From: <sip:1002@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-31411503
Content-Length: 0
User-Agent: Cisco-CUCM7.1
To: <sip:002002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-31091658
Call-ID: d373f580-a39146e0-33-fbc712ac@10.10.199.251
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bKde5dddc98f
CSeq: 101 BYE
Max-Forwards: 70

[diagram]   Call-ID:[prev][next]
[20] SIP/2.0 200 OK
Date: Wed, 17 Jun 2009 19:41:29 GMT
From: <sip:1002@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-31411503
Content-Length: 0
To: <sip:002002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-31091658
Call-ID: d373f580-a39146e0-33-fbc712ac@10.10.199.251
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bKde5dddc98f
CSeq: 101 BYE

[diagram]   Call-ID:[prev][next]
[21] SIP/2.0 200 OK
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bKdf3732bbc6
From: <sip:+9193924702@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-31411504
To: <sip:56247cef-6c2b-ad4c-54db-0514adea553a@10.10.199.238>;tag=001d45e8aa3d122b72294434-4bda89c7
Call-ID: 9a3b8580-a3914680-31-fac712ac@10.10.199.250
Date: Wed, 17 Jun 2009 19:39:52 GMT
CSeq: 103 SUBSCRIBE
Server: Cisco-CP7970G/8.5.2
Contact: <sip:56247cef-6c2b-ad4c-54db-0514adea553a@10.10.199.238:40283;transport=TCP>
Expires: 0
Content-Length: 0

[diagram]   Call-ID:[prev][next]
[22] NOTIFY sip:10.10.199.250:5060 SIP/2.0
Via: SIP/2.0/TCP 10.10.199.238:40283;branch=z9hG4bKdea25dfd
To: <sip:+9193924702@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-31411504
From: <sip:56247cef-6c2b-ad4c-54db-0514adea553a@10.10.199.238>;tag=001d45e8aa3d122b72294434-4bda89c7
```

CISCO CONFIDENTIAL

```
Call-ID: 9a3b8580-a3914680-31-fac712ac@10.10.199.250
Date: Wed, 17 Jun 2009 19:39:52 GMT
CSeq: 103 NOTIFY
Event: kpml
Subscription-State: terminated; reason=timeout
Max-Forwards: 70
Contact: <sip:56247cef-6c2b-ad4c-54db-0514adea553a@10.10.199.238:40283;transport=TCP>
Allow: ACK,BYE,CANCEL,INVITE,NOTIFY,OPTIONS,REFER,REGISTER,UPDATE,SUBSCRIBE
Content-Length: 214
Content-Type: application/kpml-response+xml
Content-Disposition: session;handling=required

<?xml version="1.0" encoding="UTF-8"?>
<kpml-response xmlns="urn:ietf:params:xml:ns:kpml-response" version="1.0" code="487" text="Subscription Exp"
suppressed="false" forced_flush="false" digits="" tag="dtmf"/>
```

[diagram] Call-ID:[prev][next]

[23] SIP/2.0 200 OK

```
Date: Wed, 17 Jun 2009 19:39:53 GMT
From: <sip:56247cef-6c2b-ad4c-54db-0514adea553a@10.10.199.238>;tag=001d45e8aa3d122b72294434-4bda89c7
Content-Length: 0
To: <sip:+9193924702@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-31411504
Call-ID: 9a3b8580-a3914680-31-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.238:40283;branch=z9hG4bKdea25dfd
CSeq: 103 NOTIFY
```

25.4 Define both Stripping/Prefixing and Calling Party Transformation CSS for Unknown Number on Device Pool Page

Title: Define both Stripping/Prefixing and Calling Party Transformation CSS for Unknown Number on Device Pool Page

Description:

The following call flow illustrates the SIP messaging that takes place between two Cisco Unified CMs via an inter cluster SIP trunk, and between the UAS side SIP trunk and the terminating side SIP phone.

Cisco IP PhoneB registered to Cisco Unified CM2 calls Cisco IP PhoneA which is registered to Cisco Unified CM1.

Configuration:

Node = Unified CM1, IP = 10.10.199.250
Node = Unified CM2, IP = 10.10.199.251

Phone = A, Line = 1002, IP = 10.10.199.238, Model = SIP TNP
Phone = B, Line = 2002, IP = 10.10.199.179, Model = SCCP

SIP Trunk between Unified CM2 & Unified CM1 has route pattern 1.XXXX
SIP Trunk between Unified CM1 & Unified CM2 has route pattern 2.XXXX

Calling party transformation configuration steps:

1. CCM1 configuration:
   1) Configure a CSS rtpCSS1 with partition rtpp1
   2) Configure a Calling Party Transformation with
      Pattern = \+91!
      Partition = rtpp1
      Calling Party Tranformation Mask - 47XX
      Prefix Digits +408804
   3) Trunk Device Page - Incoming Calling Party Transformation CSS for Unknown Number: None

      Check the "Use Device Pool CSS" checkbox
   4) Default Device Pool Page - Incoming Calling Party Transformation CSS for Unknown

CISCO CONFIDENTIAL

Number: rtpCSS1

5) Service Parameter for Incoming Calling Party Unknown Number Prefix - SIP: empty
6) Trunk Device Page - Incoming Calling Party Unknown Number Prefix: +919392
7) Trunk Device Page - Incoming Calling Party Unknown Digits to Strip: 2
8) Default Device Pool Page - Incoming Calling Party Unknown Number Prefix: default
9) Default Device Pool Page - Incoming Calling Party Unknown Digits to Strip: empty

2. CCM2 configuration:

1) Prefix Digits (Outgoing Calls): 00
2) Calling Party Number Type: Unknown
3) Calling Party Numbering Plan: Unknown
4) Discard Predot

Scenario:

Phone B DN 2002 calls Phone A DN 1002 over the SIP Trunk by dialing 11002
Phone A DN 1002 Answers
Duration short
Phone A DN 1002 goes onHook
End of Scenario

CISCO CONFIDENTIAL

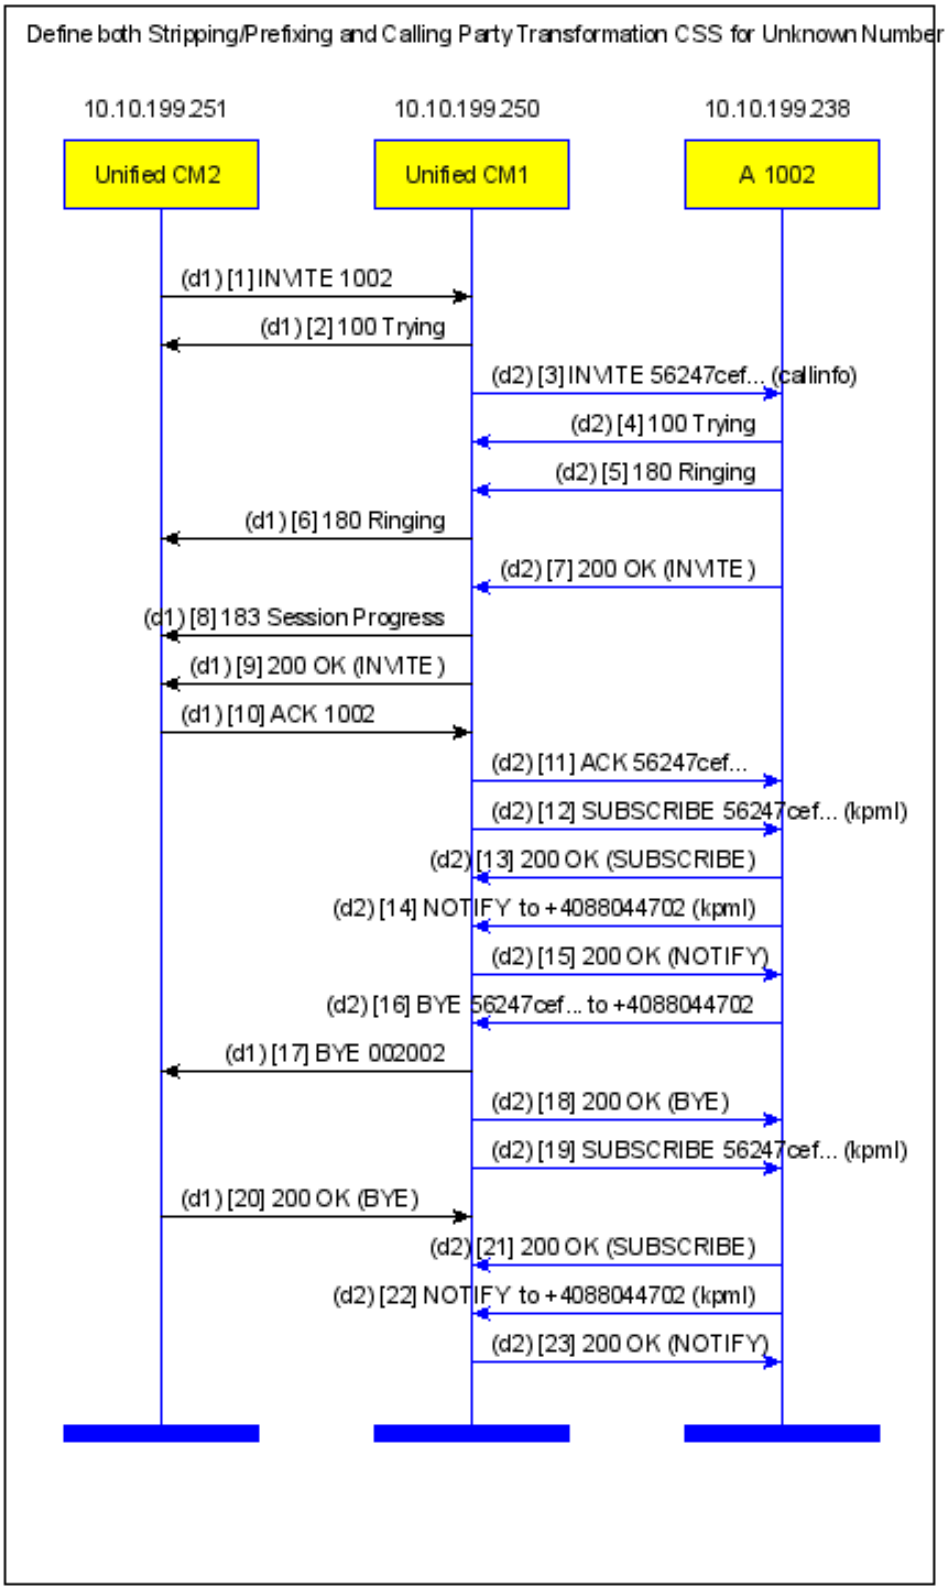

CISCO CONFIDENTIAL

[diagram] Call-ID:[prev][next]
[1] INVITE sip:1002@10.10.199.250:5060 SIP/2.0
Date: Wed, 17 Jun 2009 19:52:23 GMT
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:002002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-31091662
Allow-Events: presence
P-Asserted-Identity: <sip:002002@10.10.199.251>
Supported: timer,resource-priority,replaces
Supported: Geolocation
Min-SE: 1800
Remote-Party-ID: <sip:002002@10.10.199.251>;party=calling;screen=yes;privacy=off
Content-Length: 0
User-Agent: Cisco-CUCM7.1
To: <sip:1002@10.10.199.250>
Contact: <sip:002002@10.10.199.251:5060;transport=tcp>
Expires: 180
Call-ID: 5ea1bb00-a3914977-35-fbc712ac@10.10.199.251
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bKcd391a9ebd
CSeq: 101 INVITE
Session-Expires: 1800
Max-Forwards: 70

[diagram] Call-ID:[prev][next]
[2] SIP/2.0 100 Trying
Date: Wed, 17 Jun 2009 19:50:47 GMT
From: <sip:002002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-31091662
Allow-Events: presence
Content-Length: 0
To: <sip:1002@10.10.199.250>
Call-ID: 5ea1bb00-a3914977-35-fbc712ac@10.10.199.251
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bKcd391a9ebd
CSeq: 101 INVITE

[diagram] Call-ID:[prev][next]
[3] INVITE sip:56247cef-6c2b-ad4c-54db-0514adea553a@10.10.199.238:12853;transport=tcp SIP/2.0
Date: Wed, 17 Jun 2009 19:50:47 GMT
Call-Info: <urn:x-cisco-remotecc:callinfo>; security= NotAuthenticated; orientation= from; gci= 1-10038;
call-instance= 1
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:+4088044702@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-31411508
Allow-Events: presence
Supported: timer,resource-priority,replaces
Min-SE: 1800
Remote-Party-ID: <sip:+4088044702@10.10.199.250;x-cisco-callback-
number=+4088044702>;party=calling;screen=yes;privacy=off
Content-Length: 0
User-Agent: Cisco-CUCM7.1
To: <sip:56247cef-6c2b-ad4c-54db-0514adea553a@10.10.199.238>
Contact: <sip:56247cef-6c2b-ad4c-54db-0514adea553a@10.10.199.250:5060;transport=tcp>
Expires: 180
Call-ID: 25694b00-a3914917-35-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bKe766cedbec
CSeq: 101 INVITE
Send-Info: conference
Max-Forwards: 69
Alert-Info: <file://Bellcore-dr2/>

[diagram] Call-ID:[prev][next]
[4] SIP/2.0 100 Trying
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bKe766cedbec
From: <sip:+4088044702@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-31411508
To: <sip:56247cef-6c2b-ad4c-54db-0514adea553a@10.10.199.238>
Call-ID: 25694b00-a3914917-35-fac712ac@10.10.199.250
Date: Wed, 17 Jun 2009 19:50:47 GMT
CSeq: 101 INVITE
Server: Cisco-CP7970G/8.5.2
Contact: <sip:56247cef-6c2b-ad4c-54db-0514adea553a@10.10.199.238:12853;transport=tcp>
Allow: ACK,BYE,CANCEL,INVITE,NOTIFY,OPTIONS,REFER,REGISTER,UPDATE,SUBSCRIBE
Allow-Events: kpml,dialog
Content-Length: 0

[diagram] Call-ID:[prev][next]
[5] SIP/2.0 180 Ringing
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bKe766cedbec
From: <sip:+4088044702@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-31411508
To: <sip:56247cef-6c2b-ad4c-54db-0514adea553a@10.10.199.238>;tag=001d45e8aa3d1235fd0436dd-34d3cc1c
Call-ID: 25694b00-a3914917-35-fac712ac@10.10.199.250
Date: Wed, 17 Jun 2009 19:50:47 GMT
CSeq: 101 INVITE
Server: Cisco-CP7970G/8.5.2

CISCO CONFIDENTIAL

```
Contact: <sip:56247cef-6c2b-ad4c-54db-0514adea553a@10.10.199.238:12853;transport=tcp>
Allow: ACK,BYE,CANCEL,INVITE,NOTIFY,OPTIONS,REFER,REGISTER,UPDATE,SUBSCRIBE
Remote-Party-ID: "1002" <sip:1002@10.10.199.250>;party=called;id-type=subscriber;privacy=off;screen=yes
Allow-Events: kpml,dialog
Content-Length: 0
```

[diagram] Call-ID:[prev][next]

[6] SIP/2.0 180 Ringing

```
Date: Wed, 17 Jun 2009 19:50:47 GMT
Call-Info: <sip:10.10.199.250:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:002002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-31091662
Allow-Events: presence
P-Asserted-Identity: <sip:1002@10.10.199.250>
Supported: Geolocation
Remote-Party-ID: <sip:1002@10.10.199.250>;party=called;screen=yes;privacy=off
Content-Length: 0
To: <sip:1002@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-31411507
Contact: <sip:1002@10.10.199.250:5060;transport=tcp>
Call-ID: 5ea1bb00-a3914977-35-fbc712ac@10.10.199.251
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bKcd391a9ebd
CSeq: 101 INVITE
```

[diagram] Call-ID:[prev][next]

[7] SIP/2.0 200 OK

```
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bKe766cedbec
From: <sip:+4088044702@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-31411508
To: <sip:56247cef-6c2b-ad4c-54db-0514adea553a@10.10.199.238>;tag=001d45e8aa3d1235fd0436dd-34d3cc1c
Call-ID: 25694b00-a3914917-35-fac712ac@10.10.199.250
Date: Wed, 17 Jun 2009 19:50:48 GMT
CSeq: 101 INVITE
Server: Cisco-CP7970G/8.5.2
Contact: <sip:56247cef-6c2b-ad4c-54db-0514adea553a@10.10.199.238:12853;transport=tcp>
Allow: ACK,BYE,CANCEL,INVITE,NOTIFY,OPTIONS,REFER,REGISTER,UPDATE,SUBSCRIBE
Remote-Party-ID: "1002" <sip:1002@10.10.199.250>;party=called;id-type=subscriber;privacy=off;screen=yes
Allow-Events: kpml,dialog
Content-Length: 304
Content-Type: application/sdp
Content-Disposition: session;handling=optional

v=0
o=Cisco-SIPUA 24433 0 IN IP4 10.10.199.238
s=SIP Call
t=0 0
m=audio 32146 RTP/AVP 0 8 18 9 101
c=IN IP4 10.10.199.238
a=rtpmap:0 PCMU/8000
a=rtpmap:8 PCMA/8000
a=rtpmap:18 G729/8000
a=fmtp:18 annexb=no
a=rtpmap:9 G722/8000
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
a=sendrecv
```

[diagram] Call-ID:[prev][next]

[8] SIP/2.0 183 Session Progress

```
Date: Wed, 17 Jun 2009 19:50:47 GMT
Call-Info: <sip:10.10.199.250:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:002002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-31091662
Allow-Events: presence, kpml
P-Asserted-Identity: <sip:1002@10.10.199.250>
Supported: Geolocation
Remote-Party-ID: <sip:1002@10.10.199.250>;party=called;screen=yes;privacy=off
Content-Length: 347
To: <sip:1002@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-31411507
Contact: <sip:1002@10.10.199.250:5060;transport=tcp>
Content-Type: application/sdp
Call-ID: 5ea1bb00-a3914977-35-fbc712ac@10.10.199.251
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bKcd391a9ebd
CSeq: 101 INVITE

v=0
o=CiscoSystemsCCM-SIP 2000 1 IN IP4 10.10.199.250
s=SIP Call
c=IN IP4 10.10.199.238
t=0 0
m=audio 32146 RTP/AVP 9 0 8 18 101
a=rtpmap:9 G722/8000
```

CISCO CONFIDENTIAL

```
a=ptime:20
a=rtpmap:0 PCMU/8000
a=ptime:20
a=rtpmap:8 PCMA/8000
a=ptime:20
a=rtpmap:18 G729/8000
a=ptime:20
a=fmtp:18 annexb=no
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
```

[diagram] Call-ID:[prev][next]

[9] SIP/2.0 200 OK

```
Date: Wed, 17 Jun 2009 19:50:47 GMT
Call-Info: <sip:10.10.199.250:5060>;method="NOTIFY;Event=telephone-event;Duration=500"
Allow: INVITE, OPTIONS, INFO, BYE, CANCEL, ACK, PRACK, UPDATE, REFER, SUBSCRIBE, NOTIFY
From: <sip:002002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-31091662
Allow-Events: presence, kpml
P-Asserted-Identity: <sip:1002@10.10.199.250>
Supported: replaces
Supported: Geolocation
Remote-Party-ID: <sip:1002@10.10.199.250>;party=called;screen=yes;privacy=off
Content-Length: 347
Require:  timer
To: <sip:1002@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-31411507
Contact: <sip:1002@10.10.199.250:5060;transport=tcp>
Content-Type: application/sdp
Call-ID: 5ea1bb00-a3914977-35-fbc712ac@10.10.199.251
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bKcd391a9ebd
CSeq: 101 INVITE
Session-Expires:  1800;refresher=uas

v=0
o=CiscoSystemsCCM-SIP 2000 1 IN IP4 10.10.199.250
s=SIP Call
c=IN IP4 10.10.199.238
t=0 0
m=audio 32146 RTP/AVP 9 0 8 18 101
a=rtpmap:9 G722/8000
a=ptime:20
a=rtpmap:0 PCMU/8000
a=ptime:20
a=rtpmap:8 PCMA/8000
a=ptime:20
a=rtpmap:18 G729/8000
a=ptime:20
a=fmtp:18 annexb=no
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
```

[diagram] Call-ID:[prev][next]

[10] ACK sip:1002@10.10.199.250:5060;transport=tcp SIP/2.0

```
Date: Wed, 17 Jun 2009 19:52:23 GMT
From: <sip:002002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-31091662
Allow-Events: presence
Content-Length: 216
To: <sip:1002@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-31411507
Content-Type: application/sdp
Call-ID: 5ea1bb00-a3914977-35-fbc712ac@10.10.199.251
Via: SIP/2.0/TCP 10.10.199.251:5060;branch=z9hG4bKce7ab241ac
CSeq: 101 ACK
Max-Forwards: 70

v=0
o=CiscoSystemsCCM-SIP 2000 1 IN IP4 10.10.199.251
s=SIP Call
c=IN IP4 10.10.199.179
t=0 0
m=audio 22682 RTP/AVP 9 101
a=rtpmap:9 G722/8000
a=ptime:20
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
```

[diagram] Call-ID:[prev][next]

[11] ACK sip:56247cef-6c2b-ad4c-54db-0514adea553a@10.10.199.238:12853;transport=tcp SIP/2.0

```
Date: Wed, 17 Jun 2009 19:50:47 GMT
From: <sip:+4088044702@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-31411508
Allow-Events: presence
Content-Length: 216
```

CISCO CONFIDENTIAL

```
To: <sip:56247cef-6c2b-ad4c-54db-0514adea553a@10.10.199.238>;tag=001d45e8aa3d1235fd0436dd-34d3cc1c
Content-Type: application/sdp
Call-ID: 25694b00-a3914917-35-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bKe86230bbaf
CSeq: 101 ACK
Max-Forwards: 70

v=0
o=CiscoSystemsCCM-SIP 2000 1 IN IP4 10.10.199.250
s=SIP Call
c=IN IP4 10.10.199.179
t=0 0
m=audio 22682 RTP/AVP 9 101
a=rtpmap:9 G722/8000
a=ptime:20
a=rtpmap:101 telephone-event/8000
a=fmtp:101 0-15
```

[diagram] Call-ID:[prev][next]

[12] SUBSCRIBE sip:56247cef-6c2b-ad4c-54db-0514adea553a@10.10.199.238:12853;transport=tcp SIP/2.0

```
Date: Wed, 17 Jun 2009 19:50:48 GMT
From: <sip:+4088044702@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-31411508
Event: kpml
Content-Length: 370
User-Agent: Cisco-CUCM7.1
To: <sip:56247cef-6c2b-ad4c-54db-0514adea553a@10.10.199.238>;tag=001d45e8aa3d1235fd0436dd-34d3cc1c
Contact: <sip:10.10.199.250:5060;transport=tcp>
Expires: 7200
Content-Type: application/kpml-request+xml
Call-ID: 25694b00-a3914917-35-fac712ac@10.10.199.250
Accept: application/kpml-response+xml
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bKe92b43b419
CSeq: 102 SUBSCRIBE
Max-Forwards: 70

<?xml version="1.0" encoding="UTF-8" ?>
<kpml-request xmlns="urn:ietf:params:xml:ns:kpml-request" xmlns:xsi="http://www.w3.org/2001/XMLSchema-
instance" xsi:schemaLocation="urn:ietf:params:xml:ns:kpml-request kpml-request.xsd" version="1.0">

  <pattern interdigittimer="7260000" persist="persist">
    <regex tag="dtmf">[x*#ABCD]</regex>
  </pattern>

</kpml-request>
```

[diagram] Call-ID:[prev][next]

[13] SIP/2.0 200 OK

```
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bKe92b43b419
From: <sip:+4088044702@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-31411508
To: <sip:56247cef-6c2b-ad4c-54db-0514adea553a@10.10.199.238>;tag=001d45e8aa3d1235fd0436dd-34d3cc1c
Call-ID: 25694b00-a3914917-35-fac712ac@10.10.199.250
Date: Wed, 17 Jun 2009 19:50:48 GMT
CSeq: 102 SUBSCRIBE
Server: Cisco-CP7970G/8.5.2
Contact: <sip:56247cef-6c2b-ad4c-54db-0514adea553a@10.10.199.238:12853;transport=TCP>
Expires: 7200
Content-Length: 0
```

[diagram] Call-ID:[prev][next]

[14] NOTIFY sip:10.10.199.250:5060 SIP/2.0

```
Via: SIP/2.0/TCP 10.10.199.238:12853;branch=z9hG4bK02c10263
To: <sip:+4088044702@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-31411508
From: <sip:56247cef-6c2b-ad4c-54db-0514adea553a@10.10.199.238>;tag=001d45e8aa3d1235fd0436dd-34d3cc1c
Call-ID: 25694b00-a3914917-35-fac712ac@10.10.199.250
Date: Wed, 17 Jun 2009 19:50:48 GMT
CSeq: 101 NOTIFY
Event: kpml
Subscription-State: active; expires=7200
Max-Forwards: 70
Contact: <sip:56247cef-6c2b-ad4c-54db-0514adea553a@10.10.199.238:12853;transport=TCP>
Allow: ACK,BYE,CANCEL,INVITE,NOTIFY,OPTIONS,REFER,REGISTER,UPDATE,SUBSCRIBE
Content-Length: 0
```

[diagram] Call-ID:[prev][next]

[15] SIP/2.0 200 OK

```
Date: Wed, 17 Jun 2009 19:50:49 GMT
From: <sip:56247cef-6c2b-ad4c-54db-0514adea553a@10.10.199.238>;tag=001d45e8aa3d1235fd0436dd-34d3cc1c
Content-Length: 0
To: <sip:+4088044702@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-31411508
Call-ID: 25694b00-a3914917-35-fac712ac@10.10.199.250
```

CISCO CONFIDENTIAL

```
Via: SIP/2.0/TCP 10.10.199.238:12853;branch=z9hG4bK02c10263
CSeq: 101 NOTIFY

[diagram]   Call-ID:[prev][next]
[16] BYE sip:56247cef-6c2b-ad4c-54db-0514adea553a@10.10.199.250:5060;transport=tcp SIP/2.0
Via: SIP/2.0/TCP 10.10.199.238:12853;branch=z9hG4bK0b780098
From: <sip:56247cef-6c2b-ad4c-54db-0514adea553a@10.10.199.238>;tag=001d45e8aa3d1235fd0436dd-34d3cc1c
To: <sip:+4088044702@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-31411508
Call-ID: 25694b00-a3914917-35-fac712ac@10.10.199.250
Max-Forwards: 70
Date: Wed, 17 Jun 2009 19:50:52 GMT
CSeq: 102 BYE
User-Agent: Cisco-CP7970G/8.5.2
Content-Length: 0

[diagram]   Call-ID:[prev][next]
[17] BYE sip:002002@10.10.199.251:5060;transport=tcp SIP/2.0
Date: Wed, 17 Jun 2009 19:50:48 GMT
From: <sip:1002@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-31411507
Content-Length: 0
User-Agent: Cisco-CUCM7.1
To: <sip:002002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-31091662
Call-ID: 5ea1bb00-a3914977-35-fbc712ac@10.10.199.251
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bKea1d7d3830
CSeq: 101 BYE
Max-Forwards: 70

[diagram]   Call-ID:[prev][next]
[18] SIP/2.0 200 OK
Date: Wed, 17 Jun 2009 19:50:53 GMT
From: <sip:56247cef-6c2b-ad4c-54db-0514adea553a@10.10.199.238>;tag=001d45e8aa3d1235fd0436dd-34d3cc1c
Content-Length: 0
To: <sip:+4088044702@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-31411508
Call-ID: 25694b00-a3914917-35-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.238:12853;branch=z9hG4bK0b780098
CSeq: 102 BYE

[diagram]   Call-ID:[prev][next]
[19] SUBSCRIBE sip:56247cef-6c2b-ad4c-54db-0514adea553a@10.10.199.238:12853;transport=TCP SIP/2.0
Date: Wed, 17 Jun 2009 19:50:53 GMT
From: <sip:+4088044702@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-31411508
Event: kpml
Content-Length: 0
User-Agent: Cisco-CUCM7.1
To: <sip:56247cef-6c2b-ad4c-54db-0514adea553a@10.10.199.238>;tag=001d45e8aa3d1235fd0436dd-34d3cc1c
Contact: <sip:10.10.199.250:5060;transport=tcp>
Expires: 0
Call-ID: 25694b00-a3914917-35-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bKeb7859a3e5
CSeq: 103 SUBSCRIBE
Max-Forwards: 70

[diagram]   Call-ID:[prev][next]
[20] SIP/2.0 200 OK
Date: Wed, 17 Jun 2009 19:52:29 GMT
From: <sip:1002@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-31411507
Content-Length: 0
To: <sip:002002@10.10.199.251>;tag=5e4c9677-e740-401a-9bc2-53575dffec2a-31091662
Call-ID: 5ea1bb00-a3914977-35-fbc712ac@10.10.199.251
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bKea1d7d3830
CSeq: 101 BYE

[diagram]   Call-ID:[prev][next]
[21] SIP/2.0 200 OK
Via: SIP/2.0/TCP 10.10.199.250:5060;branch=z9hG4bKeb7859a3e5
From: <sip:+4088044702@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-31411508
To: <sip:56247cef-6c2b-ad4c-54db-0514adea553a@10.10.199.238>;tag=001d45e8aa3d1235fd0436dd-34d3cc1c
Call-ID: 25694b00-a3914917-35-fac712ac@10.10.199.250
Date: Wed, 17 Jun 2009 19:50:52 GMT
CSeq: 103 SUBSCRIBE
Server: Cisco-CP7970G/8.5.2
Contact: <sip:56247cef-6c2b-ad4c-54db-0514adea553a@10.10.199.238:12853;transport=TCP>
Expires: 0
Content-Length: 0

[diagram]   Call-ID:[prev][next]
[22] NOTIFY sip:10.10.199.250:5060 SIP/2.0
Via: SIP/2.0/TCP 10.10.199.238:12853;branch=z9hG4bK82d49e09
To: <sip:+4088044702@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-31411508
From: <sip:56247cef-6c2b-ad4c-54db-0514adea553a@10.10.199.238>;tag=001d45e8aa3d1235fd0436dd-34d3cc1c
```

CISCO CONFIDENTIAL

```
Call-ID: 25694b00-a3914917-35-fac712ac@10.10.199.250
Date: Wed, 17 Jun 2009 19:50:52 GMT
CSeq: 103 NOTIFY
Event: kpml
Subscription-State: terminated; reason=timeout
Max-Forwards: 70
Contact: <sip:56247cef-6c2b-ad4c-54db-0514adea553a@10.10.199.238:12853;transport=TCP>
Allow: ACK,BYE,CANCEL,INVITE,NOTIFY,OPTIONS,REFER,REGISTER,UPDATE,SUBSCRIBE
Content-Length: 214
Content-Type: application/kpml-response+xml
Content-Disposition: session;handling=required

<?xml version="1.0" encoding="UTF-8"?>
<kpml-response xmlns="urn:ietf:params:xml:ns:kpml-response" version="1.0" code="487" text="Subscription Exp"
suppressed="false" forced_flush="false" digits="" tag="dtmf"/>

[diagram]   Call-ID:[prev][next]
[23] SIP/2.0 200 OK
Date: Wed, 17 Jun 2009 19:50:53 GMT
From: <sip:56247cef-6c2b-ad4c-54db-0514adea553a@10.10.199.238>;tag=001d45e8aa3d1235fd0436dd-34d3cc1c
Content-Length: 0
To: <sip:+4088044702@10.10.199.250>;tag=66b5a315-cc63-4973-bca9-40b9ea58568f-31411508
Call-ID: 25694b00-a3914917-35-fac712ac@10.10.199.250
Via: SIP/2.0/TCP 10.10.199.238:12853;branch=z9hG4bK82d49e09
CSeq: 103 NOTIFY
```